


UNIVERSAL
LIBRARY



135 389

UNIVERSAL
LIBRARY

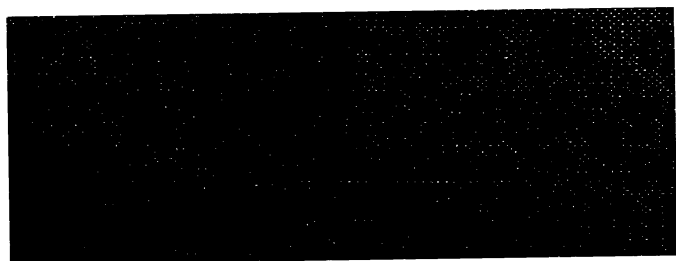

English Synonyms and Antonyms

Copyright, 1914, by FUNK & WAGNALLS COMPANY

PRINTED IN THE UNITED STATES

CONTENTS

	PAGE
PREFACE	vii
PART I.	
SYNONYMS, ANTONYMS, AND PREPOSITIONS . .	3
PART II.	
QUESTIONS AND EXAMPLES	491
INDEX OF SYNONYMS	635
INDEX OF ANTONYMS	709

PREFACE TO THE NEW EDITION

After being for eighteen years before the public, during which time it has been received with wide and constantly increasing favor, this work has now been carefully revised by the original author, with the addition of more than 50 new dissertations and upward of 660 new synonyms, bringing the total number of synonyms treated up to more than 8,000, with an increase of 154 pages in the size of the volume.

At numerous points within the paragraphs originally given new discriminations have been inserted or those already existing newly stated. The principle, which has been found so helpful, of referring all discriminations in every group to some fixed point as a standard has been steadily maintained throughout this revision.

Increasing study of the subject produces only increasing wonder at the richness, fulness, and variety of English synonyms gathered from all ages and all lands, which the vigorous practical genius of the language has, by fine distinction, so delicately differentiated as to make possible the accurate delimitation of almost all shades of human thought.

Not only for the highest reach of oratory and the perfection of literary style, but for accuracy and explicitness joined with luminous brevity in business communications, or for sprightliness, force, and union of ease and grace with effectiveness in conversation, the careful study of synonyms will be found one of the most profitable to which any speaker or writer can devote himself. Such study leads the mind to an ever-increasing perception of the fine shades of thought expressed by the difference in meaning of words which are in essence closely allied and so conduces to accuracy and clarity in thinking, while at the same time the scope and range of thought itself are widened, as the student comes to see and feel in the very words of the language the ever-varying ideas which those words have been so fitly assigned to express.

J. C. F.

Montclair, N. J., Feb. 11. 1914.

PREFACE TO FIRST EDITION

The English language is peculiarly rich in synonyms, as, with such a history, it could not fail to be. From the time of Julius Cæsar, Britons, Romans, Northmen, Saxons, Danes, and Normans fighting, fortifying, and settling upon the soil of England, with Scotch and Irish contending for mastery or existence across the mountain border and the Channel, and all fenced in together by the sea, could not but influence one another's speech. English merchants, sailors, soldiers, and travelers, trading, warring, and exploring in every clime, of necessity brought back new terms of sea and shore, of shop and camp and battle-field. English scholars have studied Greek and Latin for a thousand years, and the languages of the Continent and of the Orient in more recent times. English churchmen have introduced words from Hebrew, Greek, and Latin, through Bible and prayer-book, sermon and tract. From all this it results that there is scarcely a language ever spoken among men that has not some representative in English speech. The spirit of the Anglo-Saxon race, masterful in language as in war and commerce, has subjugated all these various elements to one idiom, making not a patchwork, but a composite language. Anglo-Saxon thrift, finding often several words that originally expressed the same idea, has detailed them to different parts of the common territory or to different service, so that we have an almost unexampled variety of words, kindred in meaning but distinct in usage, for expressing almost every shade of human thought.

Scarcely any two of such words, commonly known as synonyms, are identical at once in signification and in use. They have certain common ground within which they are interchangeable; but outside of that each has its own special province, within which any other word comes as an intruder. From these two qualities arises the great value of synonyms as contributing to beauty and effectiveness of expression. As interchangeable, they make possible that freedom and variety

by which the diction of an accomplished writer or speaker differs from the wooden uniformity of a legal document. As distinct and specific, they enable a master of style to choose in every instance the one term that is the most perfect mirror of his thought. To write or speak to the best purpose, one should know in the first place all the words from which he may choose, and then the exact reason why in any case any particular word should be chosen. To give such knowledge in these two directions is the office of a book of synonyms.

Of Milton's diction Macaulay writes:

"His poetry acts like an incantation. Its merit lies less in its obvious meaning than in its occult power. There would seem, at first sight, to be no more in his words than in other words. But they are words of enchantment. No sooner are they pronounced, than the past is present and the distant near. New forms of beauty start at once into existence, and all the burial places of the memory give up their dead. Change the structure of the sentence; *substitute one synonym for another*, and the whole effect is destroyed. The spell loses its power; and he who should then hope to conjure with it would find himself as much mistaken as Cassim in the Arabian tale, when he stood crying, 'Open Wheat,' 'Open Barley,' to the door which obeyed no sound but 'Open Sesame.' The miserable failure of Dryden in his attempt to translate into his own diction some parts of the 'Paradise Lost' is a remarkable instance of this."

Macaulay's own writings abound in examples of that exquisite precision in the choice of words, which never seems to be precise, but has all the aspect of absolute freedom. Through his language his thought bursts upon the mind as a landscape is seen instantly, perfectly, and beautifully from a mountain height. A little vagueness of thought, a slight infelicity in the choice of words would be like a cloud upon the mountain, obscuring the scene with a damp and chilling mist. Let anyone try the experiment with a poem like Gray's "Elegy," or Goldsmith's "Traveler" or "Deserted Village," of substituting other words for those the poet has chosen, and he will readily perceive how much of the charm of the lines depends upon their fine exactitude of expression.

In our own day, when so many are eager to write, and confident that they can write, and when the press is sending forth by the ton that which is called literature, but which

somehow lacks the imprint of immortality, it is of the first importance to revive the study of synonyms as a distinct branch of rhetorical culture. Prevalent errors need at times to be noted and corrected, but the teaching of pure English speech is the best defense against all that is inferior, unsuitable, or repulsive. The most effective condemnation of an objectionable word or phrase is that it is not found in scholarly works, and a student who has once learned the rich stores of vigorous, beautiful, exact, and expressive words that make up our noble language, is by that very fact put beyond the reach of all temptation to linguistic corruption.

Special instruction in the use of synonyms is necessary, for the reason that few students possess the analytical power and habit of mind required to hold a succession of separate definitions in thought at once, compare them with each other, and determine just where and how they part company; and the persons least able to do this are the very ones most in need of the information. The distinctions between words similar in meaning are often so fine and elusive as to tax the ingenuity of the accomplished scholar; yet when clearly apprehended they are as important for the purposes of language as the minute differences between similar substances are for the purpose of chemistry. Often definition itself is best secured by the comparison of kindred terms and the pointing out where each differs from the other. We perceive more clearly and remember better what each word is, by perceiving where each divides from another of kindred meaning; just as we see and remember better the situation and contour of adjacent countries, by considering them as boundaries of each other, rather than by an exact statement of the latitude and longitude of each as a separate portion of the earth's surface.

The great mass of untrained speakers and writers need to be reminded, in the first place, *that there are synonyms*—a suggestion which they would not gain from any precision of separate definitions in a dictionary. The deplorable repetition with which many slightly educated persons use such words as “elegant,” “splendid,” “clever,” “awful,” “horrid,” etc., to indicate (for they can not be said to express) almost any shade of certain approved or objectionable qualities, shows a limited vocabulary, a poverty of language, which it is of the first importance to correct. Many who are not given to such gross

nisuse would yet be surprised to learn how often they employ a very limited number of words in the attempt to give utterance to thoughts and feelings so unlike, that what is the right word on one occasion must of necessity be the wrong word at many other times. Such persons are simply unconscious of the fact that there are other words of kindred meaning from which they might choose; as the United States surveyors of Alaska found "the shuddering tenant of the frigid zone" wrapping himself in furs and cowering over a fire of sticks with untouched coal-mines beneath his feet.

Such poverty of language is always accompanied by poverty of thought. One who is content to use the same word for widely different ideas has either never observed or soon comes to forget that there is any difference between the ideas; or perhaps he retains a vague notion of a difference which he never attempts to define to himself, and dimly hints to others by adding to his inadequate word some such phrase as "you see" or "you know," in the helpless attempt to inject into another mind by suggestion what adequate words would enable him simply and distinctly to say. Such a mind resembles the old maps of Africa in which the interior was filled with cloudy spaces, where modern discovery has revealed great lakes, fertile plains, and mighty rivers. One main office of a book of synonyms is to reveal to such persons the unsuspected riches of their own language; and when a series of words is given them from which they may choose, then, with intelligent choice of words there comes of necessity a clearer perception of the difference of the ideas that are to be expressed by those different words. Thus, copiousness and clearness of language tend directly to affluence and precision of thought.

Hence there is an important use for mere lists of classified synonyms, like Roget's Thesaurus and the works of Soule and Fallows. Not one in a thousand of average students would ever discover, by independent study of the dictionary, that there are fifteen synonyms for *beautiful*, twenty-one for *beginning*, fifteen for *benevolence*, twenty for *friendly*, and thirty-seven for *pure*. The mere mention of such numbers opens vistas of possible fulness, freedom, and variety of utterance, which will have for many persons the effect of a revelation.

But it is equally important to teach that *synonyms are not*

identical and to explain why and how they differ. A person of extensive reading and study, with a fine natural sense of language, will often find all that he wants in the mere list, which recalls to his memory the appropriate word. But for the vast majority there is needed some work that compares or contrasts synonymous words, explains their differences of meaning or usage, and shows in what connections one or the other may be most fitly used. This is the purpose of the present work, to be a guide to selection from the varied treasures of English speech.

This work treats within 375 pages more than 7,500 synonyms. It has been the study of the author to give every definition or distinction in the fewest possible words consistent with clearness of statement, and this not merely for economy of space, but because such condensed statements are most easily apprehended and remembered.

The method followed has been to select from every group of synonyms one word, or two contrasted words, the meaning of which may be settled by clear definitive statements, thus securing some fixed point or points to which all the other words of the group may be referred. The great source of vagueness, error, and perplexity in many discussions of synonyms is, that the writer merely associates stray ideas loosely connected with the different words, sliding from synonym to synonym with no definite point of departure or return, so that a smooth and at first sight pleasing statement really gives the mind no definite resting-place and no sure conclusion. A true discussion of synonyms is definition by comparison, and for this there must be something definite with which to compare. When the standard is settled, approximation or differentiation can be determined with clearness and certainty. It is not enough to tell something about each word. The thing to tell is how each word is related to others of that particular group. When a word has more than one prominent meaning, the synonyms for one signification are treated in one group and a reference is made to some other group in which the synonyms for another signification are treated, as may be seen by noting the synonyms given under *APPARENT*, and following the reference to *EVIDENT*.

It has been impossible within the limits of this volume to treat in full all the words of each group of synonyms. Sometimes it has been necessary to restrict the statement to a mere

suggestion of the correct use; in some cases only the chief words of a group could be considered, giving the key to the discussion, and leaving the student to follow out the principle in the case of other words by reference to the definitive statements of the dictionary. It is to be hoped that at some time a dictionary of synonyms may be prepared, giving as full a list as that of Roget or of Soule, with discriminating remarks upon every word. Such a work would be of the greatest value, but obviously beyond the scope of a text-book for the class-room.

The author has here incorporated, by permission of the publishers of the Standard Dictionary, much of the synonym matter prepared by him for that work. All has been thoroughly revised or reconstructed, and much wholly new matter has been added.

The book contains also more than 3,700 antonyms. These are valuable as supplying definition by contrast or by negation, one of the most effective methods of defining being in many cases to tell what a thing is not. To speakers and writers antonyms are useful as furnishing oftentimes effective antitheses.

Young writers will find much help from the indication of the correct use of prepositions, the misuse of which is one of the most common of errors, and one of the most difficult to avoid, while their right use gives to style cohesion, firmness, and compactness, and is an important aid to perspicuity. To the text of the synonyms is appended a set of Questions and Examples to adapt the work for use as a text-book. Aside from the purposes of the class-room, this portion will be found of value to the individual student. Excepting those who have made a thorough study of language most persons will discover with surprise how difficult it is to answer any set of the Questions or to fill the blanks in the Examples without referring to the synonym treatment in Part I., or to a dictionary, and how rarely they can give any intelligent reason for preference even among familiar words. There are few who can study such a work without finding occasion to correct some errors into which they have unconsciously fallen, and without coming to a new delight in the use of language from a fuller knowledge of its resources and a clearer sense of its various capabilities.

West New Brighton, N. Y., Sept. 4, 1896.

SPECIAL NOTE

USE THE INDEX

Many persons fail to find the words they are seeking in this book, because they look only at the *key-word* at the head of each article. These *key-words* are given in alphabetical order, so that if one wishes to find the word "beautiful," for instance, that will be found in the regular alphabetical order on page 115.

But under the word "beautiful" there are 16 synonyms. It is obvious that not every one of these can be made the head of a group in alphabetical order.

How can any word within the group be found? By turning to the *Index* at the back of the volume. Suppose you wish synonyms for the word "pretty." You will not find that under *P*, but by turning to the *Index* you will find:

"pretty, *beautiful* 115"

That is, "pretty" is to be found under the key-word, "*beautiful*," on page 115.

Often one word is referred to several groups, thus:

cultivation, <i>agriculture</i>	43
education	209
refinement	406

some different aspect or meaning of the word being treated under each of the different groups.

PART I

BOOKS OF REFERENCE

Crabb's "English Synonyms Explained." [H.]
 Soule's "Dictionary of English Synonyms" [L.]
 Smith's "Synonyms Discriminated" [BELL.]
 Graham's "English Synonyms." [A.]
 Whateley's "English Synonyms Discriminated." [L. & S.]
 Campbell's "Handbook of Synonyms" [L. & S.]
 Fallows' "Complete Dictionary of Synonyms and Antonyms." [F. H. R.]
 Roget's "Thesaurus of English Words." [F. & W. Co.]
 Trench's "Study of English Words" [W. J. W.]
 Richard Grant White, "Words and their Uses," and "Every Day English."
 [H. M. & Co.]
 Geo. P. Marsh, "Lectures on the English Language," and "Origin and
 History of the English Language." [S.]
 Fitzedward Hall, "False Philology" [S.]
 Maetzner's "English Grammar," tr. by Gree. [J. M.]

The Synonyms of the Century and International Dictionaries have also been consulted and compared.

The Funk & Wagnalls Standard Dictionary has been used as the authority throughout.

ABBREVIATIONS USED.

A.....	D. Appleton & Co.	K-F.....	Krauth-Fleming
AS.....	Anglo-Saxon		"Vocabulary of Philosophy."
BELL; B. & S.....	Bell & Sons	L.....	Latin; Lippincott & Co.
F.....	French	L. & S.....	Lee & Shepard
F. H. R.....	Fleming H. Revell	M.....	Murray's New English Dictionary
F. & W. Co.....	Funk & Wagnalls Co.	MACM.....	Macmillan & Co.
G.....	German	S.....	Chas. Scribner's Sons
Gr.....	Greek	Sp.....	Spanish
H.....	Harper & Bros.	T. & F.....	Ticknor & Fields
H. M. & Co.....	Houghton, Mifflin & Co.	T. & H.....	Troutman & Hayes
It.....	Italian	T. & M.....	Taylor, Walton & Maberley
J. M.....	John Murray	W. J. W.....	W. J. Widdleton

PART I

SYNONYMS, ANTONYMS, AND PREPOSITIONS

ABANDON

SYNONYMS:

abdicate	desert	leave	resign
abjure	discontinue	quit	retire from
cast off	forego	recant	retract
cease	forsake	relinquish	surrender
cede	forswear	renounce	vacate
depart from	give up	repudiate	withdraw from

Abandon is a word of wide signification, applying to persons or things of any kind; *abdicate* and *resign* apply to office, authority, or power; *cede* to territorial possessions; *surrender* especially to military force, and more generally to any demand, claim, passion, etc. *Quit* carries an idea of suddenness or abruptness not necessarily implied in *abandon*, and may not have the same suggestion of finality. The king *abdicates* his throne, *cedes* his territory, *deserts* his followers, *renounces* his religion, *relinquishes* his titles, *abandons* his designs. A cowardly officer *deserts* his ship; the helpless passengers *abandon* it. We *quit* business, *give up* property, *resign* office, *abandon* a habit or a trust. *Relinquish* commonly implies reluctance; the fainting hand *relinquishes* its grasp; the creditor *relinquishes* his claim. *Abandon* implies previous association with responsibility for or control of; *forsake* implies previous association with inclination or attachment, real or assumed; a man may *abandon* or *forsake* house or friends; he *abandons* an enterprise; *forsakes* God. *Abandon* is applied to both good and evil action; a thief *abandons* his designs; a man, his *principles*. *Forsake*, like *abandon*, may be used either in the favorable, or unfavorable sense; *desert* is always unfavorable,

involving a breach of duty, except when used of mere localities; as, "The Deserted Village." While a monarch *abdicates*, a president or other elected or appointed officer *resigns*. It was held that James II. *abdicated* his throne by *deserting* it.

ANTONYMS:

adopt	defend	occupy	seek
advocate	favor	prosecute	support
assert	haunt	protect	undertake
cherish	hold	pursue	uphold
claim	keep	retain	vindicate
court	maintain		

ABASE

SYNONYMS:

bring low	depress	dishonor	lower
cast down	discredit	humble	reduce
debase	disgrace	humiliate	sink
degrade			

Abase refers only to outward conditions. "Exalt him that is low, and *abase* him that is high." *Ezek.* xxi, 26. *Debase* applies to quality or character. The coinage is *debased* by excess of alloy; the man, by vice. *Humble* in present use refers chiefly to feeling of heart; *humiliate* to outward conditions; even when one is said to *humble* himself, he either has or affects to have humility of heart. To *disgrace* may be to bring or inflict odium upon others, but the word is chiefly and increasingly applied to such moral odium as one by his own acts brings upon himself; the noun *disgrace* retains more of the passive sense than the verb; he *disgraced* himself by his conduct; he brought *disgrace* upon his family. To *dishonor* a person is to deprive him of honor that should or might be given. To *discredit* one is to injure his reputation, as for veracity or solvency. A sense of unworthiness *humiles*; a shameful insult *humiliates*; imprisonment for crime *disgraces*. *Degrade* may refer to either station or character. An officer is *degraded* by being *reduced* to the ranks, *disgraced* by cowardice; vile practises *degrade*; drunkenness is a *degrading* vice. Misfortune or injustice may *abase* the good; nothing but their own ill-doing can *debase* or *disgrace* them.

ANTONYMS:

advance	elevate	honor	raise
aggrandize	exalt	promote	uplift
dignify			

ABASH

SYNONYMS:

bewilder
chagrin
confound
confusedaunt
discompose
disconcert
disheartenembarrass
humble
humiliatemortify
overawe
shame

Any sense of inferiority *abashes*, with or without the sense of wrong. The poor are *abashed* at the splendor of wealth; the ignorant, at the learning of the wise. "I might have been *abashed* by their authority." GLADSTONE *Homeric Synchron*, p. 72. [H. 1876.] To *confuse* is to bring into a state of mental bewilderment; to *confound* is to overwhelm the mental faculties; to *daunt* is to subject to a certain degree of fear. *Embarrass* is a strong word, signifying primarily hamper, hinder, impede. A solitary thinker may be *confused* by some difficulty in a subject, or some mental defect; one is *embarrassed* in the presence of others, and because of their presence. Confusion is of the intellect, embarrassment of the feelings. A witness may be *embarrassed* by annoying personalities, so as to become *confused* in statements. To *mortify* a person is to bring upon him a painful sense of humiliation, whether because of his own or another's fault or failure. A pupil is *confused* by a perplexing question, a general *confounded* by overwhelming defeat. A hostess is *discomposed* by the tardiness of guests, a speaker *disconcerted* by a failure of memory. The criminal who is not *abashed* at detection may be *daunted* by the officer's weapon. Sudden joy may *bewilder*, but will not *abash*. The true worshipper is *humbled* rather than *abashed* before God. The parent is *mortified* by the child's rudeness, the child *abashed* at the parent's reproof. The *embarrassed* speaker finds it difficult to proceed. The mob is *overawed* by the military, the hypocrite *shamed* by exposure. "A man whom no denial, no scorn could *abash*." FIELDING *Amelia* bk. iii, ch. 9, p. 300. [B. & S. 1871.] Compare CHAGRIN; HINDER.

ANTONYMS:

animate
buoycheer
emboldenencourage
inspiritrally
uphold

ABATE

SYNONYMS:

decline
decrease
diminish

dwindle
ebb
lessen

lower
mitigate
moderate

reduce
subside

The storm, the fever, the pain *abates*. Interest *declines*. Misfortunes may be *mitigated*, desires *moderated*, intense anger *abated*, population *decreased*, taxes *reduced*. An ill-managed fortune *dwindles*; a flood *subsides*. We *abate* a nuisance, *terminate* a controversy, *suppress* a rebellion. See ALLEVIATE.

ANTONYMS:

aggravate
amplify
continue
develop

enhance
enlarge
extend

foment
increase
magnify

rage
raise
revive

PREPOSITIONS:

Abate *in* fury; abated *by* law.

ABBREVIATION

SYNONYMS:

abridgment **contraction**

An *abbreviation* is a shortening by any method; a *contraction* is a reduction of size by the drawing together of the parts. A *contraction* of a word is made by omitting certain letters or syllables and bringing together the first and last letters or elements; an *abbreviation* may be made either by omitting certain portions from the interior or by cutting off a part; a *contraction* is an *abbreviation*, but an *abbreviation* is not necessarily a *contraction*; *rec't* for receipt, *merc.* for merchandise, and *Dr.* for debtor are *contractions*; they are also *abbreviations*; *Am.* for American is an *abbreviation*, but not a *contraction*. *Abbreviation* and *contraction* are used of words and phrases, *abridgment* of books, paragraphs, sentences, etc. (Compare ABRIDGMENT.

ABET

SYNONYMS:

advocate
aid
assist

countenance
embolden
encourage

incite
instigate
promote

sanction
support
uphold

Abet and *instigate* are now used almost without exception in a bad sense; one may *incite* either to good or evil. One *incites*

or *instigates* to the doing of something not yet done, or to increased activity or further advance in the doing of it; one *abets* by giving sympathy, countenance, or substantial aid to the doing of that which is already projected or in process of commission. *Abet* and *instigate* apply either to persons or actions, *incite* to persons only; one *incites* a person to an action. A clergyman will *advocate* the claims of justice, *aid* the poor, *encourage* the despondent, *support* the weak, *uphold* the constituted authorities; but he will not *incite* to a quarrel, *instigate* a riot, or *abet* a crime. The originator of a crime often *instigates* or *incites* others to *abet* him in it, or one may *instigate* or *incite* others to a crime in the commission of which he himself takes no active part. Compare HELP.

ANTONYMS:

baffle	denounce	disconcert	expose	impede
confound	deter	discourage	frustrate	obstruct
counteract	disapprove	dissuade	hinder	

ABEYANCE**SYNONYMS:**

adjournment	expectancy	intermission	reservation
discontinuance	expectation	interruption	suspense
dormancy	inaction	quiescence	suspension

Discontinuance may be final or temporary; all other words in this list denote cessation of activity with expectation or possibility of resumption. A title to property, when in *abeyance*, is likely at any time to be revived on the appearance of a lawful owner; a claim or a measure is held in *abeyance* with distinct purpose of pressing it if occasion shall arise. *Expectancy* or *expectation*, in this connection, is *abeyance* viewed from the standpoint of one who expects to attain possession; as, an estate in *expectancy*. *Dormancy* denotes a state of suspended animation like that of a hibernating animal; a law which is in *dormancy* may be again enforced, but always with a prejudice against it, because custom has held its non-enforcement to be tantamount to an unwritten repeal. *Inaction* may be *habitual*; as, the slothful man wastes his life in *inaction*; or it may be temporary; as, the *inaction* of an army while awaiting the moment to strike, or the *inaction* of a volcano which is not extinct. *Intermission* points to expected, or perhaps calculated, resumption, and may be frequently or regularly re-

peated; as, the *intermissions* of remittent fever, the *intermission* of artillery fire, or the *intermission* between sessions of a school or of a deliberative assembly. *Intermission* is from within; *interruption* from without; *intermission* may be natural or voluntary; *interruption* is enforced by some disturbing cause; as, the *interruption* of a religious service by rioters. *Quiescence* is closely allied to *inaction*; but while *inaction* denotes lack of activity, *quiescence* denotes lack of disturbing symptoms of activity, as agitation, excitement, or commotion. The *reservation* of a right or claim maintains it in full force, entitling the party so reserving to press it at any time; mental *reservation* consists in holding unspoken some condition or qualification which, if uttered, would seem to change the whole character of some statement or promise; as, an oath to tell the truth, with the mental *reservation*, except as to one's church, party, friends, or the like. *Suspension* is ordinarily by authority, as the *suspension* of an officer from command, under charges, or the *suspension* of a student from college; *suspension* of payment is in theory temporary, but is in fact so often final as to be closely allied to bankruptcy; *suspension* of sentence, pending good behavior, is now frequently allowed on conviction of minor offenses. Compare ADJOURN.

ANTONYMS:

action
enjoyment
enforcement

exercise
force
operation

possession
renewal

resuscitation
revival

ABHOR

SYNONYMS:

abominate
despise
detest

dislike
hate

loathe
nauseate

scorn
shun

Abhor is stronger than *despise*, implying a shuddering recoil, especially a moral recoil. "How many *shun* evil as *inconvenient* who do not *abhor* it as *hateful*." TRENCH *Serm. in Westminster Abbey* xxvi, 297. [M.] *Detest* expresses indignation, with something of contempt. *Loathe* implies disgust, physical or moral. We *abhor* a traitor, *despise* a coward, *detest* a liar. We *dislike* an uncivil person. We *abhor* cruelty, *hate* tyranny. We *loathe* a reptile or a flatterer. We *abhor* Milton's heroic Satan, but we can not *despise* him.

ANTONYMS:admire
approve
covetcrave
desire
enjoyesteem
likelove
relish**ABIDE****SYNONYMS:**anticipate
await
bear
bide
confront
continuedwell
endure
expect
inhabit
live
lodgeremain
reside
rest
sojourn
staystop
tarry
tolerate
wait
watch

To *abide* is to remain continuously without limit of time unless expressed by the context: "to-day I must *abide* at thy house," *Luke* xix, 5; "a settled place for thee to *abide* in forever," 1 *Kings* viii, 13; "*Abide* with me! fast falls the even-tide," *LYTE Hymn*. *Lodge*, *sojourn*, *stay*, *tarry*, and *wait* always imply a limited time; *lodge*, to pass the night; *sojourn*, to remain temporarily; *live*, *dwell*, *reside*, to have a permanent home. *Stop*, in the sense of *stay* or *sojourn*, is colloquial, and not in approved use. Compare **ENDURE**; **REST**.

ANTONYMS:abandon
avoid
departforfeit
forfeud
journeymigrate
move
proceedreject
resist
shun**PREPOSITIONS:**

Abide in a place, *for* a time, *with* a person, *by* a statement.

ABLUTION**SYNONYMS:**bath
bathingcleaning
cleansinglavation
lavingpurification
washing

Washing, *bathing*, *laving*, or *ablution* is effected by the use of water or some other liquid. The Anglo-Saxon word *washing* is most general in meaning, denoting the application of water or other liquid to cleanse any substance by any process; as, the *washing* of clothes, the *washing* of a roof by the rain, or the *washing* of gases in the laboratory by passing them through water, the *washing* of ores in mining, or the like. In such use we do not employ *bathing*. *Washing* is also used of the sweep of water over a substance, with no reference to *cleansing*; as, the *washing* of waves upon the shore. *Bath* and *bathing* (also

Anglo-Saxon) apply primarily to the *washing* of the human body in whole or in part; a *bath*, if unlimited, means a *washing* of the whole body; as when one asks, Have I time to take a *bath*? The word may also denote the place where, or the apparatus by which, such complete *bathing* may be performed; we do not speak of a wash-basin as a *bath*; the *baths* of Caracalla had extensive facilities for complete immersion. In compounds *bath* is often limited to some specific application; as a sponge-*bath*, foot-*bath*, sitz-*bath*, shower-*bath*, etc. In science and the arts *bath* (usually in some compound) is employed to denote the partial or complete immersion of an object in some liquid or other substance for any one of various purposes, or the object by which this is effected; as, an oil-*bath*, a sand-*bath*, etc. *Bathing* is used of the free application of water or other liquid either to the whole body or to a part. Without some limitation *bathing* is understood to be complete; as, frequent *bathing* is essential to health; we speak of *bathing* the face, head, or hands, though never of a face-*bath*, head-*bath*, or hand-*bath*. In science and the arts, though objects may be cleansed in various *baths* the process is spoken of, not as *bathing*, but as *washing*. *Lavation* and *laving* (like the verb "lave") are literary or poetic words denoting the flowing or pouring of water over a substance. *Ablution* is an elevated word, not frequent in common speech, denoting a *washing*, partial or complete, or in many cases ceremonial; as, the *ablution* required of Mohammedans before each of the five daily prayers; in ordinary life to say that one who is washing his face and hands is "performing his *ablutions*" would be viewed as affectation. *Cleansing* and *purification* are more extensive in meaning than any of the above mentioned words; they may be effected by *washing*, *ablution*, etc., but also by many other means, as, the *cleansing* of the system by medication, the *purification* of the air by ventilation, the *purification* of society by moral influences, the *purification* of the church by discipline, the *cleansing* of the plague-smitten portion of London by the Great Fire, or the like. *Cleaning* may be by sweeping, dusting, etc., as well as by *washing*; vacuum-*cleaning* is for many purposes preferred to any other process. *Cleansing* is a strong Anglo-Saxon term, implying some defilement to be removed, which may not be noticeably the case in *washing*.

bathing, or *ablution*; a guest *washes* his hands before dinner with no conscious thought of *cleansing*, but a surgeon would not think that ordinary *washing* of his hands was sufficient *cleansing* after an operation. Compare CLEANSE.

ANTONYMS:

befouling	defilement	smirching	stain
besmearing	defiling	soil	staining
besmirching	polluting	soiling	taint
contaminating	pollution	soilure	tainting
contamination	smearing		

ABNEGATION**SYNONYMS:**

abjuration	denial	rejection	sacrifice
abstinence	disallowance	renunciation	surrender

Abnegation in the older use often meant *denial*; as, the *abnegation* of a heretical doctrine; it is now oftenest used of *denial* to oneself, a putting away from thought and will, and, in its fullest reach, from desire. *Renunciation* may be external; as, *renunciation* of dower; *abnegation* is internal, an act of the soul.

Difficulty, *abnegation*, martyrdom, death, are the allurements that act on the heart of man.

CARLYLE *Heroes and Hero-Worship*, lect. 11.

Surrender may be forced; *renunciation*, reluctant; *abnegation* is free and willing. See ABSTINENCE; SELF-ABNEGATION.

ANTONYMS:

assertion	demand	enjoyment	insistence
claim	enforcement	indulgence	license

ABOLISH**SYNONYMS:**

abate	eradicate	prohibit	stamp out
abrogate	exterminate	remove	subvert
annihilate	extirpate	repeal	supplant
annul	nullify	reverse	suppress
destroy	obliterate	revoke	terminate
end	overthrow	set aside	

Abolish, to do away with, bring absolutely to an end, especially as something hostile, hindering, or harmful, was formerly used of persons and material objects, a usage now obsolete except in poetry or highly figurative speech. *Abolish* is now used of institutions, customs, and conditions, especially those wide-

spread and long existing; as, to *abolish* slavery, ignorance, intemperance, poverty. A building that is burned to the ground is said to be *destroyed* by fire. *Annihilate*, as a philosophical term, signifies to put absolutely out of existence. As far as our knowledge goes, matter is never *annihilated*, but only changes its form. Some believe that the wicked will be *annihilated*. *Abolish* is not said of laws. There we use *repeal*, *abrogate*, *nullify*, etc.; *repeal* by the enacting body, *nullify* by revolutionary proceedings; a later statute *abrogates*, without formally *repealing*, any earlier law with which it conflicts. An appellate court may *reverse* or *set aside* the decision of an inferior court. *Overthrow* may be used in either a good or a bad sense; *suppress* is commonly in a good, *subvert* always in a bad, sense; as, to *subvert* our liberties; to *suppress* a rebellion. The law *prohibits* what may never have existed; it *abolishes* an existing evil. We *abate* a nuisance, *terminate* a controversy. Compare CANCEL; DEMOLISH; EXTERMINATE.

ANTONYMS:

authorize	establish	reinstate	revive
cherish	institute	renew	set up
confirm	introduce	repair	support
continue	legalize	restore	sustain
• enact	promote		

ABOMINATION

SYNONYMS:

abhorrence	curse	hatred	pest
abuse	detestation	horror	plague
annoyance	disgust	iniquity	shame
aversion	evil	nuisance	villainy
crime	execration	offense	wickedness

Abomination (from the L. *ab omen*, a thing of ill omen) was originally applied to anything held in religious or ceremonial aversion or abhorrence; as, "The things which are highly esteemed among men are *abomination* in the sight of God." Luke xvi, 15. The word is oftener applied to the object of such aversion or abhorrence than to the state of mind that so regards it; in common use *abomination* signifies something very much disliked or loathed, or that deserves to be. Choice food may be an object of *aversion* and *disgust* to a sick person; vile food would be an *abomination*. A load is to many an object of *disgust*; a foul sewer is an *abomination*. As applied to crimes,

abomination is used of such as are especially brutal, shameful, or revolting; theft is an *offense*; infanticide is an *abomination*.

ANTONYMS:

affection	blessing	enjoyment	joy
appreciation	delight	esteem	satisfaction
approval	desire	gratification	treat
benefit			

ABOUND**SYNONYMS:**

flourish	overflow	stream	swell
flow	prevail	swarm	teem
luxuriate	revel		

To *abound* (from L. *abundo*, from *ab*, from, and *unda*, wave) signifies to *overflow*, to exist, possess, or produce in generous surplus beyond demand or need; to be abundant; luxuriant, numerous, plenteous, or plentiful, or to possess, produce, or furnish in profusion. See PLENTIFUL.

ANTONYMS:

be deficient	be lacking	fall	need
be destitute	be wanting	lack	want

ABRIDGMENT**SYNONYMS:**

abbreviation	compend	epitome	summary
abstract	compendium	outline	synopsis
analysis	digest		

An *abridgment* gives the most important portions of a work substantially as they stand. An *outline* or *synopsis* is a kind of sketch closely following the plan. An *abstract* or *digest* is an independent statement of what the book contains. An *analysis* draws out the chief thoughts or arguments, whether expressed or implied. A *summary* is the most condensed statement of results or conclusions. An *epitome*, *compend*, or *compendium* is a condensed view of a subject, whether derived from a previous publication or not. We may have an *abridgment* of a dictionary, but not an *analysis*, *abstract*, *digest*, or *summary*. We may have an *epitome* of religion, a *compendium* of English literature, but not an *abridgment*. Compare ABBREVIATION.

ABSCOND

SYNONYMS:

bolt	hide	slip away
conceal oneself	leave	steal away
decamp	retire	steal off
depart	retreat	take oneself off
disappear	run away	withdraw
flee	run off	

To *abscond* is to *flee* and *hide* oneself for some discreditable reason. To *decamp*, literally to "break camp," march off, usually signifies to *depart* suddenly, secretly, or unceremoniously, implying danger of attack, discovery, restraint, or pursuit; a traveler might *decamp* in fear of lurking robbers or enemies, or soldiers on the discovery of a superior force; but, as good reasons for such withdrawal seldom arise, *decamp* has, on the whole, an unfavorable implication. All the other words of the list may have favorable meaning, the context alone determining whether the act is worthy or unworthy. To *bolt* is to start off suddenly at full speed in defiance of restraint, like a frightened or vicious horse, as a "bolt" is shot from a bow or a gun. A student *leaves* home for college; a traveler *departs* on his journey; a passer-by *disappears* in the crowd (as a hunted thief may also do); a prisoner of war may *bolt* from his guards; one may *flee* for good or bad reason.

When they persecute you in this city, *flee* ye into another.

Matt. x, 23.

A slave may *run away* from his master, *run off* from a plantation; a public man may *hide* from reporters, or a criminal from the police; one may *retire* or *withdraw* from observation for good reasons or bad; an army *retires* or *retreats* from an untenable position or before a superior force; one may *slip away* from a company he does not wish to break up, *slip away* or *steal away* from a sleeping invalid, whom he would not disturb, *slip away* denoting merely quietness, *steal away* adding the idea of something furtive.

ANTONYMS:

appear	hold one's ground	reappear
arrive	hold one's place	remain
be present	present oneself	stand one's ground
come into view	put in an appearance	stay
emerge		

ABSOLUTE

SYNONYMS:

arbitrary	compulsory	haughty	positive
arrogant	controlling	imperative	supreme
authoritative	despotic	imperious	tyrannical
autocratic	dictatorial	irresponsible	unconditional
coercive	dogmatic	lordly	unconditioned
commanding	domineering	overbearing	unequivocal
compulsive	exacting	peremptory	unlimited

In the strict sense, *absolute*, free from all limitation or control, and *supreme*, superior to all, can not properly be said of any being except the divine. Both words are used, however, in a modified sense, of human authorities; *absolute* then signifying free from limitation by other authority, and *supreme* exalted over all other; as, an *absolute* monarch, the *supreme* court. *Absolute*, in this use, does not necessarily carry any unfavorable sense, but as *absolute* power in human hands is always abused, the unfavorable meaning predominates. *Autocratic* power knows no limits outside the ruler's self; *arbitrary* power, none outside the ruler's will or judgment, *arbitrary* carrying the implication of wilfulness and capriciousness. *Despotic* is commonly applied to a masterful or severe use of power, which is expressed more decidedly by *tyrannical*. *Arbitrary* may be used in a good sense; as, the pronouncement of proper names is *arbitrary*; but the bad sense is the prevailing one; as, an *arbitrary* proceeding. *Irresponsible* power is not necessarily bad, but eminently dangerous; an executor or trustee should not be *irresponsible*; an *irresponsible* ruler is likely to be *tyrannical*. A perfect ruler might be *irresponsible* and not *tyrannical*. *Authoritative* is used always in a good sense, implying the right to claim authority; *imperative*, *peremptory*, and *positive* are used ordinarily in the good sense; as an *authoritative* definition; an *imperative* demand; a *peremptory* command; *positive* instructions; *imperious* signifies assuming and determined to command, rigorously requiring obedience. An *imperious* demand or requirement may have in it nothing offensive; it is simply one that resolutely insists upon compliance, and will not brook refusal; an *arrogant* demand is offensive by its tone of superiority, an *arbitrary* demand by its unreasonableness; an *imperious* disposition is liable to become *arbitrary* and *arrogant*. A person of an independent spirit is inclined to resent an *imperious* manner in any one, especially in

one whose superiority is not clearly recognized. *Commanding* is always used in a good sense; as, a *commanding* appearance; a *commanding* eminence. Compare DOGMATIC; INFINITE; PERFECT.

ANTONYMS:

accountable	contingent	lenient	mild
complaisant	*docile	limited	responsible
compliant	ductile	lowly	submissive
conditional	gentle	meek	yielding
constitutional	humble		

ABSOLVE

SYNONYMS:

acquit	exculpate	forgive	pardon
clear	exempt	free	release
discharge	exonerate	liberate	set free

To *absolve*, in the strict sense, is to *set free* from any bond. One may be *absolved* from a promise by a breach of faith on the part of one to whom the promise was made. To *absolve* from sins is formally to remit their condemnation and penalty, regarded as a bond upon the soul. "Almighty God . . . *pardoneth* and *absolveth* all those who truly repent, and unfeignedly believe his holy Gospel." *Book of Common Prayer, Declar. of Absol.* To *acquit* of sin or crime is to *free* from the accusation of it, pronouncing one guiltless the innocent are rightfully *acquitted*; the guilty may be mercifully *absolved*. Compare PARDON.

ANTONYMS:

accuse	compel	impeach	oblige
bind	condemn	inculpate	oblige
charge	convict		

PREPOSITIONS:

One is *absolved from* (rarely *of*) a promise, a sin, etc.

ABSORB

SYNONYMS:

consume	engross	suck up	take in
drink in	exhaust	swallow	take up
drink up	imbibe	swallow up	

A fluid that is *absorbed* is taken up into the mass of the *absorbing* body, with which it may or may not permanently combine. Wood expands when it *absorbs* moisture, iron when it

absorbs heat, the substance remaining perhaps otherwise substantially unchanged; quicklime, when it *absorbs* water, becomes a new substance with different qualities, hydrated or slaked lime. A substance is *consumed* which is destructively appropriated by some other substance, being, or agency, so that it ceases to exist or to be recognized as existing in its original condition; fuel is *consumed* in the fire, food in the body; *consume* is also applied to whatever is removed from the market for individual use; as, silk and woolen goods are *consumed*. A great talker *engrosses* the conversation. A *credulous* person *swallows* the most preposterous statement. A busy student *imbibes* or *drinks in* knowledge; he is *absorbed* in a subject that takes his whole attention. "I only postponed it because I happened to get *absorbed* in a book." KANE Grinnell Exped. ch. 43, page 403. [H. 1854.]

ANTONYMS:

cast out
disgorge
disperse
dissipate

distract
eject
emit
exude

give up
put forth
radiate
send out

shoot forth
throw off
vomit

PREPOSITIONS:

Plants absorb moisture *from* the air; the student is absorbed *in* thought; nutriment may be absorbed *into* the system *through* the skin.

ABSTINENCE**SYNONYMS:**

abstemiousness	continence	moderation	self-restraint
abstaining	fasting	self-control	sobriety
abstention	frugality	self-denial	temperance

Abstinence from food commonly signifies going without; *abstemiousness*, partaking moderately; *abstinence* may be for a single occasion, *abstemiousness* is habitual *moderation*. *Self-denial* is giving up what one wishes; *abstinence* may be refraining from what one does not desire. *Fasting* is *abstinence* from food for a limited time, and generally for religious reasons. *Sobriety* and *temperance* signify maintaining a quiet, even temper by moderate indulgence in some things, complete *abstinence* from others. We speak of *temperance* in eating, but of *abstinence* from vice. *Total abstinence* has come to signify the entire abstaining from intoxicating liquors.

ANTONYMS:

drunkenness	greed	revelling	sensuality
excess	intemperance	revelry	wantonness
gluttony	intoxication	self-indulgence	

PREPOSITIONS:

The negative side of virtue is abstinence *from* vice.

ABSTRACT, v.

SYNONYMS:

appropriate	distract	purloin	steal
detach	divert	remove	take away
discriminate	eliminate	separate	withdraw
distinguish			

The central idea of *withdrawing* makes *abstract* in common speech a euphemism for *appropriate* (unlawfully), *purloin*, *steal*. In mental processes we *discriminate* between objects by *distinguishing* their differences; we *separate* some one element from all that does not necessarily belong to it, *abstract* it, and view it alone. We may *separate* two ideas, and hold both in mind in comparison or contrast; but when we *abstract* one of them, we drop the other out of thought. The mind is *abstracted* when it is *withdrawn* from all other subjects and concentrated upon one, *diverted* when it is drawn away from what it would or should attend to by some other interest, *distracted* when the attention is divided among different subjects, so that it can not be given properly to any. The trouble with the *distracted* person is that he is not *abstracted*. Compare DISCERN.

ANTONYMS:

add	conjoin	increase	strengthen
combine	fill up	restore	unite
complete			

PREPOSITION:

The purse may be abstracted *from* the pocket; the substance *from* the accidents; a book *into* a compend.

ABSTRACTED

SYNONYMS:

absent	heedless	listless	preoccupied
absent-minded	inattentive	negligent	thoughtless
absorbed	indifferent	oblivious	

As regards mental action, *absorbed*, *abstraction*, and *preoccupied* refer to the cause, *absent* or *absent-minded* to the effect.

The man *absorbed* in one thing will appear *absent* in others. A *preoccupied* person may seem *listless* and *thoughtless*, but the really *listless* and *thoughtless* have not mental energy to be *preoccupied*. The *absent-minded* man is *oblivious* of ordinary matters, because his thoughts are elsewhere. One who is *preoccupied* is intensely busy in thought; one may be *absent-minded* either through intense concentration or simply through inattention, with fitful and aimless wandering of thought. Compare ABSTRACT.

ANTONYMS:

alert	on hand	ready	wide-awake
attentive	prompt	thoughtful	

ABSURD**SYNONYMS:**

anomalous	ill-considered	ludicrous	ridiculous
chimerical	ill-judged	mistaken	senseless
erroneous	inconclusive	monstrous	stupid
false	incorrect	nonsensical	unreasonable
foolish	infatuated	paradoxical	wild
ill-advised	irrational	preposterous	

That is *absurd* which is contrary to the first principles of reasoning; as, that a part should be greater than the whole is *absurd*. A *paradoxical* statement appears at first thought contradictory or *absurd*, while it may be really true. Anything is *irrational* when clearly contrary to sound reason, *foolish* when contrary to practical good sense, *silly* when petty and contemptible in its folly, *erroneous* when containing error that vitiates the result, *unreasonable* when there seems a perverse bias or an intent to go wrong. *Monstrous* and *preposterous* refer to what is overwhelmingly *absurd*; as, "O monstrous! eleven buckram men grown out of two," SHAKESPEARE *1 King Henry IV*, act ii, sc. 4. The *ridiculous* or the *nonsensical* is worthy only to be laughed at. The lunatic's claim to be a king is *ridiculous*; the Mother Goose rhymes are *nonsensical*. Compare INCONGRUOUS.

ANTONYMS:

certain	incontrovertible	rational	substantial
consistent	indisputable	reasonable	true
demonstrable	indubitable	sagacious	undeniable
demonstrated	infallible	sensible	unquestionable
established	logical	sound	wise
incontestable			

ABUSE

SYNONYMS:

aggrieve	impose on or	oppress	revile
damage	upon	persecute	ruin
defame	injure	pervert	slander
defile	malign	profane	victimimize
desecrate	maltreat	prostitute	vilify
disparage	misemploy	rail at	violate
harm	misuse	ravish	vituperate
ill-treat	molest	reproach	wrong
ill-use			

Abuse covers all unreasonable or improper use or treatment by word or act. A tenant does not *abuse* rented property by "reasonable wear," though that may *damage* the property and *injure* its sale; he may *abuse* it by needless defacement or neglect. It is possible to *abuse* a man without *harming* him, as when the criminal *vituperates* the judge; or to *harm* a man without *abusing* him, as when the witness tells the truth about the criminal. *Defame*, *malign*, *rail at*, *revile*, *slander*, *vilify*, and *vituperate* are used always in a bad sense. One may be justly *reproached*. To *impose on* or to *victimize* one is to *injure* him by *abusing* his confidence. To *persecute* one is to *ill-treat* him for opinion's sake, commonly for religious belief; to *oppress* is generally for political or pecuniary motives. "Thou shalt not *oppress* an hired servant that is poor and needy," *Deut.* xxiv, 14. *Misemploy*, *misuse*, and *pervert* are commonly applied to objects rather than to persons. A dissolute youth *misemploys* his time, *misuses* his money and opportunities, *harms* his associates, *perverts* his talents, *wrongs* his parents, *ruins* himself, *abuses* every good gift of God.

ANTONYMS:

applaud	conserve	favor	protect	sustain
benefit	consider	laud	regard	tend
care for	eulogize	panegyricize	respect	uphold
cherish	extol	praise	shield	vindicate

ABYSS

SYNONYMS:

abysm	deep	gulf	void
bathos	depth	pit	

A *gulf* (from Gr. *kolpos*, bay) is primarily a wide expanse of water, partially enclosed, and defined as between a bay and a sea in extent, but used with a wide range of meaning; as, the *Gulf* of Venice, the *Gulf* of Mexico. The word is then applied

to any vast and deep depression on the earth's surface that seems impassable like a sea.

A *gulf* profound as that Serbonian bog,
Where armies whole have sunk.

MILTON *Paradise Lost* bk. 11, l. 592.

In figurative or poetic use *gulf* is variously applied as to that which engulfs or overwhelms, as a whirlpool or vast ocean depth, or to anything that widely and deeply separates, as in thought, feeling, character, or relations.

Between us and you there is a great *gulf* fixed.

Luke xvi, 26.

An *abyss* (from Gr. *a-*, without, *byssos*, bottom) is primarily a bottomless gulf, unmeasurable and unfathomable; it has also come to denote any vast or immeasurable extent, as of interstellar space, without reference to direction.

And in the *abyss* of brightness dares to span
The sun's broad circle.

BRYANT *The Ages*, st. 8.

The pillared firmament and all the spheres
May sink, perchance, in the long lapse of years,
Swallowed in night's *abyss*.

ABRAHAM COLES *The Microcosm*.

The lowest depths of ocean are called "abyssal" or "abyssal," "abyssal" being the preferred scientific term; as, "abyssal" life, or "abyssal" forms. *Abyss* is figuratively used to denote what is profound and seemingly unfathomable in thought; as, an *abyss* of metaphysical disputation; an *abyss* of ignorance, degradation, or infamy. The limitless space anciently supposed to be empty or full of formless matter in a state of chaos was known as the *abyss* or the *void*, *void* signifying empty space.

Who shall tempt with wandering feet,
The dark, unbottomed, infinite *abyss*.

MILTON *Paradise Lost* bk. 11, l. 404.

Abysm is an archaic or poetic equivalent of *abyss*.

In the storm-hid *abysm* of ghostly darkness.

JOAQUIN MILLER *Ina* sc. 2, st. 4.

Pit is used with the definite article to signify the grave, the "bottomless pit," hades, gehenna, inferno, or hell, and in this sense only is a synonym of *abyss*.

We saw also there the Hobgoblins, Satyrs, and Dragons of the *pit*.

BUNYAN *Pilgrim's Progress*, p. 131.

Bathos (from Gr. *bathos*, depth) has in English use an opprobrious sense, denoting especially a sudden descent from the elevated or the sublime to the commonplace or ridiculous; so we speak of a *bathos* of stupidity or insipidity; the word is similarly applied to sharp descent in position or fortune.

How meanly has he closed his inflated career! What a sample of the *bathos* will his history present!

THOMAS JEFFERSON *Writings* iv, 240

A *bathos* is not worthy of the dignity of being called an *abyss*. Compare *CLASM*.

ANTONYMS:

canopy of heaven
dome of heaven
elevation

empyrean
firmament
height

hill
mount
mountain

summit
vault of heaven
zenith

**ACADEMIC
ACADEMICAL**

SYNONYMS:

bookish
collegiate
conventional
formal

learned
lettered
literary
pedantic

Platonic
Platonistic
scholarly
scholastic

speculative
theoretic
theoretical

Academic or *academical*, *collegiate*, *literary*, *learned*, *scholarly*, and *theoretic* or *theoretical*, all have good use as denoting what pertains to an academy or a college, to learning, literature, sound scholarship, or well-considered theory. As applied to a college or university, the *academical* department is technically that which is concerned with classical, mathematical, or general literary studies as distinguished from the professional and scientific departments. In literary use, *Academic* is used of the Academy of Plato at Athens, hence of Plato or his followers, or of the Platonic philosophy. *Formal*, too, has excellent use, denoting that which is done in accordance with proper and usual forms, carrying the weight and authority of what is established and recognized; as, a *formal* letter (distinguished from a memorandum or from an offhand or familiar note), a *formal* notification or summons. *Conventional* may denote a proper and desirable conformity with conventions or usages, as of good society. But *academic* or *academical*, *conventional*, *formal*, and *theoretic* or *theoretical* may have distinctly unfavorable use, implying the sacrifice of more important considerations to those thus designated. A question or discus-

sion which is wholly or merely *academical* is one which the schools may consider, but which has no bearing upon direct practical work or results. *Conventional* politeness may go no deeper than compliance with accepted usages. A *formal* compliment or prayer lacks heartiness or sincerity. A *theoretical* or *speculative* scheme is one that has not been sufficiently checked or tested by practice. *Scholarly* has only a good sense, as denoting that which pertains to or befits one worthy to be called a scholar; *scholastic* may have similar use, but oftener refers to the intricate and unprofitable disputations of the medieval schoolmen; as, *scholastic* subtleties or technicalities. *Pedantic*, making a needless or concerted parade of learning, is always unfavorable in meaning, while *bookish* is somewhat depreciatory, implying more connection with books than with men or with practical affairs.

ANTONYMS:

commonplace	matter-of-course	plain	uninstructed
common-sense	matter-of-fact	practical	unreasoned
everyday	obvious	simple	unstudied
ignorant	ordinary	straightforward	untaught
illiterate			

ACCESSORY**SYNONYMS:**

abetter or abettor	associate	companion	henchman
accomplice	attendant	confederate	participator
ally	coadjutor	follower	partner
assistant	colleague	helper	retainer

Colleague is used always in a good sense, *associate* and *coadjutor* generally so; *ally*, *assistant*, *associate*, *attendant*, *companion*, *helper*, either in a good or a bad sense; *abetter*, *accessory*, *accomplice*, *confederate*, almost always in a bad sense. *Ally* is oftenest used of national and military matters, or of some other connection regarded as great and important; as, *allies* of despotism. *Colleague* is applied to civil and ecclesiastical connections; members of Congress from the same State are *colleagues*, even though they may be bitter opponents politically and personally. An *Associate Justice* of the Supreme Court is near in rank to the Chief Justice. A surgeon's *assistant* is a physician or medical student who shares in the treatment and care of patients; a surgeon's *attendant* is one who rolls bandages and the like. *Follower*, *henchman*, *retainer* are persons especially devoted to a chief, and generally bound to

him by necessity, fee, or reward. *Partner* has come to denote almost exclusively a business connection. In law, an *abettor* (the general legal spelling) is always present, either actively or constructively, at the commission of the crime; an *accessory*, never. An *accomplice* is usually a principal; an *accessory*, never. If present, though only to stand outside and keep watch against surprise, one is an *abettor*, and not an *accessory*. At common law, an *accessory* implies a principal, and can not be convicted until after the conviction of the principal; the *accomplice* or *abettor* can be convicted as a principal. *Accomplice* and *abettor* have nearly the same meaning, but the former is the popular, the latter more distinctly the legal term. Compare APPENDAGE; AUXILIARY.

ANTONYMS:

adversary	commander	instigator	opposer
antagonist	enemy	leader	principal
betrayed	foe	opponent	rival
chief	hinderer		

PREPOSITIONS:

An accessory *to* the crime; *before* or *after* the fact; the accessories *of* a figure *in* a painting.

ACCIDENT

SYNONYMS:

adventure	contingency	happening	misfortune
calamity	disaster	hazard	mishap
casualty	fortuity	incident	possibility
chance	hap	misadventure	

An *accident* is that which happens without any one's direct intention; a *chance* that which happens without any known cause. If the direct cause of a railroad *accident* is known, we can not call it a *chance*. To the theist there is, in strictness, no *chance*, all things being by divine causation and control; but *chance* is spoken of where no special cause is manifest: "By *chance* there came down a certain priest that way," *Luke* x, 31. We can speak of a game of *chance*, but not of a game of *accident*. An *incident* is viewed as occurring in the regular course of things, but subordinate to the main purpose, or aside from the main design. *Fortune* is the result of inscrutable controlling forces. *Fortune* and *chance* are nearly equivalent, but *chance* can be used of human effort and endeavor as *fortune* can not

be; we say "he has a *chance* of success," or "there is one *chance* in a thousand," where we could not substitute *fortune*; as personified, *Fortune* is regarded as having a fitful purpose, *Chance* as purposeless; we speak of fickle *Fortune*, blind *Chance*; "*Fortune* favors the brave." The slaughter of men is an *incident* of battle; unexpected defeat, the *fortune* of war. Since the unintended is often the undesirable, *accident* tends to signify some *calamity* or *disaster*, unless the contrary is expressed, as when we say a fortunate or happy *accident*. An *adventure* is that which may turn out ill, a *misadventure* that which does turn out ill. A slight disturbing *accident* is a *mishap*. Compare EVENT; HAZARD.

ANTONYMS:

appointment	decree	intention	ordainment	preparation
calculation	fate	law	ordinance	provision
certainty	forcoordination	necessity	plan	purpose

PREPOSITIONS:

The accident *of* birth; an accident *to* the machinery.

ACQUAINTANCE

SYNONYMS:

association	experience	fellowship	intimacy
companionship	familiarity	friendship	knowledge

Acquaintance between persons supposes that each knows the other; we may know a public man by his writings or speeches, and by sight, but can not claim *acquaintance* unless he personally knows us. There may be pleasant *acquaintance* with little *companionship*; and conversely, much *companionship* with little *acquaintance*, as between busy clerks at adjoining desks. So there may be *association* in business without *intimacy* or *friendship*. *Acquaintance* admits of many degrees, from a slight or passing to a familiar or intimate *acquaintance*; but *acquaintance* unmodified commonly signifies less than *familiarity* or *intimacy*. As regards persons, *familiarity* is becoming restricted to the undesirable sense, as in the proverb, "*Familiarity breeds contempt*;" hence, in personal relations, the word *intimacy*, which refers to mutual knowledge of thought and feeling, is now uniformly preferred. *Friendship* includes *acquaintance* with some degree of *intimacy*, and ordinarily *companionship*, though in a wider sense *friendship* may exist be-

tween those who have never met, but know each other only by word and deed. *Acquaintance* does not involve *friendship*, for one may be well acquainted with an enemy. *Fellowship* involves not merely *acquaintance* and *companionship*, but sympathy as well. There may be much *friendship* without much *fellowship*, as between those whose homes or pursuits are far apart. There may be pleasant *fellowship* which does not reach the fulness of *friendship*. Compare ATTACHMENT; FRIENDSHIP; LOVE. As regards studies, pursuits, etc., *acquaintance* is less than *familiarity*, which supposes minute *knowledge* of particulars, arising often from long *experience* or *association*.

ANTONYMS:

ignorance ignoring inexperience unfamiliarity

PREPOSITIONS:

Acquaintance with a subject; *of* one person *with* another; *between* persons.

ACRIMONY

SYNONYMS:

acerbity	harshness	severity	tartness
asperity	malignity	sharpness	unkindness
bitterness	moroseness	sourness	virulence
causticity			

Acerbity is a *sharpness*, with a touch of *bitterness*, which may arise from momentary annoyance or habitual impatience; *asperity* is keener and more pronounced, denoting distinct irritation or vexation; in speech *asperity* is often manifested by the tone of voice rather than by the words that are spoken. *Acrimony* in speech or temper is like a corrosive acid; it springs from settled character or deeply rooted feeling of aversion or unkindness. One might speak with momentary *asperity* to his child, but not with *acrimony*, unless estrangement had begun. *Malignity* is the extreme of settled ill intent; *virulence* is an envenomed hostility. *Virulence* of speech is a quality in language that makes the language seem as if exuding poison. *Virulence* is outspoken; *malignity* may be covered with smooth and courteous phrase. We say intense *virulence*, deep *malignity*. *Severity* is always painful, and may be terrible, but carries ordinarily the implication, true or false, of justice. Compare ANGER; BITTER; ENMITY.

ANTONYMS:amiability
courtesygentleness
good naturekindness
mildnesssmoothness
sweetness**ACT, n.****SYNONYMS:**accomplishment
achievement
action
consummation
deeddoing
effect
execution
exercise
exertionexploit
feat
motion
movement
operationperformance
proceeding
transaction
work

An *act* is strictly and originally something accomplished by an exercise of power, in which sense it is synonymous with *deed* or *effect*. *Action* is a *doing*. *Act* is, therefore, single, individual, momentary; *action* a complex of *acts*, or a process, state, or habit of exerting power. We say a virtuous *act*, but rather a virtuous course of *action*. We speak of *action* of an acid upon a metal, not of its *act*. *Act* is used, also, for the simple *exertion* of power; as, an *act* of will. In this sense an *act* does not necessarily imply an external *effect*, while an *action* does. Morally, the *act* of murder is in the determination to kill; legally, the *act* is not complete without the striking of the fatal blow. *Act* and *deed* are both used for the thing done, but *act* refers to the power put forth, *deed* to the result accomplished; as, a voluntary *act*, a bad *deed*. In connection with other words *act* is more usually qualified by the use of another noun, *action* by an adjective preceding; we may say a kind *act*, though oftener an *act* of kindness, but only a kind *action*, not an *action* of kindness. As between *act* and *deed*, *deed* is commonly used of great, notable, and impressive *acts*, as are *achievement*, *exploit*, and *feat*.

Festus: We live in *deeds*, not years; in thoughts, not breaths.

BAILEY *Festus*, *A Country Town*, sc. 7.

A *feat* exhibits strength, skill, personal power, whether mental or physical, especially the latter; as, a *feat* of arms, a *feat* of memory. An *exploit* is a conspicuous or glorious *deed*, involving valor or heroism, usually combined with strength, skill, loftiness of thought, and readiness of resource; an *achievement* is the doing of something great and noteworthy; an *exploit* is brilliant, but its effect may be transient; an *achievement* is solid, and its effect enduring. *Act* and *action* are both in con-

trast to all that is merely passive and receptive. The intensest *action* is easier than passive endurance.

ANTONYMS:

cessation	immobility	inertia	quiet	suffering
deliberation	inaction	passion *	repose	suspension
endurance	inactivity	quiescence	rest	

* In philosophic sense.

ACTIVE

SYNONYMS:

agile	energetic	officious	sprightly
alert	expeditious	prompt	spry
brisk	industrious	quick	supple
bustling	lively	ready	vigorous
busy	mobile	restless	wide awake
diligent	nimble		

Active refers to both quickness and constancy of action; in the former sense it is allied with *agile*, *alert*, *brisk*, etc.; in the latter, with *busy*, *diligent*, *industrious*. The *active* love employment, the *busy* are actually employed, the *diligent* and the *industrious* are habitually *busy*. The *restless* are *active* from inability to keep quiet; their activity may be without purpose, or out of all proportion to the purpose contemplated. The *officious* are undesirably *active* in the affairs of others. Compare ALERT; ALIVE; MEDDLESOME.

ANTONYMS:

dull	inactive	lazy	slow
heavy	indolent	quiescent	sluggish
idle	inert	quiet	stupid

PREPOSITIONS:

Active *in* work, *in* a cause; *for* an object, as *for* justice; *with* persons or instrumentalities; *about* something, as *about* other people's business.

ACUMEN

SYNONYMS:

acuteness	insight	perspicacity	sharpness
cleverness	keenness	sagacity	shrewdness
discernment	penetration		

Sharpness, *acuteness*, and *insight*, however keen, and *penetration*, however deep, fall short of the meaning of *acumen*, which implies also ability to use these qualities to advantage. There are persons of keen *insight* and great *penetration* to

whom these powers are practically useless. *Acumen* is sharpness to some purpose, and belongs to a mind that is comprehensive as well as keen. *Cleverness* is a practical aptitude for study or learning. *Insight* and *discernment* are applied oftenest to the judgment of character; *penetration* and *perspicacity* to other subjects of knowledge. *Sagacity* is an uncultured skill in using quick perceptions for a desired end, generally in practical affairs; *acumen* may increase with study, and applies to the most erudite matters. *Shrewdness* is keenness or *sagacity*, often with a somewhat evil bias, as ready to take advantage of duller intellects. *Perspicacity* is the power to see clearly through that which is difficult or involved. We speak of the *acuteness* of an observer or a reasoner, the *insight* and *discernment* of a student, a clergyman, or a merchant, the *sagacity* of a hound, the *keenness* of a debater, the *shrewdness* of a usurer, the *penetration*, *perspicacity*, and *acumen* of a philosopher.

ANTONYMS:

bluntness

dulness

obtuseness

stupidity

ADAPT**SYNONYMS:**

accommodate	conform	put in place	set right
adjust	fit (fix)	put right	set to rights
apply	put in order	put to rights	suit
arrange			

To *fit* is, in this connection, to make one thing or part correspond to some other, generally with the idea of antecedent shaping; as, to *fit* a garment to the form; to *fit* a key to a lock; in its application to persons it signifies to give the knowledge or training or develop the qualities needed to meet certain requirements; as, to *fit* a student for college. *Conform* (from L. *con-*, with, together, + *forma*, form) is originally to make like in form; in physical use it often denotes an extensive and gradual process; as, the glacier *conforms* itself to the shape of ground on which it rests or over which it passes; in its more frequent figurative use it signifies commonly to accord an external agreement without reference to one's personal views or feelings; as, to *conform* one's conduct to the customs of society; James I. said of the Puritans:

I will make them *conform* or I will harry them out of the land.
 GREEN *History of the English People* vol. vi, bk. vii, ch 3, p 250
 [F. & W. CO.]

To *adjust* (originally, to make right) is to place one thing or part in suitable relation to some other or others, as for stability, suitable or harmonious action, or the like; the parts of a watch, *fitted* to each other by their original construction, must be *adjusted* by the watchmaker who assembles them; the mechanism of a typewriter must be *adjusted* for alignment; if the parts were not originally properly *fitted*, it will be found impossible to *adjust* them; *adjust* always implies some inherent fitness; this is true even in metaphorical use; differences or disputes between persons are *adjusted* when both parties agree to waive negligible matters; if the differences are fundamental, no adjustment is possible; Charles V. vainly tried to *adjust* the dispute between the Catholics who held to an infallible church and the Reformers who claimed the right of private judgment. (See COMPROMISE.) *Adapt* has less reference to original structure than *fit*, and more suggestion of change than *adjust*; we *adjust* the parts of a machine without the slightest alteration of their structure; we *adapt* the machine to a new use by some minor changes; the eye *adapts* itself to differences of light or vision by spontaneous and unconscious changes of convexity or the dilation or contraction of the pupil; the human constitution *adapts* itself to a new climate, or the mind to a new problem. *Adapt* and *adjust* in such use are often closely synonymous, yet with a subtle difference, *adjust* referring more to the mechanism, *adapt* to the result; we *adjust* a microscope or an opera-glass, in order to *adapt* it to different eyes. We dramatize a novel in order to *adapt* it for the stage; we *adjust* a play for new use by minor changes; the playwright *adapts* an English play for the American stage. To *suit* (from F. *suile*, ult. from L. *sequor*, follow) is to make or to be conformable or appropriate to, accord with, besit; as, his figure *suits* the part; in a secondary sense, to *suit* is to meet the views, wishes, or tastes of, please, satisfy; as, the plan *suits* me. *Suit* is often nearly equivalent to *fit* or *adapt*, but seldom exactly corresponds to them; "The pen *fits* my hand" might imply that the size and shape of the pen exactly fill my natural grasp; "the pen is *adapted* to my hand" would indicate that its construction and general qualities are such as my hand re-

quires; "the pen *suits* my hand" is more comprehensive, declaring that the qualities of the pen in all respects meet the demands of my hand.

Suit the action to the word, the word to the action

SHAKESPEARE *Hamlet* act III, sc. 2.

Here neither *fit* nor *adapt* could be substituted without loss, while *adjust* would be intolerable. The idea of a pleasing or satisfactory result largely underlies the use of *suit*. *Accommodate* (ult. from L. *commodus*, fit; suitable, convenient) is in some uses nearly synonymous with *adapt*, *adjust*, *conform*, or *fit*, but generally implies some concession, yielding, or sacrifice; as, to *accommodate* oneself to circumstances, i.e., by giving up some things one might desire.

Christ will never *accommodate* his morality to the times.

ADAM CLARK *Christian Theology* p 118. [P. & H.]

A metallic structure must be able to *accommodate* itself to expansion or contraction of the material; the device by which the eye *adapts* itself to distance is called the *accommodating* apparatus. In the secondary uses, the idea of convenience or of concession or of both, usually appears; we *accommodate* a friend with a loan or a traveler with lodgings; an *accommodating* person seeks others' comfort or convenience, often at more or less sacrifice of his own; a dispute is *accommodated* by mutual concessions. (See COMPROMISE). *Fix* (originally to fasten, make firm; see ATTACH): is used colloquially in the sense of *adapt*, *adjust*, *fit*, *accommodate*, repair, regulate, put in shape or in order, fit out, equip, or in any way put in suitable or satisfactory condition. This usage, which has been termed an Americanism, has been shown to have existed in England from early times. The very indefiniteness of the expression, as including all that may need to be done, in whatever way, has rendered it widely popular in America, as expressing, with exceeding convenience, what can be said by no other single word. See ARRANGE.

ANTONYMS:

confound
confuse
derange
disarrange
discompose

disjoin
disjoint
dislocate
dismember

disorder
displace
disturb
jumble

misapply
misfit
misjoin
misplace

ADD

SYNONYMS:

adjoin	append	enlarge	make up
affix	attach	extend	subjoin
amplify	augment	increase	sum up
annex	cast up	join on	

To *add* is, to *increase* by *adjoining* or *uniting*; in distinction from multiply, which is to *increase* by repeating. To *augment* a thing is to *increase* it by any means, but this word is seldom used directly of material objects; we do not *augment* a house, a farm, a nation, etc. We may *enlarge* a house, a farm, or an empire, *extend* influence or dominion, *augment* riches, power or influence, *attach* or *annex* a building to one that it *adjoins* or papers to the document they refer to, *annex* a clause or a codicil, *affix* a seal or a signature, *annex* a territory, *attach* a condition to a promise. A speaker may *amplify* a discourse by a fuller treatment throughout than was originally planned, or he may *append* or *subjoin* certain remarks without change of what has gone before. We *cast up* or *sum up* an account, though *add up* and *make up* are now more usual expressions. Compare ATTACH.

ANTONYMS:

abstract	dissever	reduce	subtract
deduct	lessen	remove	withdraw
diminish			

PREPOSITION:

Other items are to be added *to* the account.

ADDICTED

SYNONYMS:

abandoned	devoted	given over	inclined
accustomed	disposed	given up	prone
attached	given	habituated	wedded

One is *addicted* to that which he has allowed to gain a strong, habitual, and enduring hold upon action, inclination, or involuntary tendency, as to a habit or indulgence. A man may be *accustomed* to labor, *attached* to his profession, *devoted* to his religion, *given* to study or to gluttony (in the bad sense, *given over*, or *given up*, is a stronger and more hopeless expression, as is *abandoned*). One *inclined* to luxury may become *habituated* to poverty. One is *wedded* to that which has become a second nature; as, one is *wedded* to science or to art. *Prone* is

used only in a bad sense, and generally of natural tendencies; as, our hearts are *prone* to evil. *Abandoned* tells of the acquired viciousness of one who has given himself up to wickedness. *Addicted* may be used in a good, but more frequently a bad sense; as, *addicted* to study; *addicted* to drink. *Devoted* is used chiefly in the good sense; as, a mother's *devoted* affection.

ANTONYMS:

averse disinclined indisposed unaccustomed

PREPOSITION:

Addicted *to* vice.

ADDRESS, v.**SYNONYMS:**

accost	apply to	greet	speak to
apostrophize	approach	hail	woo
appeal to	court	salute	

To *accost* is to speak first, to friend or stranger, generally with a view to opening conversation; *greet* is not so distinctly limited, since one may return another's *greeting*; *greet* and *hail* may imply but a passing word; *greeting* may be altogether silent; to *hail* is to *greet* in a loud-voiced and commonly hearty and joyous way, as appears in the expression "*hail* fellow, well met." To *salute* is to *greet* with special token of respect, as a soldier his commander. To *apostrophize* is to solemnly *address* some person or personified attribute apart from the audience to whom one is speaking; as, a preacher may *apostrophize* virtue, the saints of old, or even the Deity. To *appeal* or *apply to* in this sense is to *address* formally for some special purpose, *appeal* being the more urgent word. *Address* is slightly more formal than *accost* or *greet*, though it may often be interchanged with them. One may *address* another at considerable length or in writing; he *accosts* orally and briefly. Compare APPEAL.

ANTONYMS:

avoid	elude	overlook	pass by
cut	ignore	pass	shun

PREPOSITIONS:

Address the memorial *to* the legislature; the president addressed the people *in* an eloquent speech; he addressed an intruder *with* indignation.

ADDRESS, *n.*

SYNONYMS:

adroitness	discretion	manners	readiness
courtesy	ingenuity	politeness	tact
dexterity			

Address is that indefinable something which enables a man to gain his object without seeming exertion or contest, and generally with the favor and approval of those with whom he deals. It is a general power to direct to the matter in hand whatever qualities are most needed for it at the moment. It includes *adroitness* and *discretion* to know what to do or say and what to avoid; *ingenuity* to devise; *readiness* to speak or act; the *dexterity* that comes of practise; and *tact*, which is the power of fine touch as applied to human character and feeling. *Courtesy* and *politeness* are indispensable elements of good *address*. Compare POLITE; SPEECH.

ANTONYMS:

awkwardness	clumsiness	ill-breeding	stupidity
boorishness	fatuity	ill manners	unmannerliness
clownishness	folly	rudeness	unwisdom

PREPOSITIONS:

Address in dealing with opponents; the *address of* an accomplished intriguer; an *address to* the audience.

ADEQUATE

SYNONYMS:

able	competent	fitting	sufficient
adapted	equal	qualified	suitable
capable	fit	satisfactory	suited
commensurate	fitted		

Adequate, *commensurate*, and *sufficient* signify *equal* to some given occasion or work; as, a sum *sufficient* to meet expenses; an *adequate* remedy for the disease. *Commensurate* is the more precise and learned word, signifying that which exactly measures the matter in question. *Adapted*, *fit*, *fitted*, *suited*, and *qualified* refer to the qualities which match or suit the occasion. A clergyman may have strength *adequate* to the work of a porter; but that would not be a *fit* or *suitable* occupation for him. Work is *satisfactory* if it satisfies those for whom it is done, though it may be very poor work judged by some higher standard. *Qualified* refers to acquired abilities; *competent* to

both natural and acquired; a *qualified* teacher may be no longer *competent*, by reason of ill health. *Able* and *capable* suggest general ability and reserved power, *able* being the higher word of the two. An *able* man will do something well in any position. A *capable* man will come up to any ordinary demand. We say an *able* orator, a *capable* accountant. Compare ADAPT; FIT.

ANTONYMS:

disqualified	insufficient	unfit	unsuitable
inadequate	poor	unqualified	useless
incompetent	unequal	unsatisfactory	worthless
inferior			

PREPOSITIONS:

Adequate *to* the demand; *for* the purpose.

ADHERENT**SYNONYMS:**

aid	ally	disciple	partisan
aider	backer	follower	supporter

An *adherent* is one who is devoted or attached to a person, party, principle, cause, creed, or the like. One may be an *aider* and *supporter* of a party or church, while not an *adherent* to all its doctrines or claims. An *ally* is more independent still, as he may differ on every point except the specific ground of union. The *Allies* who overthrew Napoleon were united only against him. *Allies* are regarded as equals; *adherents* and *disciples* are followers. The *adherent* depends more on his individual judgment, the *disciple* is more subject to command and instruction; thus we say the *disciples* rather than the *adherents* of Christ. *Partisan* has the narrow and odious sense of adhesion to a party, right or wrong. One may be an *adherent* or *supporter* of a party and not a *partisan*. *Backer* is a sporting and theatrical word, personal in its application, and not in the best usage. Compare ACCESSORY.

ANTONYMS:

adversary	deserter	hater	renegade
antagonist	enemy	opponent	traitor
betrayor			

PREPOSITIONS:

Adherents *to* principle; adherents *of* Luther.

ADHESIVE

SYNONYMS:

cohesive
glutinous

gummy
sticking

sticky
viscid

viscous

Adhesive is the scientific, *sticking* or *sticky* the popular word. That which is *adhesive* tends to join itself to the surface of any other body with which it is placed in contact; *cohesive* expresses the tendency of particles of the same substance to hold together. Polished plate glass is not *adhesive*, but such plates packed together are intensely *cohesive*. An *adhesive* plaster is in popular language a *sticking-plaster*. *Sticky* expresses a more limited, and generally annoying, degree of the same quality. *Glutinous*, *gummy*, *viscid*, and *viscous* are applied to semi-fluid substances, as pitch or tar.

ANTONYMS:

free

inadhesive

loose

separable

PREPOSITION:

The stiff, wet clay, adhesive *to* the foot, impeded progress.

ADJACENT

SYNONYMS:

abutting
adjoining
attached
beside

bordering
close
conterminous

contiguous
coterminous
near

neighboring
next
nigh

Adjacent farms may not be connected; if *adjoining*, they meet at the boundary-line. *Conterminous* would imply that their dimensions were exactly equal on the side where they adjoin. *Contiguous* may be used for either *adjacent* or *adjoining*. *Abutting* refers rather to the end of one building or estate than to the neighborhood of another. Buildings may be *adjacent* or *adjoining* that are not *attached*. *Near* is a relative word, places being called *near* upon the railroad which would elsewhere be deemed remote. *Neighboring* always implies such proximity that the inhabitants may be neighbors. *Next* views some object as the nearest of several or many; *next* neighbor implies a neighborhood.

ANTONYMS:

detached disconnected disjointed distant remote separate

PREPOSITION:

The farm was adjacent *to* the village.

ADMIRE

SYNONYMS:

adore	delight in	extol	respect	venerate
applaud	enjoy	honor	revere	wonder
approve	esteem	love		

In the old sense of *wonder*, *admire* is practically obsolete; the word now expresses a delight and approval, in which the element of wonder unconsciously mingles. We *admire* beauty in nature and art, *delight in* the innocent happiness of children, *enjoy* books or society, a walk or a dinner. We *approve* what is excellent, *applaud* heroic deeds, *esteem* the good, *love* our friends. We *honor* and *respect* noble character wherever found; we *revere* and *venerate* it in the aged. We *extol* the goodness and *adore* the majesty and power of God.

ANTONYMS:

abhor	contemn	detest	execrate	ridicule
abominate	despise	dislike	hate	scorn

PREPOSITION:

Admire at may still very rarely be found in the old sense of *wonder at*.

ADMISSIBLE

SYNONYMS:

allowable	passable	probable	right
fair	permissible	proper	suitable
just	possible	reasonable	tolerable

Allowable and *permissible* are distinguished on the same basis as *allow* and *permit*. See ALLOW. As between *allowable* and *admissible*, that is *allowable* which may be considered or done without active objections, opposition, or protest; that is *admissible* which may be fairly or reasonably entertained or considered; *admissible* is the stronger term; as, an *allowable* suggestion; an *admissible* hypothesis. *Admissible* and *permissible* divide along the line of theory and action; that is *admissible* which may properly be considered; that is *permissible* which may properly be done; certain evidence in a case may be *admissible*; a postponement of trial may be *permissible*; *admissible* has more of the passive, *permissible* of the active element; a statement or an excuse may be *permissible* as the act of one who makes it, *admissible* if its qualities are such that it may be received or considered. *Tolerable* is the weak-

est word of the series. denoting that which may be accepted or passed over by a certain degree of forbearance; as, a *tolerable* explanation; in common phrase, *tolerable* signifies moderately good or agreeable, and no more, denoting that which just misses of being intolerable.

ANTONYMS:

absurd	impertinent	irrelevant	unfair
alien	inadmissible	out of place	unsuitable
foreign	inapposite	unallowable	unwarrantable
illegitimate	inapplicable	unconnected	unwarranted

ADORN

SYNONYMS:

beautify	decorate	garnish	illustrate
bedeck	embellish	gild	ornament
deck			

To *embellish* is to brighten and enliven by adding something that is not necessarily or very closely connected with that to which it is added; to *illustrate* is to add something so far like in kind as to cast a side-light upon the principal matter. An author *embellishes* his narrative with fine descriptions, the artist *illustrates* it with beautiful engravings, the binder *gilds* and *decorates* the volume. *Garnish* is on a lower plane; as, the feast was *garnished* with flowers. *Deck* and *bedeck* are commonly said of apparel; as, a mother *bedecks* her daughter with silk and jewels. To *adorn* and to *ornament* alike signify to add that which makes anything beautiful and attractive, but *ornament* is more exclusively on the material plane; as, the gateway was *ornamented* with delicate carving. *Adorn* is more lofty and spiritual, referring to a beauty which is not material, and can not be put on by ornaments or decorations, but seems in perfect harmony and unity with that to which it adds a grace; if we say, the gateway was *adorned* with beautiful carving, we imply a unity and loftiness of design such as *ornamented* can not express. We say of some admirable scholar or statesman, "he touched nothing that he did not *adorn*."

At church, with meek and unaffected grace,
His looks *adorned* the venerable place.

GOLDSMITH *Deserted Village*, l. 178.

ANTONYMS:

deface	deform	disfigure	mar	spoil
--------	--------	-----------	-----	-------

PREPOSITION:

Adorn his temples *with* a coronet.

ADVERSE**SYNONYMS:**

antagonistic	incompatible	opposing	unlucky
conflicting	inimical	opposite	unpropitious
contrary	opposed	unfavorable	untoward
hostile			

Adverse (from L. *ad*, to, + *verto*, turn) signifies turned toward in opposition; as, *adverse* winds that blow against the mariner's course; *adverse* circumstances that oppose one's desire or intent. *Adverse* is rarely, if ever, used of persons, but of facts, opinions, influences, tendencies, etc. We may speak of an *adverse* party, contemplated as an impersonal organization *opposite* or *antagonistic* to some other. Accordingly *adverse* carries no idea of feeling; in this it differs from *hostile* or *inimical*, and is allied with *conflicting*, *contrary*, *opposed*, *opposing*, *opposite*. *Antagonistic* may or may not involve hostile feeling; two *opposing* lawyers may be strenuous antagonists during a trial, but warm friends outside of court. Compare ENEMY. *Adverse* is to be sharply distinguished from *averse*, which primarily indicates opposition of feeling, however much sustained by reason. See AVERSE under RELUCTANT. That which is *adverse* may prove to be afflictive, calamitous, fatal, hurtful, injurious, or unfortunate, and such words are sometimes given as synonyms of *adverse*, but no such elements inhere in the meaning of the word; the world's greatest exploits and careers have been triumphs over *adverse* circumstances, influences, or tendencies.

ANTONYMS:

advantageous	benign	favorable	prosperous
aiding	cooperating	helpful	supporting
assisting	cooperative	propitious	sustaining
auspicious	contributory		

AFFRONT**SYNONYMS:**

aggravate	exasperate	offend	vex
annoy	insult	provoke	wound
displease	irritate	tease	

One may be *annoyed* by the well-meaning awkwardness of a servant, *irritated* by a tight shoe or a thoughtless remark,

vexed at some careless neglect or needless misfortune, *wounded* by the ingratitude of child or friend. To *tease* is to give some slight and perhaps playful annoyance. *Aggravate* in the sense of *offend* is colloquial. To *provoke*, literally to call out or challenge, is to begin a contest; one *provokes* another to violence. To *affront* is to offer some defiant offense or indignity, as it were, to one's face; it is somewhat less than to *insult*. Compare PIQUE.

ANTONYMS:

conciliate content gratify honor please

AFRAID

SYNONYMS:

alarmed	cowardly	frightened	terror-stricken
anxious	faint-hearted	scared	timid
apprehensive	fearful	terrified	timorous
cautious			

Afraid is a word of wide range of meaning; it is used to indicate a slight degree of apprehension or anxiety, where nothing worthy the name of fear is involved; as, I am *afraid* we shall be late; I am *afraid* you will be disappointed; I am *afraid* the proof has not been read; in many such cases I *fear* would be more elegant and expressive than I am *afraid*; as, I *fear* appeal will be vain; I *fear* there may be a flaw in the title. On the other hand, *afraid* may indicate being under the power of deep, persuasive fear, due to real or imaginary cause; as, many a child is *afraid* in the dark; the superstitious are *afraid* of ghosts and goblins; the sailor is more *afraid* of fog than of storm. A *cautious* person foresees possibilities of danger, and moves warily or seeks safeguard or protection accordingly; the *timid* or *timorous* are constitutionally and readily subject to fear, even on slight occasions, as of criticism or publicity; yet the *cautious*, *timid*, or *timorous* may evince dauntless courage under the influence of some strong affection, as of a mother for her child, or when moved by some high moral motive, as religion or patriotism; the *cowardly* are incapable of any high motive that can overcome the mere brute instinct of self-preservation. *Fearful* is used in a double sense; objectively it signifies causing or adapted to cause fear; as, a *fearful* storm; subjectively (in the sense here considered) it signifies subject to or experiencing some degree

of fear; in this sense it is nearly synonymous with *afraid*, but is a stronger and higher word; it would be unworthy of a military officer to say that he was *afraid* of defeat; to say that he was *fearful* of defeat, as in an untenable position, would involve no discredit; *fearful* in the sense of *timid* or *timorous* is now rarely, if ever, used, a *fearful* disposition would be understood as a disposition to cause fear, rather than one readily subject to fear. Compare ALARM; ANXIETY; FEAR; FRIGHTEN.

ANTONYMS:

adventurous	composed	fearless	undaunted
audacious	confident	gallant	undismayed
bold	cool	heroic	valiant
brave	courageous	intrepid	valorous
calm	daring	reckless	venturesome
collected	dauntless		

AGENT**SYNONYMS:**

actor	instrument	mover	performer
doer	means	operator	promoter
factor			

In strict philosophical usage, the prime *mover* or *doer* of an act is the *agent*. Thus we speak of man as a voluntary *agent*, a free *agent*. But in common usage, especially in business, an *agent* is not the prime *actor*, but only an *instrument* or *factor*, acting under orders or instructions. Compare CAUSE.

ANTONYMS:

chief	inventor	originator	principal
-------	----------	------------	-----------

PREPOSITIONS:

An agent *of* the company *for* selling, etc.

AGGRANDIZE**SYNONYMS:**

advance	elevate	enrich	magnify
augment	ennoble	exalt	promote
dignify			

To *aggrandize* (from L. *ad*, to, + *grandis*, great) is to make great or greater in honor, wealth, influence, or power. To *exalt* (from L. *ex*, out, + *altus*, high) is to raise to a height, as in position, condition, rank, or honor. Both words have a

certain absoluteness; the greatness or the height must be real and impressive; in this they differ from *advance* or *promote*, which are merely relative; a sergeant may be *advanced* or *promoted* to the grade of second lieutenant, but we should not speak of him as being *aggrandized* or *exalted*.

The first act of Herod, after Augustus had *aggrandized* him so greatly, was to build a temple of white marble to his patron at Panias.

GEIKIE *Life of Christ* vol. i, ch. 4, p. 51.

See PROMOTE.

ANTONYMS:

abase	disgrace	humble	lower
debase	dishonor	humiliate	reduce
degrade	enfeeble	impoverish	shame
depress			

AGREE

SYNONYMS:

accede	admit	combine	harmonize
accept	approve	comply	join
accord	assent	concur	unite
acquiesce	coincide	consent	

Agree is the most general term of this group, signifying to have like qualities, proportions, views, or inclinations, so as to be free from jar, conflict, or contradiction in a given relation. To *concur* is to *agree* in general; to *coincide* is to *agree* in every particular. Whether in application to persons or things, *concur* tends to expression in action more than *coincide*; we may either *concur* or *coincide* in an opinion, but *concur* in a decision; views *coincide*, causes *concur*. One *accepts* another's terms, *complies* with his wishes, *admits* his statement, *approves* his plan, *conforms* to his views of doctrine or duty, *accedes* or *consents* to his proposal. *Accede* expresses the more formal agreement, *consent* the more complete. To *assent* is an act of the understanding; to *consent*, of the will. We may *concur* or *agree* with others, either in opinion or decision. Two or more persons *combine*, *join*, or *unite* in an undertaking. One may silently *acquiesce* in that which does not meet his views, but which he does not care to contest. He *admits* the charge brought, or the statement made, by another—*admit* always carrying a suggestion of reluctance. *Assent* is sometimes used for a mild form of *con-*

sent, as if agreement in the opinion assured approval of the decision.

ANTONYMS:

contend	decline	deny	disagree	dissent	protest
contradict	demur	differ	dispute	oppose	refuse

PREPOSITIONS:

I agree *in* opinion *with* the speaker; *to* the terms proposed; persons agree *on* or *upon* a statement of principles, rules, etc.; we must agree *among* ourselves.

AGRICULTURE

SYNONYMS:

cultivation	gardening	kitchen-gardening
culture	horticulture	market-gardening
farming	husbandry	tillage
floriculture		

Agriculture is the generic term, including at once the science, the art, and the process of supplying human wants by raising the products of the soil, and by the associated industries; *farming* is the practise of *agriculture* as a business; there may be theoretical *agriculture*, but not theoretical *farming*; we speak of the science of *agriculture*, the business of *farming*; scientific *agriculture* may be wholly in books; scientific *farming* is practised upon the land; we say an *agricultural* college rather than a college of *farming*. *Farming* refers to the *cultivation* of considerable portions of land, and the raising of the coarser crops; *gardening* is the close *cultivation* of a small area for small fruits, flowers, vegetables, etc., and while it may be done upon a farm is yet a distinct industry. *Gardening* in general, *kitchen-gardening* (the *cultivation* of vegetables, etc., for the household), *market-gardening* (the raising of the same for sale), *floriculture* (the *culture* of flowers), and *horticulture* (the *culture* of fruits, flowers, or vegetables), are all departments of *agriculture*, but not strictly nor ordinarily of *farming*; *farming* is itself one department of *agriculture*. *Husbandry* is a general word for any form of practical *agriculture*, but is now chiefly poetical. *Tillage* refers directly to the work bestowed upon the land, as plowing, manuring, etc.; *cultivation* refers especially to the processes that bring forward the crop; we speak of the *tillage* of the soil, the *cultivation* of corn; we also speak of land as in a

state of *cultivation*, under *cultivation*, etc. *Culture* is now applied to the careful development of any product to a state of perfection, especially by care through successive generations; the choice varieties of the strawberry have been produced by wise and patient *culture*; a good crop in any year is the result of good *cultivation*.

AIM

SYNONYMS:

aspiration	endeavor	intent	object
design	goal	intention	purpose
determination	inclination	mark	tendency
end			

The *aim* is the direction in which one shoots, or sometimes that which is aimed at. The *mark* is that at which one shoots; the *goal*, that toward which one runs. All alike indicate the direction of *endeavor*. The *end* is the point at which one expects or hopes to close his labors; the *object*, that which he would grasp as the reward of his labors. *Aspiration*, *design*, *endeavor*, *purpose*, referring to the mental acts by which the *aim* is attained, are often used as interchangeable with *aim*. *Aspiration* applies to what are viewed as noble *aims*; *endeavor*, *design*, *intention*, *purpose*, indifferently to the best or worst. *Aspiration* has less of decision than the other terms; one may aspire to an *object*, and yet lack the fixedness of *purpose* by which alone it can be attained. *Purpose* is stronger than *intention*. *Design* especially denotes the adaptation of means to an end; *endeavor* refers to the exertions by which it is to be attained. One whose *aims* are worthy, whose *aspirations* are high, whose *designs* are wise, and whose *purposes* are steadfast, may hope to reach the *goal* of his ambition, and will surely win some *object* worthy of a life's *endeavor*. Compare AMBITION; DESIGN.

ANTONYMS:

aimlessness	heedlessness	negligence	purposelessness
avoidance	neglect	oversight	thoughtlessness
carelessness			

AIR

SYNONYMS:

appearance	carriage	fashion	mien	style
bearing	demeanor	look	port	way
behavior	expression	manner	sort	

Air is that combination of qualities which makes the entire

impression we receive in a person's presence; as, we say he has the *air* of a scholar, or the *air* of a villain. *Appearance* refers more to the dress and other externals. We might say of a travel-soiled pedestrian, he has the *appearance* of a tramp, but the *air* of a gentleman. *Expression* and *look* especially refer to the face. *Expression* is oftenest applied to that which is habitual; as, he has a pleasant *expression* of countenance; *look* may be momentary; as, a *look* of dismay passed over his face. We may, however, speak of the *look* or *looks* as indicating all that we look at; as, he had the *look* of an adventurer; I did not like his *looks*. *Bearing* is rather a lofty word; as, he has a noble *bearing*; *port* is practically identical in meaning with *bearing*, but is more exclusively a literary word. *Carriage*, too, is generally used in a good sense; as, that lady has a good *carriage*. *Mien* is closely synonymous with *air* but less often used in a bad sense. We say a rakish *air* rather than a rakish *mien*. *Mien* may be used to express some prevailing feeling; as, "an indignant *mien*." *Demeanor* goes beyond *appearance*, including conduct, behavior; as, a modest *demeanor*. *Manner* and *style* are, in large part at least, acquired. Compare BEHAVIOR.

AIRY

SYNONYMS:

aerial
animated
ethereal

fairylike
frolicsome
gay

joyous
light

lively
sprightly

Aerial and *airy* both signify of or belonging to the air, but *airy* also describes that which seems as if made of air; we speak of *airy* shapes, *airy* nothings, where we could not well say *aerial*; *ethereal* describes its object as belonging to the upper air, the pure ether, and so, often, heavenly. *Sprightly*, spiritlike, refers to light, free, cheerful activity of mind and body. That which is *lively*, or *animated* may be agreeable or the reverse; as, an *animated* discussion; a *lively* company.

ANTONYMS:

clumsy
dull
heavy

inert
ponderous

slow
sluggish

stony
wooden

ALACRITY

SYNONYMS:

activity	briskness	promptitude	speed
agility	celerity	promptness	sprightliness
alertness	eagerness	quickness	swiftness
animation	liveliness	readiness	vivacity

Alertness may be without action, as of the waiting hunter or sentinel; *readiness* is more calm and less vivid than *alertness*. *Agility*, *quickness*, *celerity*, *speed*, *swiftness*, may be without agreeable motive, as under stress of terror; *activity* may be vigorous but unwilling, as when one works fiercely under compulsion. See ACTIVE. *Agility* is light and dexterous *quickness* without reference to motive; one may climb a tree with *agility* when pursued by a mad bull; *agility* is near in meaning to *nimbleness*, but is more purposeful; it is lightness and quickness of movement dexterously adapted to a definite end; we speak of the *agility* of an athlete, the *nimbleness* of a dancer; *agility* commonly involves the whole body, while *nimbleness* may be limited to some portion, as the feet or the fingers. Compare NIMBLE.

Promptness is strictly timeliness in meeting occasion or demand, and may be eager and hearty or forced and ungracious; as, the surly *promptness* of employees in punching the time-clock; the tendency is, however, to think of *promptness* as involving ready response of mind and disposition to the demand; this is still more fully expressed in *promptitude*, the state or condition from which the fact of *promptness* springs; *promptness* usually, and *promptitude* always, denotes ample or generous punctuality. *Alacrity*, primarily denoting *quickness*, has come to denote that cheerful and hearty willingness from which *quickness* and *promptness* naturally result; yet the idea of *quickness* is never absent; we could not speak of one as sawing a cord of wood with *alacrity*, though we might speak of him as starting with *alacrity* to begin the task. To obey with *alacrity* is to render obedience that is quick, cheerful, willing, and immediate. *Alacrity* is in response to some demand from without; *eagerness* is spontaneous, springing from within; *eagerness* to act may produce *alacrity* in responding to the call for action. Compare EAGER.

ANTONYMS:

apathy	dislike	indolence	reluctance	sluggishness
aversion	dulness	inertness	repugnance	stupidity
disinclination	indifference	laziness	slowness	unwillingness

ALARM

SYNONYMS:

affright	disquietude	fright	solicitude
apprehension	dread	misgiving	terror
consternation	fear	panic	timidity
dismay			

Alarm, according to its derivation *all'arme*, "to arms," is an arousing to meet and repel danger, and may be quite consistent with true courage. *Affright* and *fright* express sudden fear which, for the time at least, overwhelms courage. The sentinel discovers with *alarm* the sudden approach of the enemy; the unarmed villagers view it with *affright*. *Apprehension*, *disquietude*, *dread*, *misgiving*, and *solicitude* are in anticipation of danger; *consternation*, *dismay*, and *terror* are overwhelming fear, generally in the actual presence of that which is terrible, though these words also may have an anticipative force. *Timidity* is a quality, habit, or condition, a readiness to be affected with fear. A person of great *timidity* is constantly liable to needless *alarm* and even *terror*. Compare FEAR.

ANTONYMS:

assurance	calmness	confidence	repose	security
-----------	----------	------------	--------	----------

PREPOSITIONS:

Alarm was felt *in* the camp, *among* the soldiers, *at* the news.

ALERT

SYNONYMS:

active	lively	prepared	vigilant
brisk	nimble	prompt	watchful
bustling	on the watch	ready	wide-awake

Alert, *ready*, and *wide-awake* refer to a watchful promptness for action. *Ready* suggests thoughtful preparation; the wandering Indian is *alert*, the trained soldier is *ready*. *Ready* expresses more life and vigor than *prepared*. The gun is *prepared*; the man is *ready*. *Prompt* expresses readiness for appointment or demand at the required moment. The good general is *ready* for emergencies, *alert* to perceive opportunity or peril, *prompt* to seize occasion. The sense of *brisk*, *nimble* is the secondary and now less common signification of *alert*. Compare ACTIVE; ALIVE; NIMBLE; VIGILANT.

ANTONYMS:

drowsy	dull	heavy	inactive	slow	sluggish	stupid
--------	------	-------	----------	------	----------	--------

ALIEN, *a.*

SYNONYMS:

conflicting	distant	inapplicable	remote
contradictory	foreign	inappropriate	strange
contrary	hostile	irrelevant	unconnected
contrasted	impertinent	opposed	unlike

Foreign refers to difference of birth, *alien* to difference of allegiance. In their figurative use, that is *foreign* which is *remote*, *unlike*, or *unconnected*; that is *alien* which is *conflicting*, *hostile*, or *opposed*. That is *impertinent* (from L. *in*, not, + *pertineo*, pertain) which does not pertain to the matter in hand, in which use it is closely synonymous with *irrelevant*, having no relation or application. (For *impertinent* as applied to persons compare IMPERTINENCE; MEDDLESOME.) *Impertinent* and *irrelevant* matters can not claim consideration in a certain connection; *inappropriate* matters it would be unsuitable to consider. Compare ALIEN, *n.*; CONTRAST, *v.*

ANTONYMS:

akin	apropos	germane	proper
appropriate	essential	pertinent	relevant

PREPOSITIONS:

Such a purpose was alien *to* (or *from*) my thought; *to* preferable.

ALIEN, *n.*

SYNONYMS:

foreigner	stranger
-----------	----------

A naturalized citizen is not an *alien*, though a *foreigner* by birth, and perhaps a *stranger* in the place where he resides. A person of foreign birth not naturalized is an *alien*, though he may have been a resident in the country a large part of a lifetime, and ceased to be a *stranger* to its people or institutions. He is an *alien* in one country if his allegiance is to another. The people of any country still residing in their own land are, strictly speaking, *foreigners* to the people of all other countries, rather than *aliens*; but *alien* and *foreigner* are often used synonymously.

ANTONYMS:

citizen	fellow-countryman	native-born inhabitant
countryman	native	naturalized person

PREPOSITIONS:

Aliens *to* (more rarely *from*) our nation and laws; aliens *in* our land, *among* our people.

ALIKE

SYNONYMS:

akin	equivalent	kindred	same
analogous	homogeneous	like	similar
equal	identical	resembling	uniform

Alike is a comprehensive word, signifying as applied to two or more objects that some or all qualities of one are the same as those of the other or others; by modifiers *alike* may be made to express more or less resemblance; as, these houses are somewhat (*i. e.*, partially) *alike*; or, these houses are exactly (*i. e.*, in all respects) *alike*. Cotton and wool are *alike* in this, that they can both be woven into cloth. Substances are *homogeneous* which are made up of elements of the *same* kind, or which are the *same* in structure. Two pieces of iron may be *homogeneous* in material, while not *alike* in size or shape. In geometry, two triangles are *equal* when they can be laid over one another, and fit, line for line and angle for angle; they are *equivalent* when they simply contain the same amount of space. An *identical* proposition is one that says the same thing precisely in subject and predicate. *Similar* refers to close resemblance, which yet leaves room for question or denial of complete likeness or identity. To say "this is the *identical* man," is to say not merely that he is *similar* to the one I have in mind, but that he is the very *same* person. Things are *analogous* when they are *similar* in idea, plan, use, or character, though perhaps quite unlike in appearance; as, the gills of fishes are said to be *analogous* to the lungs in terrestrial animals.

ANTONYMS:

different	dissimilar	distinct	heterogeneous	unlike
-----------	------------	----------	---------------	--------

PREPOSITIONS:

The specimens are *alike in* kind; they are all *alike to* me.

ALIVE

SYNONYMS:

active	animated	existent	lively	subsisting
alert	breathing	existing	living	vivacious
animate	brisk	live	quick	

Alive applies to all degrees of life, from that which shows one to be barely *existing* or *existent* as a living thing, as when we say he is just *alive*, to that which implies the very utmost

of vitality and power, as in the words "he is all *alive*," "thoroughly *alive*." So the word *quick*, which began by signifying "having life," is now mostly applied to energy of life as shown in swiftness of action. *Breathing* is capable of like contrast. We say of a dying man, he is still *breathing*; or we speak of a *breathing* statue, or "*breathing* and sounding, beauteous battle," TENNYSON *Princess* can. v, l. 155, where it means having, or seeming to have, full and vigorous health, abundant life. Compare ACTIVE; ALERT; NIMBLE.

ANTONYMS:

dead	defunct	dull	lifeless
deceased	dispirited	inanimate	spiritless

PREPOSITIONS:

Alive *in* every nerve; alive *to* every noble impulse; alive *with* fervor, hope, resolve; alive *through* all his being.

ALLAY

SYNONYMS:

alleviate	compose	quiet	still
appease	mollify	soothe	tranquilize
calm	pacify		

Allay and *alleviate* are closely kindred in signification, and have been often interchanged in usage. But, in strictness, to *allay* is to lay to rest, *quiet* or *soothe* that which is excited; to *alleviate*, on the other hand, is to lighten a burden. We *allay* suffering by using means to *soothe* and *tranquilize* the sufferer; we *alleviate* suffering by doing something toward removal of the cause, so that there is less to suffer; where the trouble is wholly or chiefly in the excitement, to *allay* the excitement is virtually to remove the trouble; as, to *allay* rage or panic; we *alleviate* poverty, but do not *allay* it. *Pacify*, directly from the Latin, and *appease*, from the Latin through the French, signify to bring to peace; to *mollify* is to soften; to *calm*, *quiet*, or *tranquilize* is to make still; *compose*, to place together, unite, adjust to a calm and settled condition; to *soothe* (originally to assent to, humor) is to bring to pleased quietude. We *allay* excitement, *appease* a tumult, *calm* agitation, *compose* our feelings or countenance, *pacify* the quarrelsome, *quiet* the boisterous or clamorous, *soothe* grief or distress. Compare ALLEVIATE.

ANTONYMS:

agitate	excite	kindle	rouse	stir up
arouse	fan	provoke	stir	

ALLEGE**SYNONYMS:**

adduce	asseverate	claim	maintain	produce
advance	assign	declare	offer	say
affirm	aver	introduce	plead	state
assert	cite			

To *allege* is formally to state as true or capable of proof, but without proving. To *adduce*, literally to lead to, is to bring the evidence up to what has been *alleged*. *Adduce* is a secondary word; nothing can be *adduced* in evidence till something has been *stated* or *alleged*, which the evidence is to sustain. An *alleged* fact stands open to question or doubt. To speak of an *alleged* document, an *alleged* will, an *alleged* crime, is either to question, or at least very carefully to refrain from admitting, that the document exists, that the will is genuine, or that the crime has been committed. *Alleged* is, however, respectful; to speak of the "so-called" will or deed, etc., would be to cast discredit upon the document, and imply that the speaker was ready to brand it as unquestionably spurious; *alleged* simply concedes nothing and leaves the question open. To *produce* is to bring forward, as, for instance, papers or persons. *Adduce* is not used of persons; of them we say *introduce* or *produce*. When an *alleged* criminal is brought to trial, the counsel on either side are accustomed to *advance* a theory, and *adduce* the strongest possible evidence in its support; they will *produce* documents and witnesses, *cite* precedents, *assign* reasons, *introduce* suggestions, *offer* pleas. The accused will usually *assert* his innocence. Compare *STATE*.

ALLEGIANCE**SYNONYMS:**

devotion	fealty	loyalty	subjection
faithfulness	homage	obedience	

Allegiance is the obligation of fidelity and obedience that an individual owes to his government or sovereign, in return for the protection he receives. The feudal uses of these words have mostly passed away with the state of society that gave

them birth; but their origin still colors their present meaning. A patriotic American feels an enthusiastic *loyalty* to the republic; he takes, on occasion, an oath of *allegiance* to the government, but his *loyalty* will lead him to do more than mere *allegiance* could demand; he pays *homage* to God alone, as the only king and lord, or to those principles of right that are spiritually supreme; he acknowledges the duty of *obedience* to all rightful authority; he resents the idea of *subjection*. *Fealty* is becoming somewhat rare, except in elevated or poetic style. We prefer to speak of the *faithfulness* rather than the *fealty* of citizen, wife, or friend.

ANTONYMS:

disaffection disloyalty rebellion sedition treason

PREPOSITIONS:

We honor the allegiance *of* the citizen *to* the government; the government has a right to allegiance *from* the citizen.

ALLEGORY

SYNONYMS:

fable	illustration	parable	simile
fiction	metaphor		

In modern usage we may say that an *allegory* is an extended *simile*, while a *metaphor* is an abbreviated *simile* contained often in a phrase, perhaps in a word. The *simile* carries its comparison on the surface, in the words *as*, *like*, or similar expressions; the *metaphor* is given directly without any note of comparison. The *allegory*, *parable*, or *fable* tells its story as if true, leaving the reader or hearer to discover its fictitious character and learn its lesson. All these are, in strict definition, *fictions*; but the word *fiction* is now applied almost exclusively to novels or romances. An *allegory* is a moral or religious tale, of which the moral lesson is the substance, and all descriptions and incidents but accessories, as in "The Pilgrim's Progress." A *fable* is generally briefer, representing animals as the speakers and actors, and commonly conveying some lesson of practical wisdom or shrewdness, as "The *Fables* of Æsop." A *parable* is exclusively moral or religious, briefer and less adorned than an *allegory*, with its lesson more immediately discernible, given, as it were, at a stroke. Any comparison, analogy, instance, example, tale, anecdote, or the

like which serves to let in light upon a subject may be called an *illustration*, this word in its widest use including all the rest. Compare FICTION; STORY.

ANTONYMS:

chronicle fact history narrative record

ALLEVIATE**SYNONYMS:**

abate	lighten	reduce	remove
assuage	mitigate	relieve	soften
lessen	moderate		

Etymologically, to *alleviate* is to lift a burden toward oneself, and so *lighten* it for the bearer; to *relieve* is to lift it back from the bearer, nearly or quite away; to *remove* is to take it away altogether. *Alleviate* is thus less than *relieve*; *relieve*, ordinarily, less than *remove*. We *alleviate*, *relieve*, or *remove* the trouble; we *relieve*, not *alleviate*, the sufferer. *Assuage* is, by derivation, to sweeten; *mitigate*, to make mild; *moderate*, to bring within measure; *abate*, to beat down, and so make less. We *abate* a fever; *lessen* anxiety; *moderate* passions or desires; *lighten* burdens; *mitigate* or *alleviate* pain; *reduce* inflammation; *soften*, *assuage*, or *moderate* grief; we *lighten* or *mitigate* punishments; we *relieve* any suffering of body or mind that admits of help, comfort, or remedy. *Alleviate* has been often confused with *allay*. Compare ALLAY.

ANTONYMS:

aggravate	enhance	increase	magnify
augment	heighten	intensify	make worse
embitter			

ALLIANCE**SYNONYMS:**

coalition	confederation	fusion	partnership
compact	federation	league	union
confederacy			

Alliance is in its most common use a connection formed by treaty between sovereign states as for mutual aid in war. *Partnership* is a mercantile word; *alliance* chiefly political or matrimonial. *Coalition* is oftenest used of political parties; *fusion* is now the more common word in this sense. In an *alliance* between nations there is no surrender of sovereignty, and no union, except for a specified time and purpose. *League*

and *alliance* are used with scarcely perceptible difference of meaning. In a *confederacy* or *confederation* there is an attempt to unite separate states in a general government without surrender of sovereignty. *Union* implies so much concession as to make the separate states substantially one. *Federation* is mainly a poetic and rhetorical word expressing something of the same thought, as in Tennyson's "*federation of the world*," *Locksley Hall*, l. 128. The United States is not a *confederacy* nor an *alliance*; the nation might be called a *federation*, but prefers to be styled a federal *union*.

ANTONYMS:

antagonism	divorce	schism	separation
discord	enmity	secession	war
disunion	hostility		

PREPOSITIONS:

Alliance *with* a neighboring people; *against* the common enemy; *for* offense and defense; alliance *of*, *between*, or *among* nations.

ALLOT

SYNONYMS:

apply	award	give	portion out
appoint	destine	grant	select
apportion	distribute	mete out	set apart
assign	divide		

Allot, originally to assign by lot, applies to the giving of a definite thing to a certain person. A portion or extent of time is *allotted*; as, I expect to live out my *allotted* time. A definite period is *appointed*; as, the audience assembled at the *appointed* hour. *Allot* may also refer to space; as, to *allot* a plot of ground for a cemetery; but we now oftener use *select*, *set apart*, or *assign*. *Allot* is not now used of persons. *Appoint* may be used of time, space, or person; as, the *appointed* day; the *appointed* place; an officer was *appointed* to this station. *Destine* may also refer to time, place, or person, but it always has reference to what is considerably in the future; a man *appoints* to meet his friend in five minutes; he *destines* his son to follow his own profession. *Assign* is rarely used of time, but rather of places, persons, or things. We *assign* a work to be done and *assign* a man to do it, who, if he fails, must *assign* a reason for not doing it. That which is *allotted*, *appointed*, or *assigned* is more or less arbi-

trary, that which is *awarded* is the due requital of something the receiver has done, and he has right and claim to it; as, the medal was *awarded* for valor. Compare APPLY; APPORTION; DEVOTE.

ANTONYMS:

appropriate	deny	resume	seize
confiscate	refuse	retain	withhold

PREPOSITIONS:

Allot *to* a company *for* a purpose.

ALLOW**SYNONYMS:**

admit	consent to	let	sanction	tolerate
concede	grant	permit	suffer	yield

We *allow* that which we do not attempt to hinder; we *permit* that to which we give some express authorization. When this is given verbally it is called permission; when in writing it is commonly called a permit. There are establishments that any one will be *allowed* to visit without challenge or hindrance; there are others that no one is *allowed* to visit without a permit from the manager; there are others to which visitors are *admitted* at specified times, without a formal permit. We *allow* a child's innocent intrusion; we *concede* a right; *grant* a request; *consent* to a sale of property; *permit* an inspection of accounts; *sanction* a marriage; *tolerate* the rudeness of a well-meaning servant; *submit* to a surgical operation; *yield* to a demand or necessity against our wish or will, or *yield* something under compulsion; as, the sheriff *yielded* the keys at the muzzle of a revolver, and *allowed* the mob to enter. *Suffer*, in the sense of mild concession, is now becoming rare, its place being taken by *allow*, *permit*, or *tolerate*. Compare PERMISSION.

ANTONYMS:

deny	disapprove	protest	reject	withstand
disallow	forbid	refuse	resist	

See also synonyms for PROHIBIT.

PREPOSITIONS:

To allow *of* (in best recent usage, simply to *allow*) such an action; allow one *in* such a course; allow *for* spending-money.

ALLOY

SYNONYMS:

admixture adulteration debasement deterioration

Alloy may be either some admixture of baser with precious metal, as for giving hardness to coin or the like, or it may be a compound or mixture of two or more metals. *Adulteration*, *debasement*, and *deterioration* are always used in the bad sense; *admixture* is neutral, and may be good or bad; *alloy* is commonly good in the literal sense. An excess of *alloy* virtually amounts to *adulteration*; but *adulteration* is mostly restricted to articles used for food, drink, medicine, and kindred uses. In the figurative sense, as applied to character, etc., *alloy* is unfavorable, because there the only standard is perfection.

ALLUDE

SYNONYMS:

**advert
hint
imply**

**indicate
insinuate
intimate**

**mention
name
point**

**refer
signify
suggest**

Advert, *mention*, and *refer* are used of language that distinctly and expressly points to a certain person or thing; the other words of language from which it may be inferred. We *allude* to a matter slightly, perhaps by a word or phrase, as it were in byplay; we *advert* to it when we turn from our path to treat it; we *refer* to it by any clear utterance that distinctly turns the mind or attention to it; as, marginal figures *refer* to a parallel passage; we *mention* a thing by explicit word, as by naming it. One may *allude* to a person or thing that he does not *mention* or *name*, the speaker *adverted* to the recent disturbances and the remissness of certain public officers; though he *mentioned* no name, it was easy to see to whom he *alluded*. Cowper *alluded* to Bunyan as the "ingenious dreamer," but added:

I name thee not, lest so despised a name
Should move a smile at thy deserved fame.

One may *hint* at a thing in a friendly way, but what is *insinuated* is always unfavorable, generally both hostile and cowardly. One may *indicate* his wishes, *intimate* his plans, *imply* his opinion, *signify* his will, *suggest* a course of action. Compare SUGGESTION.

PREPOSITION:

The passage evidently alludes to the Jewish Passover.

ALLURE**SYNONYMS:**

attract	captivate	decoy	entice	lure	tempt
cajole	coax	draw	inveigle	seduce	win

To *allure* is to *draw* as with a lure by some charm or some prospect of pleasure or advantage. We may *attract* others to a certain thing without intent; as, the good unconsciously *attract* others to virtue. We may *allure* either to that which is evil or to that which is good and noble, by purpose and endeavor, as in the familiar line, "*Allured to brighter worlds, and led the way,*" GOLDSMITH *Deserted Village*, l. 170. *Lure* is rather more akin to the physical nature. It is the word we would use of drawing on an animal. *Coax* expresses the attraction of the person, not of the thing. A man may be *coaxed* to that which is by no means *alluring*. *Cajole* and *decoy* carry the idea of deceiving and ensnaring. To *inveigle* is to lead one blindly in. To *tempt* is to endeavor to lead one wrong; to *seduce* is to succeed in *winning* one from good to ill. *Win* may be used in either a bad or a good sense, in which latter it surpasses the highest sense of *allure*, because it succeeds in that which *allure* attempts; as, "He that *win-neth* souls is wise," *Prov.* xi, 30.

ANTONYMS:

chill	damp	deter	dissuade	drive away	repel	warn
-------	------	-------	----------	------------	-------	------

PREPOSITIONS:

Allure *to* a course; allure *by* hopes; allure *from* evil to good.

ALSO**SYNONYMS:**

as well	in addition	likewise	too
as well as	in like manner	similarly	withal
besides			

While some distinctions between these words and phrases will appear to the careful student, yet in practise the choice between them is largely to secure euphony and avoid repetition. The words fall into two groups; *as well as*, *besides*, *in addition*, *too*, *withal* simply add a fact or thought; *also* (all

altercation

so), *in like manner, likewise, similarly* affirm that what is added is like that to which it is added. *As well* follows the word or phrase to which it is joined. We can say the singers *as well as* the players, or the players, and the singers *as well*.

ANTONYMS:

but	nevertheless	on the contrary	yet
in spite of	notwithstanding	on the other hand	

ALTERCATION**SYNONYMS:**

argument	debate	dissension	scene
brawl	discord	disturbance	scrap
broil	discussion	fracas	strife
contention	disputation	quarrel	wrangle
controversy	dispute	row	wrangling

An *argument* is primarily a statement of fact tending to produce belief concerning a matter in doubt, something alleged as a reason or proof or a series of such reasons or proofs; in this sense an *argument* is wholly on one side. A *debate* is a presentation of opposing *arguments*, as by two or more contestants, in an orderly and somewhat formal manner. *Argument* may be also used for the setting forth of opposing reasons or proofs on both sides of a subject, in which case it becomes practically synonymous with *debate*. (Compare REASONING.) A *dispute* (from L. *dis*, apart, and *pulo*, think) is an intense *debate*, commonly involving sharpness of feeling, and sometimes acrimony or anger, and being usually less methodical and orderly than a *debate*. A *discussion* is a consideration or sifting of *arguments* on both sides of a matter, and is in its best use entirely calm and fair; *discussion* involves less suggestion of opposing sides or parties than *debate*, and may be wholly conducted by a single thinker, speaker, or writer, with no recognized opponent; as, an investigator's *discussion* of a scientific problem. *Argumentation* and *disputation* refer to processes of *argument* or *dispute*, usually prolonged. All these words may be intensified by adjectives, so as to express excited or hostile feeling; as, a heated *argument* or *debate*, a sharp, hot, or bitter *dispute*. A *controversy* always implies two parties, and generally strenuous opposition with excited feeling; *controversy* is often applied to disputation of such a character carried on in writing. *Dissen-*

sion (from L. *dis*, apart, + *sentis*, feel) is angry or violent difference of opinion, which may involve many persons, and on many sides of a matter. *Contention* (from L. *con*, together, + *tends*, stretch) is a strenuous effort to obtain something or to resist opposing force. In argumentative use a *contention* may be a statement or opinion which one is ready to defend strenuously and to the uttermost, but without anger or bitterness.

My *contention* is that knowledge does not take its rise in general conceptions

C. H. LEWES *Problems of Life and Mind*, vol. ii, ch. 4, § 25.

In common use, however, *contention* signifies hot or angry *disputation* or *controversy*, in which the personal opposition and acrimony are more noticeable than the matter in *dispute*:

Whoever keeps an open ear
For tattlers will be sure to hear
The trumpet of *contention*

COWPER *Friendship*, st. 17.

An *altercation* is a sharp *contention* in words, angry *controversy*, generally personal, petty, fierce, and bitter. *Altercation*, *affray*, *brawl*, *broil*, *fracas*, *quarrel*, *row*, *wrangle*, and *wrangling* are all words without dignity and of odious signification. When the *altercation* passes from words to blows, it becomes an *affray*. A *row* is a noisy *quarrel*, always on the verge of physical violence, which it may at any time involve. *Scrap* is a slang term, with the usual loose meaning of such words, denoting any sort of hostile encounter by word or act. *Wrangle* or *wrangling* denotes a *dispute* that is at once angry, noisy, and undignified. A *brawl* or *broil* is a rude *quarrel* by word or act or both. *Disturbance*, a word of more dignity, may likewise be by word or act; as a *disturbance* about paying one's bill; a *disturbance* of the peace. A *scene* is less vigorous and pronounced than a *disturbance*, being any display of excited feeling that offends social proprieties, including any *altercation*, *argument*, *controversy*, *debate*, *discussion*, or *dispute* that has such effect. Compare FEUD.

ANTONYMS:

agreement
concord
concurrence

conformity
consonance

harmony
unanimity

union
unity

ALTERNATIVE

SYNONYMS:

choice election option pick preference resource

A *choice* may be among many things; an *alternative* is in the strictest sense a *choice* between two things; oftener it is one of two things between which a *choice* is to be made, and either of which is the *alternative* of the other; as, the *alternative* of surrender is death; or the two things between which there is a *choice* may be called the *alternatives*; both Mill and Gladstone are quoted as extending the meaning of *alternative* to include several particulars, Gladstone even speaking of "the fourth and last of these *alternatives*." *Option* is the right or privilege of choosing; *choice* may be either the right to choose, the act of choosing, or the thing chosen. A person of ability and readiness will commonly have many *resources*. *Pick*, from the Saxon, and *election*, from the Latin, picture the objects before one, with freedom and power to choose which he will; as, there were twelve horses, among which I could take my *pick*. A *choice*, *pick*, *election*, or *preference* is that which suits one best; an *alternative* is that to which one is restricted; a *resource*, that to which one is glad to betake oneself.

ANTONYMS:

compulsion necessity

AMASS

SYNONYMS:

accumulate	gather	hoard	pile up
aggregate	heap up	hoard up	store up
collect			

To *amass* is to bring together materials that make a mass, a great bulk or quantity. With some occasional exceptions, *accumulate* is applied to the more gradual, *amass* to the more rapid gathering of money or materials, *amass* referring to the general result or bulk, *accumulate* to the particular process or rate of gain. We say interest is *accumulated* (or *accumulates*) rather than is *amassed*; he *accumulated* a fortune in the course of years; he rapidly *amassed* a fortune by shrewd speculations. Goods or money for immediate distribution are said to be *collected* rather than *amassed*. They

may be *stored up* for a longer or shorter time; but a *hoard* is always with a view of permanent retention, generally selfish. *Aggregate* is now most commonly used of numbers and amounts; as, the expenses will *aggregate* a round million.

ANTONYMS:

disperse	divide	portion	spend	waste
dissipate	parcel	scatter	squander	

PREPOSITIONS:

Amass *for* oneself; *for* a purpose; *from* a distance; *with* great labor; *by* industry.

AMATEUR**SYNONYMS:**

connoisseur critic dilettante novice tyro

Etymologically, the *amateur* is one who loves, the *connoisseur* one who knows. In usage, the term *amateur* is applied to one who pursues any study or art simply from the love of it; the word carries a natural implication of superficialness, though marked excellence is at times attained by *amateurs*. A *connoisseur* is supposed to be so thoroughly informed regarding any art or work as to be able to criticize or select intelligently and authoritatively; there are many incompetent *critics*, but there can not, in the true sense, be an incompetent *connoisseur*. The *amateur* practises to some extent that in regard to which he may not be well informed; the *connoisseur* is well informed in regard to that which he may not practise at all. A *novice* or *tyro* may be a *professional*; an *amateur* never is; the *amateur* may be skilled and experienced as the *novice* or *tyro* never is. *Dilettante*, which had originally the sense of *amateur*, has to some extent come to denote one who is superficial, pretentious, and affected, whether in theory or practise.

PREPOSITION:

An amateur *in* art.

AMAZEMENT**SYNONYMS:**

admiration	awe	confusion	surprise
astonishment	bewilderment	perplexity	wonder

Amazement and *astonishment* both express the momentary overwhelming of the mind by that which is beyond expecta-

tion. *Astonishment* especially affects the emotions, *amazement* the intellect. *Awe* is the yielding of the mind to something supremely grand in character or formidable in power, and ranges from apprehension or dread to reverent worship. *Admiration* includes delight and regard. *Surprise* lies midway between *astonishment* and *amazement*, and usually respects matters of lighter consequence or such as are less startling in character. *Amazement* may be either pleasing or painful, as when induced by the grandeur of the mountains, or by the fury of the storm. We can say pleased *surprise*, but scarcely pleased *astonishment*. *Amazement* has in it something of *confusion* or *bewilderment*; but *confusion* and *bewilderment* may occur without *amazement*, as when a multitude of details require instant attention. *Astonishment* may be without *bewilderment* or *confusion*. *Wonder* is often pleasing, and may be continuous in view of that which surpasses our comprehension; as, the magnitude, order, and beauty of the heavens fill us with increasing *wonder*. Compare PERPLEXITY.

ANTONYMS:

anticipation	composure	expectation	preparation	steadiness
calmness	coolness	indifference	self-possession	stoicism

PREPOSITION:

I was filled with amazement *at* such reckless daring.

AMBITION

SYNONYMS:

aspiration competition emulation opposition rivalry

Aspiration is the desire for excellence, pure and simple. *Ambition*, literally a going around to solicit votes, has primary reference to the award or approval of others, and is the eager desire of power, fame, or something deemed great and eminent. The prizes of *aspiration* are always virtue, nobility, skill, or other high qualities. The prizes of *ambition* are commonly advancement, fame, honor, and the like. In our older literature this word is chiefly applied to inordinate and selfish desire of supremacy:

Cromwell, I charge thee, fling away *ambition*.

By that sin fell the angels

SHAKESPEARE *Henry VIII*, act iii, sc. 2, l. 437.

But *ambition* is now largely used of an eager and steadfast

purpose to obtain something commendable in itself, viewed as a worthy prize.

The most effectual method that has been devised for diverting men from vice is to give free scope to a higher ambition.

LECKY *Hist. Eur. Morals*, vol. i, p. 261.

There is a noble and wise or an ignoble, selfish, and harmful *ambition*. *Emulation* is not so much to win any excellence or success for itself as to equal or surpass other persons. There is such a thing as a noble *emulation*, when those we would equal or surpass are noble, and the means we would use worthy. But, at the highest, *emulation* is inferior as a motive to *aspiration*, which seeks the high quality or character for its own sake, not with reference to another. *Competition* is the striving for something that is sought by another at the same time. *Emulation* regards the abstract, *competition* the concrete; *rivalry* is the same in essential meaning with *competition*, but differs in the nature of the objects contested for, which, in the case of *rivalry*, are usually of the nobler sort and less subject to direct gaging, measurement, and rule. We speak of *competition* in business, *emulation* in scholarship, *rivalry* in love, politics, etc.; *emulation* of excellence, success, achievement; *competition* for a prize; *rivalry* between persons or nations. *Competition* may be friendly, *rivalry* is commonly hostile. *Opposition* is becoming a frequent substitute for *competition* in business language; it implies that the competitor is an opponent and hinderer.

ANTONYMS:

carelessness contentment humility indifference satisfaction

AMEND

SYNONYMS:

advance	correct	meliorate	rectify
ameliorate	emend	mend	reform
better	improve	mitigate	repair
cleanse	make better	purify	

To *amend* is to change for the better by removing faults, errors, or defects, and always refers to that which at some point falls short of a standard of excellence. *Advance*, *better*, and *improve* may refer either to what is quite imperfect or to what has reached a high degree of excellence; we *advance* to the kingdom of God, *improve* the minds of our chil-

dren, *better* the morals of the people. But for matters below the point of ordinary approval we seldom use these words; we do not speak of *bettering* a wretched alley, or *improving* a foul sewer. There we use *cleanse*, *purify*, or similar words. We *correct* evils, *reform* abuses, *rectify* incidental conditions of evil or error; we *ameliorate* poverty and misery, which we can not wholly remove. We *mend* a tool, *repair* a building, *correct* proof; we *amend* character or conduct that is faulty, or a statement or law that is defective. A text, writing, or statement is *amended* by the author or some adequate authority; it is often *emended* by conjecture. A motion is *amended* by the mover or by the assembly; a constitution is *amended* by the people; an ancient text is *emended* by a critic who believes that what seems to him the better reading is what the author wrote. Compare ALLEVIATE.

ANTONYMS:

aggravate	debase	harm	mar	tarnish
blemish	depress	impair	spoil	viliate
corrupt	deteriorate	injure		

AMIALE

SYNONYMS:

agreeable	engaging	lovable	pleasing
attractive	gentle	lovely	sweet
benignant	good-natured	loving	winning
charming	kind	pleasant	winsome

Amiable combines the senses of *lovable* and *loving*; the *amiable* character has ready affection and kindness for others, with the qualities that are adapted to win their love; *amiable* is a higher and stronger word than *good-natured* or *agreeable*. *Lovely* is often applied to externals; as, a *lovely* face. *Amiable* denotes a disposition desirous to cheer, please, and make happy. A selfish man of the world may have the art to be *agreeable*; a handsome, brilliant, and witty person may be *charming* or even *attractive*, while by no means *amiable*. The *engaging*, *winning*, and *winsome* add to amiability something of beauty, accomplishments, and grace. The *benignant* are calmly kind, as from a height and a distance. *Kind*, *good-natured* people may be coarse and rude, and so fail to be *agreeable* or *pleasing*; the really *amiable* are likely to avoid such faults by their earnest desire to please. The *good-natured* have an easy disposition to get along comfortably with

every one in all circumstances. A *sweet* disposition is very sure to be *amiable*, the *loving* heart bringing out all that is *lovable* and *lovely* in character.

ANTONYMS:

acrimonious	crusty	hateful	ill-tempered	surly
churlish	disagreeable	ill-conditioned	morose	unamiable
crabbed	dogged	ill-humored	sour	unlovely
cruel	gruff	ill-natured	sullen	

AMID**SYNONYMS:**

amidst	amongst	betwixt	mingled with
among	between	in the midst of	surrounded by

Amid or *amidst* denotes *surrounded by*; *among* or *amongst* denotes *mingled with*. *Between* (archaic or poetic, *betwixt*) is said of two persons or objects, or of two groups of persons or objects. "Let there be no strife, I pray thee, *between* me and thee, and *between* my herdmen and thy herdmen," *Gen.* xiii, 9; the reference being to two bodies of herdmen. *Amid* denotes mere position; *among*, some active relation, as of companionship, hostility, etc. Lowell's "*Among my Books*" regards the books as companions; *amid* my books would suggest packing, storing, or some other incidental circumstance. We say *among* friends, or *among* enemies. *amidst* the woods, *amid* the shadows. *In the midst of* may have merely the local meaning; as, I found myself *in the midst of* a crowd; or it may express even closer association than *among*; as, "I found myself *in the midst of* friends" suggests their pressing up on every side, oneself the central object; so, "where two or three are met together in my name, there am I *in the midst of* them," *Matt.* xviii, 20; in which case it would be feebleness to say "*among* them," impossible to say "*amid* them," not so well to say "*amidst* them."

ANTONYMS:

afar from	away from	beyond	far from	outside	without
-----------	-----------	--------	----------	---------	---------

AMPLIFY**SYNONYMS:**

augment	dilate	expand	extend	unfold
develop	enlarge	expatiate	increase	widen

Amplify is now rarely used in the sense of *increase*, to add material substance, bulk, volume, or the like; it is now

almost wholly applied to discourse or writing, signifying to make fuller in statement, whether with or without adding matter of importance, as by stating fully what was before only implied, or by adding illustrations to make the meaning more readily apprehended, etc. The chief difficulty of very young writers is to *amplify*, to get beyond the bare curt statement by *developing*, *expanding*, *unfolding* the thought. The chief difficulty of those who have more material and experience is to condense sufficiently. So, in the early days of our literature *amplify* was used in the favorable sense; but at present this word and most kindred words are coming to share the derogatory meaning that has long attached to *expatiate*. We may *develop* a thought, *expand* an illustration, *extend* a discussion, *expatiate* on a hobby, *dilate* on something joyous or sad, *enlarge* a volume, *unfold* a scheme, *widen* the range of treatment.

ANTONYMS:

abbreviate	"boil down"	cut down	retrench
abridge	condense	epitomize	summarize
amputate	curtail	reduce	sum up

PREPOSITIONS:

To amplify *on* or *upon* the subject is needless. Amplify this matter *by* illustrations.

ANALOGY

SYNONYMS:

affinity	likeness	relation	similarity
coincidence	parity	resemblance	simile
comparison	proportion	semblance	similitude

Analogy is specifically a *resemblance* of relations; a *resemblance* that may be reasoned from, so that from the *likeness* in certain respects we may infer that other and perhaps deeper relations exist. *Affinity* is a mutual attraction with or without seeming likeness; as, the *affinity* of iron for oxygen. (Compare ATTACHMENT.) *Coincidence* is complete agreement in some one or more respects; there may be a *coincidence* in time of most dissimilar events. *Parity* of reasoning is said of an argument equally conclusive on subjects not strictly analogous. *Similitude* is a rhetorical comparison of one thing to another with which it has some points in common. *Resemblance* and *similarity* are external or superficial, and may

involve no deeper relation; as, the *resemblance* of a cloud to a distant mountain. Compare ALLEGORY.

ANTONYMS:

disagreement dissimilarity incongruity unlikeness
disproportion

PREPOSITIONS:

The analogy *between* (or *of*) nature and revelation; the analogy *of* sound *to* light; a family has some analogy *with* (or *to*) a state.

ANGER**SYNONYMS:**

animosity	fury	offense	rage
choler	impatience	passion	resentment
displeasure	indignation	peevishness	temper
exasperation	ire	pettishness	vexation
fretfulness	irritation	petulance	wrath

Displeasure is the mildest and most general word. *Choler* and *ire*, now rare except in poetic or highly rhetorical language, denote a still, and the latter a persistent, *anger*. *Temper* used alone in the sense of *anger* is colloquial, though we may correctly say a hot *temper*, a fiery *temper*, etc. *Passion*, though a word of far wider application, may, in the singular, be employed to denote *anger*; "did put me in a towering *passion*," SHAKESPEARE *Hamlet*, act v, sc. 2. *Anger* is violent and vindictive emotion, which is sharp, sudden, and, like all violent passions, necessarily brief. *Resentment* (a feeling back or feeling over again) is persistent, the bitter brooding over injuries. *Exasperation*, a roughening, is a hot, superficial intensity of *anger*, demanding instant expression. *Rage* drives one beyond the bounds of prudence or discretion; *fury* is stronger yet, and sweeps one away into uncontrollable violence. *Anger* is personal and usually selfish, aroused by real or supposed wrong to oneself, and directed specifically and intensely against the person who is viewed as blameworthy. *Indignation* is impersonal and unselfish *displeasure* at unworthy acts (from L. *indigna*) i. e., at wrong as wrong. Pure *indignation* is not followed by regret, and needs no repentance; it is also more self-controlled than *anger*. *Anger* is commonly a sin; *indignation* is often a duty. *Wrath* is deep and perhaps vengeful *displeasure*, as when the people of

Nazareth were "filled with *wrath*" at the plain words of Jesus (*Luke* iv, 28); it may, however, simply express the culmination of righteous *indignation* without malice in a pure being; as, the *wrath* of God. *Impatience*, *fretfulness*, *irritation*, *peevishness*, *pettishness*, *petulance*, and *vexation* are temporary and for immediate cause. *Fretfulness*, *pettishness*, and *peevishness* are chronic states finding in any petty matter an occasion for their exercise. Compare ACRIMONY; ENMITY; HATRED.

ANTONYMS:

amiability	leniency	mildness	peacefulness
charity	lenity	patience	self-control
forbearance	long-suffering	peace	self-restraint
gentleness	love	peaceableness	

PREPOSITIONS:

Anger *at* the insult prompted the reply. Anger *toward* the offender exaggerates the offense.

ANIMAL

SYNONYMS:

beast	living being	living organism	fauna
brute	living creature	sentient being	

An *animal* is a *sentient being*, distinct from inanimate matter and from vegetable life on the one side and from mental and spiritual existence on the other. Thus man is properly classified as an *animal*. But because the animal life is the lowest and rudest part of his being and that which he shares with inferior *creatures*, to call any individual man an *animal* is to imply that the animal nature has undue supremacy, and so is deep condemnation or utter insult. The *brute* is the *animal* viewed as dull to all finer feeling; the *beast* is looked upon as a being of appetites. To call a man a *brute* is to imply that he is unfeeling and cruel; to call him a *beast* is to indicate that he is vilely sensual. We speak of the cruel father as a *brute* to his children; of the drunkard as making a *beast* of himself. So firmly are these figurative senses established that we now incline to avoid applying *brute* or *beast* to any creature, as a horse or dog, for which we have any affection; we prefer in such cases the word *animal*. *Creature* is a word of wide signification, including all the things that God has created, whether inanimate objects,

plants, animals, angels, or men. A *living being*, *creature*, or *organism* may be, in strictness either a plant or an animal, since plants have life—vegetable life; but in popular use a *living being* or *living creature* is understood to mean an *animal*:

And God created great whales, and every *living creature* that moveth, which the waters brought forth abundantly, after their kind.

Gen. i, 21.

In scientific use a *living organism* is indeterminately either plant or animal, and in the lower forms of life it is often difficult to decide in a given case which it is. The *animals* of a region are collectively called its *fauna*.

ANTONYMS:

angel
inanimate object
man

matter
mind
mineral

soul
spirit

substance (material)
vegetable

ANNOUNCE

SYNONYMS:

advertise
blazon
circulate
communicate
declare
enunciate

give notice (of)
give out
herald
make known
notify

proclaim
promulgate
propound
publish
report

reveal
say
spread abroad
state
tell

To *announce* is to give intelligence of in some formal or public way. We may *announce* that which has occurred or that which is to occur, though the word is chiefly used in the anticipative sense; we *announce* a book when it is in press, a guest when he arrives. To *blazon* is to make widely known; *announce* publicly; *publish* far and wide. We *advertise* our business, *communicate* our intentions, *enunciate* our views; we *notify* an individual, *give notice* to the public. *Declare* has often an authoritative force; to *declare* war is to cause war to be, where before there may have been only hostilities; we say *declare* war, *proclaim* peace. We *propound* a question or an argument, *promulgate* the views of a sect or party, or the decision of a court, etc. We *report* an interview, *reveal* a secret, *herald* the coming of some distinguished person or great event. *Publish*, in popular usage, is becoming closely restricted to the sense of issuing through the press; we *announce* a book that is to be *published*.

ANTONYMS:

bury	hide	keep secret	suppress
conceal	hush	secrete	withhold
cover (up)	keep back		

PREPOSITIONS:

The event was announced *to* the family *by* telegraph.

ANSWER

SYNONYMS:

rejoinder repartee reply response retort

A verbal *answer* is a return of words to something that seems to call for them, and is made to a charge as well as to a question; an *answer* may be even made to an unspoken implication or manifestation; see Luke v, 22. In a wider sense, anything said or done in return for some word, action, or suggestion of another may be called an *answer*. The blow of an enraged man, the whinny of a horse, the howling of the wind, the movement of a bolt in a lock, an echo, etc., may each be an *answer* to some word or movement. A *reply* is an unfolding, and ordinarily implies thought and intelligence. A *rejoinder* is strictly an *answer* to a *reply*, though often used in the general sense of *answer*, but always with the implication of something more or less controversial or opposed, though lacking the conclusiveness implied in *answer*; an *answer*, in the full sense, to a charge, an argument, or an objection is adequate, and finally refutes and disposes of it; a *reply* or *rejoinder* may be quite inadequate, so that one may say, "This reply is not an *answer*;" "I am ready with an *answer*" means far more than "I am ready with a *reply*." A *response* is accordant or harmonious, designed or adapted to carry on the thought of the words that called it forth, as the *responses* in a liturgical service, or to meet the wish of him who seeks it; as, the appeal for aid met a prompt and hearty *response*. *Repartee* is a prompt, witty, and commonly good-natured *answer* to some argument or attack; a *retort* may also be witty, but is severe and may be even savage in its intensity.

PREPOSITIONS:

An answer *in* writing, or *by* word of mouth, *to* the question.

ANTICIPATE

SYNONYMS:

apprehend
expectforecast
foretastehope
look forward to

To *anticipate* may be either to take before in fact or to take before in thought; in the former sense it is allied with *prevent*; in the latter, with the synonyms above given. This is coming to be the prevalent and favorite use. We *expect* that which we have good reason to believe will happen; as, a boy *expects* to grow to manhood. We *hope* for that which we much desire and somewhat *expect*. We *apprehend* what we both *expect* and fear. *Anticipate* is commonly used now, like *foretaste*, of that which we *expect* both with confidence and pleasure. In this use it is a stronger word than *hope*, where often "the wish is father to the thought." I *hope* for a visit from my friend, though I have no word from him; I *expect* it when he writes that he is coming; and as the time draws near I *anticipate* it with pleasure. Compare ABIDE; PREVENT.

ANTONYMS:

despair of
distrustdoubt
dreadfear
recallrecollect
remember

ANTICIPATION

SYNONYMS:

antepast
apprehension
expectancy
expectationforeboding
forecast
foresight
foretasteforethought
hope
presentiment
prevision

Expectation may be either of good or evil; *presentiment* almost always, *apprehension* and *foreboding* always, of evil; *anticipation* and *antepast*, commonly of good. Thus, we speak of the pleasures of *anticipation*. A *foretaste* may be of good or evil, and is more than imaginary; it is a part actually received in advance. *Foresight* and *forethought* prevent future evil and secure future good by timely looking forward, and acting upon what is foreseen. Compare ANTICIPATE.

ANTONYMS:

astonishment
consummation
despair
doubtdread
enjoyment
fearrealization
surprise
wonder

ANTIPATHY

SYNONYMS:

abhorrence	disgust	hatred	repugnance
antagonism	dislike	hostility	repulsion
aversion	distaste	opposition	uncongeniality
detestation			

Antipathy, *repugnance*, and *uncongeniality* are instinctive; other forms of *dislike* may be acquired or cherished for cause. *Uncongeniality* is negative, a want of touch or sympathy. An *antipathy* to a person or thing is an instinctive recoil from connection or association with that person or thing, and may be physical or mental, or both. *Antagonism* may result from the necessity of circumstances; *opposition* may spring from conflicting views or interests; *abhorrence* and *detestation* may be the result of religious and moral training; *distaste* and *disgust* may be acquired; *aversion* is a deep and permanent *dislike*. A natural *antipathy* may give rise to *opposition* which may result in *hatred* and *hostility*. Compare ACRIMONY; ANGER; ENMITY; HATRED.

ANTONYMS:

affinity	attraction	fellow-feeling	kindliness	sympathy
agreement	congeniality	harmony	regard	

PREPOSITIONS:

Antipathy to (less frequently *for* or *against*) a person or thing; *antipathy between* or *betwixt* two persons or things.

ANTIQUE

SYNONYMS:

ancient	old-fashioned	quaint	superannuated
antiquated			

Antique refers to an *ancient*, *antiquated* to a discarded style. *Antique* is that which is either *ancient* in fact or *ancient* in style. The reference is to the style rather than to the age. We can speak of the *antique* architecture of a church just built. The difference between *antiquated* and *antique* is not in the age, for a Puritan style may be scorned as *antiquated*, while a Roman or Renaissance style may be prized as *antique*. The *antiquated* is not so much out of date as out of vogue. *Old-fashioned* may be used approvingly or contemptuously. In the latter case it becomes a synonym for *antiquated*; in the good sense it approaches the meaning

of *antique*, but indicates less duration. We call a wide New England fireplace *old-fashioned*; a coin of the Cæsars, *antique*. *Quaint* combines the idea of age with a pleasing oddity; as, a *quaint* gambrel-roofed house. *Antiquated* is sometimes used of persons in a sense akin to *superannuated*. The *antiquated* person is out of style and out of sympathy with the present generation by reason of age; the *superannuated* person is incapacitated for present activities by reason of age. Compare OLD.

ANTONYMS:

fashionable fresh modern modish new recent stylish

ANXIETY**SYNONYMS:**

anguish	disquiet	foreboding	perplexity
apprehension	disturbance	fretfulness	solicitude
care	dread	fretting	trouble
concern	fear	misgiving	worry

Anxiety is, according to its derivation, a choking *disquiet*, akin to *anguish*; anxiety is mental; *anguish* may be mental or physical; *anguish* is in regard to the known, *anxiety* in regard to the unknown; *anguish* is because of what has happened, *anxiety* because of what may happen. *Anxiety* refers to some future event, always suggesting hopeful possibility, and thus differing from *apprehension*, *fear*, *dread*, *foreboding*, *terror*, all of which may be quite despairing. In matters within our reach, *anxiety* always stirs the question whether something can not be done, and is thus a valuable spur to doing; in this respect it is allied to *care*. *Foreboding*, *dread*, etc., commonly incapacitate for all helpful thought or endeavor. *Worry* is a more petty, restless, and manifest *anxiety*; *anxiety* may be quiet and silent; *worry* is communicated to all around. *Solicitude* is a milder *anxiety*. *Fretting* or *fretfulness* is a weak complaining without thought of accomplishing or changing anything, but merely as a relief to one's own *disquiet*. *Perplexity* often involves *anxiety*, but may be quite free from it. A student may be perplexed regarding a translation, yet, if he has time enough, not at all anxious regarding it.

ANTONYMS:

apathy	calmness	confidence	light-heartedness	satisfaction
assurance	carelessness	ease	nonchalance	tranquility

PREPOSITIONS:

Anxiety *for* a friend's return; anxiety *about*, *in regard to*, or *concerning* the future.

APATHY

SYNONYMS:

calmness	insensibility	quietness	stoicism
composure	lethargy	quietude	tranquillity
immobility	passiveness	sluggishness	unconcern
impassibility	phlegm	stillness	unfeelingness
indifference			

Apathy, according to its Greek derivation, is a simple absence of feeling or emotion. There are persons to whom a certain degree of *apathy* is natural, an innate *sluggishness* of the emotional nature. In the *apathy* of despair, a person gives up, without resistance or sensibility, to what he has fiercely struggled to avoid. While *apathy* is want of feeling, *calmness* is feeling without agitation. *Calmness* is the result of strength, courage, or trust; *apathy* is the result of dulness or weakness. *Composure* is freedom from agitation or disturbance, resulting ordinarily from force of will, or from perfect confidence in one's own resources. *Impassibility* is a philosophical term applied to the Deity, as infinitely exalted above all stir of passion or emotion. *Unfeelingness*, the Saxon word that should be the exact equivalent of *apathy*, really means more, a lack of the feeling one ought to have, a censurable hardness of heart. *Indifference* and *insensibility* designate the absence of feeling toward certain persons or things; *apathy*, entire absence of feeling. *Indifference* is a want of interest; *insensibility* is a want of feeling; *unconcern* has reference to consequences. We speak of *insensibility* of heart, *immobility* of countenance. *Stoicism* is an intentional suppression of feeling and deadening of sensibilities, while *apathy* is involuntary. Compare CALM; REST; STUPOR.

ANTONYMS:

agitation	eagerness	fury	susceptibility
alarm	emotion	passion	sympathy
anxiety	excitement	sensibility	turbulence
care	feeling	sensitiveness	vehemence
distress	frenzy	storm	violence
disturbance			

PREPOSITIONS:

The apathy of monastic life; apathy toward good.

A PIECE**SYNONYMS:**

distributively each individually separately severally

There is no discernible difference in sense between so much *apiece* and so much *each*; the former is the more common and popular, the latter the more elegant expression. *Distributively* is generally used of numbers and abstract relations. *Individually* emphasizes the independence of the individuals; *separately* and *severally* still more emphatically hold them apart. The signers of a note may become jointly and *severally* responsible, that is, *each* liable for the entire amount, as if he had signed it alone. Witnesses are often brought *separately* into court, in order that no one may be influenced by the testimony of another. If a company of laborers demand a dollar *apiece*, that is a demand that *each* shall receive that sum; if they *individually* demand a dollar, *each* individual makes the demand.

ANTONYMS:

accumulatively
collectively

confusedly
en masse

indiscriminately
synthetically

together
unitedly

APOLOGY**SYNONYMS:**

acknowledgment defense excuse plea
confession exculpation justification vindication

All these words express one's answer to a charge of wrong or error that is or might be made. *Apology* has undergone a remarkable change from its old sense of valiant *defense*—as in Justin Martyr's *Apologies* for the Christian faith—to its present meaning of humble *confession* and concession. He who offers an *apology* admits himself, at least technically and seemingly, in the wrong. An *apology* is for what one has done or left undone; an *excuse* may be for what one proposes to do or leave undone as well; as, one sends beforehand his *excuse* for not accepting an invitation; if he should fail either to be present or to excuse himself, an *apology* would be in order. An *excuse* for a fault is an attempt at partial justifi-

cation; as, one alleges haste as an *excuse* for carelessness. *Confession* is a full *acknowledgment* of wrong, generally of a grave wrong, with or without *apology* or *excuse*. *Plea* ranges in sense from a prayer for favor or pardon to an attempt at full *vindication*. *Defense*, *exculpation*, *justification*, and *vindication* are more properly antonyms than synonyms of *apology* in its modern sense, and should be so given, but for their connection with its historic usage. Compare CONFESS; DEFENSE.

ANTONYMS:

accusation	charge	condemnation	injury	wrong
censure	complaint	imputation	insult	offense

PREPOSITIONS:

An apology *to* the guest *for* the oversight would be fitting.

APPARENT

SYNONYMS:

likely	presumable	probable	seeming
---------------	-------------------	-----------------	----------------

The *apparent* is that which appears; the word has two contrasted senses, either of that which is manifest, visible, certain, or of that which merely seems to be and may be very different from what is; as, the *apparent* motion of the sun around the earth. *Apparent* kindness casts a doubt on the reality of the kindness; *apparent* neglect implies that more care and pains may have been bestowed than we are aware of. *Presumable* implies that a thing may be reasonably supposed beforehand without any full knowledge of the facts. *Probable* implies that we know facts enough to make us moderately confident of it. *Seeming* expresses great doubt of the reality; *seeming* innocence comes very near in meaning to *probable* guilt. *Apparent* indicates less assurance than *probable*, and more than *seeming*. A man's *probable* intent we believe will prove to be his real intent; his *seeming* intent we believe to be a sham; his *apparent* intent may be the true one, though we have not yet evidence on which to pronounce with certainty or even with confidence. *Likely* is a word with a wide range of usage, but always implying the belief that the thing is, or will be, true; it is often used with the infinitive, as the other words of this list can not be; as, it is *likely* to happen. Compare EVIDENT.

ANTONYMS:

doubtful dubious improbable unimaginable unlikely

PREPOSITIONS:

(When *apparent* is used in the sense of evident): His guilt is apparent *in* every act *to* all observers.

APPEAL**SYNONYMS:**

address	call (upon)	invoke	request
apply	entreat	refer (to)	resort (to)

To *appeal* (from L. *appello*, *appellare*, to address, call upon, entreat, etc.) closely follows in English the Latin sense. Anciently, one who felt himself wronged would seize an opportunity, if possible, to *call out* to the king for redress, thus often securing reversal of the judgment of a subordinate officer:

And as the King of Israel was passing by upon the wall, there cried a woman unto him, saying, Help, my lord, O, King. 2 Kings vi, 26.

Hence comes the modern legal sense, to *appeal* (a case) from a lower authority to a higher:

I *appeal* unto Cæsar.

Acts xxv, 11.

Figuratively, one may *appeal* to any authority believed to be decisive; as, to *appeal* to facts, statistics, history, arms, force, reason, or posterity.

Greatness *appeals* to the future.

EMERSON *Essays, Self-Reliance.*

In personal use, to *appeal* is more than to *ask*; it is to *ask* with special earnestness, and is akin to *beseech* or *entreat*; one *appeals* to another for some form of help, support, favor, or benefit; an offender may *appeal* for mercy or forgiveness. By extension to inanimate things and abstractions, to ideas, activities, emotions, etc., to *appeal* is to awaken response or sympathy; courage, sincerity, and tenderness *appeal* to some of our noblest instincts; sensationalism does not *appeal* to me:

Man is not a creature of pure reason; he must have his senses delightfully *appealed* to. LAMB *Essays of Elia*, p. 53. [W L & CO]

To *apply* is more formal than to *appeal*; one may *apply* to an appointing officer *for* an appointment; *apply* to the treasurer *for* funds; *apply* at the bureau of information *for* particulars. Compare ADDRESS; APPLY; ASK; PLEAD; PRAY.

ANTONYMS:

abjure defy deny disavow disclaim refuse repudiate

APPEAR

SYNONYMS:

have the appearance or semblance look seem

Appear and *look* refer to what manifests itself to the senses; to a semblance or probability presented directly to the mind. *Seem* applies to what is manifest to the mind on reflection. It suddenly *appears* to me that there is smoke in the distance; as I watch, it *looks* like a fire; from my knowledge of the locality and observation of particulars, it *seems* to me a farmhouse must be burning.

ANTONYMS:

be be certain, real, or true be the fact exist

PREPOSITIONS:

Appear at the front; *among* the first; *on* or *upon* the surface; *to* the eye; *in* evidence, *in* print; *from* reports; *near* the harbor; *before* the public; *in* appropriate dress; *with* the insignia of his rank; *above* the clouds; *below* the surface; *under* the lee; *over* the sea; *through* the mist; *appear for*, *in behalf of*, or *against* one in court.

APPEND

SYNONYMS:

add affix annex attach subjoin subscribe

To *append* (from L. *ad*, to, + *pendo*, hang) is literally to hang to, as a seal (formerly, and in some cases still, held to the document by a strip of parchment, ribbon, or the like); hence to *add* (see ADD) or *attach* as something accessory, subordinate, or supplemental; as, to *append* a codicil to a will. To *affix* (from L. *ad*, to, + *figo*, fasten) is to *fix*, *fasten*, or *attach*, to, on, or upon something already existing, of which it may or may not become an integral part; as, to *affix* a placard to a wall or a superscription to a letter; to *affix* a syllable at the beginning or end of a word (either a prefix or a suffix being called an "affix"). To *annex* (from L. *ad*, to, + *necto*, bind, tie) is to *add* at the end, with less idea of subordination and dependence, and more of combination or union than is conveyed by *append*; as, to *annex* a suburb to a city, or a prov-

ince to an empire. A codicil or a signature may be *affixed*, *annexed*, *appended*, or *attached*; the signature or name may also be said to be *subscribed*; a title or a superscription is *affixed* (not *annexed* or *appended*, though in some cases we may speak of it as *attached*) to a volume or a treatise; a penalty may be *affixed*, *annexed*, or *attached* to a prohibition; a condition may be *affixed*, *annexed*, or *attached* to a promise; notes or indexes are not *affixed*, but *added* or *appended* to a volume; an appendix is something *appended*.

ANTONYMS:

detach

disconnect

disengage

separate

APPENDAGE**SYNONYMS:**

accessory

addition

appurtenance

concomitant

accompaniment

adjunct

attachment

extension

addendum

appendix

auxiliary

supplement

An *adjunct* (something joined to) constitutes no real part of the thing or system to which it is joined, though perhaps a valuable *addition*; an *appendage* is commonly a real, though not an essential or necessary part of that with which it is connected; an *appurtenance* belongs subordinately to something by which it is employed, especially as an instrument to accomplish some purpose. A horse's tail is at once an ornamental *appendage* and a useful *appurtenance*; we could not call it an *adjunct*, though we might use that word of his iron shoes. *Attachment*, primarily the act of attaching or the state of being attached, is extended to denote the means of attaching, as a nexus, band, or tie; as, the *attachments* of a muscle; also, to denote something appended or attached, as an *adjunct*; in machinery an *attachment* is some mechanism that can be brought into optional connection with the principal movement; as, a spiral turning *attachment* to a lathe; an eolian *attachment* to a piano; a hemmer is a valuable *attachment* of a sewing-machine. An *extension*, as of a railroad or of a franchise, carries out further something already existing. We add an *appendix* to a book, to contain names, dates, lists, etc., which would encumber the text; we add a *supplement* to supply omissions, as, for instance, to bring it up to date. An *appendix* may be called an *addendum*; but *addendum* may be used of a brief note, which would not be dignified by the

name of *appendix*; such notes are often grouped as *addenda*. An *addition* might be matter interwoven in the body of the work, an index, plates, editorial notes, etc., which might be valuable *additions*, but not within the meaning of *appendix* or *supplement*. Compare ACCESSORY; AUXILIARY.

ANTONYMS:

main body original total whole

PREPOSITIONS:

That which is thought of as added we call an appendage *to*; that which is looked upon as an integral part is called an appendage *of*.

APPETITE

SYNONYMS:

appetency	impulse	lust	propensity
craving	inclination	passion	relish
desire	liking	proclivity	thirst
disposition	longing	proneness	zest

Appetite is used only of the demands of the physical system, unless otherwise expressly stated, as when we say an *appetite* for knowledge; *passion* includes all excitable impulses of our nature, as anger, fear, love, hatred, etc. *Appetite* is thus more animal than *passion*; and when we speak of *passions* and *appetites* as conjoined or contrasted, we think of the *appetites* as wholly physical and of the *passions* as, in part at least, mental or spiritual. We say an *appetite* for food, a *passion* for fame. Compare DESIRE.

ANTONYMS:

antipathy	detestation	dislike	distaste	indifference	repugnance
aversion	disgust	disrelish	hatred	loathing	repulsion

Compare ANTIPATHY.

PREPOSITION:

He had an insatiable appetite *for* the marvelous.

APPLY

SYNONYMS:

allot	associate	connect	employ	fix
appropriate	attach	dedicate	exercise	use
assign	conjoin	devote	fit	

To *apply* (from L. *ad*, to, + *plico*, fold), literally to fold to or upon, signifies to lay, place, or put upon for some special

purpose; to bring into contact with, according to some idea of purpose, fitness, or relationship; as, to *apply* the finger to the pulse; to *apply* a poultice to a bruise or a bandage to a wound; *apply* oil to a machine; in figurative use we *apply* a principle, law, or rule to a particular case; we *apply* steam to navigation; *apply* the mind or *apply* oneself to study or to a problem; *apply* a fund to a special use; *apply* a test to a metal, or to evidence, professions, or character; *apply* an epithet or a nickname.

The words above given as synonyms for *apply* must be regarded as suggestions rather than substitutes, except within very narrow limits. While *apply* may, in some special use, be substituted for any one of these, or of a variety of other words, it is rarely interchangeable with any one of them, so that it may almost be said to be a word without a synonym. When we seem to have found a synonym, examination quickly shows that the differences are more striking, the resemblances between the words so compared. Thus, a sticking-plaster which is *applied* to a surface is of necessity *attached*, but the latter word is rarely used in that connection; a poultice which is *applied* is often especially so prepared that it shall not become *attached*; a postage-stamp, which is *attached* or *affixed* to a letter, is not said to be *applied*; a measuring-rule is *applied* to a surface, and is useful for that purpose because it is not *attached*; a whip is *applied* to a horse, but if it were *attached* to the horse it could not well be *applied*; a placard is *affixed* to a post, but it is not said to be *applied*; a sum of money may be *allotted*, *applied*, *appropriated*, *dedicated*, or *devoted* to a particular use; but *allot* carries too much of its original meaning of chance, and *dedicate* or *devote* too much of sacredness for business use; *appropriate* has a sense of official designation which is not in *apply*; money may be *applied* to a use for which it was not *appropriated*; that which is *applied* may be sometimes said to be *used*, *employed*, or *exercised*; but to *employ*, *exercise*, or *use* the mind on a problem would mean much less than to *apply* the mind to the problem; a remedy is said to be *used*, but not *applied*, internally; we *apply*, *adapt*, *adjust*, or *fit* a theory to the facts (but not the facts to the theory)—*apply* to test its correctness, *adapt*, *adjust*, or *fit* by any change in the theory

that the facts may require; a rule, law, or principle *fits* a case to which it exactly corresponds; it *applies* to a case with which it has some inherent connection; the proposition that the three angles of a triangle are equal to two right angles does not *apply* to the segment of a circle; the law against burglary does not *apply* to highway robbery; *apply* and *refer* view the same fact from opposite directions; we *apply* a rule to a case, *refer* (never *apply*) the case to the rule. *Apply* thus stands singularly alone; its true meanings and connections can be learned only by study of the dictionary and of approved usage, not by any substitution of other words.

ANTONYMS:

See synonyms for ATTACH.

APPORTION

SYNONYMS:

allot	assign	distribute	grant
appoint	deal	divide	share
appropriate	dispense		

To *allot* or *assign* may be to make an arbitrary division; the same is true of *distribute* or *divide*. That which is *apportioned* is given by some fixed rule, which is meant to be uniform and fair; as, representatives are *apportioned* among the States according to population. To *dispense* is to give out freely; as, the sun *dispenses* light and heat. A thing is *appropriated* to or for a specific purpose (to which it thus becomes *proper*, in the original sense of being its own); money *appropriated* by Congress for one purpose can not be expended for any other. One may *apportion* what he only holds in trust; he *shares* what is his own. Compare ALLOT.

ANTONYMS:

cling to	consolidate	gather together	receive
collect	divide arbitrarily	keep together	retain

PREPOSITIONS:

Apportion *to* each a fair amount; apportion the property *among* the heirs, *between* two claimants; apportion *according* to numbers, etc.

APPROXIMATION

SYNONYMS:

approach	likeness	neighborhood	resemblance
contiguity	nearness	propinquity	similarity

In mathematics, *approximation* is not guesswork, not looseness, and not error. The process of *approximation* is as exact and correct at every point as that by which an absolute result is secured; the result only fails of exactness because of some inherent difficulty in the problem. The attempt to "square the circle" gives only an *approximate* result, because of the impossibility of expressing the circumference in terms of the radius. But the limits of error on either side are known, and the *approximation* has practical value. Outside of mathematics, the correct use of *approximation* (and the kindred words *approximate* and *approximately*) is to express as near an approach to accuracy and certainty as the conditions of human thought or action in any given case make possible. *Resemblance* and *similarity* may be but superficial and apparent; *approximation* is real. *Approach* is a relative term, indicating that one has come nearer than before, though the distance may yet be considerable; an *approximation* brings one really near. *Nearness*, *neighborhood*, and *propinquity* are commonly used of place; *approximation*, of mathematical calculations and abstract reasoning; we speak of *approach* to the shore, *nearness* to the town, *approximation* to the truth.

ANTONYMS:

difference distance error remoteness unlikeness variation

PREPOSITIONS:

The approximation *of* the vegetable *to* the animal type.

ARMS

SYNONYMS:

accouterments armor harness mail weapons

Arms are implements of attack; *armor* is a defensive covering. The knight put on his *armor*; he grasped his *arms*. With the disuse of defensive *armor* the word has practically gone out of military use, but it is still employed in the navy, where the distinction is clearly preserved; any vessel provided with cannon is an *armed* vessel; an *armored* ship is an iron-

clad. Anything that can be wielded in a fight may become a *weapon*, as a pitchfork or a paving-stone; *arms* are especially made and designed for conflict.

ARMY

SYNONYMS:

armament	forces	military	soldiers
array	host	multitude	soldiery
force	legions	phalanx	troops

An *army* is an organized body of men armed for war, ordinarily considerable in numbers, always independent in organization so far as not to be a constituent part of any other command. Organization, unity, and independence, rather than numbers are the essentials of an *army*. We speak of the invading *army* of Cortes or Pizarro, though either body was contemptible in numbers from a modern military standpoint. We may have a little *army*, a large *army*, or a vast *army*. *Host* is used for any vast and orderly assemblage; as, the stars are called the heavenly *host*. *Multitude* expresses number without order or organization; a *multitude* of armed men is not an *army*, but a mob. *Legion* (from the Latin) and *phalanx* (from the Greek) are applied by a kind of poetic license to modern *forces*; the plural *legions* is preferred, in most uses, to the singular. *Military* is a general word for land-*forces*; the *military* may include all the armed *soldiery* of a nation, or the term may be applied to any small detached company, as at a fort, in distinction from civilians. Any organized body of men by whom the law or will of a people is executed is a *force*; the word is a usual term for the police of any locality.

ARRAIGN

SYNONYMS:

accuse	charge	impeach	prosecute
censure	cite	indict	summon

Arraign is an official word, a person accused of crime is *arraigned* when he is formally called into court, the indictment read to him, and the demand made of him to plead guilty or not guilty; in more extended use, to *arraign* is to call in question for fault in any formal, public, or official way.

One may *charge* another with any fault, great or trifling, privately or publicly, formally or informally. *Accuse* is stronger than *charge*, suggesting more of the formal and criminal; a person may *charge* a friend with unkindness or neglect; he may *accuse* a tramp of stealing. *Censure* carries the idea of fault, but not of crime; it may be private and individual, or public and official. A judge, a president, or other officer of high rank may be *impeached* before the appropriate tribunal for high crimes; the veracity of a witness may be *impeached* by damaging evidence. A person of the highest character may be *summoned* as defendant in a civil suit; or he may be *cited* to answer as administrator, etc. *Indict* and *arraign* apply strictly to criminal proceedings, and only an alleged criminal is *indicted* or *arraigned*. One is *indicted* by the grand jury, and *arraigned* before the appropriate court.

ANTONYMS:

acquit	discharge	exonerate	overlook	release
condone	excuse	forgive	pardon	set free

PREPOSITIONS:

Arraign *at* the bar, *before* the tribunal, *of* or *for* a crime; *on* or *upon* an indictment.

ARRANGE**SYNONYMS:**

adjust	compose	order	set in order
array	dispose	place in order	set up
assort	form	put in order	sort
classify	group	range	sort out
colligate	harmonize	set	sort over
collocate	marshal		

To *arrange* is to place in definite order, in accordance with some plan or design; the basis of arrangement may greatly vary; we may *arrange* objects according to size or character, as books upon shelves; according to convenience or readiness for use, as a mechanic's tools; according to taste or artistic effect, as the pictures or furniture of a room, the flowers in a vase, etc.; or according to rhetorical effect or logical connection, as words in a sentence, sentences in a paragraph, or arguments in a discourse. The same objects may be differently *arranged* according to the purpose in view; articles of apparel are *arranged* in a wardrobe according to space, convenience, or readiness for use; they are *arranged*

upon the person according to their effect as parts of a costume. To *assort* or *classify* is to *arrange* according to sorts or classes; ready-made clothing is placed for sale in *assorted* sizes; books are *classified* in a public library. *Assort* generally has reference to material qualities, as of size, color, weight, or the like; *classify* to some mental basis of connection or sequence; goods are *assorted*; plants and animals are *classified* according to genera, species, etc.; to *assort* the specimens in a museum according to size, color, or appearance would spoil the classification; furniture is *assorted* in a warehouse, *arranged* in a parlor. Studies or students are not *assorted*, but *arranged* or *classified*. To *sort*, *sort over*, or *sort out*, is viewed as a ruder and more general process, less definite and exact than to *assort*, and quite lacking the orderly basis of *arrange*. To *harmonize* is to *arrange* in such order or relation as to produce a harmonious effect, musical or other. To *range*, to place in a row or rows, is used primarily of large objects or those covering considerable space, as, in the use of the noun, we speak of a "range" of columns or of mountains, as used of troops *range* has less reference than *arrange* to minor matters of order and alignment, and more to the extended distribution of the whole as an effective fighting force.

At midnight, in the forest shades,
Bozzaris *ranged* his Sulhote band

HALLECK *Marco Bozzaris, st 2.*

Here *arranged* would be insufferably feeble. To *array* is to draw up or *arrange* in order for battle, as an army; *array* expresses more of readiness for action on a large scale than *arrange*, and more of spectacular and cohesive formation than *range*; scouts or skirmishers may be *ranged* along the front; the main army is *arrayed* in line of battle. *Marshal* is more preparatory, and may have reference merely to the enrolment and assemblage of a force.

False wizard, avaunt! I have *marshalled* my clan.

CAMPBELL *Lochiel's Warning.*

As modern projectiles discourage spectacular formations the word *array* is falling out of military use, but still, both as noun and verb, has extensive literary employment with splendid descriptive force.

By torch and trumpet fast *arrayed*,
Each warrior drew his battle blade.

CAMPBELL *Hohenlinden*.

The midnight brought the signal-sound of strife,
The morn, the *marshaling* in arms,
The day, battle's magnificently stern *array*.

BYRON *Childe Harold*, st. 28.

As applied to dress, *array* carries the same idea of splendor.

Solomon, in all his glory, was not *arrayed* like one of these.

Matt. vi, 29.

To *form*, in this connection, is to *arrange* parts or units so that they assume a certain form or shape; as, to *form* a procession; to *form* troops in line or column; to *form* a regiment in a square; to *dispose* is to place parts or units in relative position for mutual cooperation or support on an extended scale; a modern army is *disposed* over so large an area that the different parts can not see one another, and no "form" of the entire force is visible from any point; hence we naturally speak of the disposition rather than of the formation of the force. To *compose* is to put together things, thoughts, parts, or elements so as to form an orderly whole; to *compose* may include *arranging*, but commonly involves much more; in *compose*, the thought of unity prevails; in *dispose*, the thought of distribution. In printing, to *compose* is to *arrange* (type) in proper order, as in the *composing-stick*—in this sense rarely used, *set* or *set up* being the technical terms; yet a type-setter is regularly called a "compositor," and the process "composition." See ADJUST; COMPROMISE.

ANTONYMS:

confuse
derange
disarrange

disorder
disperse

disturb
jumble

pi or pie (print)
scatter

ARRAY

SYNONYMS:

army
arrangement
battle array

collection
disposition
exhibition

line of battle
order
order of battle

parade
show
sight

The phrase *battle array* or *array of battle* is archaic and poetic; we now say in *line* or *order of battle*. The *parade* is for *exhibition* and oversight, and partial rehearsal of military manual and maneuvers. *Array* refers to a continuous

arrangement of men, so that all may be seen or reviewed at once. This is practically impossible with the vast *armies* of our day. We say rather the *disposition* of troops, which expresses their location so as to sustain and support, though unable to see or readily communicate with each other. Compare DRESS.

ARREST

SYNONYMS:

apprehend	detain	restrain	stop
capture	hold	secure	take into custody
catch	make prisoner	seize	take prisoner

The legal term *arrest* carries always the implication of a legal offense; this is true even of *arresting* for debt. But one may be *detained* by process of law when no offense is alleged against him, as in the case of a witness who is *held* in a house of detention till a case comes to trial. One may be *restrained* of his liberty without arrest, as in an insane asylum; an individual or corporation may be *restrained* by injunction from selling certain property. In case of an arrest, an officer may *secure* his prisoner by fetters, by a locked door, or other means effectually to prevent escape. *Capture* is commonly used of seizure by armed force; as, to *capture* a ship, a fort, etc. Compare HINDER; OBSTRUCT.

ANTONYMS:

discharge	dismiss	free	liberate	release	set free
-----------	---------	------	----------	---------	----------

PREPOSITIONS:

Arrested *for* crime, *on* suspicion, *by* the sheriff; *on*, *upon*, or *by virtue of* a warrant; *on* final process; *in* execution.

ARTIFICE

SYNONYMS:

art	cunning	guile	ruse
blind	device	imposture	stratagem
cheat	dodge	invention	subterfuge
contrivance	finesse	machination	trick
craft	fraud	maneuver	wile

A *contrivance* or *device* may be either good or bad. A *cheat* is a mean advantage in a bargain; a *fraud*, any form of covert robbery or injury. *Imposture* is a deceitful *contrivance* for securing charity, credit, or consideration. A *stratagem* or *maneuver* may be of the good against the bad, as it were a

skilful movement of war. A *wile* is usually but not necessarily evil.

E'en children followed with endearing *wile*.

GOLDSMITH *Deserted Village*, l. 184.

A *trick* is often low, injurious, and malicious; we say a mean *trick*; the word is sometimes used playfully with less than its full meaning. A *ruse* or a *blind* may be quite innocent and harmless. An *artifice* is a carefully and delicately prepared *contrivance* for doing indirectly what one could not well do directly. A *device* is something studied out for promoting an end, as in a mechanism; the word is used of indirect action, often, but not necessarily directed to an evil, selfish, or injurious end. *Finesse* is especially subtle *contrivance*, delicate *artifice*, whether for good or evil. Compare FRAUD.

ANTONYMS:

artlessness
candor
fairness

frankness
guilelessness
honesty

ingenuousness
innocence
openness

simplicity
sincerity
truth

ARTIST

SYNONYMS:

artificer artisan mechanic operative workman

Artist, *artificer*, and *artisan* are all from the root of *art*, but *artist* holds to the esthetic sense, while *artificer* and *artisan* follow the mechanical or industrial sense of the word (see ART under SCIENCE). *Artist* thus comes only into accidental association with the other words of this group, not being a synonym of any one of them and having practically no synonym of its own. The work of the *artist* is creative; that of the *artisan* mechanical. The man who paints a beautiful picture is an *artist*; the man who makes pin-heads all day is an *artisan*. The *artificer* is between the two, putting more thought, intelligence, and taste into his work than the *artisan*, but less of the idealizing, creative power than the *artist*. The sculptor, shaping his model in clay, is *artificer* as well as *artist*; patient *artisans*, working simply by rule and scale, chisel and polish the stone. The man who constructs anything by mere routine is a *mechanic*. The man whose work involves thought, skill, and constructive power is an *artificer*. The hod-carrier is a *laborer*; the bricklayer is a *mechanic*;

the master mason is an *artificer*. Those who operate machinery nearly self-acting are *operatives*.

ASK

SYNONYMS:

appeal
apply for
apply to
beg

beseech
crave
demand
entreat

implore
petition
pray
request

require
solicit
supplicate

One *asks* what he feels that he may fairly claim and reasonably expect; "if a son shall *ask* bread of any of you that is a father," *Luke* xi, 11; he *begs* for that to which he advances no claim but pity. *Demand* is a determined and often an arrogant word; one may rightfully *demand* what is his own or his due, when it is withheld or denied; or he may wrongfully *demand* that to which he has no claim but power. *Require* is less arrogant and obtrusive than *demand*, but is exceedingly strenuous; as, the court *requires* the attendance of witnesses. *Entreat* implies a special earnestness of asking, and *beseech*, a still added and more humble intensity; *beseech* was formerly often used as a polite intensive for *beg* or *pray*; as, I *beseech* you to tell me. To *implore* is to *ask*, with weeping and lamentation; to *supplicate* is to *ask*, as it were, on bended knees. *Crave* and *request* are somewhat formal terms; *crave* has almost disappeared from conversation; *request* would seem distant between parent and child. *Pray* is now used chiefly of address to the Supreme Being; *petition* is used of written request to persons in authority; as, to *petition* the legislature to pass an act, or the governor to pardon an offender. Compare APPEAL; PLEAD; PRAY.

ANTONYMS:

claim command deny enforce exact extort insist refuse reject

PREPOSITIONS:

Ask a person *for* a thing; ask a thing *of* or *from* a person; ask *after* or *about* one's health, welfare, friends, etc.

ASSOCIATE, v.

SYNONYMS:

affiliate attach confederate connect join link
ally combine conjoin couple league unite

To *associate* (from L. *ad*, to, + *socius*, a companion, ally) is

to put, bring, or come together *with* something else in companionship of fact or thought; feelings, speech, manners, and morals will be influenced by the persons with whom one *associates*; things are *associated* in thought when for any reason the thought of one calls up that of the other; we *associate* a certain meaning with a word, with or without reason, rightly or wrongly (for association is far from definition); if we *attach* a certain meaning to a word, we have (or believe ourselves to have) definite reason for so doing; we *associate* a song with some scene where it was heard, or the perfume of a flower with a friend who loved it; the association of ideas is one of the most important topics in psychology. To *ally* (from L. *ad*, to, + *ligo*, bind) is to *unite* by treaty, league, or agreement, as sovereign states (compare *ALLY*, *n*, under *ADHERENT*); hence, to *connect* by any relationship, as by marriage, likeness, origin, etc.; persons or families of prominence may be said to be *allied* by marriage. To *affiliate* (from L. *ad*, to, + *filus*, son), primarily to adopt or receive into a family, as a son or daughter, is commonly used as signifying to receive or *associate* with on friendly terms (followed by *with* or *to*—or, in a certain legal or scientific use, by *on* or *upon*); as, to *affiliate* oneself *with* (or *to*) a political party; a person's character may be judged by the character of those with whom he is *affiliated*; virtue *affiliates* with virtue; we speak of *affiliated* sciences, studies, colleges, or schools. Compare *ATTACH*.

ANTONYMS:

avoid	disrupt	diverge	estrangle	sever
disconnect	dissociate	divide	part	sunder
disjoin	disunite	divorce	separate	

ASSOCIATE, *n*.**SYNONYMS:**

accomplice	colleague	consort	mate
ally	companion	fellow	partner
chum	comrade	friend	peer
coadjutor	confederate	helpmate	

Associate is popularly used of mere friendly relations, but oftener implies some work, enterprise, or pursuit in which the associated persons unite. An *associate* as used officially implies a chief, leader, or principal, to whom the *associate* is not fully equal in rank; as, an *associate* editor. We rarely

speak of *associates* in crime or wrong, using *confederates* or *accomplices* instead. *Companion* gives itself with equal readiness to the good or evil sense, as also does *comrade*. One may be a *companion* in travel who would not readily become an *associate* at home. A lady advertises for a *companion*; she would not advertise for an *associate*. *Peer* implies equality rather than companionship; as, a jury of his *peers*. *Comrade* expresses more fellowship and good feeling than *companion*. *Fellow* has almost gone out of use in this connection, except in an inferior or patronizing sense. *Consort* is a word of equality and dignity, as applied especially to the marriage relation. Compare ACCESSORY; ACQUAINTANCE; FRIENDSHIP.

ANTONYMS:

antagonist	foe	opponent	rival
enemy	hinderer	opposer	stranger

PREPOSITIONS:

These were the associates *of* the leader *in* the enterprise.

ASSOCIATION

SYNONYMS:

alliance	confederacy	familiarity	lodge
club	confederation	federation	participation
community	conjunction	fellowship	partnership
companionship	connection	fraternity	society
company	corporation	friendship	union

We speak of an *alliance* of nations, a *club* of pleasure-seekers, a *community* of Shakers, a *company* of soldiers or of friends, a *confederacy*, *confederation*, *federation*, or *union* of separate states under one general government, a *partnership* or *company* of business men, a *conjunction* of planets. The whole body of Freemasons constitute a *fraternity*; one of their local organizations is called a *lodge*. A *corporation* or *company* is formed for purposes of business; an *association* or *society* (though also incorporated) is for learning, literature, benevolence, religion, etc. Compare ASSOCIATE; ACQUAINTANCE; FRIENDSHIP.

ANTONYMS:

disintegration	independence	isolation	separation	solitude
----------------	--------------	-----------	------------	----------

PREPOSITIONS:

An association *of* scholars *for* the advancement of knowledge; association *with* the good is ennobling.

ASSUME

SYNONYMS:

accept
affect
appropriate

arrogate
claim
feign

postulate
presume
pretend

put on
take
usurp

The distinctive idea of *assume* is to take by one's own independent volition, whether well or ill, rightfully or wrongfully. One may *accept* an obligation or *assume* an authority that properly belongs to him, or he may *assume* an obligation or indebtedness that could not be required of him. He may *assume* authority or office that is his right; if he *assumes* what does not belong to him, he is said to *arrogate* or *usurp* it. A man may *usurp* the substance of power in the most unpretending way; what he *arrogates* to himself he *assumes* with a haughty and overbearing manner. One *assumes* the robes or insignia of office by putting them *on*, with or without right. If he *takes* to himself the credit and appearance of qualities he does not possess, he is said to *affect* or *feign*, or to *pretend* to, the character he thus *assumes*. What a debater *postulates* he openly states and *takes* for granted without proof; what he *assumes* he may take for granted without mention. A favorite trick of the sophist is quietly to *assume* as true what would at once be challenged if expressly stated. What a man *claims* he asserts his right to *take*; what he *assumes* he *takes*.

ASSURANCE

SYNONYMS:

arrogance
assertion
assumption

boldness
confidence
effrontery

impudence
presumption
self-assertion

self-confidence
self-reliance
trust

Assurance may have the good sense of a high, sustained *confidence* and *trust*; as, the saint's *assurance* of heaven. *Confidence* is founded upon reasons; *assurance* is largely a matter of feeling. In the bad sense, *assurance* is a vicious courage, with belief of one's ability to outwit or defy others; the hardened criminal is remarkable for habitual *assurance*. For the calm conviction of one's own rectitude and ability, *self-confidence* is a better word than *assurance*; *self-reliance* expresses confidence in one's own resources, independently of others' aid. In the bad sense *assurance* is less gross than *im-*

puudence, which is (according to its etymology) a shameless boldness. *Assurance* is in act or manner; *impudence* may be in speech. *Effrontery* is *impudence* defiantly displayed. Compare FAITH; PRIDE.

ANTONYMS:

bashfulness	consternation	distrust	hesitancy	shyness
confusion	dismay	doubt	misgiving	timidity

ASTUTE

SYNONYMS:

acute	discerning	penetrating	sharp
artful	discriminating	penetrative	shrewd
clear-sighted	keen	perspicacious	subtile
crafty	knowing	sagacious	subtle
cunning			

Acute, from the Latin, suggests the sharpness of the needle's point; *keen*, from the Saxon, the sharpness of the cutting edge. *Astute*, from the Latin, with the original sense of *cunning* has come to have a meaning that combines the sense of *acute* or *keen* with that of *sagacious*. The *astute* mind adds to *acuteness* and *keenness* an element of *cunning* or *finesse*. The *astute* debater leads his opponents into a snare by getting them to make admissions, or urge arguments, of which he sees a result that they do not perceive. The *acute*, *keen* intellect may take no special advantage of these qualities; the *astute* mind has always a point to make for itself, and seldom fails to make it. A *knowing* look, air, etc., in general indicates practical knowledge with a touch of shrewdness, and perhaps of *cunning*; in regard to some special matter, it indicates the possession of reserved knowledge which the person could impart if he chose. *Knowing* has often a slightly invidious sense. We speak of a *knowing* rascal, meaning *cunning* or *shrewd* within a narrow range, but of a *knowing* horse or dog, in the sense of *sagacious*, implying that he knows more than could be expected of such an animal. A *knowing* child has more knowledge than would be looked for at his years, perhaps more than is quite desirable, while to speak of a child as *intelligent* is altogether complimentary.

ANTONYMS:

blind	imbecile	stolid	undiscerning
dull	shallow	stupid	unintelligent
idiotic	short-sighted		

ATTACH

SYNONYMS:

add	append	conjoin	hitch	stick
adjoin	apply	connect	join	unite
affix	associate	fasten	secure	
annex	combine	fix		

To *attach* (from L. *ad*, to, + Bret. *tach*, nail) is primarily to cause one thing to hold securely to another as by a nail; thence the meaning is extended to include any other means of secure connection, as by a cord, etc.; a handle is *attached* to a valise, a hook to a fishing-line, a bayonet to a gun; a plant is *attached* to the ground by its roots. We commonly speak of *attaching* the less to the greater, the subordinate to the principal, the final to the preliminary, the particular to the general, the movable to the permanent, etc.; we *attach* a nozzle to a hose, a hose to a faucet or a hydrant; a barnacle *attaches* itself to a ship. In some cases we may speak of either of two objects as *attached* to the other, according to our point of view; we may say that the hilt of the sword is *attached* to the blade or the blade to the hilt; or, two or more objects may be spoken of as *attached* to each other or to one another. In official relations an officer is said to be *attached* to a regiment, a ship, an expedition, or the like, a secretary to an embassy, etc. In legal use a person or property that is *attached* is viewed as *bound* and held by the bond of the law. In mental, moral, and spiritual relations we *attach* a certain meaning to a word, or significance to an action; we *attach* importance to a discovery; one may be *attached* to a party by custom, association, or self-interest, or by sympathy, principle, or patriotism; a person is *attached* to another or to others by affection. To *fasten* (from AS. *fæstnian*, fasten) is to make fast, as one object to another; as, to *fasten* a door by a bolt; to *fasten* a glove by a button; to *fasten* boards together with nails or screws; figuratively, to cause to adhere by any means or agency; as, to *fasten* a quarrel, a reproach, a nickname, etc., upon any one. In the physical sense, *attach* and *fasten* are close synonyms, and often used interchangeably; that which is *attached* or *fastened* may have considerable freedom of movement, provided the connection be secure; as, a boat is *attached* or *fastened* to the wharf by a mooring-line; yet, even here, there are differences of usage; we say that a muscle

is *attached* (rather than *fastened*) to a bone by a tendon; a horse is *fastened* to a post by a strap or rope; he is *attached* to the vehicle by the harness; in either case we may use the plain Old English verb *hitch*, which is applied especially to a temporary fastening; we may also speak of the horse as *tied* to the post, but not to the load; a door is *attached* to the door-post by hinges; it is *fastened* at the opposite side by a bolt or lock; we *attach* or *fasten* papers to each other by paste, mucilage, or the like (in which case we may be said to *stick* them together—compare ADHESIVE), or by clips or by other metallic devices known as “paper-fasteners,” or by rubber bands, etc.; yet here appears a difference of usage; we may *fasten* the papers together temporarily, simply to keep them from being scattered, but those which are *attached* are viewed as having some definite relation to each other; as, “See depositions *attached*.” We may *fasten* or *attach* objects by *binding* or *tying*. See BIND. To *join* is to bring together, bring into close contact, adhesion, conjunction, or cooperation; as, to *join* hands, fortunes, forces, estates, etc.; if one building is *joined* to another the two are built against or into each other; *unite* is a close synonym for *join*, but of fuller meaning; in the physical sense things are *united* which are *joined* so as to form one concordant whole, to adhere closely together, to exist or act as one; figuratively, things are *united* which are *joined* in close and harmonious relation, as by legal, marital, social, or other tie, by interest, affection, fellowship, or the like; as, to *unite* nations by treaty, to *unite* hearts in love, to *unite* courage with fortitude; persons are *joined* or *united* in marriage, *unite* having the fuller and nobler meaning. To *connect* (from L. *con*, together, + *necto*, bind, tie) is to *join* as by links or fastenings; to bring into close relation, especially by some intervening means or agency; as, two buildings are *connected* by a subway, or two oceans by a strait; thence *connect* is extended in meaning to denote numerous forms of close relationship, as by origin, derivation, significance, association of ideas, classification, causation, consequence, etc.; in the scheme of the solar system, the moon is *connected* with the earth, though it is not *attached*, *fastened*, or *joined* to, or *united* with it; a word is *connected* with another by derivation from the same root; two words are *con-*

nected in meaning where each expresses some part of the meaning conveyed by the other; two thoughts, feelings, or ideas are *connected* when the one suggests the other, or when both are suggested by the same object; as the idea of food is *connected* with the sensation of hunger, the sound of a crash with the idea of a falling object, etc.; two wires that merely touch are mechanically disconnected, as either may be freely drawn away from the other; but they are electrically *connected* (forming what is called a "loose connection"), as affording a means by which an electric current may pass from one to another. *Connect* is a word of looser, less vigorous and intimate meaning than *attach*, *join*, or *unite*; husband and wife are *joined* or *united* (not *connected*) in marriage: their two families, or any members of either are *connected* by that marriage; *attached* could not be used in either sense; so we speak of persons as distantly connected (or related), or of one as a distant connection (or relation, relative, or kinsman) of another. Compare ADD; APPEND; APPLY; ASSOCIATE; BIND; FIX.

ANTONYMS:

alienate	discard	disjoin	disunite	divorce	separate
detach	disconnect	dissociate	divert	remove	sever

PREPOSITIONS:

Attach *to* the document *at* the bottom *with* mucilage; attached *by* ligaments, *by* a cord, a halter, or the like; in legal usage, attach *for* a debt, etc. (anciently *of* high treason); loss or blame may attach *on* or *upon*.

ATTACHMENT**SYNONYMS:**

adherence	devotion	friendship	regard
adhesion	esteem	inclination	tenderness
affection	estimation	love	union
affinity			

Attachment, in the sense here considered, is a feeling that binds a person by ties of heart to another person or thing; we speak of a man's *adherence* to his purpose, his *adhesion* to his party, or to anything to which he clings tenaciously, though with no special tenderness; of his *attachment* to his church, to the old homestead, or to any persons or objects that he may hold dear. *Affection* expresses more warmth of feeling; we

should not speak of a mother's *attachment* to her babe, but of her *affection* or of her *devotion*. *Inclination* expresses simply a tendency, which may be good or bad, yielded to or overcome; as, an *inclination* to study; an *inclination* to drink. *Affinity* is an instinctive drawing, inclination, liking, or friendliness founded upon some correspondence of nature; as in chemistry, *affinity* does not involve likeness, so, in spiritual relations, *affinity* may be between opposite natures or qualities, between which there is no inherent contradiction, each supplying some lack in the other; there may be *affinity* between the brave and the timid, between the martial courage of the soldier and the moral courage of the statesman, but not between courage and cowardice, nor between virtue and vice; the brave, true, and good of to-day have *affinity* with the brave, true, and good of all the ages past; *affinity*, which is capable of the highest meaning, is now often popularly used, in a degraded sense, of a supposedly irresistible attraction between two persons of opposite sex, outside the bounds of marriage or propriety; by a usage little removed from slang, either of such persons is said to be the other's *affinity*. *Regard* is more distant than *affection* or *attachment*, but closer and warmer than *esteem*; we speak of high *esteem*, kind *regard*. Compare ACQUAINTANCE; APPENDAGE; FRIENDSHIP; LOVE; UNION.

ANTONYMS:

alienation	aversion	distance	estrangement	repugnance
animosity	coolness	divorce	indifference	separation
antipathy	dislike	enmity	opposition	severance

PREPOSITIONS:

Attachment *of* a true man *to* his friends; attachment *to* a leader *for* his nobility of character; the attachments *between* two persons or things; attachment *by* muscular fibers, or *by* a rope, etc.

ATTACK, v.

SYNONYMS:

assail	beset	combat	invade
assault	besiege	encounter	set upon
beleaguer	charge	fall upon	storm

To *attack* is to begin hostilities of any kind. A general *invades* a country by marching in troops; he *attacks* a city by drawing up an army against it; he *assaults* it by hurling his troops directly upon its defenses. *Assail* and *assault*, though al

the same original etymology, have diverged in meaning, so that *assault* alone retains the meaning of direct personal violence. One may *assail* another with reproaches; he *assaults* him with a blow, a brandished weapon, etc. Armies or squadrons *charge*; *combat* and *encounter* may be said of individual contests. To *beset* is to set around, or, so to speak, to stud one's path, with menaces, attacks, or persuasions. To *besiege* and *beleaguer* are the acts of armies. To *encounter* is to meet face to face, and may be said either of the *attacking* or of the resisting force or person, or of both.

ANTONYMS:

aid	cover	protect	shelter	support	uphold
befriend	defend	resist	shield	sustain	withstand

PREPOSITIONS:

We were attacked *by* the enemy *with* cannon and musketry.

ATTACK, n.**SYNONYMS:**

aggression	incursion	invasion	onslaught
assault	infringement	onset	trespass
encroachment	intrusion		

An *attack* may be by word; an *aggression* is always by deed. An *assault* may be upon the person, an *aggression* is upon rights, possessions, etc. An *invasion* of a nation's territories is an act of *aggression*; an *intrusion* upon a neighboring estate is a *trespass*. *Onslaught* signifies intensely violent *assault*, as by an army or a desperado, though it is sometimes used of violent speech.

ANTONYMS:

defense repulsion resistance retreat submission surrender

PREPOSITIONS:

The enemy made an attack *upon* (or *on*) our works.

ATTAIN**SYNONYMS:**

accomplish	arrive at	gain	master	reach
achieve	compass	get	obtain	secure
acquire	earn	grasp	procure	win

A person may *obtain* a situation by the intercession of friends, he *procures* a dinner by paying for it. *Attain* is a lofty word, pointing to some high or desirable result; a man

attains the mountain summit, he *attains* honor or learning as the result of strenuous and earnest labor. Even that usage of *attain* which has been thought to refer to mere progress of time carries the thought of a result desired; as, to *attain* to old age; the man desires to live to a good old age; we should not speak of his *attaining* his dotage. One may *attain* an object that will prove not worth his labor, but what he *achieves* is in itself great and splendid; as, the Greeks at Marathon *achieved* a glorious victory. Compare DO; GET; REACH.

ANTONYMS:

abandon fail forfeit give up let go lose miss

ATTITUDE

SYNONYMS:

pose position posture

Position as applied to the arrangement or situation of the human body or limbs may denote that which is conscious or unconscious, of the living or the dead; but we do not speak of the *attitude*, *pose*, or *posture* of a corpse; unless, in some rare case, we might say the body was found in a sitting *posture*, where the *posture* is thought of as assumed in life, or as, at first glance, suggesting life. A *posture* is assumed without any special reference to expression of feeling; as, an erect *posture*, a reclining *posture*; *attitude* is the *position* appropriate to the expression of some feeling; the *attitude* may be unconsciously taken through the strength of the feeling; as, an *attitude* of defiance; or it may be consciously assumed in the attempt to express the feeling; as, he assumed an *attitude* of humility. A *pose* is a *position* studied for artistic effect, or considered with reference to such effect; the unconscious *posture* of a spectator or listener may be an admirable *pose* from an artist's standpoint.

ATTRIBUTE, n.

SYNONYMS:

ascribe associate connect refer
assign charge impute

We may *attribute* to a person either that which belongs to him or that which we merely suppose to be his. We *attribute* to God infinite power. We may *attribute* a wrong intent to an

innocent person. We may *attribute* a result, rightly or wrongly, to a certain cause; in such case, however, *attribute* carries always a concession of uncertainty or possible error. Where we are quite sure, we simply *refer* a matter to the cause or class to which it belongs or *ascribe* to one what is surely his, etc. Many diseases formerly *attributed* to witchcraft are now *referred* to the action of micro-organisms. We may *attribute* a matter in silent thought; we *ascribe* anything openly in speech or writing; King Saul said of the singing women, "They have *ascribed* unto David ten thousands, and to me they have *ascribed* but thousands." We *associate* things which may have no necessary or causal relation; as, we may *associate* the striking of a clock with the serving of dinner, though the two are not necessarily connected. We *charge* a person with what we deem blameworthy. We may *impute* good or evil, but more commonly evil.

ANTONYMS:

deny disconnect dissociate separate sever sunder

PREPOSITIONS:

It is uncharitable to attribute evil motives *to* (archaic *unto*) others.

ATTRIBUTE, *n.***SYNONYMS:**

property quality

A *quality* (from L. *qualis*, such)—the "suchness" of anything, according to the German idiom—denotes what a thing really is in some respect; an *attribute* is what we conceive a thing to be in some one respect; thus, while *attribute* may, *quality* must, express something of the real nature of that to which it is ascribed; we speak of the *attributes* of God, the *qualities* of matter. "Originally 'the *attributes* of God' was preferred, probably, because men assumed no knowledge of the actual *qualities* of the Deity, but only of those more or less fitly attributed to him." J. A. H. MURRAY. [M.] Holiness is an *attribute* of God; the *attributes* of many heathen deities have been only the *qualities* of wicked men joined to superhuman power. A *property* (from L. *proprius*, one's own) is what belongs especially to one thing as its own peculiar possession, in distinction from all other things; when we speak of the *qualities* or the *properties* of matter, *quality* is the more general, *property* the more limited term. A

quality is inherent; a *property* may be transient; physicists now, however, prefer to term those *qualities* manifested by all bodies (such as impenetrability, extension, etc.), *general properties* of matter, while those peculiar to certain substances or to certain states of those substances (as fluidity, malleability, etc.) are termed *specific properties*, in this wider use of the word *property*, it becomes strictly synonymous with *quality*. Compare CHARACTERISTIC; EMBLEM.

ANTONYMS:

being essence nature substance

AUGUR

SYNONYMS:

betoken	forebode	predict	prognosticate
bode	foretell	presage	prophecy
divine	portend		

"Persons or things *augur*; persons only *forebode* or *presage*; things only *betoken* or *portend*." CRABB *English Synonymes*. We *augur* well for a voyage from past good fortune and a good start; we *presage* success from the staunchness of the ship and the skill of the captain. We *forebode* misfortune either from circumstances that *betoken* failure, or from gloomy fancies for which we could not give a reason. *Portend* is unfavorable in meaning (as appears also in the noun "portent" and the adjective "portentous"); dissipation among the officers and mutiny among the crew *portend* disaster. *Divine* has reference to the ancient soothsayers' arts (as in Gen. xliv, 5, 15), and refers rather to reading hearts than to reading the future. We say, I could not *divine* his motive, or his intention. Compare SIGN.

ANTONYMS:

assure	determine	make sure	settle
calculate	establish	prove	warrant
demonstrate	insure		

PREPOSITIONS:

I *augur from* all circumstances a prosperous result; I *augur ill of* the enterprise; "augurs *ill to* the rights of the people," THOMAS JEFFERSON *Writings*, vol. ii, p. 506. [T. & M. 1853.] I *augur well*, or this *augurs well, for* your cause.

AUTHENTIC

SYNONYMS:

accepted	certain	original	sure
accredited	current	real	true
authoritative	genuine	received	trustworthy
authorized	legitimate	reliable	veritable

That is *authentic* which is true to the facts; that is *genuine* which is true to its own claims; as, *authentic* history; *genuine* money.

"A '*genuine*' work is one written by the author whose name it bears; an '*authentic*' work is one which relates truthfully the matters of which it treats. For example, the apocryphal Gospel of St. Thomas is neither '*genuine*' nor '*authentic*.' It is not '*genuine*,' for St. Thomas did not write it, it is not '*authentic*,' for its contents are mainly fables and lies."

TRENCH *On the Study of Words*. Lect. vi, p. 189. [W. J. W.]

Authentic is, however, used by reputable writers as synonymous with *genuine*, though usually where genuineness carries a certain authority. We speak of *accepted* conclusions, *certain* evidence, *current* money, *genuine* letters, a *legitimate* conclusion or *legitimate* authority, *original* manuscripts, *real* value, *received* interpretation, *sure* proof, a *true* statement, a *trustworthy* witness, a *veritable* discovery.

ANTONYMS:

apocryphal	counterfeit	exploded	false	spurious
baseless	disputed	fabulous	fictitious	unauthorized

AUXILIARY

SYNONYMS:

accessory	assistant	helper	promoter
aid	coadjutor	mercenary	subordinate
ally	confederate		

An *auxiliary* is a person or thing that helps in a subordinate capacity. *Allies* unite as equals; *auxiliaries* are, at least technically, inferiors or subordinates. Yet the *auxiliary* is more than a mere *assistant*. The word is oftenest found in the plural, and in the military sense; *auxiliaries* are troops of one nation uniting with the armies, and acting under the orders, of another. *Mercenaries* serve only for pay; *auxiliaries* often for reasons of state, policy, or patriotism as well. Compare ACCESSORY; APPENDAGE.

ANTONYMS:

antagonist	hinderer	opponent	opposer
------------	----------	----------	---------

PREPOSITIONS:

The auxiliaries *of* the Romans; an auxiliary *in* a good cause; an auxiliary *to* learning.

AVARICIOUS

SYNONYMS:

close
covetous
greedy

miserly
niggardly
parsimonious

penurious
rapacious

sordid
stingy

Avaricious and *covetous* refer especially to acquisition, *miserly*, *niggardly*, *parsimonious* and *penurious* to expenditure. The *avaricious* man has an eager craving for money, and ordinarily desires both to get and to keep, the *covetous* man to get something away from its possessor; though one may be made *avaricious* by the pressure of great expenditures. *Miserly* and *niggardly* persons seek to gain by mean and petty savings; the *miserly* by stinting themselves, the *niggardly* by stinting others. *Parsimonious* and *penurious* may apply to one's outlay either for himself or for others; in the latter use, they are somewhat less harsh and reproachful terms than *niggardly*. The *close* man holds like a vise all that he gets. *Near* and *nigh* are provincial words of similar import. The *rapacious* have the robber instinct, and put it in practise in some form, as far as they dare. The *avaricious* and *rapacious* are ready to reach out for gain; the *parsimonious*, *miserly*, and *niggardly* prefer the safer and less adventurous way of avoiding expenditure. *Greedy* and *stingy* are used not only of money, but often of other things, as food, etc. The *greedy* child wishes to enjoy everything himself; the *stingy* child, to keep others from getting it.

ANTONYMS:

bountiful free generous liberal munificent prodigal wasteful

PREPOSITION:

The monarch was *avaricious of* power.

AVENGE

SYNONYMS:

punish **retaliate** **revenge** **vindicate** **visit**

Avenge and *revenge*, once close synonyms, are now far apart in meaning. To *avenge* is to *visit* some offense with punish-

ment, in order to *vindicate* the righteous, or to uphold and illustrate the right by the suffering or destruction of the wicked. "And seeing one of them suffer wrong, he *avenged* him that was oppressed, and smote the Egyptian." *Acts* vii, 24. To *revenge* is to inflict harm or suffering upon another through personal anger and resentment at something done to ourselves. *Avenge* is unselfish; *revenge* is selfish. *Revenge*, according to present usage, could not be said of God. To *retaliate* may be necessary for self-defense, without the idea of *revenge*. Compare REVENGE.

PREPOSITIONS:

Avenge *on* or *upon* (rarely, *avenge oneself of*) a wrong-doer.

AVOW**SYNONYMS:**

acknowledge
admit
aver

avouch
confess
declare

own
proclaim
profess

protest
testify
witness

Acknowledge, *admit*, and *declare* refer either to oneself or to others; all the other words refer only to one's own knowledge or action. To *avow* is to declare boldly and openly, commonly as something one is ready to justify, maintain, or defend. A man *acknowledges* another's claim or his own promise; he *admits* an opponent's advantage or his own error; he *declares* either what he has seen or experienced or what he has received from another; he *avers* what he is sure of from his own knowledge or consciousness; he gives his assurance as the voucher for what he *avouches*; he *avows* openly a belief or intention that he has silently held. *Avow* and *avouch* take a direct object; *aver* is followed by a conjunction: a man *avows* his faith, *avouches* a deed, *avers* that he was present. *Avow* has usually a good sense; what a person *avows* he at least does not treat as blameworthy, criminal, or shameful; if he did, he would be said to *confess* it; yet there is always the suggestion that some will be ready to challenge or censure what one *avows*; as, the clergyman *avowed* his dissent from the doctrine of his church. *Own* applies to all things, good or bad, great or small, which one takes as his own. Compare CONFESS; STATE.

ANTONYMS:

contradict
deny

disavow
disclaim

disown
ignore

repudiate

AWFUL

SYNONYMS:

alarming	dread	horrible	shocking
appalling	dreadful	imposing	solemn
august	fearful	majestic	stately
dire	frightful	noble	terrible
direful	grand	portentous	terrific

Awful should not be used of things which are merely disagreeable or annoying, nor of all that are *alarming* and *terrible*, but only of such as bring a solemn awe upon the soul, as in the presence of a superior power; as, the *awful* hush before the battle. That which is *awful* arouses an oppressive, that which is *august* an admiring reverence; we speak of the *august* presence of a mighty monarch, the *awful* presence of death. We speak of an *exalted* station, a *grand* mountain, an *imposing* presence, a *majestic* cathedral, a *noble* mien, a *solemn* litany, a *stately* march, an *august* assembly, the *awful* scene of the Judgment Day.

ANTONYMS:

base	commonplace	despicable	inferior	mean	undignified
beggarly	contemptible	humble	lowly	paltry	vulgar

AWKWARD

SYNONYMS:

boorish	clumsy	rough	unhandy
bungling	gawky	uncouth	unskilful
clownish	maladroit	ungainly	

Awkward, from *awk* (kindred with *off*, from the Norwegian), is *off-ward*, turned the wrong way; it was anciently used of a back-handed or left-handed blow in battle, of squinting eyes, etc. *Clumsy*, on the other hand (from *clumse*, also through the Norwegian), signifies benumbed, stiffened with cold; this is the original meaning of *clumsy* fingers, *clumsy* limbs. Thus, *awkward* primarily refers to action, *clumsy* to condition. A tool, a vehicle, or the human frame may be *clumsy* in shape or build, *awkward* in motion. The *clumsy* man is almost of necessity *awkward*, but the *awkward* man may not be naturally *clumsy*. The finest untrained colt is *awkward* in harness; a horse that is *clumsy* in build can never be trained out of awkwardness. An *awkward* statement has an uncomfortable, and perhaps recoiling force; a statement that contains ill-assorted and incongruous material in ill-chosen

language is *clumsy*. We speak of an *awkward* predicament, an *awkward* scrape. An *awkward* excuse commonly reflects on the one who offers it. We say the admitted facts have an *awkward* appearance. In none of these cases could *clumsy* be used. *Clumsy* is, however, applied to movements that seem as unsuitable as those of benumbed and stiffened limbs. A dancing bear is both *clumsy* and *awkward*.

ANTONYMS:

adroit clever dexterous handy skilful

PREPOSITIONS:

The raw recruit is awkward *in* action; *at* the business.

AXIOM**SYNONYM:**

truism

Both the *axiom* and the *truism* are instantly seen to be true, and need no proof; but in an *axiom* there is progress of thought, while the *truism* simply says the same thing over again, or says what is too manifest to need saying. The *axiom* that "things which are equal to the same thing are equal to one another" unfolds in the latter part of the sentence the truth implied in the first part, which might have been overlooked if not stated. In the *truism* that "a man can do all he is capable of," the former and the latter part of the sentence are simply identical, and the mind is left just where it started. Hence the *axiom* is valuable and useful, while the *truism* is weak and flat, unless the form of statement makes it striking or racy, as "all fools are out of their wits." Compare PROVERB.

ANTONYMS:

absurdity demonstration paradox sophism
contradiction nonsense

BABBLE**SYNONYMS:**

blab	chat	jabber	prattle
blurt	chatter	murmur	tattle
blurt out	gabble	palaver	twaddle
cackle	gossip	prate	

Most of these words are onomatopoeic. The *cackle* of a hen, the *gabble* of a goose, the *chatter* of a magpie, the *babble* of a

baffle

running stream, as applied to human speech, indicate a rapid succession of what are to the listener meaningless sounds. *Blab* and *blurt* (commonly *blurt out*) refer to the letting out of what the lips can no longer keep in; *blab*, of a secret; *blurt out*, of passionate feeling. To *chat* is to talk in an easy, pleasant way, not without sense, but without special purpose. *Chatting* is the practise of adults, *prattling* that of children. To *prate* is to talk idly, presumptuously, or foolishly, but not necessarily incoherently. To *jabber* is to utter a rapid succession of unintelligible sounds, generally more noisy than *chattering*. To *gossip* is to talk of petty personal matters, as for pastime or mischief. To *twaddle* is to talk feeble nonsense. To *murmur* is to utter suppressed or even inarticulate sounds, suggesting the notes of a dove, or the sound of a running stream, and is used figuratively of the half suppressed utterances of affection or pity, or of complaint, resentment, etc. Compare **SPEAK**.

PREPOSITIONS:

Babies babble *for* the moon; the crowd babbles *of* a hero; the sick man babbles *of* home.

BAFFLE**SYNONYMS:**

balk
circumvent

counteract
foil

frustrate
outwit

thwart

To *baffle* a scheme, plan or the like is to render it ineffectual by any action or want of action, however slight, that is sufficient to spoil it for the moment, as a fox or hare may *baffle* dogs by sudden doublings or turnings;

By wily turns, by desperate bounds,
Had *baffled* Percy's best bloodhounds.

SCOTT *Lay of the Last Minstrel* can. 1, st. 21, l. 5.

So a person may be said to be *baffled* in a scheme or plan; a shrewd witness may *baffle* a lawyer by cunning evasions. *Baffle* is especially applied to a continuous series of acts or omissions, each seemingly slight, yet sufficient for the immediate purpose.

He who *baffles* does so by skill, forethought, address The *baffled* finds that the baffler has been before him, and has taken just so much out of his arrangements as to make his plan ineffectual. Hence, *baffling* commonly implies versatility in the baffler, and repeated little counteractions *Baffling*

winds seem to shift with the ship's course An obstinate disease may *baffle* the skill of the physician

C. J. SMITH, *Synonyms Discriminated*, p. 142.

To *foil* is to make an attempt nugatory by craft or skill, as an agile wrestler may *foil* the attempt of a heavier opponent to close with him, by slipping away from his grasp.

The foe, invulnerable still,

Foiled his wild rage by steady skill.

SCOTT *Lady of the Lake* can. v, st. 15, l. 19.

An attack is *foiled* which is made to miss its mark. A scheme, plan, or attempt may fail because of inherent defect or weakness; it is *foiled* by a skilful antagonist. A person is also said to be *foiled* in an undertaking which is thus rendered abortive. One may be distinctly aware how and how far he is *foiled*; one who is *baffled* is left at a loss—with a sense of uncertainty whether any possible new turn may not be as effectually met. The verb *balk* derives its meaning from the noun "balk," signifying a ridge of land left unplowed, as between adjoining unfenced farms or separate divisions of the same farm—a line at which tillage stops. A plan, project, or movement is *balked* when rendered impossible of accomplishment; by some insuperable obstacle or hindrance less conspicuous than a block or bar; as, the advance was *balked* by a morass; the enterprise was *balked* by the apathy of those expected to engage in it.

The sturdy cavalier was not to be *balked* in his purpose.

PRESCOTT *Philip II.* vol. i, pt. ii, ch. 13, p. 292.

Time after time our hopes are *balked*.

SPENCER *Study of Sociology* ch. 7, p. 161.

Balk is applied either to persons or to acts, movements, etc. *Frustrate* and *thwart* are more absolute than *baffle* or *foil*, coming close to the meaning of defeat. To *frustrate* (from L. *frustra*, in vain) is to bring to complete and final failure; that which is often *baffled* or *foiled* may yet succeed; that which is *frustrated* is definitely prevented from succeeding. To *thwart* (from Ice. *thvert*, across) is to *defeat* as by some force or action coming across the path; action may be *thwarted* by counter-action, as an intended movement by a counter-attack; an attempt to pass a measure in an assembly may be *thwarted* by filibustering (in which case it may also be said to be *frustrated*). *Thwart* always implies an opposer,

while *frustrate* may not; a plan, scheme, or the like may be *frustrated* (not *thwarted*) by an accident; as, an attempted surprise may be *frustrated* by the accidental discharge of a gun, or *thwarted* by the vigilance of the enemy's sentinels. A person is also said to be *frustrated* or *thwarted* in his hope, plan, design, or the like. *Outwit* is allied in meaning with *baffle* and *foil*, as are *outgeneral* and *outmaneuver*, but the two latter words are applied to more extensive movements and on a grander scale; Napoleon *outgeneralled* and *outmaneuvered* the Allies at Austerlitz; it would be a very inadequate statement to say that he *baffled* or *foiled* them. To *circumvent* (from L. *circum*, around, + *venio*, come) is to defeat by passing around, and, as it were, attacking in flank—in common phrase “to get round” an opponent or opposition. To *contravene* (from L. *contra*, against, + *venio*, come) is to meet by direct opposition; to *counteract* is to meet by some direct force adequate to overcome the thing opposed; as, a remedy *counteracts* a disease; a false impression may be *counteracted* by argument, explanation, or the like.

ANTONYMS:

abet advance aid assist encourage promote prosper
Compare synonyms for **HELP**.

BANISH

SYNONYMS:

ban	dismiss	evict	expel
discharge	drive out	exile	ostracize
dislodge	eject	expatriate	oust

Banish, primarily to put under *ban*, to compel by authority to leave a place or country, perhaps with restriction to some other place or country. From a country, a person may be *banished*, *exiled*, or *expatriated*; *banished* from any country where he may happen to be, but *expatriated* or *exiled* only from his own. One may *expatriate* or *exile* himself, he is *banished* by others. *Banish* is a word of wide import; one may *banish* disturbing thoughts; care may *banish* sleep. To *expel* is to *drive out* with violence or rudeness, and so often with disgrace.

PREPOSITIONS:

Catiline was banished *from Rome*; John the Apostle was banished *to Patmos*.

BANK

SYNONYMS:

beach	bound	brink	edge	margin	shore
border	brim	coast	marge	rim	strand

Bank is a general term for the land along the edge of a water-course; it may also denote a raised portion of the bed of a river, lake, or ocean; as, the *Banks* of Newfoundland. A *beach* is a strip or expanse of incoherent wave-worn sand, which is often pebbly or full of boulders; we speak of the *beach* of a lake or ocean; a *beach* is sometimes found in the bed of a river. *Strand* is a more poetic term for a wave-washed *shore*, especially as a place for landing or embarking; as, the keel grates on the *strand*. The whole line of a country or continent that borders the sea is a *coast*. *Shore* is any land, whether cliff, or sand, or marsh, bordering water. We do not speak of the *coast* of a river, nor of the *banks* of the ocean, though there may be *banks* by or under the sea. *Edge* is the line where land and water meet; as, the water's *edge*. *Brink* is the place from which one may fall; as, the river's *brink*; the *brink* of a precipice; the *brink* of ruin.

BANKRUPTCY

SYNONYMS:

failure	insolvency	suspension of payment
----------------	-------------------	------------------------------

These terms are all applied in a general way to the condition of one who is indebted to an amount greater than can be paid from his available assets. *Failure* is the popular term for an insolvent condition culminating in assignment of property or *suspension of payment* with or without judicial proceedings. *Insolvency* denotes the condition, which may be known to the debtor before his creditors are aware of it, or any legal proceedings have been taken. *Insolvency* has limited legal use, but the leading word in law, both in England and the United States is *bankruptcy*. The Constitution of the United States (Art. I, Sect. 8) authorizes Congress "to establish . . . uniform laws on the subject of *bankruptcies* throughout the United States." *Bankruptcy* may be *voluntary* (on the petition of the debtor) or *involuntary* (by legal proceedings instituted by his creditors); in either case the intent of modern laws in *bankruptcy*, in contrast with the

harsh debtor-statutes of former times, is to provide a humane and equitable method of distributing the property of the debtor *pro rata* among his creditors, and setting him free (by *discharge in bankruptcy*) from further proceedings, so that he may have the opportunity again to engage in business and, if possible, to recover himself. Though no legal obligation rests upon him to repay the debts so adjudged, an honorable man, on attaining new success, will recognize the moral obligation, and of such action many conspicuous cases are on record. A similar result is often reached by an arrangement of an insolvent debtor with his creditors, without official recognition of *bankruptcy*.

ANTONYMS:credit
prosperity

solvency

soundness

standing

BANTER**SYNONYMS:****badinage**
chaff
derision**irony**
jeering
mockery**raillery**
ridicule**sarcasm**
satire

Banter is the touching upon some fault, weakness, or fancied secret of another in a way half to pique and half to please; *badinage* is delicate, refined *banter*. *Raillery* has more sharpness, but is usually good-humored and well meant. *Irony*, the saying one thing that the reverse may be understood, may be either mild or bitter. All the other words have a hostile intent. *Ridicule* makes a person or thing the subject of contemptuous merriment; *derision* seeks to make the object derided seem utterly despicable—to laugh it to scorn. *Chaff* is the coarse witticism of the streets, perhaps merry, oftener malicious; *jeering* is loud, rude *ridicule*, as of a hostile crowd or mob. *Mockery* is more studied, and many include mimicry and personal violence, as well as scornful speech. A *satire* is a formal composition; a *sarcasm* may be an impromptu sentence. The *satire* shows up follies to keep people from them; the *sarcasm* hits them because they are foolish, without inquiring whether it will do good or harm; the *satire* is plainly uttered; the *sarcasm* is covert.

BARBAROUS

SYNONYMS:

atrocious
barbarian
barbaric
brutal

cruel
inhuman
merciless

pitiless
rude
savage

uncivilized
uncouth
untamed

Whatever is not civilized is *barbarian*; *barbaric* indicates rude magnificence, uncultured richness; as, *barbaric* splendor a *barbaric* melody. *Barbarous* refers to the worst side of *barbarian* life, and to revolting acts, especially of cruelty, such as a civilized man would not be expected to do; as, a *barbarous* deed. We may, however, say *barbarous* nations, *barbarous* tribes, without implying anything more than want of civilization and culture. *Savage* is more distinctly bloodthirsty than *barbarous*. In this sense we speak of a *savage* beast and of *barbarous* usage.

ANTONYMS:

civilized
courtly
cultured

delicate
elegant
graceful

humane
nice
polite

refined
tender
urbane

BARRIER

SYNONYMS:

bar
barricade
block
breastwork

bulwark
hindrance
obstacle

obstruction
parapet
prohibition

rampart
restraint
restriction

A *bar* is something that is or may be firmly fixed, ordinarily with intent to prevent entrance or egress; as, the *bars* of a prison cell; the *bars* of a wood-lot. A *barrier* obstructs, but is not necessarily impassable. *Barrier* is used of objects more extensive than those to which *bar* is ordinarily applied. A mountain range may be a *barrier* to exploration; but a mass of sand across the entrance to a harbor is called a *bar*. Discovered falsehood is a *bar* to confidence. *Barricade* has become practically a technical name for an improvised street fortification, and, unless in some way modified, is usually so understood. A *parapet* is a low or breast-high wall, as about the edge of a roof, terrace, etc., especially, in military use, such a wall for the protection of troops; a *rampart* is the embankment surrounding a fort, on which the *parapet* is raised; the word *rampart* is often used as including the *parapet*.

Bulwark is a general word for any defensive wall or *ram-part*; its only technical use at present is in nautical language, where it signifies the raised side of a ship above the upper deck, topped by the rail. Compare BOUNDARY; IMPEDIMENT.

ANTONYMS:

admittance
entrance

opening
passage

road
thoroughfare

transit
way

PREPOSITIONS:

A barrier *to* progress, *against* invasion; a barrier *between* nations.

BATTLE

SYNONYMS:

action
affair
bout

combat
conflict
contest

encounter
engagement
fight

passage of arms
skirmish
strife

Conflict is a general word which describes opponents, whether individuals or hosts, as dashed together. One continuous *conflict* between entire armies is a *battle*. Another *battle* may be fought upon the same field after a considerable interval; or a new *battle* may follow immediately, the armies meeting upon a new field. An *action* is brief and partial; a *battle* may last for days. *Engagement* is a somewhat formal expression for *battle*; as, it was the commander's purpose to avoid a general *engagement*. A protracted war, including many *battles*, may be a stubborn *contest*. *Combat*, originally a hostile *encounter* between individuals, is now used for extensive *engagements*. A *skirmish* is between small detachments or scattered troops. An *encounter* may be either purposed or accidental, between individuals or armed forces. *Fight* is a word of less dignity than *battle*; we should not ordinarily speak of Waterloo as a *fight*, unless where the word is used in the sense of fighting; as, I was in the thick of the *fight*.

ANTONYMS:

armistice

concord

peace

suspension of hostilities

truce

PREPOSITIONS:

A battle *of* giants; battle *between* armies; a battle *for* life, *against* invaders; a battle *to* the death; the battle *of* (more rarely *at*) Marathon

BEAT

SYNONYMS:

bastinado	chastise	hit	smite	thrash
batter	conquer	overcome	spank	vanquish
belabor	cudgel	pommel	strike	whip
bruise	defeat	pound	surpass	worst
castigate	flog	scourge	switch	

Strike or *hit* is the word for a single blow—forceful, sudden contact or impact, intentional or unintentional. To *beat* is to *strike* or *hit* repeatedly; as, a bird *beats* the air with its wings. Others of the above words describe the manner of *beating*, as *bastinado*, to *beat* on the soles of the feet; *belabor*, to inflict a comprehensive and exhaustive *beating*; *cudgel*, to *beat* with a stick; *thrash*, as wheat was *beaten* out with the old hand-flail; to *pound* (akin to L. *pondus*, a weight) is to *beat* with a heavy, and *pommel* with a blunt, instrument. To *batter* and to *bruise* refer to the results of *beating*; that is battered which is broken or defaced by repeated blows on the surface; that is *bruised* which has suffered even one severe contusion. The metaphorical sense of *beat*, however, so far preponderates that one may be very badly *bruised* and *battered*, and yet not be said to be *beaten*, unless he has got the worst of the *beating*. To *beat* a combatant is to disable or dishearten him for further fighting. Hence *beat* becomes the synonym for every word which implies getting the advantage of another. Compare **BREAK**; **CONQUER**.

ANTONYMS:

fail fall get the worst of go down go under surrender

Almost all antonyms in this class are passive, and can be formed indefinitely from the conquering words by the use of the auxiliary *be*; as, be beaten, be defeated, be conquered, etc.

PREPOSITIONS:

Beat with a stick *over* the head; *beat by* a trick; *out of* town; *beat to* the ground; *into* submission.

BEAUTIFUL

SYNONYMS:

attractive	charming	exquisite	handsome
beauteous	comely	fair	lovely
bewitching	delightful	fine	picturesque
blooming	elegant	graceful	pretty
bonny			

The definition of beauty, "perfection of form," is a good key

to the meaning of *beautiful*, if we understand "form" in its widest sense. There must also be harmony and unity, and in human beings spiritual loveliness, to constitute an object or a person really *beautiful*. Thus, we speak of a *beautiful* landscape, a *beautiful* poem. But *beautiful* implies also, in concrete objects, softness of outline and delicacy of mold; it is opposed to all that is hard and rugged, hence we say a *beautiful* woman, but not a *beautiful* man. *Beautiful* has the further limit of not transcending our powers of appreciation. *Pretty* expresses in a far less degree that which is pleasing to a refined taste in objects comparatively small, slight, and dainty; as, a *pretty* bonnet; a *pretty* girl. That is *handsome* which is not only superficially pleasing, but well and harmoniously proportioned, with usually the added idea that it is made so by art, breeding, or training; as, a *handsome* horse; a *handsome* house. *Handsome* is a term far inferior to *beautiful*; we may even say a *handsome* villain. *Fair* denotes what is bright, smooth, clear, and without blemish; as, a *fair* face. The word applies wholly to what is superficial; we can say "*fair*, yet false." In a specific sense, *fair* has the sense of blond, as opposed to dark or brunette. One who possesses vivacity, wit, good nature, or other pleasing qualities may be *attractive* without beauty. *Comely* denotes an aspect that is smooth, genial, and wholesome, with a certain fulness of contour and pleasing symmetry, though falling short of the *beautiful*; as, a *comely* matron. That is *picturesque* which would make a striking picture.

ANTONYMS:

awkward	ghastly	horrid	unattractive
clumsy	grim	odious	uncouth
deformed	grisly	repulsive	ungainly
disgusting	grotesque	shocking	unlovely
frightful	hideous	ugly	unpleasant

PREPOSITIONS:

Beautiful *to* the eye; beautiful *in* appearance, *in* spirit; "beautiful *for* situation," Ps. xlviii, 2; beautiful *of* aspect, *of* its kind.

BECAUSE

SYNONYMS:

as for inasmuch as since

Because, literally *by-cause*, is the most direct and complete

word for giving the reason of a thing. *Since*, originally denoting succession in time, signifies a succession in a chain of reasoning, a natural inference or result. *As* indicates something like, coordinate, parallel. *Since* is weaker than *because*; *as* is weaker than *since*; either may introduce the reason before the main statement; thus, *since* or *as* you are going, I will accompany you. Often the weaker word is the more courteous, implying less constraint; for example, *as* you request it, I will come, rather than I will come *because* you request it. *Inasmuch as* is a formal and qualified expression, implying by just so much, and no more: thus, *inasmuch as* the debtor has no property, I abandon the claim. *For* is a loose connective, giving often mere suggestion or indication rather than reason or cause; as, it is morning, *for* (not *because*) the birds are singing.

ANTONYMS:

although however nevertheless notwithstanding yet
Compare synonyms for BUT; NOTWITHSTANDING.

BECOMING**SYNONYMS:**

befitting	congruous	fit	meet	seemly
beseeming	decent	fitting	neat	suitable
comely	decorous	graceful	proper	worthy

That is *becoming* in dress which suits the complexion, figure, and other qualities of the wearer, so as to produce on the whole a pleasing effect. That is *decent* which does not offend modesty or propriety. That is *suitable* which is adapted to the age, station, situation, and other circumstances of the wearer; coarse, heavy boots are *suitable* for farm-work; a juvenile style of dress is not *suitable* for an old lady. In conduct much the same rules apply. The dignity and gravity of a patriarch would not be *becoming* to a child; at a funeral lively, cheery sociability would not be *decorous*, while noisy hilarity would not be *decent*; sumptuous display would not be *suitable* for a poor person. *Fit* is a compendious term for whatever fits the person, time, place, occasion, etc.; as, a *fit* person; a *fit* abode; a *fit* place. *Fitting*, or *befitting*, is somewhat more elegant, implying a nicer adaptation. *Meet*, a somewhat archaic word, expresses a moral fitness; as, *meet* for heaven. Compare BEAUTIFUL.

ANTONYMS:

awkward	ill-fitting	indecent	unbecoming	unseemly
ill-becoming	improper	indecorous	unfit	unsuitable

PREPOSITIONS:

The dress was becoming *to* the wearer. Such conduct was becoming *in* him.

BEGINNING**SYNONYMS:**

arising	fountain	initiation	outset	spring
commencement	inauguration	opening	rise	start
fount	inception	origin	source	

The Latin *commencement* is more formal than the Saxon *beginning*, as the verb *commence*, is more formal than *begin*. *Commencement* is for the most part restricted to some form of action, while *beginning* has no restriction, but may be applied to action, state, material, extent, enumeration, or to whatever else may be conceived of as having a first part, point, degree, etc. The letter A is at the *beginning* (not the *commencement*) of every alphabet. If we were to speak of the *commencement* of the Pacific Railroad, we should be understood to refer to the enterprise and its initiatory act; if we were to refer to the roadway we should say "Here is the *beginning* of the Pacific Railroad." In the great majority of cases *begin* and *beginning* are preferable to *commence* and *commencement* as the simple, idiomatic English words, always accurate and expressive. "In the *beginning* was the word," *John* i, 1. An *origin* is the point from which something starts or sets out, often involving, and always suggesting causal connection; as, the *origin* of evil; the *origin* of a nation, a government, or a family. A *source* is that which furnishes a first and continuous supply, that which flows forth freely or may be readily recurred to; as, the *source* of a river; a *source* of knowledge; a *source* of inspiration; fertile land is a *source* (not an *origin*) of wealth. A *rise* is thought of as in an action; we say that a lake is the *source* of a certain river, or that the river takes its *rise* from the lake. Motley wrote of "The *Rise* of the Dutch Republic." *Fount*, *fountain*, and *spring*, in their figurative senses, keep close to their literal meaning. Compare CAUSE.

ANTONYMS:

See synonyms for END.

BEHAVIOR

SYNONYMS:

action
bearing
breeding

carriage
conduct
demeanor

deportment
life

manner
manners

Behavior is our *action* in the presence of others; *conduct* includes also that which is known only to ourselves and our Maker. *Carriage* expresses simply the manner of holding the body, especially in sitting or walking, as when it is said of a lady "she has a fine *carriage*." *Bearing* refers to the bodily expression of feeling or disposition; as, a haughty *bearing*; a noble *bearing*. *Demeanor* is the bodily expression, not only of feelings, but of moral states; as, a devout *demeanor*. *Breeding*, unless with some adverse limitation, denotes that *manner* and *conduct* which result from good birth and training. *Deportment* is *behavior* as related to a set of rules; as, the pupil's *deportment* was faultless. A person's *manner* may be that of a moment, or toward a single person; his *manners* are his habitual style of *behavior* toward or before others, especially in matters of etiquette and politeness; as, good *manners* are always pleasing.

PREPOSITIONS:

The behavior *of* the pastor *to* or *toward* his people, *on* or *upon* the streets, *before* the multitude, or *in* the church, *with* the godly, or *with* the worldly, was alike faultless.

BEND

SYNONYMS:

bias
bow
crook
curve

deflect
deviate
diverge
incline

influence
mold
persuade
stoop

submit
turn
twine
twist

warp
yield

In some cases a thing is spoken of as *bent* where the parts make an angle; but oftener to *bend* is understood to be to draw to or through a curve; as, to *bend* a bow. To *submit* or *yield* is to *bend* the mind humbly to another's wishes. To *incline* or *influence* is to *bend* another's wishes toward our own; to *persuade* is to draw them quite over. To *warp* is to *bend* slightly through the whole fiber, as a board in the sun. To *crook* is to *bend* irregularly, as a *crooked* stick. *Deflect*, *deviate*, and *diverge* are said of any turning away; *deviate*

commonly of a slight and gradual movement, *diverge* of a more sharp and decided one. To *bias* is to cut across the texture, or incline to one side; in figurative use always with an unfavorable import. *Mold* is a stronger word than *bend*; we may *bend* by a superior force that which still resists the constraint; as, a *bent* bow; we *mold* something plastic entirely to some desired form.

BENEVOLENCE

SYNONYMS:

almsgiving	charity	kind-heartedness	munificence
beneficence	generosity	kindliness	philanthropy
benignity	good-will	kindness	sympathy
bounty	humanity	liberality	unselfishness

According to the etymology and original usage, *beneficence* is the doing well, *benevolence* the wishing or willing well to others; but *benevolence* has come to include *beneficence*, and to displace it. We should not now speak of *benevolence* which did not help, unless where there was no power to help; even then we should rather say *good-will* or *sympathy*. *Charity*, which originally meant the purest love for God and man (as in 1 Cor. xiii), is now almost universally applied to some form of *almsgiving*, and is much more limited in meaning than *benevolence*. *Benignity* suggests some occult power of blessing, such as was formerly ascribed to the stars; we may say a good man has an air of *benignity*. *Kindness* and *tenderness* are personal; *benevolence* and *charity* are general. *Kindness* extends to all sentient beings, whether men or animals, in prosperity or in distress. *Tenderness* especially goes out toward the young, feeble, and needy, or even to the dead. *Humanity* is so much *kindness* and *tenderness* toward man or beast as it would be inhuman not to have; we say of some act of care or *kindness*, "common *humanity* requires it." *Generosity* is self-forgetful *kindness* in disposition or action; it includes much besides giving; as, the *generosity* of forgiveness. *Bounty* applies to ample giving, which on a larger scale is expressed by *munificence*. *Liberality* indicates broad, genial kindly views, whether manifested in gifts or otherwise. We speak of the *bounty* of a generous host, the *liberality* or *munificence* of the founder of a college, or of the *liberality* of a theologian toward the holders of conflicting beliefs.

Philanthropy applies to wide schemes for human welfare, often, but not always, involving large expenditures in *charity* or *benevolence*. Compare *MERCY*.

ANTONYMS:

barbarity	harshness	malevolence	self-seeking
brutality	illiberality	malignity	stinginess
churlishness	ill-will	niggardliness	unkindness
greediness	inhumanity	selfishness	

PREPOSITIONS:

Benevolence *of, on the part of, or from* the wealthy, *to or toward* the poor.

BIND**SYNONYMS:**

bind up	fasten	hitch	restrain	shackle	tie
compel	fetter	moor	restrict	tether	tie up
engage	fix	oblige	secure		

Binding is primarily by something flexible, as a cord or bandage drawn closely around an object or group of objects. We *bind up* an object to close, cover, or protect it; as to *bind up* a wound, a person is said to be *bound up in* that which engrosses his thoughts or feelings. Anything flexible may be *tied* by having the ends interlaced and drawn together so as to form a knot or bow; or any object may be *tied* by a flexible bond so interlaced; to *tie up* is to *fasten* by such a bond so as to prevent free movement or separation of parts; as, to *tie up* a dog; to *tie up* a package or an estate. An animal is *tethered*, as to a stake, by a rope or chain long enough to allow much freedom of motion, as for grazing; a vessel is *moored* by a line or cable to some fixed object. We *bind* a sheaf of wheat with a cord; we *tie* the cord in a knot; we *fasten* by any means that will make things hold together, as a board by nails, or a door by a lock. The verbs *tie* and *fasten* are scarcely used in the figurative sense, though using the noun, we speak of the *ties* of affection. *Bind* has an extensive figurative use. One is *bound* by conscience or honor; he is *obliged* by some imperious necessity; *engaged* by his own promise; *compelled* by physical force or its moral equivalent. Compare *ATTACH*.

ANTONYMS:

free	loose	set free	unbind	unfasten	unloose	untie
------	-------	----------	--------	----------	---------	-------

PREPOSITIONS:

Bind *to* a pillar; *unto* an altar; *to* a service; bind one *with*

chains or *in* chains; one is bound *by* a contract; a splint is bound *upon* a limb; the arms may be bound *to* the sides or *behind* the back; bind a wreath *about*, *around*, or *round* the head; twigs are bound *in* or *into* fagots; for military purposes, they are bound *at* both ends and *in* the middle; one is bound *by* a contract, or bound *under* a penalty to fulfil a contract.

BITTER

SYNONYMS:

acerb	acrid	harsh	sour
acetous	acrimonious	irate	stinging
acid	biting	pungent	tart
acidulated	caustic	savage	vinegarish
acidulous	cutting	sharp	virulent

Acid, *sour*, and *bitter* agree in being contrasted with *sweet*, but the two former are sharply distinguished from the latter. *Acid* or *sour* is the taste of vinegar or lemon-juice; *bitter* that of quassia, quinin, or strychnin. *Acrid* is nearly allied to *bitter*. *Pungent* suggests the effect of pepper or snuff on the organs of taste or smell; as, a *pungent* odor. *Caustic* indicates the corroding effect of some strong chemical, as nitrate of silver. In a figurative sense, as applied to language or character, these words are very closely allied. We say a *sour* face, *sharp* words, *bitter* complaints, *caustic* wit, *cutting* irony, *biting* sarcasm, a *stinging* taunt, *harsh* judgment, a *tart* reply. *Harsh* carries the idea of intentional and severe unkindness, *bitter* of a severity that arises from real or supposed ill treatment. The *bitter* speech springs from the sore heart. *Tart* and *sharp* utterances may not proceed from an intention to wound, but merely from a wit recklessly keen; *cutting*, *stinging*, and *biting* speech indicates more or less of hostile intent, the latter being the more deeply malicious. The *caustic* utterance is meant to burn, perhaps wholesomely, as in the satire of Juvenal or Cervantes. Compare MOROSE.

ANTONYMS:

dulcet	honeyed	luscious	nectared	saccharine	sweet
--------	---------	----------	----------	------------	-------

BLEACH, *v.*

SYNONYMS:

blanch	make white	whiten	whitewash
--------	------------	--------	-----------

To *whiten* is to *make white* in general, but commonly it

means to overspread with white coloring-matter. *Bleach* and *blanch* both signify to *whiten* by depriving of color, the former permanently, as linen; the latter either permanently (as, to *blanch* celery) or temporarily (as, to *blanch* the cheek with fear). To *whitewash* is to *whiten* superficially, especially by false approval.

ANTONYMS:

blacken color darken dye soil stain

BLEAK**SYNONYMS:**

bare	chilling	desolate	exposed	unsheltered
blank	chilly	dismal	gloomy	waste
cheerless	cold	dreary	piercing	wild
chill	cutting	dull	stormy	windy

The idea of cold or chilliness is always found in *bleak*; a *bleak* situation is one open to chilling wind and storm; in the northern climate a rock, island, moor, prairie, or mountainside, which is *bare*, *blank*, *desolate*, *exposed*, *unsheltered*, *waste*, or *wild* is sure to be *cold* and *bleak*; but in the tropics this would not be true; the Sahara is a *desolate* waste of sand, *unsheltered* from the burning sun, and swept by fierce winds, but it is not *bleak*; *bleak* is also applied to seasons, winds, etc., which are characterized by mingled chill and desolateness; in this use it is allied with such words as *chill*, *chilling*, *chilly*, *cold*, *cutting*, *piercing*, *stormy*, *windy*.

So *bleak* these shores, wind-swept, and all the year
Washed by the wild Atlantic's restless tide.

CELIA THAXTER, *Rock Weeds*, st. 1.

Ah! distinctly I remember! It was in the *bleak* December.

POE *Raven*, st. 2.

The night was *bleak*; the rain fell, the wind roared.

MACAULAY *History of England*, ch. ix.

Dreary is independent of temperature; that which is *bleak* is commonly also *dreary*, but that which is *dreary* may not be *bleak*, as a tropical jungle in the rainy season; that which is *lonely*, *dismal*, *gloomy*, *cheerless*, is *dreary* in any climate, at any season; so a conversation, speech, poem, or the like, may be *dreary* by dulness, monotony, and cheerlessness.

The day is cold and dark and *dreary*,
It rains and the wind is never weary.

LONGFELLOW *The Rainy Day*, st. 1.

ANTONYMS:

balmy
bright
cheerful

cheery
genial
homelike

mild
sheltered

sunny
warm

BLEMISH

SYNONYMS:

blot
blur
brand
crack
daub
defacement
defect

deformity
dent
disfigurement
disgrace
dishonor
fault

flaw
imperfection
injury
reproach
smirch
soil

speck
spot
stain
stigma
taint
tarnish

Whatever mars the beauty of completeness of an object is a *blemish*, whether original, as squinting eyes, or the result of accident or disease, etc., as the pits of smallpox. A *blemish* is superficial; a *flaw* or *taint* is in structure or substance. In the moral sense, we speak of a *blot* or *stain* upon reputation; a *flaw* or *taint* in character. A *defect* is the want or lack of something; *fault*, primarily a failing, is something that fails of an apparent intent or disappoints a natural expectation; thus a sudden dislocation or displacement of geological strata is called a *fault*. Figuratively a *blemish* comes from one's own ill-doing; a *brand* or *stigma* is inflicted by others; as, the *brand* of infamy.

BLOW

SYNONYMS:

box
buffet
calamity
concussion

cuff
cut
disaster
hit

knock
lash
misfortune
rap

shock
stripe
stroke
thump

A *blow* is a sudden impact, as of a fist or a club; a *stroke* is a sweeping movement; as, the *stroke* of a sword, of an oar, of the arm in swimming. A *shock* is the sudden encounter with some heavy body; as, colliding railway-trains meet with a *shock*; the *shock* of battle. A *slap* is given with the open hand, a *lash* with a whip, thong, or the like; we speak also of the *cut* of a whip. A *buffet* or *cuff* is given only with the hand; a *blow* either with hand or weapon. A *cuff* is a somewhat side-long *blow*, generally with the open hand; as, a *cuff* or *box* on the ear; a *hit* is any sudden forcible contact, intended or unintended. A *stripe* is the effect or mark of a *stroke*. In

the metaphorical sense, *blow* is used for sudden, stunning, staggering *calamity* or sorrow; *stroke* for sweeping *disaster*, and also for sweeping achievement and success. We say a *stroke* of paralysis, or a *stroke* of genius. We speak of the *buffets* of adverse fortune. *Shock* is used of that which is at once sudden, violent, and prostrating; we speak of a *shock* of electricity, the *shock* of an amputation, a *shock* of surprise. A *hit* is something sudden and successful, whether by intention or accident, as a well-directed witticism, sarcasm, or repartee, an apt or happy remark, or a fortunate achievement; as, a capital *hit*; a lucky *hit*; the play or the player made a *hit*. Compare BEAT.

BLUFF

SYNONYMS:

abrupt	brusk	impolite	rough
blunt	coarse	inconsiderate	rude
blustering	discourteous	open	uncivil
bold	frank	plain-spoken	unmannerly

Bluff is a word of good meaning, as are *frank* and *open*. The *bluff* man talks and laughs loudly and freely, says and does whatever he pleases with fearless good nature, and with no thought of annoying or giving pain to others. The *blunt* man says things which he is perfectly aware are disagreeable, either from a defiant indifference to other's feelings, or from the pleasure of tormenting.

ANTONYMS:

bland courteous genial polished polite refined reserved urbane

BODY

SYNONYMS:

ashes	clay	dust	frame	system
carcass	corpse	form	remains	trunk

Body denotes the entire physical structure, considered as a whole, of man or animal; *form* looks upon it as a thing of shape and outline, perhaps of beauty; *frame* regards it as supported by its bony framework; *system* views it as an assemblage of many related and harmonious organs. *Body*, *form*, *frame*, and *system* may be either dead or living; *clay* and *dust* are sometimes so used in religious or poetic style, though ordinarily these words are used only of the dead. *Corpse* and *remains* are used only of the dead. *Corpse* is the plain technical word for

a dead body still retaining its unity; *remains* may be used after any lapse of time; the latter is also the more refined and less ghastly term; as, friends are invited to view the *remains*. *Carcass* applies only to the *body* of an animal, or of a human being regarded with contempt and loathing. Compare COMPANY.

ANTONYMS:

intellect intelligence mind soul spirit

BOTH**SYNONYMS:****twain****two**

Both refers to *two* objects previously mentioned, or had in mind, viewed or acting in connection; as, *both* men fired at once; "*two* men fired" might mean any two, out of any number, and without reference to any previous thought or mention. *Twain* is a nearly obsolete form of *two*. *The two*, or *the twain*, is practically equivalent to *both*; *both*, however, expresses a closer unity. We would say *both* men rushed against the enemy; the *two* men flew at each other. Compare EVERY.

ANTONYMS:

each either every neither none no one not any

BOUNDARY**SYNONYMS:****barrier**
border
bound
bourn
bourne**confines**
edge
enclosure
frontier
landmark**limit**
line
marches
marge**margin**
term
termination
verge

The *boundary* was originally the *landmark*, that which marked off one piece of territory from another. The *bound* is the *limit*, marked or unmarked. Now, however, the difference between the two words has come to be simply one of usage. As regards territory, we speak of the *boundaries* of a nation or of an estate; the *bounds* of a college, a ball-ground, etc. *Bounds* may be used for all within the *limits*, *boundary* for the limiting line only. *Boundary* looks to that which is without; *bound* only to that which is within. Hence we speak of the *bounds*, not the *boundaries*, of a subject, of the universe, etc.;

we say the students were forbidden to go beyond the *bounds*. A *barrier* is something that bars ingress or egress. A *barrier* may be a *boundary*, as was the Great Wall of China. *Bourn*, or *bourne*, is a poetical expression for *bound* or *boundary*. A *border* is a strip of land along the *boundary*. *Edge* is a sharp terminal line, as where river or ocean meets the land. *Limit* is now used almost wholly in the figurative sense; as, the *limit* of discussion, of time, of jurisdiction. *Line* is a military term; as, within the *lines*, or through the *lines*, of an army. Compare BARRIER; END.

ANTONYMS:

center citadel estate inside interior land region territory

PREPOSITIONS:

The boundaries *of* an estate; the boundary *between* neighboring territories.

BRAVE**SYNONYMS:**

adventurous	daring	fearless	undaunted
bold	dashing	gallant	undismayed
chivalric	dauntless	heroic	valiant
chivalrous	doughty	intrepid	venturesome
courageous			

The *adventurous* man goes in quest of danger; the *bold* man stands out and faces danger or censure; the *brave* man combines confidence with resolution in presence of danger; the *chivalrous* man puts himself in peril for others' protection. The *daring* step out to defy danger; the *dauntless* will not flinch before anything that may come to them; the *doughty* will give and take limitless hard knocks. The *adventurous* find something romantic in dangerous enterprises; the *venturesome* may be simply heedless, reckless, or ignorant. All great explorers have been *adventurous*; children, fools, and criminals are *venturesome*. The *fearless* and *intrepid* possess unshaken nerves in any place of danger. *Courageous* is more than *brave*, adding a moral element; the *courageous* man steadily encounters perils to which he may be keenly sensitive, at the call of duty; the *gallant* are *brave* in a dashing, showy, and splendid way; the *valiant* not only dare great dangers, but achieve great results; the *heroic* are nobly *daring* and *dauntless*, truly *chivalrous*, sublimely *courageous*. Compare FORTITUDE

ANTONYMS:

afraid	cringing	fearful	pusillanimous	timid
cowardly	faint-hearted	frightened	shrinking	timorous

BREAK

SYNONYMS:

bankrupt	demolish	rupture	smash
burst	destroy	sever	split
cashier	fracture	shatter	sunder
crack	rend	shiver	transgress
crush	rive		

To *break* is to divide sharply, with severance of particles, as by a blow or strain. To *burst* is to *break* by pressure from within, as a bombshell, but it is used also for the result of violent force otherwise exerted; as, to *burst* in a door, where the door yields as if to an explosion. To *crush* is to *break* by pressure from without, as an egg-shell. To *crack* is to *break* without complete severance of parts; a *cracked* cup or mirror may still hold together. *Fracture* has a somewhat similar sense. In a *fractured* limb, the ends of the *broken* bone may be separated, though both portions are still retained within the common muscular tissue. A *shattered* object is *broken* suddenly and in numerous directions; as, a vase is *shattered* by a blow, a building by an earthquake. A *shivered* glass is *broken* into numerous minute, needle-like fragments. To *smash* is to *break* thoroughly to pieces with a crashing sound by some sudden act of violence; a watch once *smashed* will scarcely be worth repair. To *split* is to cause wood to crack or part in the way of the grain, and is applied to any other case where a natural tendency to separation is enforced by an external cause; as, to *split* a convention or a party. To *demolish* is to beat down, as a mound, building, fortress, etc.; to *destroy* is to put by any process beyond restoration physically, mentally, or morally; to *destroy* an army is to *shatter* and scatter it that it can not be rallied or reassembled as a fighting force. Compare *REND*.

ANTONYMS:

attach bind fasten join mend secure solder unite weld

PREPOSITIONS:

Break *to* pieces, or *in* pieces, *into* several pieces (when the object is thought of as divided rather than shattered), break *with* a friend; *from* or *away from* a suppliant; break *into*

a house; *out* of prison; break *across* one's knee; break *through* a hedge; break *in upon* one's retirement; break *over* the rules; break *on* or *upon* the shore, *against* the rocks.

BRIGHT

SYNONYMS:

beaming	glaring	illuminated	shimmering
brilliant	gleaming	incandescent	shining
cheerful	glimmering	luminous	sparkling
cheering	glistening	lustrous	splendid
cheery	glittering	radiant	sunny
dazzling	glorious	refulgent	sunshine
effulgent	glowing	resplendent	twinkling
flashing	illuminated	scintillating	

An object is *bright* that shines with either original or reflected light; thus the sun, the moon, and the stars are *bright*; that is *brilliant* which shines with unusual or distinctive brightness; as, one star in a constellation may be especially *brilliant*; all the stars are strikingly *brilliant* on a clear moonless night by contrast with the deep blue-black of the sky; a diamond cut so as to throw out the maximum of light is called a "brilliant." That is *radiant* from which light seems to pour forth in rays:

The glorious lamp of heaven, the *radiant* sun.

DRYDEN *Story of Acis*, l. 165

An object which is *radiant* sends forth a steady light, while that of a *brilliant* object may be fitful. *Beaming* is applied to light which seems to be sent forth in beams, and is a milder word than *radiant*. *Gleaming* is applied to that which sends forth or reflects light in sudden flashes, as the warrior's *gleaming* sword. *Glowing* is applied to a light like that from molten metal; *dazzling* is said of the effect on the eye of the beholder, and may apply to the full splendor of the sun or to intense reflected light as, from a gem, etc.; any light which the eye cannot well bear is *dazzling*; *glaring* is a kindred word, but denotes a powerful, persistent light that affects the beholder disagreeably; that which is *dazzling* may be admired, while that which is *glaring* is repellant. *Effulgent* and *refulgent* are used, with little difference of meaning, of light at once intense and pervading; *refulgent* (from L. *re*, back, + *fulges*, shine) applies especially to reflected light, shining far and wide; *resplendent* is similar to *refulgent*, but

more superficial, and near to the meaning of gorgeous or magnificent:

Child of the sun, *refulgent* summer comes.

THOMSON *Seasons, Summer*, l. 966.

There all within full rich arrayd he found

With royall arras and *resplendent* gold

SPENSER *Faerie Queene* bk. i, can. 8, st 35, l. 1.

An object is *splendid* which gives out or reflects light of especial abundance and power, and often of varied hues, impressing the beholder with mingled wonder and admiration; as, a *splendid* sunrise. That which is *luminous* sends forth distinct light, which may be greater or less in degree, emitted or reflected, though the tendency is now to use the word of light sent forth from within; a *luminous* object is thought of as self-*luminous*; the sun is a *luminous* body; the faint phosphorescence of the glow-worm makes it *luminous* in the dark. *Lustrous* is applied to that which sends forth a soft but vivid light as from a polished surface; as, *lustrous* silks. That which is *illuminated* or *illumined* is lit up by light from some source apart from itself, often by light supplied from within; we speak of a building or a city as *illuminated*, when light shines out from every window on some joyous occasion; *illumined* is poetic, and oftenest used in a spiritual sense. *Sparkling* is said of light thrown out as by sparks from many points; *scintillating*, of such light in intermittent flashes. *Glistening* applies to the shining from a wet, *glittering* to that from a dry, surface; Coleridge finely chooses *glittering*, not *glistening* to describe the eye of the wasted old man in his great poem:

By thy long gray beard and *glittering* eye,

Now, wherefore stopp'st thou me?

Ancient Mariner, pt. i, st. 1.

Glimmering and *shimmering* refer to faint, wavering, and unsteady light, that which is *shimmering* being tremulous, as from rippling waves; we speak of *shimmering* silks, that seem to change shade or hue with motion. Compare the nouns corresponding to these adjectives under LIGHT.

The figurative meaning of these words is largely controlled by the literal. So used, *bright* is inferior to *brilliant*; we speak of a *bright* boy, a *brilliant* genius; of a *bright* idea in common matters, a *brilliant* idea in philosophy, literature, or

statesmanship; of a *brilliant* (not a *bright*) achievement; of a *dazzling* success; of *sparkling* or *scintillating* wit, of a *luminous* style, exposition, production, or sentence, of a *glaring* inconsistency or contradiction, of a *beaming* or *radiant* countenance (where *radiant* is the more vivid, *beaming* the gentler word; as, *beaming* with love, *radiant* with delight); a *bright*, *sunny*, or *sunshiny* face has an effect like that of a landscape lit up by pleasant sunlight, so that these words are akin to *cheerful*, *cheering*, and *cheery*. We speak of eyes *sparkling* with pleasure, *gleaming* with excitement, rage, or fury, *glowing* with some strong suppressed feeling as of devotion or ambition, lighting them up as by an internal fire. *Splendid* applies to that which has splendor (see under **LIGHT**), and is akin to grand, glorious, magnificent, honorable, illustrious, heroic, etc.; as, a *splendid* palace, pageant, or banquet, a *splendid* achievement, career, or victory (in which latter uses it far transcends the meaning of *brilliant*). The colloquial use of *splendid* to denote anything that is excellent, useful, agreeable, or the like, is a perversion and degradation of a noble word; it is a cheap misuse of language to speak of *splendid* weather, *splendid* hunting or fishing, a *splendid* bargain or picnic, of a *splendid* salesman or accountant, a *splendid* batter, pitcher, or umpire, a *splendid* walker, swimmer, or musician; an oration may be *splendid*, but it is not suitable to call the man who utters it a *splendid* orator; it is monstrous to speak of the *splendid* fit of a garment or of a *splendid* beefsteak.

ANTONYMS:

See synonyms for **DARK**.

BRUTISH**SYNONYMS:**

animal	brute	insensible	stupid
base	carnal	lascivious	swinish
beastly	coarse	sensual	unintellectual
bestial	ignorant	sottish	unspiritual
brutal	imbruted	stolid	vile

A *brutish* man simply follows his *animal* instincts, without special inclination to do harm; the *brutal* have always a spirit of malice and cruelty. *Brute* has no special character, except as indicating what a brute might possess; much the same is

true of *animal*, except that *animal* leans more to the side of sensuality, *brute* to that of force, as appears in the familiar phrase "*brute force*." Hunger is an *animal* appetite; a *brute* impulse suddenly prompts one to strike a blow in anger. *Bestial*, in modern usage, implies an intensified and degrading animalism. Any supremacy of the *animal* or *brute* instincts over the intellectual and spiritual in man is *base* and *vile*. *Beastly* refers largely to the outward and visible consequences of excess; as, *beastly* drunkenness. Compare ANIMAL.

ANTONYMS:

elevated	grand	intellectual	noble
enlightened	great	intelligent	refined
exalted	humane		

BURN

SYNONYMS:

blaze	consume	ignite	set fire to
brand	cremate	incinerate	set on fire
cauterize	flame	kindle	singe
char	flash	scorch	

To *burn* is to subject to the action of fire, or of intense heat so as to effect either partial change or complete combustion; as, to *burn* wood in the fire; to *burn* one's hand on a hot stove; the sun *burns* the face. One *brands* with a hot iron, but *cauterizes* with some corrosive substance, as silver nitrate. *Cremate* is now used specifically for *consuming* a dead body by intense heat. To *incinerate* is to reduce to ashes; the sense differs little from that of *cremate*, but it is in less popular use. To *kindle* is to *set on fire*, as if with a candle; *ignite* is the more learned and scientific word for the same thing, extending even to the heating of metals to a state of incandescence without burning. To *scorch* and to *singe* are superficial, and to *char* usually so. Both *kindle* and *burn* have an extensive figurative use; as, to *kindle* strife: to *burn* with wrath, love, devotion, curiosity. Compare LIGHT.

ANTONYMS:

cool	extinguish	put out	smother	stifle	subdue
------	------------	---------	---------	--------	--------

PREPOSITIONS:

To *burn in* the fire; *burn with* fire; *burn to* the ground; *burn to* ashes; *burn through* the skin, or the roof; *burn into* the soil, etc.

BUSINESS

SYNONYMS:

affair	concern	job	trading
art	craft	occupation	traffic
avocation	duty	pursuit	transaction
barter	employment	profession	vocation
calling	handicraft	trade	work
commerce			

A *business* is what one follows regularly; an *occupation* is what he happens at any time to be engaged in; trout-fishing may be one's *occupation* for a time, as a relief from *business*; *business* is ordinarily for profit, while the *occupation* may be a matter of learning, philanthropy, or religion. A *profession* implies scholarship; as, the learned *professions*. *Pursuit* is an *occupation* which one follows with ardor. An *avocation* is what calls one away from other work; a *vocation* or *calling*, that to which one is called by some special fitness or sense of duty; thus, we speak of the gospel ministry as a *vocation* or *calling*, rather than a *business*. *Trade* or *trading* is, in general, the exchanging of one thing for another; in the special sense, a *trade* is an *occupation* involving manual training and skilled labor; as, the ancient Jews held that every boy should learn a *trade*. A *transaction* is a single action, whether in *business*, diplomacy, or otherwise; *affair* has a similar, but lighter meaning; as, this little *affair*; an important *transaction*. The plural *affairs* has a distinctive meaning, including all activities where men deal with one another on any considerable scale; as, a man of *affairs*. A *job* is a piece of work viewed as a single undertaking, and ordinarily paid for as such. *Trade* and *commerce* may be used as equivalents, but *trade* is capable of a more limited application; we speak of the *trade* of a village, the *commerce* of a nation. *Barter* is the direct exchange of commodities; *business*, *trade*, and *commerce* are chiefly transacted by means of money, bills of exchange, etc. *Business*, *occupation*, etc., may be what one does independently; *employment* may be in the service of another. *Work* is any application of energy to secure a result, or the result thus secured; thus, we speak of the *work* of God. *Art* in the industrial sense is a system of rules and accepted methods for the accomplishment of some practical result; as, the *art* of printing; collectively, the *arts*. A *craft* is some occupation requiring technical skill or manual dexterity, or the persons, collectively, engaged in its exercise; as, the weaver's *craft*.

PREPOSITIONS:

The business *of* a druggist; in business *with* his father; doing business *for* his father; have you business *with* me? business *in* New York; business *about*, *concerning*, or *in regard to* certain property.

BUT**SYNONYMS:**

and	however	notwithstanding	that
barely	just	only	though
besides	merely	provided	unless
except	moreover	save	yet
further	nevertheless	still	

But ranges from the faintest contrast to absolute negation; as, I am willing to go, *but* (on the other hand) content to stay; he is not an honest man, *but* (on the contrary) a villain. The contrast may be with a silent thought; as, *but* let us go (it being understood that we might stay longer). In restrictive use, *except* and *excepting* are slightly more emphatic than *but*; we say, no injury *but* a scratch; or, no injury *except* some painful bruises. Such expressions as "words are *but* breath" (nothing *but*) may be referred to the restrictive use by ellipsis. So may the use of *but* in the sense of *unless*; as, "it never rains *but* it pours." To the same head must be referred the conditional use; as, "you may go, *but* with your father's consent" (*i. e.*, "*provided* you have," "*except* that you must have," etc.). "Doubt *but*" is now less used than the more logical "doubt *that*." *But* never becomes a full synonym for *and*; *and* adds something like, *but* adds something different; "brave *and* tender" implies that tenderness is natural to the brave; "brave *but* tender" implies that bravery and tenderness are rarely combined. For the concessive use, compare **NOTWITHSTANDING**.

BY**SYNONYMS:**

by dint of	by means of	through	with
-------------------	--------------------	----------------	-------------

By refers to the agent; *through*, to the means, cause, or condition; *with*, to the instrument. *By* commonly refers to persons; *with*, to things; *through* may refer to either. The road having become impassable *through* long disuse, a way was

opened *by* pioneers *with* axes. *By* may, however, be applied to any object which is viewed as partaking of action and agency; as, the metal was corroded *by* the acid; skill is gained *by* practise. We speak of communicating *with* a person *by* letter. *Through* implies a more distant connection than *by* or *with*, and more intervening elements. Material objects are perceived *by* the mind *through* the senses.

CABAL

SYNONYMS:

combination
conclave

confederacy
conspiracy

crew
faction

gang
junto

Cabal (from Heb. *gabbalah*, a mystic system of theosophy among the Hebrews) originally denoted something secret or occult, then a secret meeting or association of a few persons for private ends, and thence a small band or company of persons secretly associated to promote designs of their own, independent of or opposed to the public welfare; the word, already in use, received a specially opprobrious meaning as applied to a ministry of Charles II. of England, partly from their own faults, and largely from those of their sovereign, which were laid upon them, since "the King could do no wrong," and the easy-going "merry monarch" was supposed incapable of wishing to.

It happened by a whimsical coincidence that, in 1671, the cabinet consisted of five persons, the initial letters of whose names made up the word *Cabal*—Clifford, Arlington, Buckingham, Ashley, and Lauderdale. These ministers were therefore emphatically called the *Cabal*; and they soon made that appellation so infamous that it has never since their time been used except as a term of reproach

MACAULAY *History of England*, vol. i, ch. 2.

Hence *cabal* has come to mean a *combination* or *conspiracy* of leaders for some secret purpose viewed as unpatriotic or unworthy. The word *junto*, once current in a similar sense, has fallen almost completely out of use.

A *conspiracy* is a *combination* of persons for an evil purpose, or the act of so combining. *Conspiracy* is a distinct crime under common, and generally under statutory, law. A *faction* is more extensive than a *conspiracy*, less formal in organization, less definite in plan. *Faction* and its adjective, *factions*, have always an unfavorable sense. A *gang* is a company of work-

men all doing the same work under one leader; the word is used figuratively only of *combinations* which it is meant to stigmatize as rude and mercenary; *crew* is used in a closely similar sense. A *conclave* is secret, but of larger numbers, ordinarily, than a *cabal*, and may have honorable use; as, the *conclave* of cardinals. Compare COMPANY.

CALCULATE

SYNONYMS:

account	compute	count	enumerate	number	reckon
cast	consider	deem	estimate	rate	sum up

Number is the generic term. To *count* is to *number* one by one. To *calculate* is to use more complicated processes, as multiplication, division, etc., more rapid but not less exact. *Compute* allows more of the element of probability, which is still more strongly expressed by *estimate*. We *compute* the slain in a great war from the number known to have fallen in certain great battles; *compute* refers to the present or the past, *estimate* more frequently to the future; as, to *estimate* the cost of a proposed building. To *enumerate* is to mention item by item; as, to *enumerate* one's grievances. To *rate* is to *estimate* by comparison, as if the object were one of a series. We *count* upon a desired future; we do not *count* upon the undesired. As applied to the present, we *reckon* or *count* a thing precious or worthless. Compare ESTEEM.

PREPOSITIONS:

It is vain to calculate *on* or *upon* an uncertain result.

CALL, v.

SYNONYMS:

bawl	cry (out)	roar	shriek
bellow	ejaculate	scream	vociferate
clamor	exclaim	shout	yell

To *call* is to send out the voice in order to attract another's attention, either by word or by inarticulate utterance. Animals *call* their mates, or their young; a man *calls* his dog, his horse, etc. The sense is extended to include summons by bell, or any signal. To *shout* is to *call* or *exclaim* with the fullest volume of sustained voice; to *scream* is to utter a shriller cry; to *shriek* or to *yell* refers to that which is louder and wilder still.

We *shout* words; in *screaming*, *shrieking*, or *yelling* there is often no attempt at articulation. To *bawl* is to utter senseless, noisy cries, as of a child in pain or anger. *Bellow* and *roar* are applied to the utterances of animals, and only contemptuously to those of persons. To *clamor* is to utter with noisy iteration; it applies also to the confused cries of a multitude. To *vociferate* is commonly applied to loud and excited speech where there is little besides the exertion of voice. In *exclaiming*, the utterance may not be strikingly, though somewhat, above the ordinary tone and pitch; we may *exclaim* by mere interjections, or by connected words, but always by some articulate utterance. To *ejaculate* is to throw out brief, disconnected, but coherent utterances of joy, regret, and especially of appeal, petition, prayer; the use of such devotional utterances has received the special name of "ejaculatory prayer." To *cry out* is to give forth a louder and more excited utterance than in *exclaiming* or *calling*; one often *exclaims* with sudden joy as well as sorrow; if he *cries out*, it is oftener in grief or agony. In the most common colloquial usage, to *cry* is to express grief or pain by weeping or sobbing. One may *exclaim*, *cry out*, or *ejaculate* with no thought of others' presence; when he *calls*, it is to attract another's attention.

ANTONYMS:

be silent be still hark hearken hush list listen

CALM**SYNONYMS:**

balmy
bland
collected
composed
cool
dispassionate
gentle

imperturbable
mild
pacific
peaceful
placid
quiet
sedate

self-possessed
serene
smooth
still
tranquil
undisturbed
unruffled

That is *calm* which is free from disturbance or agitation; in the physical sense, free from violent motion or action; in the mental or spiritual realm, free from excited or disturbing emotion or passion. We speak of a *calm* sea, a *placid* lake, a *serene* sky, a *still* night, a *quiet* day, a *quiet* home. We speak, also, of "*still* waters," "*smooth* sailing," which are different modes of expressing freedom from manifest agitation.

Balmy is said of that which is fragrant, refreshing, or healing like balm, soothing, *mild*; *bland* of that which is *mild*, soft, genial, and agreeable; thus the air or the breeze may be described as *balmy* or *bland*; *bland* is also applied to smooth and soothing manner, speech, or the like, in the sense of gentle, genial, soft-spoken, or agreeable. Of mental conditions, one is *calm* who triumphs over a tendency to excitement; *cool*, if he scarcely feels the tendency. One may be *calm* by the very reaction from excitement, or by the oppression of overpowering emotion, as we speak of the calmness of despair. One is *composed* who has subdued excited feeling; he is *collected* when he has every thought, feeling, or perception awake and at command. *Tranquil* refers to a present state; *placid*, to a prevailing tendency. We speak of a *tranquil* mind, a *placid* disposition. The *serene* spirit dwells as if in the clear upper air, above all storm and shadow.

The star of the unconquered will,
He rises in my breast,
Serene and resolute and still,
And calm, and self-possessed

LONGFELLOW *Light of Stars*, st 7.

ANTONYMS:

agitated	excited	frenzied	passionate	ruffled	violent
boisterous	fierce	furious	raging	stormy	wild
disturbed	frantic	heated	roused	turbulent	wrathful

CANCEL

SYNONYMS:

abolish	discharge	nullify	rescind
abrogate	efface	obliterate	revoke
annul	erase	quash	rub off or out
blot out	expunge	remove	scratch out
cross off or out	make void	repeal	vacate

Cancel, *efface*, *erase*, *expunge*, and *obliterate* have as their first meaning the removal of written characters or other forms of record. To *cancel* is, literally, to make a lattice by cross-lines, exactly our English *cross out*; to *efface* is to *rub off*, smooth away the face, as of an inscription; to *erase* is to *scratch out*, commonly for the purpose of writing something else in the same space; to *expunge*, is to punch out with some sharp instrument, so as to show that the words are no longer part of the writing; to *obliterate* is to cover over or remove, as was done by reversing the Roman stylus, and *rubbing out* with the

rounded end what had been written with the point on the waxen tablet. What has been *canceled*, *erased*, *expunged* may perhaps still be traced; what is *obliterated* is gone forever, as if it had never been. In many establishments, when a debt is *discharged* by payment, the record is *cancelled*. The figurative use of the words keeps close to the primary sense. Compare ABOLISH.

ANTONYMS:

approve	enact	establish	perpetuate	reenact	uphold
confirm	enforce	maintain	record	sustain	write

CANDID**SYNONYMS:**

aboveboard	honest	open	truthful
artless	impartial	simple	unbiased
fair	ingenuous	sincere	unprejudiced
frank	innocent	straightforward	unreserved
guileless	naive	transparent	unsophisticated

A *candid* statement is meant to be true to the real facts and just to all parties; a *fair* statement is really so. *Fair* is applied to the conduct; *candid* is not; as, *fair* treatment, "a *fair* field, and no favor." One who is *frank* has a fearless and unconstrained truthfulness. *Honest* and *ingenuous* unite in expressing contempt for deceit. On the other hand, *artless*, *guileless*, *naive*, *simple*, and *unsophisticated* express the goodness which comes from want of the knowledge or thought of evil. As truth is not always agreeable or timely, *candid* and *frank* have often an objectionable sense; "to be *candid* with you," "to be perfectly *frank*," are regarded as sure preludes to something disagreeable. *Open* and *unreserved* may imply unstudied truthfulness or defiant recklessness; as *open* admiration, *open* robbery. There may be *transparent* integrity or *transparent* fraud. *Sincere* applies to the feelings, as being all that one's words would imply.

ANTONYMS:

adroit	cunning	diplomatic	intriguing	sharp	subtle
artful	deceitful	foxy	knowing	shrewd	tricky
crafty	designing	insincere	maneuvering	sly	wily

PREPOSITIONS:

Candid in debate; *candid to* or *toward* opponents; *candid with* friend or foe; to be *candid about* or *in regard to* the matter.

CAPARISON

SYNONYMS:

accouterments harness housings trappings

Harness was formerly used of the armor of a knight as well as of a horse; it is now used almost exclusively of the straps and appurtenances worn by a horse when attached to a vehicle; the animal is said to be "kind in *harness*." The other words apply to the ornamental outfit of a horse, especially under saddle. We speak also of the *accouterments* of a soldier. *Caparison* is used rarely and somewhat slightly, and *trappings* quite contemptuously, for showy human apparel. Compare **ARMS; DRESS.**

CAPITAL

SYNONYMS:

chief city métropolis seat of government

The *metropolis* is the chief city in the commercial, the *capital* in the political sense. The *capital* of an American State is rarely its *metropolis*.

CAPTIOUS

SYNONYMS:

**carping critical fretful peevish testy
caviling cynical hypercritical petulant touchy
censorious faultfinding irritable splenetic**

Critical, though often used invidiously, is a word of high and good meaning; as, a *critical* study of Shakespeare is worthy of respect and consideration; no important matter, as a deed, the specifications for a building, a contract, a legislative act, or the like, should be passed without *critical* examination. *Captious* denotes a tendency to untimely, uncalled for, or unreasonable criticism, especially in small matters, or on petty grounds; captiousness is a fault of the spirit and disposition, and is closely synonymous with *fault-finding*; the *captious* spirit catches at every chance to find fault, and is on the watch for it; hence, *captious* approaches the meaning of *fretful*, *irritable*, *peevish*, *petulant*, etc. *Censorious* denotes a tendency to censure for the sake of censuring; censoriousness is less petty and more severe than captiousness; one may be *censorious* from high ideals or principles of right and duty joined with lack of appreciation, charity,

tenderness, and sympathy for others; censoriousness goes with self-righteousness. *Hypercritical* signifies *critical* beyond the bounds of sound reason or common sense, which recognizes the necessity of a certain amount of tolerated imperfection in all practical matters; a *hypercritical* person would reject a noble stanza for a superfluous syllable or an imperfect rime, or fix attention so strongly on the flaw as to overshadow the excellence of the whole; the *hypercritical* person may not be *captious* or ill-tempered, but merely actuated by a wire-drawn minuteness and petty exactness of criticism. *Caviling* is of the intellect; a cavil is not an argument, but an attack upon an argument, statement, or truth, always petty and sneering, and often disingenuous; a *caviling* spirit never arrives, nor seeks to arrive, at essential truth. *Carping* is less serious and ill-tempered than *captious*, though quite as petty, and commonly more scornful; a *carping* critic stands aloof and flings a censure or a sneer at what the *captious* person hotly blames. A *cynical* person is coldly contemptuous of most things that others admire or believe in, especially of disinterestedness or moral worth; he does not become angry like the *captious*, nor severe like the *censorious*, not thinking anger or severity worth while; the *cynical* man keeps his own temper, but often seriously tries that of others.

ANTONYMS:

appreciative	considerate	fair	laudatory
approving	easy	flattering	negligent
careless	easy-going	genial	reasonable
commendatory	encouraging	good-natured	thoughtful
complimentary	eulogistic		

CARE**SYNONYMS:**

anxiety	concern	oversight	trouble
attention	direction	perplexity	vigilance
bother	forethought	precaution	wariness
caution	heed	prudence	watchfulness
charge	management	solicitude	worry
circumspection			

Care concerns what we possess; *anxiety*, often, what we do not; riches bring many *cares*; poverty brings many *anxieties*. *Care* also signifies watchful *attention*, in view of possible harm; as, "This side up with *care*;" "Take *care* of yourself;" or, as a sharp warning, "Take *care*!" *Caution* has a sense of possible

harm and risk only to be escaped, if at all, by careful deliberation and observation. *Care* inclines to the positive, *caution* to the negative; *care* is shown in doing, *caution* largely in not doing. *Precaution* is allied with *care*, *prudence* with *caution*; a man rides a dangerous horse with *care*; *caution* will keep him from mounting the horse; *precaution* looks to the saddle-girths, bit, and bridle, and all that may make the rider secure. *Circumspection* is watchful observation and calculation, but without the timidity implied in *caution*. *Bother* is disagreeable *care*, disliked or resented by the person compelled to exercise it. *Concern* denotes a serious interest, milder than *anxiety*; as, *concern* for the safety of a ship at sea. *Heed* implies *attention* without disquiet; it is now largely displaced by *attention* and *care*. *Solicitude* involves especially the element of desire, not expressed in *anxiety*, and of hopefulness, not implied in *care*. A parent feels constant *solicitude* for his children's welfare, *anxiety* as to dangers that threaten it, with *care* to guard against them. *Watchfulness* recognizes the possibility of danger, *wariness* the probability. A man who is not influenced by *caution* to keep out of danger may display great *wariness* in the midst of it. *Care* has also the sense of responsibility, with possible control, as expressed in *charge*, *management*, *oversight*; as, these children are under my *care*; send the money to me in *care* of the firm. Compare ALARM; ANXIETY; PRUDENCE.

ANTONYMS:

carelessness	inattention	negligence	recklessness
disregard	indifference	omission	remissness
heedlessness	neglect	oversight	slight

PREPOSITIONS:

Take *care of* the house; *for* the future; *about* the matter.

CAREER

SYNONYMS:

charge	flight	passage	race
course	line of achievement	public life	rush

A *career* was originally the ground for a race, or, especially, for a knight's *charge* in tournament or battle; whence *career* was early applied to the *charge* itself.

If you will use the lance, take ground for your *career* . . . The four horsemen met in full *career*.

SCOTT *Quentin Durward* ch. 14, p. 194 [D. F. & CO.]

In its figurative use *career* signifies some continuous and conspicuous work, usually a life-work, and most frequently one of honorable achievement. Compare BUSINESS.

CARESS

SYNONYMS:

coddle
court

embrace
flatter

fondle
kiss

pamper
pet

To *caress* is less than to *embrace*; more dignified and less familiar than to *fondle*. A visitor *caresses* a friend's child; a mother *fondles* her babe. *Fondling* is always by touch; *caressing* may be also by words, or other tender and pleasing attentions.

ANTONYMS:

See synonyms for AFFRONT.

PREPOSITIONS:

Caressed *by* or *with* the hand; caressed *by* admirers, at court.

CARICATURE

SYNONYMS:

burlesque
exaggeration

extravaganza
imitation

mimicry
parody

take-off
travesty

A *caricature* is a grotesque *exaggeration* of striking features or peculiarities, generally of a person; a *burlesque* treats any subject in an absurd or incongruous manner. A *burlesque* is written or acted; a *caricature* is more commonly in sketch or picture. A *parody* changes the subject, but keeps the style; a *travesty* keeps the subject, but changes the style; a *burlesque* does not hold itself to either subject or style; but is content with a general resemblance to what it may imitate. A *caricature*, *parody*, or *travesty* must have an original, a *burlesque* may be an independent composition. An account of a school-boys' quarrel after the general manner of Homer's Iliad would be a *burlesque*; the real story of the Iliad told in newspaper style would be a *travesty*. An *extravaganza* is a fantastic composition, musical, dramatic, or narrative. *Imitation* is serious; *mimicry* is either intentionally or unintentionally comical.

CAROUSAL

SYNONYMS:

carnival	drinking-bout	revel	saturnalia
carouse	jollification	revelry	spree
debauch	orgy	rout	wassail

These words all denote wild and careless merrymaking, in which all restraint is thrown aside. All are forms of letting go, with differences in the degree of self-abandonment. The *carnival*, the final festival before the long privation of Lent, includes much harmless, but somewhat riotous, fun, and thence reaches all degrees of unrestrained license; we may speak of a skating *carnival*, a *carnival* of debauchery, a *carnival* of slaughter. The *revel* and *revelry* may include much that is elegant and sumptuous, with enjoyment that is merely careless and unrestrained, thence extending to the wildest excess; in its best use, either *revel* or *revelry* is of a higher grade than *carnival*:

There was a sound of *revelry* by night,
And Belgium's capital had gathered then
Her beauty and her chivalry

BYRON *Childe Harold*.

Carousal, *carouse*, *debauch*, *orgy*, etc., all denote unrestrained indulgence in drunkenness or other vicious pleasure, with the accompanying degradation. Compare FEAST.

ANTONYMS:

abstemiousness	austerity	privation	temperance
abstinence	fast	sobriety	

CARRY

SYNONYMS:

bear	convey	move	sustain	transmit
bring	lift	remove	take	transport

A person may *bear* a load either when in motion or at rest; he *carries* it only when in motion. The stooping Atlas *bears* the world on his shoulders; swiftly moving Time *carries* the hour-glass and scythe; a person may be said either to *bear* or to *carry* a scar, since it is upon him whether in motion or at rest. If an object is to be *moved* from the place we occupy, we say *carry*; if to the place we occupy, we say *bring*. A messenger *carries* a letter to a correspondent, and *brings* an answer. *Take* is often used in this sense in place of *carry*; as, *take* that letter to the office. *Carry* often signifies to

transport by personal strength, without reference to the direction; as, that is more than he can *carry*; yet, even so, it would not be admissible to say *carry* it to me, or *carry* it here; in such case we must say *bring*. To *lift* is simply to raise from the ground, though but for an instant, with no reference to holding or moving; one may be able to *lift* what he could not *carry*. The figurative uses of *carry* are very numerous; as, to *carry* an election, *carry* the country, *carry* (in the sense of *capture*) a fort, *carry* an audience, *carry* a stock of goods, etc. Compare CONVEY; KEEP; SUPPORT.

ANTONYMS:

drop	give up	shake off	throw off
fall under	let go	throw down	

PREPOSITIONS:

To *carry* coals *to* Newcastle; *carry* nothing *from*, or *out of*, this house; he carried these qualities *into* all he did; *carry across* the street, *over* the bridge, *through* the woods, *around* or *round* the corner; *beyond* the river; the cable was carried *under* the sea.

CATASTROPHE**SYNONYMS:**

calamity	denouement	mischance	mishap
cataclysm	disaster	misfortune	sequel

A *cataclysm* or *catastrophe* is some great convulsion or momentous event that may or may not be a cause of misery to man. In *calamity*, or *disaster*, the thought of human suffering is always present. It has been held by many geologists that numerous *catastrophes* or *cataclysms* antedated the existence of man. In literature, the final event of a drama is the *catastrophe*, or *denouement*. *Misfortune* ordinarily suggests less of suddenness and violence than *calamity* or *disaster*, and is especially applied to that which is lingering or enduring in its effects. In history, the end of every great war or the fall of a nation is a *catastrophe*, though it may not be a *calamity*. Yet such an event, if not a *calamity* to the race, will always involve much individual *disaster* and *misfortune*. Pestilence is a *calamity*; a defeat in battle, a shipwreck, or a failure in business is a *disaster*; sickness or loss of property is a *misfortune*; failure to meet a friend is a *mischance*; the breaking of a teacup is a *mishap*.

ANTONYMS:

benefit	boon	favor	pleasure	prosperity
blessing	comfort	help	privilege	success

PREPOSITIONS:

The catastrophe *of* a play; *of* a siege; rarely, *to* a person, etc.

CATCH

SYNONYMS:

apprehend	ensnare	overtake
capture	entrap	secure
clasp	grasp	seize
clutch	grip	snatch
comprehend	gripe	take
discover	lay hold of (on, upon)	take hold of

To *catch* is to come up with or take possession of something departing, fugitive, or illusive. We *catch* a runaway horse, a flying ball, a mouse in a trap. We *clutch* with a swift, tenacious movement of the fingers; we *grasp* with a firm but moderate closure of the whole hand; we *grip* or *gripe* with the strongest muscular closure of the whole hand possible to exert. We *clasp* in the arms. We *snatch* with a quick, sudden, and usually a surprising motion. In the figurative sense, *catch* is used of any act that brings a person or thing into our power or possession; as, to *catch* a criminal in the act; to *catch* an idea, in the sense of *apprehend* or *comprehend*. Compare ARREST.

ANTONYMS:

fall of	give up	lose	release	throw aside
fall short of	let go	miss	restore	throw away

PREPOSITIONS:

To catch *at* a straw; *to* catch a fugitive *by* the collar; to catch a ball *with* the left hand; he caught the disease *from* the patient; the thief was caught *in* the act; the bird *in* the snare.

CAUSE

SYNONYMS:

actor	causation	fountain	power
agent	condition	motive	precedent
antecedent	creator	occasion	reason
author	designer	origin	source
casualty	former	originator	spring

The efficient *cause*, that which makes anything to be or be done, is the common meaning of the word, as in the saying

"There is no effect without a *cause*." Every man instinctively recognizes himself acting through will as the *cause* of his own actions. The *Creator* is the Great First *Cause* of all things. A *condition* is something that necessarily precedes a result, but does not produce it. An *antecedent* simply precedes a result, with or without any agency in producing it; as, Monday is the invariable *antecedent* of Tuesday, but not the *cause* of it. The direct antonym of *cause* is *effect*, while that of *antecedent* is *consequent*. An *occasion* is some event which brings a *cause* into action at a particular moment; gravitation and heat are the *causes* of an avalanche; the steep incline of the mountain-side is a necessary *condition*, and the shout of the traveler may be the *occasion* of its fall. *Causality* is the doctrine or principle of causes, *causation* the action or working of causes. Compare DESIGN; REASON.

ANTONYMS:

consequence	development	end	fruit	outcome	product
creation	effect	event	issue	outgrowth	result

PREPOSITIONS:

The cause *of* the disaster; cause *for* interference.

CAVITY**SYNONYMS:**

aperture	crack	gap	perforation
bore	crater	gorge	pipe
breach	defile	hold	pore
burrow	dell	hole	ravine
cave	den	hollow	rent
cavern	dent	indentation	slit
cell	depression	mine	tube
chasm	depth	notch	tunnel
cleft	excavation	opening	vale
concavity	fissure	orifice	valley

A *cavity* is a hollow space within a body, which may be open externally or completely enclosed; as, the *cavity* of the mouth; the *cavity* of the skull; *concavity* usually denotes the state of being concave, but may denote a concave surface or *cavity*. A *hole* is an *opening* in a solid body or compact substance; it may extend entirely through the body, or only partly through it, forming a *cavity*, and may be of any shape, provided the transverse axes are not greatly unequal, as illustrated in the proverb of "fitting round men into square holes." A *hole* is generally thought of as open at one or

both surfaces of the body containing it, though we speak of the *holes* in a cheese, or the *holes* in worm-eaten wood, which extend at random within the substance; a *hole* in the ground, in the trunk or branch of a tree, or the like, either found existing or purposely excavated, is often used for the home or hiding-place of an animal, and may be a *burrow* or *den*; from the use of such resorts by the inferior animals as foxes, rats, or the like, the word *hole* has an opprobrious meaning as applied to human habitations or resorts; as, the Black *Hole* of Calcutta; a rum-*hole*. An *opening* very long in proportion to its width is more commonly called a *crack*, *fissure*, *slit*, or the like, or on the surface of the earth such an opening is designated as a *chasm*, *gorge*, or *ravine*. A *defile* is a long mountain-pass so narrow that it can be marched through only in file, as in single file. A *rent* in a garment is made by tearing; a *slit*, by cutting. A small space wholly enclosed is called a *cell*; a biological *cell* is commonly filled with protoplasm. A *tube* is a long, hollow, cylindrical body, as of wood, rubber, metal, or glass, for the passage of liquids or gases; a similar formation in the body of a plant or animal is likewise called a *tube*; as, the bronchial tubes; a *pipe* is a long conducting passage, commonly, but not necessarily cylindrical; as, a drain-*pipe*; a *pipe-line* for oil, etc.; the metallic *tubes* of a wind-instrument are called *pipes*; as, the *pipes* of an organ; the bagpipe is known collectively as the *pipes*:

Pipes of the misty moorlands,
Voice of the vales and hills,
The droning of the torrents.
The treble of the rills.

WHITTIER *The Pipes at Lucknow*, st 1.

For the most part the difference between *tube* and *pipe* is simply a matter of usage. The minute *orifices* or perforations of the sweat-glands through the skin are called *pores*. An *orifice* is an *opening* into a cavity, as the mouth of a *hole*, *tube*, or *pipe*. In nautical use, the *hold* is the cavity of a ship below the deck, used for storage of cargo. A *crater* is an *opening* of a volcano, at or near the summit, through which eruptions occur. A *bore*, *excavation*, *mine*, *perforation*, or *tunnel* is artificially made; as, the *bore* of a cannon, the *excavation* for the foundation of a new building; a *mine* run

by an enemy under a fortress; the *tunnel* under the Simplon; a *perforation* may be extensive, as of a shot through armor, or minute, as of a needle-point through paper, rubber, or the like. A *dent* or *indentation* is a depression on the surface of a solid, as if beaten in. A *notch* is sharply cut, as with a knife or saw, generally in the edge or convex surface of an object; a *notch* in a mountain-chain is named from its shape as viewed from a distance, when it seems to be sharply cut into the contour of the range. *Aperture* is a very general word, applying to an *opening* of almost any shape or size through the surface of a solid body, affording ingress or egress, or permitting the passage of light, sound, etc.; *aperture* is much used in science of a measurable *opening* or interval; as, the *aperture* of a lens; the *aperture* of a microscope or of a telescope. The noun *hollow* denotes a shallow *concavity* or sunken space, usually round or oval, on the outer surface of a solid, as of the earth. A *cleft* is an *opening* or separation made, or seeming as if made, by splitting or cleaving. A *breach* is an *opening* roughly broken, generally from the top or edge down through a wall or other object, as by a battering-ram or cannon; a *gap* may be between portions that never were joined; as, a *gap* in a mountain range. Compare BREAK; REND.

ANTONYMS:

convexity	hill	mount	protuberance
elevation	hillock	mountain	rampart
eminence	knoll	peak	rising
excescence	lump	projection	swelling
height	mound	prominence	

CEASE**SYNONYMS:**

abstain	desist	give over	quit
bring to an end	discontinue	intermit	refrain
come to an end	end	leave off	stop
conclude	finish	pause	terminate

Strains of music may gradually or suddenly *cease*. A man *quits* work on the instant; he may *discontinue* a practise gradually; he *quits* suddenly and completely; he *stops* short in what he may or may not resume; he *pauses* in what he will probably resume. What *intermits* or is *intermitted* returns again, as a fever that *intermits*. Compare ABANDON; DIE; END; REST.

ANTONYMS:

begin	inaugurate	originate	set in operation
commence	initiate	set about	set on foot
enter upon	institute	set going	start

PREPOSITION:

Cease *from* anger.

CELEBRATE**SYNONYMS:**

commemorate	keep	observe	solemnize
-------------	------	---------	-----------

To *celebrate* any event or occasion is to make some demonstration of respect or rejoicing because of or in memory of it, or to perform such public rites or ceremonies as it properly demands. We *celebrate* the birth, *commemorate* the death of one beloved or honored. We *celebrate* a national anniversary with music and song, with firing of guns and ringing of bells; we *commemorate* by any solemn and thoughtful service, or by a monument or other enduring memorial. We *keep* the Sabbath, *solemnize* a marriage, *observe* an anniversary; we *celebrate* or *observe* the Lord's Supper in which believers *commemorate* the sufferings and death of Christ.

ANTONYMS:

contemn	dishonor	forget	neglect	profane
despise	disregard	ignore	overlook	violate

PREPOSITIONS:

We celebrate the day *with* appropriate ceremonies; the victory was celebrated *by* the people, *with* rejoicing.

CENTER**SYNONYMS:**

middle	midst
--------	-------

We speak of the *center* of a circle, the *middle* of a room, the *middle* of the street, the *midst* of a forest. The *center* is equally distant from every point of the circumference of a circle, or from the opposite boundaries on each axis of a parallelogram, etc.; the *middle* is more general and less definite. The *center* is a point; the *middle* may be a line or a space. We say *at* the *center*; *in* the *middle*. *Midst* commonly implies a group or multitude of surrounding objects. Compare **AMID**.

ANTONYMS:

bound	boundary	circumference	perimeter	rim
-------	----------	---------------	-----------	-----

CHAGRIN

SYNONYMS:

confusion	discomposure	humiliation	shame
disappointment	dismay	mortification	vexation

Chagrin unites *disappointment* with some degree of *humiliation*. A rainy day may bring *disappointment*; needless failure in some enterprise brings *chagrin*. *Shame* involves the consciousness of fault, guilt, or impropriety; *chagrin* of failure of judgment, or harm to reputation. A consciousness that one has displayed his own ignorance will cause him *mortification*, however worthy his intent; if there was a design to deceive, the exposure will cover him with *shame*.

ANTONYMS:

delight	exultation	glory	rejoicing	triumph
---------	------------	-------	-----------	---------

PREPOSITIONS:

He felt deep *chagrin* *at* (because of, on account of) failure.

CHANGE, *v.*

SYNONYMS:

alter	exchange	shift	transmute
commute	metamorphose	substitute	turn
convert	modify	transfigure	vary
diversify	qualify	transform	veer

To *change* is distinctively to make a thing other than it has been, in some respect at least; to *exchange* to put or take something else in its place; to *alter* is ordinarily to *change* partially, to make different in one or more particulars. To *exchange* is often to transfer ownership; as, to *exchange* city for country property. *Change* is often used in the sense of *exchange*; as, to *change* horses. To *transmute* is to *change* the qualities while the substance remains the same; as, to *transmute* the baser metals into gold. To *transform* is to *change* form or appearance, with or without deeper and more essential change; it is less absolute than *transmute*, though sometimes used for that word, and is often used in a spiritual sense as *transmute* could not be; "Be ye *transformed* by the renewing of your mind," Rom. xii, 2. *Transfigure* is, as in its Scriptural use, to change in an exalted and glorious spiritual way; "Jesus . . . was *transfigured* before them, and his face did shine as the sun, and his raiment was white as the light," Matt. xvii, 1, 2. To *metamorphose* is to make some remarkable change, ordinarily

in external qualities, but often in structure, use, or chemical constitution, as of a caterpillar into a butterfly, of the stamens of a plant into petals, or of the crystalline structure of rocks, hence called "metamorphic rocks," as when a limestone is *metamorphosed* into a marble. To *vary* is to *change* from time to time, often capriciously. To *commute* is to put something easier, lighter, milder, or in some way more favorable in place of that which is *commuted*; as, to *commute* capital punishment to imprisonment for life; to *commute* daily fares on a railway to a monthly payment. To *convert* (from L. *con*, with, and *verto*, turn) is to primarily turn about, and signifies to *change* in form, character, use, etc., through a wide range of relations; iron is *converted* into steel, joy into grief, a sinner into a saint. To *turn* is a popular word for *change* in any sense short of the meaning of *exchange*, being often *equivalent* to *alter*, *convert*, *transform*, *transmute*, etc. We *modify* or *qualify* a statement which might seem too strong; we *modify* it by some limitation, *qualify* it by some addition.

ANTONYMS:

abide	continue	hold	persist	retain
bide	endure	keep	remain	stay

PREPOSITIONS:

To change a home toilet *for* a street dress; to change *from* a caterpillar *to* or *into* a butterfly; to change clothes *with* a beggar.

CHANGE, n.**SYNONYMS:**

alteration	mutation	renewing	transmutation
conversion	novelty	revolution	variation
diversity	regeneration	transformation	variety
innovation	renewal	transition	vicissitude

A *change* is a passing from one state or form to another, any act or process by which a thing becomes unlike what it was before, or the unlikeness so produced; we say a *change* was taking place, or the *change* that had taken place was manifest. *Mutation* is a more formal word for *change*, often suggesting repeated or continual *change*; as, the *mutations* of fortune. *Novelty* is a *change* to what is new, or the newness of that to which a change is made; as, he was perpetually desirous of *novelty*. *Revolution* is specifically and most commonly a *change* of government. *Variation* is a partial *change* in form,

qualities, etc., but especially in position or action; as, the *variation* of the magnetic needle or of the pulse. *Variety* is a succession of *changes* or an intermixture of different things, and is always thought of as agreeable. *Vicissitude* is sharp, sudden, or violent *change*, always thought of as surprising and often as disturbing or distressing; as, the *vicissitudes* of politics. *Transition* is *change* by passing from one place or state to another, especially in a natural, regular, or orderly way; as, the *transition* from spring to summer, or from youth to manhood. An *innovation* is a *change* that breaks in upon an established order or custom; as, an *innovation* in religion or politics. For the distinctions between the other words compare the synonyms for **CHANGE**, *v.* In the religious sense *regeneration* is the vital *renewing* of the soul by the power of the divine Spirit; *conversion* is the conscious and manifest *change* from evil to good, or from a lower to a higher spiritual state; as, in Luke xxii, 32. "when thou art *converted*, strengthen thy brethren." In popular use *conversion* is the most common word to express the idea of *regeneration*.

ANTONYMS:

constancy	fixedness	invariability	steadiness
continuance	fixity	permanence	unchangeableness
firminess	identity	persistence	uniformity

PREPOSITIONS:

We have made a change *for* the better; the change *from* winter to spring; the change *of* a liquid *to* or *into* a gas; a change *in* quality; a change *by* absorption or oxidation.

CHARACTER**SYNONYMS:**

constitution	nature	reputation	temper
disposition	personality	spirit	temperament
genius	record		

Character is what one is; *reputation*, what he is thought to be; his *record* is the total of his known action or inaction. As a rule, a man's *record* will substantially express his *character*; his *reputation* may be higher or lower than his *character* or *record* will justify. *Repute* is a somewhat formal word, with the same general sense as *reputation*. One's *nature* includes all his original endowments or propensities; *character* includes both natural and acquired traits. We speak of one's physical *con-*

stitution as strong or weak, etc., and figuratively, always with the adjective, of his mental or moral *constitution*. Compare CHARACTERISTIC.

PREPOSITIONS:

The witness has a character *for* veracity; his character is *above* suspicion; the character *of* the applicant.

CHARACTERISTIC

SYNONYMS:

attribute	indication	property	singularity
character	mark	quality	trace
distinction	peculiarity	sign	trait
feature			

A *characteristic* belongs to the nature or *character* of the person, thing, or class, and serves to identify an object; as, a copper-colored skin, high cheek-bones, and straight, black hair are *characteristics* of the American Indian. A *sign* is manifest to an observer; a *mark* or a *characteristic* may be more difficult to discover; an insensible person may show *signs* of life, while sometimes only close examination will disclose *marks* of violence. Pallor is ordinarily a *mark* of fear; but in some brave natures it is simply a *characteristic* of intense earnestness. *Mark* is sometimes used in a good, but often in a bad sense; we speak of the *characteristic* of a gentleman, the *mark* of a villain. Compare ATTRIBUTE; CHARACTER.

CHARMING

SYNONYMS:

bewitching	delightful	enrapturing	fascinating
captivating	enchanting	entrancing	winning

That is *charming* or *bewitching* which is adapted to win others as by a magic spell. *Enchanting*, *enrapturing*, *entrancing* represent the influence as not only supernatural, but irresistible and *delightful*. That which is *fascinating* may win without delighting, drawing by some unseen power, as a serpent its prey; we can speak of horrible *fascination*. *Charming* applies only to what is external to oneself; *delightful* may apply to personal experiences or emotions as well; we speak of a *charming* manner, a *charming* dress, but of *delightful* anticipations. Compare AMIABLE; BEAUTIFUL.

CHASTEN

SYNONYMS:

afflict	chastise	discipline	punish	refine	subdue
castigate	correct	humble	purify	soften	try

Castigate and *chastise* refer strictly to corporal punishment, though both are somewhat archaic; *correct* and *punish* are often used as euphemisms in preference to either. *Punish* is distinctly retributive in sense; *chastise*, partly retributive, and partly corrective; *chasten*, wholly corrective. *Chasten* is used exclusively in the spiritual sense, and chiefly of the visitation of God.

PREPOSITIONS:

"We are chastened *of* the Lord," 1 *Cor.* xi, 32; "they . . . chastened us *after* their own pleasure, but He *for* our profit," *Heb.* xii, 10; "chasten *in* thy hot displeasure," *Ps.* iv, 7; chasten *with* pain; *by* trials and sorrows.

CHECK

SYNONYMS:

bridle	curb	inhibit	reduce	slacken
checkmate	hinder	moderate	repress	stay
counteract	impede	obstruct	restrain	stop

To *check* is to *restrain* movement (see RESTRAIN) suddenly, and partially or temporarily; as, to *check* the speed of a horse or of a railway train; to *check* the advance of an enemy; to *check* progress. *Check* has none of the suggestion of art, cunning, or superior skill that is in *baffle* and *foil* (see BAFFLE); an enemy's advance may be *checked* by marching up an effective force or planting cannon squarely in his front. The words *check* and *checkmate* are to be discriminated as partial and total; in the game of chess, in which both originated, a "check" is any attack upon the king; a player's first business is to get his king "out of check"; until that is done he can make no other move; if he cannot do that, he is beaten, and is technically said to be *checkmated*; *checkmate* (from Pers. *shah mat*, the king is dead) is never to be used figuratively of anything less than final and irremediable defeat. (Compare DEFEAT under CONQUER.) A person or movement is *checked* if in any way restrained; *checkmated* if defeated beyond recovery. Compare HINDER; OBSTRUCT; REPROVE; RESTRAIN.

ANTONYMS:

abet	expedite	indulge	license	rush
accelerate	free	instigate	loose	speed
allow	hasten	let go	loosen	urge forward
encourage	hurry	liberate	quicken	urge on

CHERISH**SYNONYMS:**

cheer	encourage	harbor	nurse	shelter
cling to	entertain	hold dear	nurture	treasure
comfort	foster	nourish	protect	value

To *cherish* is both to *hold dear* and to treat as dear. Mere unexpressed esteem would not be *cherishing*. In the marriage vow, "to love, honor, and *cherish*," the word *cherish* implies all that each can do by love and tenderness for the welfare and happiness of the other, as by support, protection, care in sickness, comfort in sorrow, sympathy, and help of every kind. To *nurse* is to tend the helpless or feeble, as infants, or the sick or wounded. To *nourish* is strictly to sustain and build up by food; to *nurture* includes careful mental and spiritual training, with something of love and tenderness; to *foster* is simply to maintain and care for, to bring up, a *foster-child* will be *nourished*, but may not be as tenderly *nurtured* or as lovingly *cherished* as if one's own. In the figurative sense, the opinion one *cherishes* he holds, not with mere cold conviction, but with loving devotion.

ANTONYMS:

See synonyms for ABANDON ; CHASTEN.

CHIEF, n.**SYNONYMS:**

captain	commander	king	master	principal	sachem
chieftain	head	leader	prince	ruler	

A *chief* is either the *ruler* of a tribe or the *head* of some department of established government; as, the *chief* of police; the word is rarely, and for the most part colloquially, applied to one holding some analogous position in literary or mercantile life, etc. *Chieftain* is now mainly employed in literary, and chiefly poetic, use; it has special historic application to the *head* of a Scottish clan. A *leader* is one who is voluntarily followed, because of ability to guide or control, or as the choice of a party. A *master* is one who can enforce

obedience. The highest officer of any considerable military force is called the *commander*; of all the forces of a nation, etc., the *commander-in-chief*. *Principal*, which is also an adjective, has important use as a noun, in the sense of a leader; as, the *principal* in a debate, a duel, or a crime, the *principal* of a school, etc.; also, of property, capital, or the like on which interest accrues; as, the *principal* of a loan. *Principal* is to be sharply distinguished from *principle*, which is never an adjective, and as a noun is wholly different in sense. Compare PRINCIPAL, *a*.

ANTONYMS:

adherent	follower	retainer	servant	subordinate	vassal
attendant	minion	satellite	subaltern	underling	

CHOOSE**SYNONYMS:**

cull elect pick pick out prefer select

Prefer indicates a state of desire and approval; *choose*, an act of will. Prudence or generosity may lead one to *choose* what he does not *prefer*. *Select* implies a careful consideration of the reasons for preference and choice. Among objects so nearly alike that we have no reason to *prefer* any one to another we may simply *choose* the nearest, but we could not be said to *select* it. Aside from theology, *elect* is popularly confined to the political sense; as, a free people *elect* their own rulers. *Cull*, from the Latin *colligere*, commonly means to collect, as well as to *select*. In a garden we *cull* the choicest flowers.

ANTONYMS:

cast away	decline	dismiss	refuse	repudiate
cast out	disclaim	leave	reject	throw aside

PREPOSITIONS:

Choose *from* or *from among* the number; choose *out of* the army; choose *between* (or *betwixt*) two; *among* many; choose *for* the purpose.

CIRCUMLOCUTION**SYNONYMS:**

diffuseness	prolixity	surplusage	verbiage
periphrasis	redundance	tautology	verbosity
pleonasm	redundancy	tediousness	wordiness

Circumlocution and *periphrasis* are roundabout ways of ex-

pressing thought; *circumlocution* is the more common, *periphrasis* the more technical word. Constant *circumlocution* produces an affected and heavy style; occasionally, skilful *periphrasis* conduces both to beauty and to simplicity. Etymologically, *diffuseness* is a scattering, both of words and thought; *redundancy* is an overflow. *Prolixity* goes into endless petty details, without selection or perspective. *Pleonasm* is the expression of an idea already plainly implied; *tautology* is the restatement in other words of an idea already stated, or a useless repetition of a word or words. *Pleonasm* may add emphasis; *tautology* is always a fault. "I saw it with my eyes" is a *pleonasm*; "all the members agreed unanimously" is *tautology*. *Verbiage* is the use of mere words without thought. *Verbosity* and *wordiness* denote an excess of words in proportion to the thought. *Tediousness* is the sure result of any of these faults of style.

ANTONYMS:

brevity	conciseness	plainness	succinctness
compactness	condensation	shortness	terseness
compression	directness		

CIRCUMSTANCE

SYNONYMS:

accompaniment	fact	item	point
concomitant	feature	occurrence	position
detail	incident	particular	situation
event			

A *circumstance* (from L. *circum*, around, and *sto*, stand) is something existing or occurring in connection with or relation to some other fact or event, modifying or throwing light upon the principal matter without affecting its essential character; an *accompaniment* is something that unites with the principal matter, though not necessary to it; as, the piano *accompaniment* to a song; a *concomitant* goes with a thing in natural connection, but in a subordinate capacity, or perhaps in contrast; as, cheerfulness is a *concomitant* of virtue. A *circumstance* is not strictly, nor usually, an occasion, condition, effect, or result. (See these words under CAUSE.) Nor is the *circumstance* properly an *incident*. (See under ACCIDENT.) We say, "My decision will depend upon *circumstances*"—not "upon *incidents*." That a man wore a blue necktie would not probably be the cause, occasion, condition, or *concomitant* of his

committing murder; but it might be a very important *circumstance* in identifying him as the murderer. All the *circumstances* make up the *situation*. A certain disease is the cause of a man's death, his suffering is an *incident*; that he is in his own home, that he has good medical attendance, careful nursing, etc., are consolatory *circumstances*. With the same idea of subordination, we often say, "This is not a *circumstance* to that." So a person is said to be in easy *circumstances*. Compare *EVENT*.

PREPOSITIONS:

"Mere situation is expressed by 'in the circumstances'; action affected is performed 'under the circumstances.'" [M.]

CLASS

SYNONYMS:

association	circle	clique	company	degree	order	set
caste	clan	club	coterie	grade	rank	

A *class* is a number or body of persons or objects having common pursuits, purposes, attributes, or characteristics. A *caste* is hereditary; a *class* may be independent of lineage or descent; membership in a *caste* is supposed to be for life; membership in a *class* may be very transient; a religious and ceremonial sacredness attaches to the *caste*, as not to the *class*. The rich and the poor form separate *classes*; yet individuals are constantly passing from each to the other; the *classes* in a college remain the same, but their membership changes every year. We speak of *rank* among hereditary nobility or military officers; of various *orders* of the priesthood; by accommodation, we may refer in a general way to the higher *ranks*, the lower *orders* of any society. *Grade* implies some regular scale of valuation, and some inherent qualities for which a person or thing is placed higher or lower in the scale; as, the coarser and finer *grades* of wool; a man of an inferior *grade*. A *coterie* is a small company of persons of similar tastes, who meet frequently in an informal way, rather for social enjoyment than for any serious purpose. *Clique* has always an unfavorable meaning. A *clique* is always fractional, implying some greater gathering of which it is a part; the association breaks up into *cliques*. Persons unite in a *coterie* through simple liking for one another; they withdraw into a *clique*.

largely through aversion to outsiders. A *set*, while exclusive, is more extensive than a *clique*, and chiefly of persons who are united by common social station, etc. *Circle* is similar in meaning to *set*, but of wider application; we speak of scientific and religious as well as of social *circles*.

PREPOSITIONS:

A class *of* merchants; the senior class *at* (sometimes *of*) Harvard; the classes *in* college.

CLEANSE

SYNONYMS:

brush	lave	scour	sweep
clean	mop	scrub	wash
disinfect	purify	sponge	wipe
dust	rinse		

To *clean* is to make clean by removing dirt, impurities, or soil of any kind. *Cleanse* implies a worse condition to start from, and more to do, than *clean*. Hercules *cleansed* the Augean stables. *Cleanse* is especially applied to purifying processes where liquid is used, as in the flushing of a street, etc. We *brush* clothing if dusty, *sponge* it, or *sponge* it off, if soiled; or *sponge* off a spot. Furniture, books, etc., are *dusted*; floors are *mopped* or *scrubbed*; metallic utensils are *scoured*; a room is *swept*; soiled garments are *washed*; foul air or water is *purified*. *Cleanse* and *purify* are used extensively in a moral sense; *wash* in that sense is archaic.

Cleanse your hands, ye sinners, and *purify* your hearts, ye double-minded.

James, iv, 8.

Compare ABLUTION; AMEND.

ANTONYMS:

befoul	contaminate	deprave	stain
besmear	corrupt	pollute	sully
besmirch	debase	soil	taunt
bespatter	defile	spoil	vitiate

PREPOSITIONS:

Cleanse of or *from* physical or moral defilement; *cleanse with* an instrument; *by* an agent; the room was cleaned *by* the attendants *with* soap and water.

CLEAR

SYNONYMS:

apparent	intelligible	pellucid	transparent
definite	limpid	perspicuous	unadorned
diaphanous	lucid	plain	unambiguous
distinct	manifest	straightforward	unequivocal
evident	obvious	translucent	unmistakable
explicit			

Clear (from *L. clarus*, bright, brilliant) primarily refers to that which shines, and impresses the mind through the eye with a sense of luster or splendor. A substance is said to be *clear* that offers no impediment to vision—is not dim, dark, or obscure. *Transparent* refers to the medium through which a substance is seen, *clear* to the substance itself, without reference to anything to be seen through it; we speak of a stream as *clear* when we think of the water itself; we speak of it as *transparent* with reference to the ease with which we see the pebbles at the bottom. *Clear* is also said of that which comes to the sense without dimness, dulness, obstruction, or obscurity, so that there is no uncertainty as to its exact form, character, or meaning, with something of the brightness or brilliancy implied in the primary meaning of the word *clear*; as, the outlines of the ship were *clear* against the sky; a *clear* view; a *clear* note; “*clear* as a bell;” a *clear*, frosty air; a *clear* sky; a *clear* statement; hence, the word is used for that which is free from any kind of obstruction; as, a *clear* field. *Lucid* and *pellucid* refer to a shining clearness, as of crystal. A *transparent* body allows the forms and colors of objects beyond to be seen through it; a *translucent* body allows light to pass through, but may not permit forms and colors to be distinguished; plate glass is *transparent*, ground glass is *translucent*. *Limpid* refers to a liquid clearness, or that which suggests it; as, *limpid* streams. That which is *distinct* is well defined, especially in outline, each part or object standing or seeming apart from any other, not confused, indefinite, or blurred; *distinct* enunciation enables the hearer to catch every word or vocal sound without perplexity or confusion; a *distinct* statement is free from indefiniteness or ambiguity; a *distinct* apprehension of a thought leaves the mind in no doubt or uncertainty regarding it. That is *plain*, in the sense here considered, which is, as it were, level to the thought, so that one goes straight on without difficulty or

hindrance; as, *plain* language; a *plain* statement; a *clear* explanation. *Perspicuous* is often equivalent to *plain*, but *plain* never wholly loses the meaning of *unadorned*, so that we could not call it at once ornate and *plain*. Compare EVIDENT.

ANTONYMS:

ambiguous	dubious	mysterious	turbid
cloudy	foggy	obscure	unintelligible
dim	indistinct	opaque	vague

PREPOSITIONS:

Clear *to* the mind; clear *in* argument; clear *of* or *from* annoyances.

CLEVER**SYNONYMS:**

able	dexterous	intellectual	quick-witted
adroit	expert	intelligent	sharp
apt	gifted	keen	skilful
bright	happy	knowing	smart
capable	ingenious	quick	talented

Clever, as used in England, especially implies an aptitude for study or learning, and for excellent though not preeminent mental achievement. The early New England usage as implying simple and weak good nature has largely affected the use of the word throughout the United States, where it has never been much in favor. *Smart*, indicating dashing ability, is now coming to have a suggestion of unscrupulousness, similar to that of the word *sharp*, which makes its use a doubtful compliment. The discriminating use of such words as *able*, *gifted*, *talented*, etc., is greatly preferable to an excessive use of the word *clever*. Compare ACUMEN; ASTUTE; POWER.

ANTONYMS:

awkward	dull	ignorant	stupid
bungling	foolish	senseless	thick-headed
clumsy	idiotic	slow	witless

COLLISION**SYNONYMS:**

clash	conflict	impact	opposition
clashing	contact	meeting	shock
concussion	encounter		

Collision, the act or fact of striking violently together, is the result of motion or action, and is sudden and momentary;

contact may be a condition of rest, and be continuous and permanent; *collision* is sudden and violent *contact*. *Concussion* is often by transmitted force rather than by direct *impact*; two railway-trains come into *collision*; an explosion of dynamite shatters neighboring windows by *concussion*. *Impact* is the blow given by the striking body; as, the *impact* of the cannon-shot upon the target. An *encounter* is a sudden meeting, friendly or hostile; as, an *encounter* with friends or with foes; an *encounter* of wits or of combatants; the hostile meaning is becoming predominant. *Meeting* is neutral, and may be of the dearest friends or of the bitterest foes; of objects, of persons, or of opinions; of two or of a multitude. *Shock* is the result of *collision*. In the figurative use, we speak of *clashing* of views, *collision* of persons. *Opposition* is used chiefly of persons, more rarely of opinions or interests; *conflict* is used indifferently of all.

ANTONYMS:

agreement	concert	conformity	unison
amity	concord	harmony	unity
coincidence	concurrence		

PREPOSITIONS:

Collision of one object *with* another; of or *between* opposing objects.

COMFORTABLE**SYNONYMS:**

agreeable	cheery	genial	snug
at ease	commodious	pleasant	well-off
at rest	contented	satisfactory	well-provided
cheerful	convenient	satisfied	well-to-do

A person is *comfortable* in mind when *contented* and measurably *satisfied*. A little additional brightness makes him *cheerful*. He is *comfortable* in body when free from pain, quiet, *at ease*, *at rest*. He is *comfortable* in circumstances, or in *comfortable* circumstances, when things about him are generally *agreeable* and *satisfactory*, usually with the suggestion of sufficient means to secure that result.

ANTONYMS:

cheerless	dissatisfied	forlorn	uncomfortable
disagreeable	distressed	miserable	wretched
discontented	dreary		

COMMIT

SYNONYMS:

assign confide consign entrust relegate trust

Commit, in the sense here considered, is to give in charge, put into care or keeping; to *confide* or *intrust* is to *commit* especially to one's fidelity, *confide* being used chiefly of mental or spiritual, *intrust* also of material things; we *assign* a duty, *confide* a secret, *intrust* a treasure; we *commit* thoughts to writing; *commit* a paper to the flames, a body to the earth; a prisoner is *committed* to jail. *Consign* is a formal word in mercantile use; as, to *consign* goods to an agent. Religiously, we *consign* the body to the grave, *commit* the soul to God. Compare *do*.

PREPOSITIONS:

Commit to a friend *for* safe-keeping; in law, *commit to* prison *for* trial; *without* bail; in default *of* bail; *on* suspicion.

COMPANY

SYNONYMS:

assemblage	concourse	convocation	host
assembly	conference	crowd	meeting
band	congregation	gathering	multitude
collection	convention	group	throng
conclave			

Company (from L. *cum*, with, and *panis*, bread) denotes primarily the association of those who eat at a common table, or the persons so associated, table-companions, messmates, friends, and hence is widely extended to include any association of those united permanently or temporarily, for business, pleasure, festivity, travel, etc., or by sorrow, misfortune, or wrong; *company* may denote an indefinite number (ordinarily more than two), but less than a *multitude*; in the military sense a *company* is a limited and definite number of men; *company* implies more unity of feeling and purpose than *crowd*, and is a less formal and more familiar word than *assemblage* or *assembly*. An *assemblage* may be of persons or of objects; an *assembly* is always of persons. An *assemblage* is promiscuous and unorganized; an *assembly* is organized and united in some common purpose. A *conclave* is a secret *assembly*. A *convocation* is an *assembly* called by authority for a special purpose; the term *convention* suggests

less dependence upon any superior authority or summons. A *group* is small in number and distinct in outline, clearly marked off from all else in space or time. *Collection*, *crowd*, *gathering*, *group*, and *multitude* have the unorganized and promiscuous character of the *assemblage*; the other terms come under the general idea of *assembly*. *Congregation* is now almost exclusively religious; *meeting* is often so used, but is less restricted, as we may speak of a *meeting* of armed men. *Gathering* refers to a coming together, commonly of numbers, from far and near; as, the *gathering* of the Scottish clans. Compare CABAL.

ANTONYMS:

dispersion loneliness privacy retirement seclusion solitude

COMPEL**SYNONYMS:**

coerce constrain drive force make necessitate oblige

To *compel* one to an act is to secure its performance by the use of irresistible physical or moral force. *Force* implies primarily an actual physical process, absolutely subduing all resistance. *Coerce* implies the actual or potential use of so much force as may be necessary to secure the surrender of the will; the American secessionists contended that the Federal government had no right to *coerce* a State. *Constrain* implies the yielding of judgment and will, and in some cases of inclination or affection, to an overmastering power; as, "the love of Christ *constraineth* us," 2 Cor. v. 14. Compare DRIVE; INFLUENCE.

ANTONYMS:

See synonyms for HINDER.

PREPOSITIONS:

The soldiers were compelled *to* desertion; preferably with the infinitive, compelled *to* desert.

COMPLAIN**SYNONYMS:**

croak	growl	grunt	remonstrate
find fault	grumble	murmur	repine

To *complain* is to give utterance to dissatisfaction or objection, express a sense of wrong or ill treatment. One *com-*

plaints of a real or assumed grievance; he may *murmur* through mere peevishness or ill temper; he *repines*, with vain distress, at the irrevocable or the inevitable. *Complaining* is by speech or writing; *murmuring* is commonly said of half-repressed utterance; *repining* of the mental act alone. One may *complain* of an offense to the offender or to others; he *remonstrates* with the offender only. *Complain* has a formal and legal meaning, which the other words have not, signifying to make a formal accusation, present a specific charge; the same is true of the noun *complaint*.

ANTONYMS:

applaud approve commend eulogize laud praise

PREPOSITIONS:

Complain of a thing *to* a person; *of* one person *to* another, *of* or *against* a person *for* an act; *to* an officer; *before* the court; *about* a thing.

COMPLEX

SYNONYMS:

abstruse	confused	intricate	mixed
complicated	conglomerate	involved	multiform
composite	entangled	manifold	obscure
compound	heterogeneous	mingled	tangled

That is *complex* which is made up of several connected parts. That is *compound* in which the parts are not merely connected, but fused, or otherwise combined into a single substance. In a *composite* object the different parts have less of unity than in that which is *complex* or *compound*, but maintain their distinct individuality. In a *heterogeneous* body unlike parts or particles are intermingled, often without apparent order or plan. *Conglomerate* (literally, globed together) is said of a *confused* mingling of masses or lumps of various substances. The New England pudding-stone is a *conglomerate* rock. In a *complex* object the arrangement and relation of parts may be perfectly clear; in a *complicated* mechanism the parts are so numerous, or so combined, that the mind can not readily grasp their mutual relations; in an *intricate* arrangement the parts are so intertwined that it is difficult to follow their windings; things are *involved* which are rolled together so as not to be easily separated, either in thought or in fact; things which are *tangled* or *entangled* mutually hold and draw upon each other.

The conception of a material object is usually *complex*, involving form, less color, size, and other elements; a clock is a *complicated* mechanism; the Gordian knot was *intricate*; the twining serpents of the Laocoon are *involved*. We speak of an *abstruse* statement, a *complex* conception, a *confused* heap, a *heterogeneous* mass, a *tangled* skein, an *intricate* problem; of *composite* architecture, an *involved* sentence; of the *complicated* or *intricate* accounts of a great business, the *entangled* accounts of an incompetent or dishonest bookkeeper.

ANTONYMS:

clear	homogeneous	plain	uncombined	uniform
direct	obvious	simple	uncompounded	unraveled

COMPROMISE**SYNONYMS:**

accommodation	arbitration	compounding	conciliation
adjustment	arrangement	concession	settlement
agreement	composition		

Agreement expresses the act or fact of agreeing, and may be free and hearty or secured with labor and difficulty. *Concession* is a yielding to another of that which one would like to retain; *concession* may be voluntary and generous, calculating and crafty, or forced and unwilling. *Compromise* is mutual *concession* by those of opposing views and interests, each yielding something to the other or others; the expression "mutual *compromise*," sometimes heard, is tautological, for *compromise* is by its very nature "mutual"; where all the concession is on one side, there is no *compromise*. *Adjustment* of differences is largely by treatment or explanation of matters of fact on some basis that can be mutually accepted, and may or may not involve *concession* or *compromise*; as, the *adjustment* of a loss under an insurance policy. *Accommodation* is a fitting or adapting of the views or wishes of one to those of another; *arrangement* is similar in meaning; either *accommodation* or *arrangement* partakes of the nature of *compromise*, but is less formal and comprehensive in meaning; as, his creditors granted him an *accommodation*; or, he made an *arrangement* with his creditors; the decision to admit Missouri as a slave State on condition of freedom for all other territory north of the parallel of 35 degrees 30 minutes might be termed an *agreement*, *accommodation*,

adjustment, or *arrangement*; it is historically known as the "Missouri *Compromise*." *Composition* and *compounding* in this sense are now somewhat rare and technical terms; the latter is chiefly used in an opprobrious sense; as, the *compounding* of a felony, by refraining, for a consideration, from bringing the guilty party to justice. *Conciliation* is a general term, signifying the overcoming of enmity or opposition by some pleasing method, action, or influence, perhaps, though not necessarily, involving *concession* or *compromise*,—*conciliation* often precedes any formal action, and is the basis that makes *agreement* possible. *Settlement* is the conclusion of any matter, whether in dispute or not, by some act that is final; as, the *settlement* of an account by payment of the amount due. *Arbitration* is the most formal of these terms, signifying the reference of a disputed matter or matters, by law, treaty, or mutual agreement, to some outside person or persons (an "arbitrator" or "arbitrators"), whose decision shall be binding upon both the contending parties; as, the Court of *Arbitration* at the Hague. Since the readiest method of *compromise* is often by the yielding of principle for expediency, the word has come to have an opprobrious sense which is not part of its original meaning.

They enslave their children's children who make *compromise* with sin.

LOWELL *Present Crisis*, st. 9.

When *compromise* broadens, intellect and conscience are thrust into narrower room.

GEORGE ELIOT *Felix Holt*, ch. 16.

Temporizing (from L. *tempus*, time) is not *settlement*; it has no more virtue than *compromise*, and less stability, being a mere momentary *adjustment*, to meet the suppressed needs of the time for the time.

ANTONYMS:

altercation	contest	discussion	dissension	war
battle	controversy	disputation	quarrel	wrangle
contention	debate	dispute	strife	wrangling

CONDEMN

SYNONYMS:

blame	convict	doom	reprove
censure	denounce	reprobate	sentence

To *condemn* is to pass judicial sentence or render judgment or decision against. We may *censure* silently; we *condemn*

ordinarily by open and formal utterance. *Condemn* is more final than *blame* or *censure*; a *condemned* criminal has had his trial; a *condemned* building can not stand; a *condemned* ship can not sail. A person is *convicted* when his guilt is made clearly manifest to others; in somewhat archaic use, a person is said to be *convicted* when guilt is brought clearly home to his own conscience (*convict* in this sense being allied with *convince*, which we see under *PERSUADE*); in legal usage one is said to be *convicted* only by the verdict of a jury. In stating the penalty of an offense, the legal word *sentence* is now more common than *condemn*; as, he was *sentenced* to imprisonment; but it is good usage to say, he was *condemned* to imprisonment. To *denounce* is to make public or official declaration against, especially in a violent and threatening manner.

From the pulpits in the northern States Burr was *denounced* as an assassin. *COFFIN Building the Nation* ch. 10, p. 137 [H. 1883.]

To *doom* is to *condemn* solemnly and consign to evil or destruction or to predetermine to an evil destiny; an inferior race in presence of a superior is *doomed* to subjugation or extinction. Compare *ARRAIGN*; *REPROVE*.

ANTONYMS:

absolve
acquit

applaud
approve

exonerate
justify

pardon
praise

PREPOSITIONS:

The bandit was condemned *to* death *for* his crime.

CONDIGN

SYNONYMS:

adequate
deserved

exemplary
fit

just
meet

merited
rigorous

severe
suitable

**Condign* and *exemplary* are both used of *severe* punishment, viewed from different points; *condign* (from L. *con*, intensive, + *dignus*, worthy) is held to be "worthy" of the fault or crime punished, viewing punishment as vindictive, or demanded by the nature of the offense; *exemplary* (from L. *exemplum*, example) views the punishment (which may, perhaps, be the same in fact) as furnishing a warning "example" to deter others from committing a like offense; so a court may award *exemplary* damages, beyond the amount of

actual injury done, as a public warning against similar acts, as of malicious mischief. As the judgment of the gravity of an offense depends largely upon the view and temper of the one inflicting the penalty, *condign* has become a somewhat reproachful word, having been often used to disguise punishments unnecessarily or unjustly harsh or *severe*, or inflicted in anger or revenge. Compare **SEVERE**.

ANTONYMS:

gentle	lenient	moderate	scant	slight	trivial
inadequate	mild	petty	scanty	trifling	

CONFESS

SYNONYMS:

accept	allow	concede	grant
acknowledge	avow	disclose	own
admit	certify	endorse	recognize

We *accept* another's statement; *admit* any point made against us; *acknowledge* what we have said or done, good or bad; *avow* our individual beliefs or feelings; *certify* to facts within our knowledge; *confess* our own faults; *endorse* a friend's note or statement; *grant* a request; *own* our faults or obligations; *recognize* lawful authority; *concede* a claim. *Confess* has a high and sacred use in the religious sense; as, to *confess* Christ before men. It may have also a playful sense (often with *to*); as, one *confesses to* a weakness for confectionery. The chief present use of the word, however, is in the sense of making known to others one's own wrong-doing; in this sense *confess* is stronger than *acknowledge* or *admit*, and more specific than *own*; a person *admits* a mistake; *acknowledges* a fault; *confesses* sin or crime. Compare **APOLOGY**; **AVOW**.

ANTONYMS:

cloak	deny	disown	hide	screen
conceal	disavow	dissemble	mask	secrete
cover	disguise	dissimulate	repudiate	veil

CONFIRM

SYNONYMS:

assure	fix	sanction	substantiate
corroborate	prove	settle	sustain
establish	ratify	strengthen	uphold

Confirm (from L. *con*, together, and *firmitas*, firm) is to add firmness or give stability to. Both *confirm* and *corroborate* pre-

suppose something already existing to which the confirmation or corroboration is added. Testimony is *corroborated* by concurrent testimony or by circumstances; *confirmed* by *established* facts. That which is thoroughly *proved* is said to be *established*; so is that which is official and has adequate power behind it; as, the *established* government; the *established* church. The continents are *fixed*. A treaty is *ratified*; an appointment *confirmed*. An act is *sanctioned* by any person or authority that passes upon it approvingly. A statement is *substantiated*; a report *confirmed*; a controversy *settled*; the decision of a lower court *sustained* by a higher. Just government should be *upheld*. The beneficent results of Christianity *confirm* our faith in it as a divine revelation.

ANTONYMS:

abrogate	cancel	overthrow	shatter	upset
annul	destroy	shake	unsettle	weaken

PREPOSITIONS:

Confirm a statement *by* testimony; confirm a person *in* a belief.

CONGRATULATE**SYNONYM:**

felicitate

To *felicitate* is to pronounce one happy or wish one joy; to *congratulate* is to express hearty sympathy in his joys or hopes. *Felicitate* is cold and formal. We say one *felicitates* himself; though to *congratulate* oneself, which is less natural, is becoming prevalent.

ANTONYMS:

condole with console

PREPOSITIONS:

Congratulate one *on* or *upon* his success.

CONJOIN**SYNONYMS:**

adjoin	attach	concatenate	join
affix	combine	connect	unite
associate			

An object that *adjoins* another touches that other at one or more points or at one side or edge; a garden *adjoins* a house when lying beside or behind it; if we were to say that

the garden is *connected* with the house, we should think of some path or passageway by which the one might be reached from the other. To *conjoin* is to *join* with much completeness and permanence, as by adhesion, intergrowing, or fusing together at a point, edge, or surface; paint is at once *conjoined* with the surface to which it is applied; things that are *joined* may not be *conjoined*; friendly hands or meeting roads or streams are *joined*, but not *conjoined*. *Conjoin* is often interchangeable with *unite*, but *conjoin* directs attention to the original separateness, *unite* to the final unity. To *subjoin* is to add at the end, to *attach* or *affix* as something additional, to *append*. *Concatenate* (a somewhat rare or technical word) signifies to *join* in a chain or series, all the parts of which have neutral relations; as, in nature causes and effects are *concatenated*. Compare ADD; APPEND; APPLY; ATTACH; UNITE.

ANTONYMS:

See the antonyms for the words above referred to.

CONQUER

SYNONYMS:

beat	master	prevail over	subject
checkmate	overcome	put down	subjugate
crush	overmaster	quell	surmount
defeat	overmatch	reduce	vanquish
discomfit	overpower	rout	win
down	overthrow	subdue	worst
humble			

To *defeat* an enemy is to gain an advantage for the time; to *vanquish* is to win a signal victory; to *conquer* is to *overcome* so effectually that the victory is regarded as final. An army is *defeated* when it is driven back or compelled to retire disastrously, with loss of position, military equipment, and men. A "defeat" is final for a battle, but not necessarily for a campaign. *Conquer*, in many cases, carries the idea of possession; as, to *conquer* respect, affection, peace, etc. A country is *conquered* when its armies are *defeated* and its territory is occupied by the enemy; it may be *subjected* to indemnity or to various disabilities; it is *subjugated* when it is held helplessly and continuously under military control; it is *subdued* when all resistance has died out. An army is *routed* when it is converted into a mob of fugitives. Compare BEAT.

ANTONYMS:capitulate
cede
fail
fallfly
forfeit
lose
resignretire
retreat
submitsuccumb
surrender
yield**CONSCIOUS****SYNONYMS:**advised
apprised
assuredaware
certain
certifiedcognizant
informedsensible
sure

One is *aware* of that which exists without him; he is *conscious* of the inner workings of his own mind. *Sensible* may be used in the exact sense of *conscious*, or it may partake of both the senses mentioned above. One may be *sensible* of his own or another's error; he is *conscious* only of his own. A person may feel *assured* or *sure* of something false or non-existent; what he is *aware* of, still more what he is *conscious* of, must be fact. *Sensible* has often a reference to the emotions where *conscious* might apply only to the intellect; to say a culprit is *sensible* of his degradation is more forcible than to say he is *conscious* of it.

ANTONYMS:

cold dead deaf ignorant insensible unaware unconscious

PREPOSITION:

On the stormy sea, man is conscious *of* the limitation of human power.

CONSEQUENCE**SYNONYMS:**consequent
effect
endevent
issue
outcomeoutgrowth
resultsequel
upshot

Effect is the strongest of these words; it is that which is directly produced by the action of an efficient cause; we say, "Every *effect* must have an adequate cause" (compare CAUSE). In regard to human actions, *effect* commonly relates to intention; as, the shot took *effect*, *i. e.*, the *effect* intended. A *consequence* is that which follows an act naturally, but less directly than the *effect*. The motion of the piston is the *effect*, and the agitation of the water under the paddle-wheels a *consequence* of the expansion of steam in the cylinder. The *result* is, literally, the rebound of an act, depending on many

elements; the *issue* is that which flows forth directly; we say the *issue* of a battle, the *result* of a campaign. A *consequent* commonly is that which follows simply in order of time, or by logical inference. The *end* is the actual *outcome* without determination of its relation to what has gone before; it is ordinarily viewed as either the necessary, natural, or logical *outcome*, any *effect*, *consequence*, or *result* being termed an *end*; as, the *end* of such a course must be ruin. The *event* (from L. *e*, out, and *vemo*, come) is primarily exactly the same in meaning as *outcome*; but in use it is more nearly equivalent to *upshot*, signifying the sum and substance of all *effects*, *consequences*, and *results* of a course of action. Compare ACCIDENT; CAUSE; CIRCUMSTANCE; END; EVENT.

CONSOLE

SYNONYMS:

comfort condole with encourage sympathize with

One *condoles with* another by the expression of kindly sympathy in his trouble; he *consoles* him by considerations adapted to soothe and sustain the spirit, as by the assurances and promises of the gospel; he *encourages* him by the hope of some relief or deliverance; he *comforts* him by whatever act or word tends to bring mind or body to a state of rest and cheer. We *sympathize with* others, not only in sorrow, but in joy. Compare ALLEVIATE; PITY.

ANTONYMS:

annoy distress disturb grieve hurt sadden trouble wound

CONTAGION

SYNONYM:

infection

Infection is frequently confused with *contagion*, even by medical men. The best usage now limits *contagion* to diseases that are transmitted by contact with the diseased person, either directly by touch or indirectly by use of the same articles, by breath, effluvia, etc. *Infection* is applied to diseases produced by no known or definable influence of one person upon another, but where common climatic, malarious, or other widespread conditions are believed to be chiefly instrumental.

CONTINUAL

SYNONYMS:

ceaseless	incessant	regular	uninterrupted
constant	invariable	unbroken	unremitting
continuous	perpetual	unceasing	unvarying

Continuous describes that which is absolutely without pause or break; *continual*, that which often intermits, but as regularly begins again. A *continuous* beach is exposed to the *continual* beating of the waves. A similar distinction is made between *incessant* and *ceaseless*. The *incessant* discharge of firearms makes the *ceaseless* roar of battle. *Constant* is sometimes used in the sense of *continual*; but its chief uses are mental and moral.

CONTRACT

SYNONYMS:

agreement	cartel	engagement	pledge
arrangement	compact	obligation	promise
bargain	covenant	pact	stipulation

All these words involve at least two parties, though an *engagement* or *promise* may be the act of but one. A *contract* is a formal *agreement* between two or more parties for the doing or leaving undone some specified act or acts, and is ordinarily in writing. Mutual *promises* may have the force of a *contract*. A consideration, or compensation, is essential to convert an *agreement* into a *contract*. A *contract* may be oral or written. A *covenant* in law is a written *contract* under seal. *Covenant* is frequent in religious usage, as *contract* is in law and business. *Compact* is essentially the same as *contract*, but is applied to international *agreements*, treaties, etc. A *bargain* is a mutual *agreement* for an exchange of values, without the formality of a *contract*. A *stipulation* is a single item in an *agreement* or *contract*. A *cartel* is a military *agreement* for the exchange of prisoners or the like.

CONTRAST

SYNONYMS:

compare	differentiate	discriminate	oppose
---------	---------------	--------------	--------

To *compare* (from L. *con*, together, and *par*, equal) is to place together in order to show likeness or unlikeness; to *contrast* (from L. *contra*, against, and *sto*, stand) is to set in op-

position in order to show unlikeness. We *contrast* objects that have been already *compared*. We must *compare* them, at least momentarily, even to know that they are different. We *contrast* them when we observe their unlikeness in a general way; we *differentiate* them when we note the difference exactly and point by point. We distinguish objects when we note a difference that may fall short of *contrast*; we *discriminate* them when we classify or place them according to their differences.

PREPOSITION:

We contrast one object *with* another.

CONVERSATION

SYNONYMS:

chat	communion	converse	intercourse
colloquy	confabulation	dialogue	parley
communication	conference	discourse	talk

Conversation (from L. *con*, with) is, etymologically, an interchange of ideas with some other person or persons. *Talk* may be wholly one-sided. Many brilliant talkers have been incapable of *conversation*. There may be *intercourse* without *conversation*, as by looks, signs, etc.; *communion* is of hearts, with or without words; *communication* is often by writing, and may be uninvited and unreciprocated. *Talk* may denote the mere utterance of words with little thought; thus, we say idle *talk*, empty *talk*, rather than idle or empty *conversation*. *Discourse* is now applied chiefly to public addresses. A *conference* is more formal than a *conversation*. *Dialogue* denotes ordinarily an artificial or imaginary *conversation*, generally of two persons, but sometimes of more. A *colloquy* is indefinite as to number, and generally somewhat informal. Compare BEHAVIOR.

PREPOSITIONS:

Conversation *with* friends; *between* or *among* the guests; *about* a matter.

CONVERT

SYNONYMS:

disciple	neophyte	proselyte
----------	----------	-----------

The name *disciple* is given to the follower of a certain faith, without reference to any previous belief or allegiance; a *con-*

vert is a person who has come to one faith from a different belief or from unbelief. A *proselyte* is one who has been led to accept a religious system, whether with or without true faith; a *convert* is always understood to be a believer. A *neophyte* is a new *convert*, not yet fully indoctrinated, or not admitted to full privileges. The antonyms *apostate*, *pervert*, and *renegade* are condemnatory names applied to the *convert* by those whose faith he forsakes.

CONVEY

SYNONYMS:

carry
change
give

move
remove
sell

shift
transfer

transmit
transport

Convey, *transmit*, and *transport* all imply delivery at a destination; as, I will *convey* the information to your friend; air *conveys* sound (to a listener); *carry* does not necessarily imply delivery, and often does not admit of it. A man *carries* an appearance, *conveys* an impression. the appearance remaining his own, the impression being given to another; I will *transmit* the letter; *transport* the goods. A horse *carries* his mane and tail, but does not *convey* them. *Transfer* may or may not imply delivery to another person; as, items may be *transferred* from one account to another or a word *transferred* to the following line. In law, real estate, which can not be moved, is *conveyed* by simply *transferring* title and possession. *Transport* usually refers to material, *transfer*, *transmit*, and *convey* may refer to immaterial objects; we *transfer* possession, *transmit* intelligence, *convey* ideas, but do not *transport* them. In the case of *convey* the figurative sense now predominates. Compare CARRY.

ANTONYMS:

cling to hold keep possess preserve retain

PREPOSITIONS:

Convey *to* a friend, a purchaser, etc.; convey *from* the house *to* the station; convey *by* express, *by* hand, etc.

CONVOKE

SYNONYMS:

assemble call	call together collect	convene gather	muster summon
------------------	--------------------------	-------------------	------------------

A convention is *called* by some officer or officers, as by its president, its executive committee, or some eminent leaders; the delegates are *assembled* or *convened* in a certain place, at a certain hour. *Convoked* implies an organized body and a superior authority; *assemble* and *convene* express more independent action; Parliament is *convoked*; Congress *assembles*. Troops are *mustered*; witnesses and jurymen are *summoned*.

ANTONYMS:

adjourn break up	disband discharge	dismiss disperse	dissolve prorogue	scatter separate
---------------------	----------------------	---------------------	----------------------	---------------------

CRIMINAL

SYNONYMS:

abominable culpable felonious flagitious	guilty illegal immoral iniquitous	nefarious sinful unlawful vicious	vile wicked wrong
---	--	--	-------------------------

Every *criminal* act is *illegal* or *unlawful*, but *illegal* or *unlawful* acts may not be *criminal*. Offenses against public law are *criminal*; offenses against private rights are merely *illegal* or *unlawful*. As a general rule, all acts punishable by fine or imprisonment or both, are *criminal* in view of the law. It is *illegal* for a man to trespass on another's land, but it is not *criminal*; the trespasser is liable to a civil suit for damages, but not to indictment, fine, or imprisonment. A *felonious* act is a *criminal* act of an aggravated kind, which is punishable by imprisonment in the penitentiary or by death. A *flagitious* crime is one that brings public odium. *Vicious* refers to the indulgence of evil appetites, habits, or passions; *vicious* acts are not necessarily *criminal*, or even *illegal*; we speak of a *vicious* horse. That which is *iniquitous*, i. e., contrary to equity, may sometimes be done under the forms of law. Ingratitude is *sinful*, hypocrisy is *wicked*, but neither is punishable by human law; hence, neither is *criminal* or *illegal*. Compare SIN.

ANTONYMS:

innocent just	lawful legal	meritorious moral	right virtuous
------------------	-----------------	----------------------	-------------------

CRITERION

SYNONYMS:

measure
proofrule
standard

test

touchstone

A *standard* is a *measure* of quantity, quality, or value established by law or general consent; it is general recognition and acceptance that makes a *standard*. A *criterion* (from Gr. *krinō*, judge) is a *standard* believed to have special accuracy or certainty, so that other things may be "judged" by it; the meaning is often strengthened by adjectives; as, a sure or an infallible *criterion*; any fact, truth, or principle, regarded as established, may be a *criterion*. A *test* views a person or thing as put upon trial under fixed and approved conditions; as, a *test* for the purity or fineness of gold, for the tensile strength of a rope or wire; a chemical *test* to determine the existence or the quantity of any ingredient in a mixture; certain oaths have been at various times used as *tests* of loyalty, and known as *test-oaths*. *Touchstone*, formerly denoting a stone supposed to indicate the fineness of gold, is now only used figuratively in the general sense of *test*. Compare DEMONSTRATION; TESTIMONY.

ANTONYMS:

chance
conjecturefancy
guessimagination
probabilitypossibility
supposition

DAILY

SYNONYM:

diurnal

Daily is the Saxon and popular, *diurnal* the Latin and scientific term. In strict usage, *daily* is the antonym of *nightly* as *diurnal* is of *nocturnal*. *Daily* is not, however, held strictly to this use; a physician makes *daily* visits if he calls at some time within each period of twenty-four hours. *Diurnal* is more exact in all its uses; a *diurnal* flower opens or blooms only in daylight; a *diurnal* bird or animal flies or ranges only by day; in contradistinction to *nocturnal* flowers, birds, etc. A *diurnal* motion exactly fills an astronomical day or the time of one rotation of a planet on its axis, while a *daily* motion is much less definite.

ANTONYMS:

nightly

nocturnal

DANGER

SYNONYMS:

hazard insecurity jeopardy peril risk

Danger is exposure to possible evil, which may be either near and probable or remote and doubtful; *peril* is exposure to imminent and sharply threatening evil, especially to such as results from violence. An invalid may be in *danger* of consumption; a disarmed soldier is in *peril* of death. *Jeopardy* is nearly the same as *peril*, but involves, like *risk*, more of the element of chance or uncertainty; a man tried upon a capital charge is said to be put in *jeopardy* of life. *Insecurity* is a feeble word, but exceedingly broad, applying to the placing of a dish, or the possibilities of a life, a fortune, or a government. Compare HAZARD.

ANTONYMS:

defense immunity protection safeguard safety security shelter

DARK

SYNONYMS:

black	gloomy	opaque	somber
dim	murky	sable	swart
dismal	mysterious	shadowy	swarthy
dusky	obscure	shady	

Strictly, that which is *black* is absolutely destitute of color; that which is *dark* is absolutely destitute of light. In common speech, however, a coat is *black*, though not optically colorless; the night is *dark*, though the stars shine. That is *obscure*, *shadowy*, or *shady* from which the light is more or less cut off. *Dusky* is applied to objects which appear as if viewed in fading light; the word is often used, as are *swart* and *swarthy*, of the human skin when quite *dark*, or even verging toward *black*. *Dim* refers to imperfection of outline, from distance, darkness, mist, etc., or from some defect of vision. *Opaque* objects, as smoked glass, are impervious to light. *Murky* is said of that which is at once *dark*, *obscure*, and *gloomy*; as, a *murky* den; a *murky* sky. Figuratively, *dark* is emblematic of sadness, agreeing with *somber*, *dismal*, *gloomy*, also of moral evil; as, a *dark* deed. Of intellectual matter, *dark* is now rarely used in the old sense of a *dark* saying, etc. See MYSTERIOUS; OBSCURE.

ANTONYMS:

bright	crystalline	glowing	lucid	shining
brilliant	dazzling	illuminated	luminous	transparent
clear	gleaming	light	radiant	white

Compare synonyms for **LIGHT**.

DECAY**SYNONYMS:**

corrupt decompose molder putrefy rot spoil

Rot is a strong word, ordinarily esteemed coarse, but on occasion capable of approved emphatic use; as, "the name of the wicked shall *rot*," *Prov.* x, 7; *decay* and *decompose* are now common euphemisms. A substance is *decomposed* when resolved into its original elements by any process; it is *decayed* when resolved into its original elements by natural processes; it *decays* gradually, but may be instantly *decomposed*, as water into oxygen and hydrogen; to say that a thing is *decayed* may denote only a partial result, but to say it is *decomposed* ordinarily implies that the change is complete or nearly so. *Putrefy* and the adjectives *putrid* and *putrescent*, and the nouns *putridity* and *putrescence*, are used almost exclusively of animal matter in a state of decomposition, the more general word *decay* being used of either animal or vegetable substances.

DECEPTION**SYNONYMS:**

craft	double-dealing	finesse	lie
cunning	duplicity	fraud	lying
deceit	equivocation	guile	prevarication
deceitfulness	fabrication	hypocrisy	trickery
delusion	falsehood	imposition	untruth
dissimulation			

Deceit is the habit, *deception* the act; *guile* applies to the disposition out of which *deceit* and *deception* grow, and also to their actual practise. A *lie*, *lying*, or *falsehood*, is the uttering of what one knows to be false with intent to deceive. The novel or drama is not a *lie*, because not meant to deceive; the ancient teaching that the earth was flat was not a *lie*, because not then known to be false. *Untruth* is more than lack of accuracy, implying always lack of veracity; but it is a somewhat milder and more dignified word than *lie*. *Falsehood* and *lying* are in utterance; *deceit* and *deception* may be merely in act or

implication. *Deception* may be innocent, and even unintentional, as in the case of an optical illusion; *deceit* always involves injurious intent. *Craft* and *cunning* have not necessarily any moral quality; they are common traits of animals, but stand rather low in the human scale. *Duplicity* is the habitual speaking or acting with intent to appear to mean what one does not. *Dissimulation* is rather a concealing of what is than a pretense of what is not. *Equivocation* is the saying or stating of one thing in order that something other and different may be understood. *Finesse* is simply an adroit and delicate management of a matter for one's own side, not necessarily involving *deceit*. Compare ARTIFICE; FALLACY; FICTION; FRAUD; HYPOCRISY.

ANTONYMS:

candor	frankness	honesty	simplicity	truth
fair dealing	guilelessness	openness	sincerity	veracity

DEFENSE

SYNONYMS:

apology	guard	rampart	shelter
bulwark	justification	resistance	shield
fortress	protection	safeguard	vindication

The weak may speak or act in *defense* of the strong; none but the powerful can assure others of *protection*. A *defense* is ordinarily against actual attack; *protection* is against possible as well as actual dangers. We speak of *defense* against an assault, *protection* from the cold. *Vindication* is a triumphant *defense* of character and conduct against charges of error or wrong. Compare APOLOGY.

ANTONYMS:

abandonment betrayal capitulation desertion flight surrender

PREPOSITIONS:

Defense *against* assault or assailants; in law, defense *to* an action, *from* the testimony.

DEFER

SYNONYMS:

adjourn	delay	procrastinate	put off
break off	dissolve	prorogue	suspend
break up	postpone	protract	

Adjourn (through F. from L. *ad*, to, + *diurnus*, daily, from

dies, day) signifies literally to put off to another day, hence, by extension, to put off to any future time. *Prorogue* (from L. *prorogo*, extend, defer) is a special legal or legislative term, applying only to the British Parliament or to similar colonial assemblies. A voluntary assembly may *adjourn* itself; Parliament is *prorogued* by order of the king.

By the king's authority alone, and by his writs are they (the two houses of peers and commons) assembled, and by him alone are they *prorogued* and dissolved, but each house may *adjourn* itself. BACON.

A parliament which is *prorogued* still exists, and may be summoned by the sovereign at any time to meet again without a new election; a parliament which is *dissolved* ceases to exist; all its unfinished business is dead; there can be no parliament until a general election is held, resulting in a new parliament, which must take up all business *de novo*; an "adjournment" is simply a voluntary intermission at the discretion of either or both houses. The congress of the United States and the various State legislatures terminate their sessions only by adjournment, either to a day fixed by vote or to the time of compulsory re-assembling provided by the constitution. If a deliberative body *adjourns* with no day fixed either by vote or law for re-assembling, it thereby terminates its existence; hence the phrase to *adjourn sine die*, or *without day* (which is etymologically a contradiction in terms) is used to denote the final breaking up or dissolution of an assembly; to *adjourn without day* is to *terminate* the existence of the body and, of course, any future consideration by that body of its unfinished business; the existence of an American congress would terminate *ipso facto*, even if there were no formal adjournment, by the arrival of the day fixed by the constitution for the assembly of a new congress, and by the expiration of the term for which the representatives and many of the senators were elected. In common usage, to *adjourn* a matter is to hold it in abeyance (see ABEYANCE) until it may be more conveniently or suitably considered—to *defer*, or *postpone* it; in such use *defer* and *postpone* are closely equivalent to *adjourn*; to *defer* is simply to lay by or put aside temporarily; to *postpone* (from L. *post*, after, + *pono*, place) is strictly to put aside until "after" something else is done, known, obtained, or the like; as, to *postpone* the attack until daylight; but *postpone* is often used without such limitation; both *defer* and *postpone* imply ex-

pectation of later consideration, or action; *procrastinate* is less definite than *adjourn*, *defer*, or *delay*; procrastination is purposeless; one who *procrastinates* gives no assurance that he will ever act. Compare **HINDER**.

ANTONYMS:

act	despatch	hasten	quicken	urge on
act on	expedite	hurry	take up	urge forward

DEFILE

SYNONYMS:

befoul	corrupt	pollute	spoil	sully	tarnish
contaminate	infect	soil	stain	taint	vitiate

The hand may be *defiled* by a touch of pitch; swine that have been wallowing in the mud are *befouled*. *Contaminate* and *infect* refer to something evil that deeply pervades and permeates, as the human body or mind. *Pollute* is used chiefly of liquids; as, water *polluted* with sewage. *Tainted* meat is repulsive; *infected* meat contains germs of disease. A *soiled* garment may be cleansed by washing; a *spoiled* garment is beyond cleansing or repair. Bright metal is *tarnished* by exposure; a fair sheet is *sullied* by a dirty hand. In figurative use, *defile* may be used merely in the ceremonial sense; "they themselves went not into the judgment hall, lest they should be *defiled*," *John* xviii, 28; *contaminate* refers to deep spiritual injury. *Pollute* has also a reference to sacrilege; as, to *pollute* a sanctuary, an altar, or an ordinance. The innocent are often *contaminated* by association with the wicked; the vicious are more and more *corrupted* by their own excesses. We speak of a *vitiated* taste or style; fraud *vitiate*s a title or a contract

ANTONYMS:

clean	cleanse	disinfect	hallow	purify	sanctify	wash
-------	---------	-----------	--------	--------	----------	------

PREPOSITIONS:

The temple was defiled *with* blood; defiled *by* sacrilegious deeds.

DEFINITION

SYNONYMS:

comment	description	exposition	rendering
commentary	explanation	interpretation	translation

A *definition* is exact, an *explanation* general; a *definition* is formal, a *description* pictorial. A *definition* must include all

that belongs to the object defined, and exclude all that does not; a *description* may include only some general features; an *explanation* may simply throw light upon some point of special difficulty. An *exposition* undertakes to state more fully what is compactly given or only implied in the text; as, an *exposition* of Scripture. *Interpretation* is ordinarily from one language into another, or from the language of one period into that of another; it may also be a statement giving the doubtful or hidden meaning of that which is recondite or perplexing; as, the *interpretation* of a dream, a riddle, or of some difficult passage. *Definition*, *explanation*, *exposition*, and *interpretation* are ordinarily blended in a *commentary*, which may also include *description*. A *comment* is upon a single passage; a *commentary* may be the same, but is usually understood to be a volume of *comments*.

DELEGATE

SYNONYMS:

deputy legate proxy representative substitute

These words agree in designating one who acts in the place of some other or others. The *legate* is an ecclesiastical officer representing the Pope. In strict usage the *deputy* or *delegate* is more limited in functions and more closely bound by instructions than a *representative*. A single officer may have a *deputy*; many persons combine to choose a *delegate* or *representative*. In the United States informal assemblies send *delegates* to nominating conventions with no legislative authority; *representatives* are legally elected to Congress and the various legislatures, with lawmaking power.

DELIBERATE

SYNONYMS:

**confer consult meditate reflect
consider debate ponder weigh**

An individual *considers*, *meditates*, *ponders*, *reflects*, by himself; he *weighs* a matter in his own mind, and is sometimes said even to *debate* with himself. *Consult* and *confer* always imply two or more persons, as does *debate*, unless expressly limited as above. *Confer* suggests the interchange of counsel, advice, or information; *consult* indicates almost exclusively the

receiving of it. A man *confers* with his associates about a new investment; he *consults* his physician about his health; he may *confer* with him on matters of general interest. He *consults* a dictionary, but does not *confer* with it. *Deliberate*, which can be applied to a single individual, is also the word for a great number, while *consult* is ordinarily limited to a few; a committee *consults*; an assembly *deliberates*. *Deliberating* always carries the idea of slowness; *consulting* is compatible with haste; we can speak of a hasty consultation, not of a hasty deliberation. *Debate* implies opposing views; *deliberate*, simply a gathering and balancing of all facts and reasons. We *consider* or *deliberate* with a view to action, while meditation may be quite purposeless.

PREPOSITIONS:

We deliberate *on* or *upon*, also *about* or *concerning* a matter: the first two are preferable.

DELICIOUS**SYNONYMS:**

dainty delightful exquisite luscious savory

That is *delicious* which affords a gratification at once vivid and delicate to the senses, especially to those of taste and smell; as *delicious* fruit; a *delicious* odor; *luscious* has a kindred but more fulsome meaning, inclining toward a cloying excess of sweetness or richness. *Savory* is applied chiefly to cooked food made palatable by spices and condiments. *Delightful* may be applied to the higher gratifications of sense, as *delightful* music, but is chiefly used for that which is mental and spiritual. *Delicious* has a limited use in this way; as, a *delicious* bit of poetry; the word is sometimes used ironically for some pleasing absurdity; as, this is *delicious*! Compare DELIGHTFUL.

ANTONYMS:

acrid bitter loathsome nauseous repulsive unpalatable unsavory

DELIGHTFUL**SYNONYMS:**

acceptable	delicious	pleasant	refreshing
agreeable	grateful	pleasing	satisfying
congenial	gratifying	pleasurable	welcome

Agreeable refers to whatever gives a mild degree of pleasure;

as, an *agreeable* perfume. *Acceptable* indicates a thing to be worthy of acceptance; as, an *acceptable* offering. *Grateful* is stronger than *agreeable* or *gratifying*, indicating whatever awakens a feeling akin to gratitude. A *pleasant* face and pleasing manners arouse *pleasurable* sensations, and make the possessor an *agreeable* companion; if possessed of intelligence, vivacity, and goodness, such a person's society will be *delightful*. Criminals may find each other's company *congenial*, but scarcely *delightful*. *Satisfying* denotes anything that is received with calm acquiescence, as substantial food, or established truth. That is *welcome* which is received with joyful heartiness; as, *welcome* tidings. Compare BEAUTIFUL; CHARMING; DELICIOUS.

ANTONYMS:

depressing	hateful	miserable	saddening
disappointing	horrible	mournful	woful
distressing	melancholy	painful	wretched

DELUSION**SYNONYMS:**

error fallacy hallucination illusion phantasm

A *delusion* is a mistaken conviction, an *illusion* is a mistaken perception or inference. An *illusion* may be wholly of the senses; a *delusion* always involves some mental error. In an optical *illusion* the observer sees either what does not exist, or what exists otherwise than as he sees it, as when in a mirage distant springs and trees appear close at hand. We speak of the *illusions* of fancy or of hope, but of the *delusions* of the insane. A *hallucination* is a false image or belief which has nothing, outside of the disordered mind, to suggest it; as, the *hallucinations* of delirium tremens. Compare DECEPTION; INSANITY.

ANTONYMS:

actuality certainty fact reality truth verity

DEMOLISH**SYNONYMS:**

destroy overthrow overturn raze ruin

A building, monument, or other structure is *demolished* when reduced to a shapeless mass; it is *razed* when leveled with the

ground; it is *destroyed* when its structural unity is gone, whether or not its component parts remain. An edifice is *destroyed* by fire or earthquake; it is *demolished* by bombardment; it is *ruined* when, by violence or neglect, it has become unfit for human habitation. Compare ABOLISH; BREAK.

ANTONYMS:

build	create	repair	restore
construct	make		

DEMONSTRATION

SYNONYMS:

certainty	consequence	evidence	inference
conclusion	deduction	induction	proof

Demonstration, in the strict and proper sense, is the highest form of *proof*, and gives the most absolute *certainty*; but can not be applied outside of pure mathematics or other strictly deductive reasoning; there can be *proof* and *certainty*, however, in matters that do not admit of *demonstration*. A *conclusion* is the absolute and necessary result of the admission of certain premises; an *inference* is a probable *conclusion* toward which known facts, statements, or admissions point, but which they do not absolutely establish; sound premises, together with their necessary *conclusion*, constitute a *demonstration*. *Evidence* is that which tends to show a thing to be true; in the widest sense, as including self-evidence or consciousness, it is the basis of all knowledge. *Proof* in the strict sense is complete, irresistible *evidence*; as, there was much *evidence* against the accused, but not amounting to *proof* of guilt. Moral *certainty* is a conviction resting on such *evidence* as puts a matter beyond reasonable doubt, while not so irresistible as *demonstration*. Compare HYPOTHESIS; INDUCTION.

DEPENDENT, n.

SYNONYMS:

defective	degenerate	delinquent
------------------	-------------------	-------------------

These terms are used somewhat vaguely to indicate classes of persons who fall below average social requirements, and ordinarily demand support or restraint, or both, by organized society. *Defectives* are those who lack some natural faculty of power, ordinarily essential to self-support, including

the deaf, blind, crippled, idiotic, etc. *Degenerates* are those who naturally tend to revert to a lower mental or moral grade, ordinarily in some way harmful or dangerous to the community, as certain persons who from childhood show a tendency to arson, setting fire to anything that can burn, without regard to consequences to property or life, and without the ordinary motives of the criminal incendiary; such tendencies may manifest themselves in numerous ways; many alcoholics are now classed as *degenerates*. *Delinquents* are those who have committed some overt act against law and order, requiring to be dealt with by legal action; this class would strictly include all criminals, but the term is ordinarily used to describe those guilty of minor offenses, as the juvenile offenders who are at once cared for, restrained, and educated in reform schools; there is an increasing tendency to separate criminals who commit crime with distinctly criminal purpose, as the professional burglar, from those who drift into criminal acts with no fixed criminal intent, as boys break into basements to steal chains, gas-fittings, etc.; the dividing line is vague and often difficult to draw, depending upon clear analysis of each individual case, which is largely the work of the judges of the modern juvenile courts. *Defectives* and *degenerates* may not be *dependents*, as they may belong to families able to support them, or may be even inheritors of wealth, while committing an act requiring legal interference. *Dependents* are all those for any reason unable to support themselves, including children without parents or guardians able to provide for them; *dependent* children may be neither *defectives* nor *degenerates*, but in every way normal; in natural life *dependents* are ordinarily made such by some mental or physical defect, and include the imbecile, those of unsound mind not classed as positively insane, cripples, paralytics, consumptives, those enfeebled by advanced age, etc.; in strictness the insane are in the highest degree *dependents*, but are not usually referred to under that classification. There is an increasing tendency in modern legal and social administration to a higher humanity, which separates those who need care or restraint because of defect, weakness, heredity, etc., from those knowingly and determinedly vicious or criminal.

DESIGN

SYNONYMS:

aim
device
end

final cause
intent
intention

object
plan
project

proposal
purpose
scheme

Design refers to the adaptation of means to an *end*, the correspondence and coordination of parts, or of separate acts, to produce a result; *intent* and *purpose* overleap all particulars, and fasten on the end itself. *Intention* is simply the more familiar form of the legal and philosophical *intent*. *Plan* relates to details of form, structure, and action, in themselves; *design* considers these same details all as a means to an *end*. The *plan* of a campaign may be for a series of sharp attacks, with the *design* of thus surprising and overpowering the enemy. A man comes to a fixed *intention* to kill his enemy; he forms a *plan* to entrap him into his power, with the *design* of then compassing his death; as the law can not read the heart, it can only infer the *intent* from the evidences of *design*. *Intent* denotes a straining, stretching forth toward an *object*; *purpose* simply the placing it before oneself; hence, we speak of the *purpose* rather than the *intent* or *intention* of God. We hold that the marks of *design* in nature prove it the work of a great Designer. *Intention* contemplates the possibility of failure; *purpose* looks to assured success; *intent* or *intention* refers especially to the state of mind of the actor; *purpose* to the result of the action. Compare AIM; CAUSE; IDEA; MODEL.

PREPOSITIONS:

The design *of* defrauding; the design *of* a building; a design *for* a statue.

DESIRE

SYNONYMS:

appetence
appetite
aspiration

concupiscence
coveting
craving

hankering
inclination
longing

proclivity
propensity
wish

Inclination is the mildest of these terms; it is a quiet, or even a vague or unconscious, tendency. Even when we speak of a strong or decided *inclination* we do not express the intensity of *desire*. *Desire* has a wide range, from the highest objects to the lowest; *desire* is for an object near at hand, or near in thought, and viewed as attainable; a *wish* may be for what is

remote or uncertain, or even for what is recognized as impossible. *Craving* is stronger than *hankering*; *hankering* may be the result of a fitful and capricious *appetite*; *craving* may be the imperious and reasonable demand of the whole nature. *Longing* is a reaching out with deep and persistent demand for that which is viewed as now distant but at some time attainable; as, the captive's *longing* for release. *Coveting* ordinarily denotes wrong *desire* for that which is another's. Compare APPETITE.

ANTONYMS:

See synonyms for ANTIPATHY.

PREPOSITIONS:

The desire *of* fame; a desire *for* excellence.

DESPAIR**SYNONYMS:**

desperation despondency discouragement hopelessness

Discouragement is the result of so much repulse or failure as wears out courage. *Discouragements* too frequent and long continued may produce a settled *hopelessness*. *Hopelessness* is negative, and may result from simple apathy; *despondency* and *despair* are more emphatic and decided. *Despondency* is an incapacity for the present exercise of hope; *despair* is the utter abandonment of hope. *Despondency* relaxes energy and effort and is always attended with sadness or distress; *despair* may produce a stony calmness, or it may lead to *desperation*. *Desperation* is energized *despair*, vigorous in action, reckless of consequences.

ANTONYMS:

anticipation	confidence	encouragement	hope
assurance	courage	expectancy	hopefulness
cheer	elation	expectation	trust

DEVOTE**SYNONYMS:**

allot apportion assign dedicate hallow
apply appropriate consecrate destine set apart

Consecrate, *dedicate*, *devote*, and *hallow* are all originally words of sacred meaning; as, to *consecrate* ground for a cemetery; to *dedicate* a church to divine worship; to *devote* one-

self to prayer; to *hallow* the Sabbath day. *Consecrate* and *hallow* retain their original sacredness, but *dedicate* and *devote* have drifted far away. Thus, to *dedicate* a book is for the author to preface it with a complimentary inscription bearing the name of a friend or patron. *Devote* (from L. *de*, from, + *voveo*, from *votum*, vow) was originally to *set apart* from oneself, or from ordinary use to some sacred purpose, which might be destructive; thus Jericho, with all that it contained, was *devoted* by Joshua to destruction (*Josh.* vi, 17; vii, 1; where the American Revision has wisely preferred the word "devoted" to the word "accursed" of the Authorized Version); thus it is still possible to speak of persons or things as *devoted* to death, destruction, or ruin; in common use, however, to *devote* is to *set apart* with a sacred or earnest purpose to some desirable object; as, a young man *devotes* himself to the ministry; a sum of money is *devoted* to charity; this portion of the book is *devoted* to the study of evolution. It is chiefly by the lingering touch of sacredness that *devote* differs from *apply* when the two words are used as synonyms; a person *applies* himself to study as a matter of fact; he *devotes* himself to study from some earnest purpose behind the fact. Compare ALLOT; APPLY; APPORTION.

ANTONYMS:

abuse
alienate
desecrate

misapply
misappropriate

misuse
pervert

squander
waste

DEXTERITY

SYNONYMS:

adroitness
aptitude

cleverness
expertness

readiness
skill

Adroitness (from F. *à*, to, and *droit*, right) and *dexterity* (from L. *dexter*, right, right-hand) might each be rendered "right-handedness"; but *adroitness* carries more of the idea of eluding, parrying, or checking some hostile movement, or taking advantage of another in controversy; *dexterity* conveys the idea of doing, accomplishing something readily and well, without reference to any action of others. We speak of *adroitness* in fencing, boxing, or debate, of *dexterity* in horsemanship, in the use of tools, weapons, etc. *Aptitude* (from L. *aptus*, fit, fitted) is a natural *readiness*, which by practise may be developed into

dexterity. *Skill* is more exact to line, rule, and method than *dexterity*. *Dexterity* can not be communicated. and, oftentimes can not even be explained by its possessor; *skill* to a very great extent can be imparted; "*skilled workmen*" in various trades are numbered by thousands. Compare ADDRESS; CLEVER; POWER; SKILFUL.

PREPOSITIONS:

Dexterity of hand, of movement, of management; with the pen; in action, in manipulating men; at cards.

DICTION

SYNONYMS:

expression	phrase	style	vocabulary
language	phraseology	verbiage	wording

An author's *diction* is strictly his choice and use of words. with no special reference to thought; *expression* regards the words simply as the vehicle of the thought. *Phrase* and *phraseology* apply to words or combinations of words which are somewhat technical; as, in legal *phraseology*; in military *phrase*. *Diction* is general; *wording* is limited; we speak of the *diction* of an author or of a work, the *wording* of a proposition, of a resolution, etc. *Verbiage* never bears this sense (see CIRCUMLOCUTION). The *language* of a writer or speaker may be the national speech he employs; as, the English or French *language*; or the word may denote his use of that *language*; as, the author's *language* is well (or ill) chosen. *Style* includes *diction*, *expression*, rhetorical figures such as metaphor and simile, the effect of an author's prevailing tone of thought, of his personal traits—in short, all that makes up the clothing of thought in words; thus, we speak of a figurative *style*, a frigid or an argumentative *style*, etc., or of the *style* of Macaulay, Prescott, or others. An author's *vocabulary* is the range of words which he brings into his use. Compare LANGUAGE.

DIE

SYNONYMS:

cease	decline	expire	perish
decease	depart	fade	wither

Die, to go out of life, become destitute of vital power and

action, is figuratively applied to anything which has the appearance of life.

Where the *dying* night-lamp flickers.

TENNYSON *Locksley Hall*, st. 40.

An echo, a strain of music, a tempest, a topic, an issue, *dies*. *Expire* (literally, to breathe out) is a softer word for *die*; it is used figuratively of things that *cease* to exist by reaching a natural limit; as, a lease *expires*; the time has *expired*. To *perish* (literally, in Latin, to go through, as in English we say, "the fire goes out") is oftenest used of death by privation or exposure; as, "I *perish* with hunger," *Luke* xv, 17; sometimes, of death by violence. Knowledge and fame, art and empires, may be said to *perish*; the word denotes utter destruction and decay.

ANTONYMS:

be born	come into being	flourish	rise again
begin	come to life	grow	rise from the dead
be immortal	exist	live	survive

PREPOSITIONS:

To die *of* fever; *by* violence; rarely, *with* the sword, famine, etc. (*Ezek.* vii, 15); to die *for* one's country; to die *at* sea; in one's bed; *in* agony; die *to* the world.

DIFFERENCE

SYNONYMS:

contrariety	discrimination	distinction	inequality
contrast	disparity	divergence	unlikeness
disagreement	dissimilarity	diversity	variation
discrepancy	dissimilitude	inconsistency	variety

Difference is the state or quality of being unlike or the amount of such unlikeness. A *difference* is in the things compared; a *discrimination* is in our judgment of them; a *distinction* is in our definition or description or mental image of them. Careful *discrimination* of real *differences* results in clear *distinctions*. *Disparity* is stronger than *inequality*, implying that one thing falls far below another; as, the *disparity* of our achievements when compared with our ideals. *Dissimilarity* is between things sharply contrasted; there may be a *difference* between those almost alike. There is a *discrepancy* in accounts that fail to balance. *Variety* involves more than two objects; so, in general, does *diversity*; *varia-*

tion is a *difference* in the condition or action of the same object at different times. *Disagreement* is not merely the lack, but the opposite, of agreement; it is a mild word for opposition and conflict; *difference* is sometimes used in the same sense.

ANTONYMS:

agreement	harmony	likeness	sameness	uniformity
consonance	identity	resemblance	similarity	unity

PREPOSITIONS:

Difference *between* the old and the new; differences *among* men; a difference *in* character; *of* action; *of* style; (less frequently) a difference (controversy) *with* a person; a difference *of* one thing *from* (incorrectly *to*) another.

DIFFICULT**SYNONYMS:**

arduous	hard	onerous	toilsome
exhausting	laborious	severe	trying

Arduous (from L. *arduus*, steep) signifies primarily so steep and lofty as to be difficult of ascent, and hence applies to that which involves great and sustained exertion and ordinarily for a lofty aim; great learning can only be won by *arduous* toil. *Hard* applies to anything that resists our endeavors as a scarcely penetrable mass resists our physical force. Anything is *hard* that involves tax and strain whether of the physical or mental powers. *Difficult* is not used of that which merely taxes physical force; a dead lift is called *hard* rather than *difficult*; breaking stone on the road would be called *hard* rather than *difficult* work; that is *difficult* which involves skill, sagacity, or address, with or without a considerable expenditure of physical force; a geometrical problem may be *difficult* to solve, a tangled skein to unravel; a mountain *difficult* to ascend. *Hard* may be active or passive; a thing may be *hard* to do or *hard* to bear. *Arduous* is always active. That which is *laborious* or *toilsome* simply requires the steady application of labor or toil till accomplished; *toilsome* is the stronger word. That which is *onerous* (from L. *onus*, a burden) is mentally burdensome or oppressive. Responsibility may be *onerous* even when it involves no special exertion.

ANTONYMS:

easy	facile	light	pleasant	slight	trifling	trivial
------	--------	-------	----------	--------	----------	---------

DIRECTION

SYNONYMS:

aim bearing course inclination tendency way

The *direction* of an object is the line of motion or of vision toward it, or the line in which the object is moving, considered from our own actual or mental standpoint. *Way*, literally the road or path, comes naturally to mean the *direction* of the road or path, conversationally, *way* is almost a perfect synonym of *direction*; as, which *way* did he go? or, in which *direction*? *Bearing* is the direction in which an object is seen with reference to another, and especially with reference to the points of the compass. *Course* is the *direction* of a moving object; *inclination*, that toward which a stationary object leans; *tendency*, the *direction* toward which anything stretches or reaches out; *tendency* is stronger and more active than *inclination*. Compare AIM; CARE; ORDER; OVERSIGHT.

DISCERN

SYNONYMS:

**behold discriminate observe recognize
descry distinguish perceive see**

What we *discern* we *see* apart from all other objects; what we *discriminate* we judge apart; what we *distinguish* we mark apart, or recognize by some special mark or manifest difference. We *discriminate* by real differences; we *distinguish* by outward signs; an officer is readily *distinguished* from a common soldier by his uniform. Objects may be dimly *discerned* at twilight, when yet we can not clearly *distinguish* one from another. We *descry* (originally *espy*) what is difficult to discover. Compare DISCOVER; LOOK.

DISCOVER

SYNONYMS:

**ascertain detect disclose ferret out find out
descry discern expose find invent**

Of human actions or character, *detect* is used, almost without exception, in a bad sense; *discover* may be used in either the good or the bad sense, oftener in the good; he was *detected* in a fraud; real merit is sure to be *discovered*. In scientific language, *detect* is used of delicate indications that appear in course

of careful watching; as, a slight fluttering of the pulse could be *detected*. We *discover* what has existed but has not been known to us; we *invent* combinations or arrangements not before in use; Columbus *discovered* America; Morse *invented* the electric telegraph. *Find* is the most general word for every means of coming to know what was not before certainly known. A man *finds* in the road some stranger's purse, or *finds* his own which he is searching for. The expert *discovers* or *detects* an error in an account; the auditor *finds* the account to be correct. Compare DISCERN.

ANTONYMS:

See synonyms for HIDE.

DISEASE

SYNONYMS:

affection	disorder	indisposition	sickness
ailment	distemper	infirmity	unhealthiness
complaint	illness	malady	unsoundness

Disease is the general term for any deviation from health; in a more limited sense it denotes some definite morbid condition; *disorder* and *affection* are rather partial and limited; as, a nervous *affection*; a *disorder* of the digestive system. *Sickness* was generally used in English speech and literature, till the close of the eighteenth century at least, for every form of physical *disorder*, as abundantly appears in the English Bible: "Jesus went about . . . healing all manner of *sickness* and all manner of *disease* among the people," *Matt.* iv, 23; "Elisha was fallen *sick* of his *sickness* whereof he died," *2 Kings* xiii, 14. There is now, in England, a tendency to restrict the words *sick* and *sickness* to nausea, or "*sickness* at the stomach," and to hold *ill* and *illness* as the only proper words to use in a general sense. This distinction has received but a very limited acceptance in the United States, where *sick* and *sickness* have the earlier and wider usage. We speak of trifling *ailments*, a slight *indisposition*, a serious or a deadly *disease*; a slight or severe *illness*; a painful *sickness*. *Complaint* is a popular term, which may be applied to any degree of ill health, slight or severe. *Infirmity* denotes a chronic or lingering weakness or disability, as blindness or lameness.

ANTONYMS:

health robustness soundness strength sturdiness vigor

DISPARAGE

SYNONYMS:

belittle	depreciate	discredit	underestimate
carp at	derogate from	dishonor	underrate
decry	detract from	lower	undervalue

To *decry* is to cry down, in some noisy, public, or conspicuous manner. A witness or a statement is *discredited*; the currency is *depreciated*; a good name is *dishonored* by unworthy conduct; we *underestimate* in our own minds; we may *underrate* or *undervalue* in statement to others. These words are used, with few exceptions, of things such as qualities, merits, attainments, etc. To *disparage* is to *belittle* by damaging comparison or suggestion; it is used only of things. A man's achievements are *disparaged*, his motives *depreciated*, his professions *discredited*; he himself is calumniated, slandered, etc. Compare SLANDER.

ANTONYMS:

See synonyms for PRAISE.

DISPLACE

SYNONYMS:

confuse	derange	disturb	mislay	remove
crowd out	disarrange	jumble	misplace	unsettle

Objects are *displaced* when moved out of the place they have occupied; they are *misplaced* when put into a place where they should not be. One may know where to find what he has *misplaced*; what he has *misland* he can not locate. Compare MIX.

ANTONYMS:

adjust	assort	dispose	order	put in order	set in order
array	classify	group	place	put in place	sort

DO

SYNONYMS:

accomplish	carry out	discharge	perform
achieve	carry through	effect	perpetrate
actualize	commit	execute	realize
bring about	complete	finish	transact
bring to pass	consummate	fulfil	work out

Do is the one comprehensive word which includes this whole class. We may say of the least item of daily work, "It is *done*,"

and of the grandest human achievement, "Well *done!*" *Finish* and *complete* signify to bring to an end what was previously begun; there is frequently the difference in usage that *finish* is applied to the fine details and is superficial, while *complete* is comprehensive, being applied to the whole ideal, plan, and execution; as, to *finish* a statue; to complete a scheme of philosophy. To *discharge* is to *do* what is given in charge, expected, or required; as, to *discharge* the duties of the office. To *fulfil* is to *do* or to be what has been promised, expected, hoped, or desired; as, a son *fulfils* a father's hopes. *Realize*, *effect*, *execute*, and *consummate* all signify to embody in fact what was before in thought. One may *realize* that which he has done nothing to *bring about*; he may *realize* the dreams of youth by inheriting a fortune; but he can not *effect* his early designs except by *doing* the utmost that is necessary to make them fact. *Effect* includes all that is *done* to *accomplish* the intent; *execute* refers rather to the final steps; *consummate* is limited quite sharply to the concluding act. An officer *executes* the law when he proceeds against its violators; a purchase is *consummated* when the money is paid and the property delivered. *Execute* refers more commonly to the commands of another, *effect* and *consummate* to one's own designs; as, the commander *effected* the capture of the fort, because his officers and men promptly *executed* his commands. *Achieve*—to *do* something worthy of a chief—signifies always to *perform* some great and generally some worthy exploit. *Perform* and *accomplish* both imply working toward the end; but *perform* always allows a possibility of not attaining, while *accomplish* carries the thought of full completion. In Longfellow's lines, "Patience; *accomplish* thy labor," etc., *perform* could not be substituted without great loss. As between *complete* and *accomplish*, *complete* considers rather the thing as *done*; *accomplish*, the whole process of doing it. *Commit*, as applied to actions, is used only of those that are bad, whether grave or trivial; *perpetrate* is used chiefly of aggravated crimes or, somewhat humorously, of blunders. A man may *commit* a sin, a trespass, or a murder; *perpetrate* an outrage or a felony. We *finish* a garment or a letter, *complete* an edifice or a life-work, *consummate* a bargain or a crime, *discharge* a duty, *effect* a purpose, *execute* a command, *fulfil* a promise, *perform* our daily tasks, *realize* an ideal, *accomplish* a design, *achieve*

a victory. Compare ACT; MAKE; TRANSACT; TRANSACTION.

ANTONYMS:

baffle	defeat	fail	mar	miss	ruin
come short	destroy	frustrate	miscarry	neglect	spoil

DOCILE

SYNONYMS:

amenable	manageable	pliant	teachable
compliant	obedient	submissive	tractable
gentle	pliable	tame	yielding

One who is *docile* is easily taught; one who is *tractable* is easily led; one who is *pliant* is easily bent in any direction; *compliant* represents one as inclined or persuaded to agreement with another's will. Compare DUTY.

ANTONYMS:

determined	inflexible	opinionated	stubborn
dogged	intractable	resolute	wilful
firm	obstinate	self-willed	unyielding

DOCTRINE

SYNONYMS:

article of belief	belief	precept	teaching
article of faith	dogma	principle	tenet

Doctrine primarily signifies that which is taught; *principle*, the fundamental basis on which the *teaching* rests. A *doctrine* is reasoned out, and may be defended by reasoning; a *dogma* rests on authority, as of direct revelation, the decision of the church, etc. A *doctrine* or *dogma* is a statement of some one item of *belief*; a *creed* is a summary of *doctrines* or *dogmas*. *Dogma* has commonly, at the present day, an offensive signification, as of a *belief* arrogantly asserted. *Tenet* is simply that which is held, and is applied to a single item of *belief*; it is a neutral word, neither approving nor condemning; we speak of the *doctrines* of our own church; of the *tenets* of others. A *precept* relates not to *belief*, but to conduct. Compare FAITH; LAW.

DOGMATIC

SYNONYMS:

arrogant	doctrinal	magisterial	positive
authoritative	domineering	opinionated	self-opinionated
dictatorial	imperious	overbearing	systematic

Dogmatic is technically applied in a good sense to that which

is formally enunciated by adequate authority; *doctrinal* to that which is stated in the form of doctrine to be taught or defended. *Dogmatic* theology, called also "dogmatics," gives definite propositions, which it holds to be delivered by authority; *systematic* theology considers the same propositions in their logical connection and order as parts of a system; a *doctrinal* statement is less absolute in its claim than a *dogmatic* treatise, and may be more partial than the term *systematic* would imply. Outside of theology, *dogmatic* has generally an offensive sense; a *dogmatic* statement is one for which the author does not trouble himself to give a reason, either because of the strength of his convictions, or because of his contempt for those whom he addresses; thus *dogmatic* is, in common use, allied with *arrogant* and kindred words.

DOUBT, *v.*

SYNONYMS:

distrust mistrust surmise suspect

To *doubt* is to lack conviction. Incompleteness of evidence may compel one to *doubt*, or some perverse bias of mind may incline him to. *Distrust* may express simply a lack of confidence; as, I *distrust* my own judgment; or it may be nearly equivalent to *suspect*; as, I *distrusted* that man from the start. *Mistrust* and *suspect* imply that one is almost assured of positive evil; one may *distrust* himself or others; he *suspects* others. *Mistrust* is now rarely, if ever, used of persons, but only of motives, intentions, etc. *Distrust* is always serious; *mistrust* is often used playfully. Compare FLUCTUATE; SUPPOSE. Compare synonyms for DOUBT, *n.*

ANTONYMS:

believe depend on rely on trust
confide in depend upon rely upon

DOUBT, *n.*

SYNONYMS:

disbelief incredulity perplexity suspense
distrust indecision question suspicion
hesitancy irresolution scruple unbelief
hesitation misgiving skepticism uncertainty

Doubt is a lack of conviction that may refer either to matters

of belief or to matters of practise. As regards belief, while *doubt* is lack of conviction, *disbelief* is conviction to the contrary; *unbelief* refers to a settled state of mind, generally accompanied with opposition of heart. *Perplexity* is active and painful; *doubt* may be quiescent. *Perplexity* presses toward a solution; *doubt* may be content to linger unresolved. Any improbable statement awakens *incredulity*. In theological usage *unbelief* and *skepticism* have a condemnatory force, as implying wilful rejection of manifest truth. As regards practical matters, *uncertainty* applies to the unknown or undecided; *doubt* implies some negative evidence. *Suspense* regards the future, and is eager and anxious; *uncertainty* may relate to any period, and be quite indifferent. *Misgiving* is ordinarily in regard to the outcome of something already done or decided; *hesitation*, *indecision*, and *irresolution* have reference to something that remains to be decided or done, and are due oftener to infirmity of will than to lack of knowledge. *Distrust* and *suspicion* apply especially to the motives, character, etc., of others, and are more decidedly adverse than *doubt*. *Scruple* relates to matters of conscience and duty. Compare DOUBT, *v.*; PERPLEXITY.

ANTONYMS:

assurance	certainly	conviction	determination	resolution
belief	confidence	decision	persuasion	resolve

DRAW**SYNONYMS:**

allure	drag	haul	induce	lure	tow
attract	entice	incline	lead	pull	tug

One object *draws* another when it moves it toward itself or in the direction of its own motion by the exertion of adequate force, whether slight or powerful. To *attract* is to exert a force that tends to *draw*, though it may produce no actual motion; all objects are *attracted* toward the earth, though they may be sustained from falling. To *drag* is to *draw* against strong resistance; as, to *drag* a sled over bare ground, or a carriage up a steep hill. To *pull* is to exert a *drawing* force, whether adequate or inadequate; as, the fish *pulls* on the line; a dentist *pulls* a tooth. To *tug* is to *draw*, or try to *draw*, a resisting object with a continuous straining motion; as to *tug* at the oar. To *haul* is to *draw* somewhat slowly a heavy object; as,

to *haul* a seine; to *haul* logs. One vessel *tows* another. In the figurative sense, *attract* is more nearly akin to *incline*, *draw* to *induce*. We are *attracted* by one's appearance, *drawn* to his side. Compare ALLURE; ARRAY; INFLUENCE.

ANTONYMS:

alienate estrange rebuff reject repel repulse

See synonyms for DRIVE.

PREPOSITIONS:

To draw water *from* or *out* of the well; draw the boat *through* the water, *to* the shore; draw air *into* the lungs; draw *with* cords of love; the wagon is drawn *by* horses, *along* the road, *across* the field, *over* the stones, *through* the woods, *to* the barn.

DREAM**SYNONYMS:**

day-dream
fancy

fantasy
hallucination

reverie
romance

trance
vision

A *dream* is strictly a train of thoughts, fantasies, and images passing through the mind during sleep; a *vision* may occur when one is awake, and in clear exercise of the senses and mental powers; *vision* is often applied to something seen by the mind through supernatural agency, whether in sleep or wakefulness, conceived as more real and authoritative than a *dream*; a *trance* is an abnormal state, which is different from normal sleep or wakefulness. A *reverie* is a purposeless drifting of the mind when awake, under the influence of mental images; a *day-dream* that which passes before the mind in such condition. A *fancy* is some image presented to the mind, often in the fullest exercise of its powers. *Hallucination* is the seeming perception of non-existent objects, as in insanity or delirium. In the figurative sense, we speak of *dreams* of fortune, *visions* of glory, with little difference of meaning except that the *vision* is thought of as fuller and more vivid. We speak of a *trance* of delight when the emotion almost sweeps one away from the normal exercise of the faculties.

ANTONYMS:

certainty fact reality realization substance verity

DRESS

SYNONYMS:

apparel	clothes	garb	habit	uniform
array	clothing	garments	raiment	vestments
attire	costume	habiliments	robes	vesture

Clothing denotes the entire covering of the body, taken as a whole; *clothes* and *garments* view it as composed of separate parts. *Clothes*, *clothing*, and *garments* may be used of inner or outer covering; all the other words in the list (with possible rare exceptions in the case of *raiment*) refer to the outer *garments*. *Array*, *raiment*, and *vesture* are archaic or poetic; so, too, is *habit*, except in technical use to denote a lady's riding-dress. The word *vestments* is now rare, except in ecclesiastical use. *Apparel* and *attire* are most frequently used of somewhat complete and elegant outer *clothing*, though Shakespeare speaks of "poor and mean *attire*." *Dress* may be used, specifically, for a woman's gown, and in that sense may be either rich or shabby; but in the general sense it denotes outer *clothing* which is meant to be elegant, complete, and appropriate to some social or public occasion; as, full *dress*, court *dress*, evening *dress*, etc. *Dress* has now largely displaced *apparel* and *attire*. *Garb* denotes the *clothing* characteristic of some class, profession, or the like; as, the *garb* of a priest. *Costume* is chiefly used for that which befits an assumed character; as, a theatrical *costume*; we sometimes speak of a national *costume*, etc.

ANTONYMS:

bareness	dishabille	nakedness	undress
disarray	exposure	nudity	

DRIVE

SYNONYMS:

compel	propel	repel	resist	thrust
impel	push	repulse	ride	urge on

To *drive* is to move an object with some force or violence before or away from oneself; it is the direct reverse of *draw*, *lead*, etc. A man leads a horse by the halter, *drives* him with whip and rein. One may be *driven* to a thing or from it; hence, *drive* is a synonym equally for *compel* or for *repel* or *repulse*. *Repulse* is stronger and more conclusive than *repel*;

one may be *repelled* by the very aspect of the person whose favor he seeks, but is not *repulsed* except by the direct refusal or ignoring of his suit. A certain conventional modern usage, especially in England, requires us to say that we *drive* in a carriage, *ride* upon a horse; though in Scripture we read of *riding* in a chariot (2 *Kings* ix, 16; *Jer.* xvii. 15, etc.); good examples of the same usage may be found abundantly in the older English. Many good authorities prefer to use *ride* in the older and broader sense as signifying to be supported and borne along by any means of conveyance, as in a railway car. Compare BANISH; COMPEL; INFLUENCE.

ANTONYMS:

See synonyms for DRAW.

PREPOSITIONS:

Drive *to* market; *to* despair; drive *into* exile *from* one's presence; *out of* the city; drive *by*, *with*, or *under* the lash; drive *by* or *past* beautiful estates; *along* the beach; *beside* the river; *through* the park; *across* the field; *around* the square; *to* the door; *into* the barn; *out of* the sunshine.

DRUNK, a.**SYNONYMS:**

boozy	half-seas-over	sottish
drunken	inebriated	the worse for liquor
elevated	intoxicated	tipsy
exhilarated	maudlin	under the influence of
fuddled	muddled	liquor
full	overcome	

Numerous colloquial and slang expressions might be added to the list above given. *Drunken* may immediately precede the noun which it qualifies, while *drunk* cannot; thus, the man was *drunk*; he made him *drunk*; a *drunken* man. *Drunk*, *inebriated*, *intoxicated*, etc., denote actual condition at some one time; *drunken* may denote habitual condition or character, or whatever is caused or characterized by drunkenness; as, an idle, *drunken* wretch; a *drunken* sleep, speech, quarrel, brawl, or riot. *Sottish* always refers to established habit or character. *Intoxicated* is the more scientific and elegant term to denote the condition roughly indicated by *drunk* or *drunken*. Figuratively, we may speak of a persecutor as *drunk* with blood;

or of a person as *intoxicated* with success, ambition, glory, or the like.

The fact that "drunk," the past participle of the verb "drink," is the same in form as the adjective *drunk* causes confusion in many minds; persons feel it incorrect to say, "he had *drunk* a glass of water"; yet this is perfectly correct, and grammatically the only correct form.

The stag at eve had *drunk* his fill,

Where danced the moon on Monan's rill.

SCOTT *Lady of the Lake*, can. i, st. 1.

"I have *drank*," "he had *drank*," etc., are inadmissible; if the use of the participle *drunk* causes undesirable suggestion in any case, the confusion is best avoided by some change of expression; as, "he had been *drinking* a glass of water"; "he had *had*—or had *taken*—a glass of water," etc.

ANTONYMS:

abstemious

abstinent

ascetic

sober

temperate

DUPLICATE

SYNONYMS:

copy

counterpart

facsimile

imitation

likeness

replica

reproduction

transcript

A *copy* is as nearly like the original as the copyist has power to make it; a *duplicate* is exactly like the original; a carbon *copy* of a typewritten document must be a *duplicate*; we may have an inaccurate *copy*, but never an inaccurate *duplicate*. A *facsimile* is like the original in appearance; a *duplicate* is the same as the original in substance and effect; a *facsimile* of the Declaration of Independence is not a *duplicate*. A *facsimile* of a key might be quite useless; a *duplicate* will open the lock. A *counterpart* exactly corresponds to another object, but perhaps without design, while a *copy* is intentional. An *imitation* is always thought of as inferior to the original; as, an *imitation* of Milton. A *replica* is a *copy* of a work of art by the maker of the original. In law, a *copy* of an instrument has in itself no authority; the signatures, as well as other matters, may be copied; a *duplicate* is really an original, containing the same provisions and signed by the same persons, so that it may have in all respects the same force and effect;

a *transcript* is an official *copy*, authenticated by the signature of the proper officer, and by the seal of the appropriate court. While strictly there could be but one *duplicate*, the word is now extended to an indefinite number of exact *copies*. *Reproduction* is chiefly applied to living organisms.

ANTONYMS:

archetype model original pattern prototype

DUTY**SYNONYMS:**

accountability function office right
business obligation responsibility righteousness

Etymologically, *duty* is that which is owed or due; *obligation*, that to or by which one is bound; *right*, that which is correct, straight, or in the direct line of truth and goodness; *responsibility*, that for which one must answer. *Duty* and *responsibility* are thought of as to some person or persons; *right* is impersonal. One's *duty* may be to others or to himself; his *obligations* and *responsibilities* are to others. *Duty* arises from the nature of things; *obligation* and *responsibility* may be created by circumstances, as by one's own promise, or by the acceptance of a trust, etc. We speak of a parent's *duty*, a debtor's *obligation*; or of a child's *duty* of obedience, and a parent's *responsibility* for the child's welfare. *Right* is that which accords with the moral system of the universe. *Righteousness* is *right* incarnated in action. In a more limited sense, *right* may be used of what one may rightly claim, and so be the converse of *duty*. It is the creditor's *right* to demand payment, and the debtor's *duty* to pay. Compare BUSINESS.

EAGER**SYNONYMS:**

animated	earnest	impatient	keen
anxious	enthusiastic	impetuous	longing
ardent	fervent	importunate	vehement
burning	glowing	intense	yearning
desirous	hot	intent	zealous

One is *eager* who impatiently desires to accomplish some end; one is *earnest* with a desire that is less impatient, but more deep, resolute, and constant; one is *anxious* with a desire that

foresees rather the pain of disappointment than the delight of attainment. One is *eager* for the gratification of any appetite or passion; he is *earnest* in conviction, purpose, or character. *Eager* usually refers to some specific and immediate satisfaction, *earnest* to something permanent and enduring; the patriotic soldier is *earnest* in his devotion to his country, *eager* for a decisive battle.

ANTONYMS:

apathetic	cool	indifferent	regardless	unconcerned
calm	dispassionate	negligent	stolid	uninterested
careless	frigid	phlegmatic	stony	unmindful
cold	heedless	purposeless	stupid	unmoved

PREPOSITIONS:

Eager for (more rarely *after*) favor, honor, etc.; *eager in* pursuit.

EASE

SYNONYMS:

easiness expertness facility knack readiness

Ease in the sense here considered denotes freedom from conscious or apparent effort, tax, or strain. *Ease* may be either of condition or of action; *facility* is always of action; *readiness* is of action or of expected action. One lives at *ease*, who has no pressing cares; one stands at *ease*, moves or speaks with *ease*, when wholly without constraint. *Facility* is always active; *readiness* may be active or passive; the speaker has *facility* of expression, *readiness* of wit; any appliance is in *readiness* for use. *Ease* of action may imply merely the possession of ample power; *facility* always implies practise and skill; any one can press down the keys of a typewriter with *ease*; only the skilled operator works the machine with *facility*. *Readiness* in the active sense includes much of the meaning of *ease* with the added idea of promptness or alertness. *Easiness* applies to the thing done, rather than to the doer. *Expertness* applies to the more mechanical processes of body and mind; we speak of the *readiness* of an orator, but of the *expertness* of a gymnast. Compare COMFORTABLE; DEXTERITY; POWER.

ANTONYMS:

annoyance	difficulty	irritation	uneasiness
awkwardness	discomfort	perplexity	vexation
constraint	disquiet	trouble	worry

EDUCATION

SYNONYMS:

breeding
cultivation
culture
development

discipline
information
instruction
knowledge

learning
nurture
reading
schooling

study
teaching
training
tuition

Education (from L. *educere*, to lead or draw out) is the systematic development and cultivation of the mind and other natural powers. "*Education* is the harmonious development of all our faculties. It begins in the nursery, and goes on at school, but does not end there. It continues through life, whether we will or not. . . . 'Every person,' says Gibbon, 'has two educations, one which he receives from others, and one more important, which he gives himself.'" JOHN LUBBOCK *The Use of Life* ch. vii, p. 111. [Macm. 1894.] *Instruction*, the impartation of *knowledge* by others (from L. *instruere*, to build in or into) is but a part of education, often the smallest part. *Teaching* is the more familiar and less formal word for *instruction*. *Training* refers not merely to the impartation of *knowledge*, but to the exercising of one in actions with the design to form habits. *Discipline* is systematic and rigorous *training*, with the idea of subjection to authority and perhaps of punishment. *Tuition* is the technical term for *teaching* as the business of an instructor or as in the routine of a school; *tuition* is narrower than *teaching*, not, like the latter word, including *training*. *Study* is emphatically what one does for himself. We speak of the *teaching*, *training*, or *discipline*, but not of the *education* or *tuition* of a dog or a horse. *Breeding* and *nurture* include *teaching* and *training*, especially as directed by and dependent upon home life and personal association; *breeding* having reference largely to manners with such qualities as are deemed distinctively characteristic of high birth; *nurture* (literally *nourishing*) having more direct reference to moral qualities, not overlooking the physical and mental. *Knowledge* and *learning* tell nothing of mental development apart from the capacity to acquire and remember, and nothing whatever of that moral development which is included in *education* in its fullest and noblest sense; *learning*, too, may be acquired by one's unaided industry, but any full *education* must be the result in great part of *instruction*, *training*, and personal association. *Study* is emphatically what

one does for himself, and in which *instruction* and *tuition* can only point the way, encourage the student to advance, and remove obstacles; vigorous, preserving *study* is one of the best elements of *training*. *Study* is also used in the sense of the thing studied, a subject to be mastered by *study*, a studious pursuit. Compare KNOWLEDGE; REFINEMENT; WISDOM.

ANTONYMS:

ignorance illiteracy

Compare synonyms for IGNORANT.

EFFRONTERY

SYNONYMS:

assurance	boldness	hardihood	insolence
audacity	brass	impudence	shamelessness

Audacity, in the sense here considered, is a reckless defiance of law, decency, public opinion, or personal rights, claims, or views, approaching the meaning of *impudence* or *shamelessness*, but always carrying the thought of the personal risk that one disregards in such defiance; the merely *impudent* or *shameless* person may take no thought of consequences, the *audacious* person recognizes and recklessly braves them. *Hardihood* defies and disregards the rational judgment of men. *Effrontery* (from L. *effrons*, barefaced, shameless) adds to *audacity* and *hardihood* the special element of defiance of considerations of property, duty, and respect for others, yet not to the extent implied in *impudence* or *shamelessness*. *Impudence* disregards what is due to superiors: *shamelessness* defies decency. *Boldness* is forward-stepping courage, spoken of with reference to the presence and observation of others; *boldness*, in the good sense, is courage viewed from the outside; but the word is frequently used in an unfavorable sense to indicate a lack of proper sensitiveness and modesty. Compare ASSURANCE; BRAVE.

ANTONYMS:

bashfulness	diffidence	sensitiveness	shyness
coyness	modesty	shrinking	timidity

EGOTISM

SYNONYMS:

conceit	self-assertion	self-confidence	self-esteem
egoism	self-conceit	self-consciousness	vanity

Egoism is giving the "I" undue supremacy in thought; *ego-*

tism is giving the "I" undue prominence in speech. *Egotism* is sometimes used in the sense of *egoism*, or supreme regard for oneself. *Self-assertion* is the claim by word, act, or manner of what one believes to be his due; *self-conceit* is an overestimate of one's own powers or deserts. *Conceit* is a briefer expression for *self-conceit*, with always an offensive implication; *self-conceit* is ridiculous or pitiable; *conceit* arouses resentment. There is a worthy *self-confidence* which springs from consciousness of rectitude and of power equal to demands. *Self-assertion* at times becomes a duty; but *self-conceit* is always a weakness. *Self-consciousness* is the keeping of one's thoughts upon oneself, with the constant anxious question of what others will think. *Vanity* is an overweening admiration of self, craving equal admiration from others; *self-consciousness* is commonly painful to its possessor, *vanity* always a source of satisfaction, except as it fails to receive its supposed due. *Self-esteem* is more solid and better founded than *self-conceit*; but is ordinarily a weakness, and never has the worthy sense of *self-confidence*. Compare ASSURANCE; PRIDE.

ANTONYMS:

bashfulness	humility	self-forgetfulness	unobtrusiveness
deference	modesty	shyness	unostentatiousness
diffidence	self-distrust		

EMBLEM**SYNONYMS:**

attribute figure image symbol token sign type

Emblem is the English form of *emblema*, a Latin word of Greek origin, signifying a figure beaten out on a metallic vessel by blows from within; also, a figure inlaid in wood, stone, or other material as a copy of some natural object. The Greek word *symbolon* denoted a victor's wreath, a check, or any object that might be compared with, or found to correspond with another, whether there was or was not anything in the objects compared to suggest the comparison. Thus an *emblem* resembles, a *symbol* represents. An *emblem* has some natural fitness to suggest that for which it stands; a *symbol* has been chosen or agreed upon to suggest something else, with or without natural fitness; a *sign* does actually suggest the thing with or without reason, and with or without intention or choice. A *symbol* may be also an *emblem*; thus the

elements of bread and wine in the Lord's Supper are both appropriate *emblems* and his own chosen *symbols* of suffering and death. A statement of doctrine is often called a *symbol* of faith; but it is not an *emblem*. On the other hand, the same thing may be both a *sign* and a *symbol*; a letter of the alphabet is a *sign* which indicates a sound; but letters are often used as mathematical, chemical, or astronomical *symbols*. A *token* is something given or done as a pledge or expression of feeling or intent; while the *sign* may be unintentional, the *token* is voluntary; kind looks may be *signs* of regard; a gift is a *token*; a ring, which is a natural *emblem* of eternity, and also its accepted *symbol*, is frequently given as a *token* of friendship or love. A *figure* in the sense here considered is something that represents an idea to the mind somewhat as a form is represented to the eye, as in drawing, painting, or sculpture; as representing a future reality, a *figure* may be practically the same as a *type*. An *image* is a visible representation, especially in sculpture, having or supposed to have a close resemblance to that which it represents. A *type* is in religion a representation of a greater reality to come; we speak of one object as the *type* of the class whose characteristics it exhibits, as in the case of animal or vegetable *types*. An *attribute* in art is some accessory used to characterize a *figure* or scene; the *attribute* is often an *emblem* or *symbol*; thus the eagle is the *attribute* of St. John as an *emblem* of lofty spiritual vision. Compare SIGN.

EMIGRATE

SYNONYMS:

immigrate

migrate

To *migrate* is to change one's dwelling-place, usually with the idea of repeated change, or of periodical return; it applies to wandering tribes of men, and to many birds and animals. *Emigrate* and *immigrate* carry the idea of a permanent change of residence to some other country or some distant region; the two words are used distinctively of human beings, and apply to the same person and the same act, according to the side from which the action is viewed.

PREPOSITIONS:

A person *emigrates from* the land he leaves, and *immigrates to* the land where he takes up his abode.

EMPLOY

SYNONYMS:

call engage engross hire make use of use use up

In general terms it may be said that to *employ* is to devote to one's purpose, to *use* is to render subservient to one's purpose; what is *used* is viewed as more absolutely an instrument than what is *employed*; a merchant *employs* a clerk; he *uses* pen and paper; as a rule, *use* is not said of persons, except in a degrading sense; as, the conspirators *used* him as a go-between. Hence the expression common in some religious circles "that God would *use* me" is not to be commended; it has also the fault of representing the human worker as absolutely a passive and helpless instrument; the phrase is altogether unscriptural; the Scripture says, "We are laborers together with (co-workers with) God." That which is *used* is often consumed in the *using*, or in familiar phrase *used up*; as, we *used* twenty tons of coal last winter; in such cases we could not substitute *employ*. A person may be *employed* in his own work or in that of another; in the latter case the service is always understood to be for pay. In this connection *employ* is a word of more dignity than *hire*; a general is *employed* in his country's service; a mercenary adventurer is *hired* to fight a tyrant's battles. It is unsuitable, according to present usage, to speak of *hiring* a pastor; the Scripture, indeed, says of the preacher, "The laborer is worthy of his hire"; but this sense is archaic, and *hire* now implies that the one *hired* works directly and primarily for the pay, as expressed in the noun "hireling"; a pastor is properly said to be *called*, or when the business side of the transaction is referred to, *engaged*, or possibly *employed*, at a certain salary.

PREPOSITIONS:

Employ *in*, *on*, *upon*, or *about* a work, business, etc., *for* a purpose; *at* a stipulated salary.

END, v.

SYNONYMS:

break off	close	conclude	expire	quit	terminate
cease	complete	desist	finish	stop	wind up

That *ends*, or is *ended*, of which there is no more, whether or not more was intended or needed; that is *closed*, *completed*,

concluded, or *finished* which has come to an expected or appropriate end. A speech may be *ended* almost as soon as begun, because of the speaker's illness, or of tumult in the audience; in such a case, the speech is neither *closed*, *completed*, nor *finished*, nor, in the strict sense, *concluded*. An argument may be *closed* with nothing proved; when an argument is *concluded* all that is deemed necessary to prove the point has been stated. To *finish* is to do the last thing there is to do; as, "I have *finished* my course," 2 Tim. iv, 7. *Finish* has come to mean, not merely to *complete* in the essentials, but to perfect in all the minute details, as in the expression "to add the *finishing* touches." The enumeration is *completed*; the poem, the picture, the statue is *finished*. To *terminate* may be either to bring to an arbitrary or to an appropriate end; as, he *terminated* his remarks abruptly; the spire *terminates* in a cross. A thing *stops* that comes to rest from motion; or the motion *stops* or *ceases* when the object comes to rest; *stop* frequently signifies to bring or come to a sudden and decided cessation of motion, progress, or action of any kind. Compare DO; TRANSACT.

ANTONYMS:

begin
commence
conceive

embark in
enter upon
initiate

launch
originate
start

END, *n.*

SYNONYMS:

accomplishment
achievement
bound
boundary
cessation
close
completion
conclusion
consequence
consummation
design

effect
expiration
extent
extremity
finale
finis
finish
fulfilment
goal
intent
issue

limit
outcome
period
point
purpose
result
termination
terminus
tip
utmost
uttermost

The *end* is the terminal part of a material object that has length; the *extremity* is distinctively the terminal *point*, and may thus be but part of the *end* in the general sense of that word; the *extremity* is viewed as that which is most remote from some center, or some mean or standard position; the Southern *end* of South America includes all Patagonia, the southern *extremity* or *point* is Cape Horn. *Tip* has

nearly the same meaning as *extremity*, but is said of small or slight and tapering objects; as, the *tip* of the finger; *point* in such connections is said of that which is drawn out to exceeding fineness or sharpness, as the *point* of a needle, a fork, or a sword; *extremity* is said of something considerable; we do not speak of the *extremity* of a needle. *Terminus* is chiefly used to designate the *end* of a line of travel or transportation: specifically, the furthestmost station in any direction on a railway, or by extension the town or village where it is situated. *Termination* is the Latin and more formal word for the Saxon *end*, but is chiefly used of time, words, undertakings, or abstractions of any kind. *Expiration* signifies the coming to an *end* in the natural course of things; as, the *expiration* of a year, or of a lease; it is used of things of some consequence; we do not ordinarily speak of the *expiration* of an hour or of a day. *Limit* implies some check to or restraint upon further advance, right, or privilege; as, the *limits* of an estate (compare BOUNDARY). A *goal* is an *end* sought or striven for, as in a race. For the figurative senses of *end* and its associated words, compare the synonyms for the verb END; also for AIM; CONSEQUENCE; DESIGN.

ANTONYMS:

See synonyms for BEGINNING.

ENDEAVOR, *v.*

SYNONYMS:

attempt essay strive try undertake

To *attempt* is to take action somewhat experimentally with the hope and purpose of accomplishing a certain result; to *endeavor* is to *attempt* strenuously and with firm and enduring purpose. To *attempt* expresses a single act; to *endeavor*, a continuous exertion; we say I will *endeavor* (not I will *attempt*) while I live. To *attempt* is with the view of accomplishing; to *essay*, with a view of testing our own powers. To *undertake* is to accept or take upon oneself as an obligation, as some business, labor, or trust; the word often implies complete assurance of success; as, I will *undertake* to produce the witness. To *strive* suggests little of the result, much of toil, strain, and contest, in seeking it; I will *strive* to fulfil your wishes, *i. e.*,

I will spare no labor and exertion to do it. *Try* is the most comprehensive of these words. The original idea of testing or experimenting is not thought of when a man says "I will *try*." To *attempt* suggests giving up, if the thing is not accomplished at a stroke; to *try* implies using other means and studying out other ways if not at first successful. *Endeavor* is more mild and formal; the pilot in the burning pilot-house does not say "I will *endeavor*" or "I will *attempt* to hold the ship to her course," but "I'll *try*, sir!"

ANTONYMS:abandon
dismiss
dropgive up
let go
neglectomit
overlook
pass bythrow away
throw over
throw up**ENDEAVOR, n.****SYNONYMS:****attempt effort essay exertion struggle trial**

Effort denotes the voluntary putting forth of power to attain or accomplish some specific thing; it reaches toward a definite end; *exertion* is a putting forth of power without special reference to an object. Every *effort* is an *exertion*, but not every *exertion* is an *effort*. *Attempt* is more experimental than *effort*, *endeavor* less strenuous but more continuous. An *effort* is a single act, an *endeavor* a continued series of acts; an *endeavor* is sustained and enduring, and may be lifelong; we do not have a society of Christian *Attempt*, or of Christian *Effort*, but of Christian *Endeavor*. A *struggle* is a violent *effort* or strenuous *exertion*. An *essay* is an *attempt*, *effort*, or *endeavor* made as a test of the powers of the one who makes it. Compare ENDEAVOR, v.

ENDURE**SYNONYMS:**abide
afford
allow
bearbear up under
bear with
brook
permitput up with
submit to
suffer
supportsustain
tolerate
undergo

Bear is the most general of these words; it is metaphorically to hold up or keep up a burden of care, pain, grief, annoyance, or the like, without sinking, lamenting, or repining. *Allow* and *permit* involve large concession of the will; *put up with* and *tolerate* imply decided aversion and reluctant withholding

of opposition or interference; whispering is *allowed* by the school-teacher who does not forbid nor censure it; one *puts up with* the presence of a disagreeable visitor; a state *tolerates* a religion which it would be glad to suppress. To *endure* is to *bear with* strain and resistance, but with conscious power; *endure* conveys a fuller suggestion of contest and conquest than *bear*. One may choose to *endure* the pain of a surgical operation rather than take anesthetics; he *permits* the thing to come which he must brace himself to *endure* when it comes. To *afford* is to be equal to a pecuniary demand, *i. e.*, to be able to *bear* it. To *brook* is quietly to *put up with* provocation or insult. *Abide* combines the senses of await and *endure*; as, I will *abide* the result. Compare ABIDE; ETERNAL; PERMANENT; SUPPORT.

ANTONYMS:

break	despair	fail	fall	give out	sink	surrender
break down	droop	faint	falter	give up	succumb	yield

ENEMY .**SYNONYMS:**

• adversary antagonist competitor foe opponent rival

An *enemy* in private life is one who is moved by hostile feeling with active disposition to injure; but in military language all who fight on the opposite side are called *enemies* or collectively "the *enemy*," where no personal animosity may be implied; *foe*, which is rather a poetical and literary word, implies intensely hostile spirit and purpose. An *antagonist* is one who opposes and is opposed actively and with intensity of effort; an *opponent*, one in whom the attitude of resistance is the more prominent; a *competitor*, one who seeks the same object for which another is striving; *antagonists* in wrestling, *competitors* in business, *opponents* in debate may contend with no personal ill will; *rivals* in love, ambition, etc., rarely avoid inimical feeling. *Adversary* was formerly much used in the general sense of *antagonist* or *opponent*, but is now less common, and largely restricted to the hostile sense; an *adversary* is ordinarily one who not only opposes another in fact, but does so with hostile spirit, or perhaps out of pure malignity; as, the great *Adversary*. Compare synonyms for AMBITION.

ANTONYMS:

abettor accomplice accessory ally friend helper supporter

PREPOSITIONS:

He was the enemy of my friend *in* the contest.

ENMITY

SYNONYMS:

acrimony	bitterness	ill will	malignity
animosity	hatred	malevolence	rancor
antagonism	hostility	malice	spite

Enmity is the state of being an enemy or the feeling and disposition characterizing an enemy (compare **ENEMY**). *Animosity* denotes a feeling more active and vehement, but often less enduring and determined, than *enmity*. *Enmity* distinctly recognizes its object as an enemy, to be met or dealt with accordingly. *Hostility* is *enmity* in action; the term *hostilities* between nations denotes actual armed collision. *Bitterness* is a resentful feeling arising from a belief that one has been wronged; *acrimony* is a kindred feeling, but deeper and more persistent, and may arise from the crossing of one's wishes or plans by another, where no injustice or wrong is felt. *Antagonism*, as between two competing authors or merchants, does not necessarily imply *enmity*, but ordinarily suggests a shade, at least, of hostile feeling. *Malice* is a disposition or intent to injure others, for the gratification of some evil passion; *malignity* is intense and violent *enmity*, *hatred*, or *malice*. Compare synonyms for **ACRIMONY**; **ANGER**; **HATRED**.

ANTONYMS:

agreement	amity	friendship	kindliness	regard
alliance	concord	harmony	kindness	sympathy

ENTERTAIN

SYNONYMS:

amuse	cheer	disport	enliven	interest	please
beguile	delight	divert	gratify	occupy	recreate

To *entertain*, in the sense here considered, is to engage and pleasantly occupy the attention; to *amuse* is to occupy the attention in an especially bright and cheerful way, often with that which excites merriment or laughter; as, he *entertained* us with an *amusing* story. To *divert* is to turn from serious thoughts or laborious pursuits to something that lightly and agreeably occupies the mind; one may be *entertained* or *amused*

who has nothing serious or laborious from which to be *diverted*. To *recreate*, literally to re-create, is to engage mind or body in some pleasing activity that restores strength and energy for serious work. To *beguile* is, as it were, to cheat into cheer and comfort by something that insensibly draws thought or feeling away from pain or disquiet. We *beguile* a weary hour, *cheer* the despondent, *divert* the preoccupied, *enliven* a dull evening or company, *gratify* our friends' wishes, *entertain*, *interest*, *please* a listening audience, *occupy* idle time, *disport* ourselves when merry, *recreate* when worn with toil; we *amuse* ourselves or others with whatever pleasantly passes the time without special exertion, each according to his taste.

ANTONYMS:

annoy bore busy disquiet distract disturb tire weary

ENTERTAINMENT**SYNONYMS:**

amusement	diversion	fun	pleasure
cheer	enjoyment	merriment	recreation
delight	frolic	pastime	sport

Entertainment and *recreation* imply thought and mental occupation, though in an agreeable, refreshing way; they are therefore words of a high order. *Entertainment*, apart from its special senses of a public performance or a social party, and predominantly even there, is used of somewhat mirthful mental delight; *recreation* may, and usually does, combine the mental with the physical. *Amusement* and *pastime* are nearly equivalent, the latter probably the lighter word; many slight things may be *pastimes* which we should hardly dignify by the name of *amusements*. *Sports* are almost wholly on the physical plane, though involving a certain grade of mental action; fox-hunting, horse-racing, and baseball are *sports*. Certain *sports* may afford *entertainment* or *recreation* to certain persons, according to their individual tastes; but *entertainment* and *recreation* are capable of a meaning so high as never to be approached by any meaning of *sport*. *Cheer* may be very quiet, as the *cheer* of a bright fire to an aged traveler; *merriment* is with liveliness and laughter; *fun* and *frolic* are apt to be boisterous. *Amusement* is a form of *enjoyment*, but *enjoyment* may be too keen to be called *amusement*. Compare ENTERTAIN; FEAST.

ANTONYMS:

ennui fatigue labor lassitude toil weariness work

ENTHUSIASM

SYNONYMS:

ardor	excitement	frenzy	transport
devotion	extravagance	inspiration	vehemence
eagerness	fanaticism	intensity	warmth
earnestness	fervency	passion	zeal
ecstasy	fervor	rapture	

The old meaning of *enthusiasm* implies a pseudo *inspiration*, an almost frantic *extravagance* in behalf of something supposed to be an expression of the divine will. This sense remains as the controlling one in the kindred noun *enthusiast*. *Enthusiasm* has now chiefly the meaning of an earnest and commendable *devotion*, an intense and eager interest. Against the hindrances of the world, nothing great and good can be carried without a certain *fervor*, *intensity*, and *vehemence*; these joined with faith, courage, and hopefulness make *enthusiasm*. *Zeal* is burning *earnestness*, always tending to vigorous action with all the *devotion* or *enthusiasm*, though often without its hopefulness. Compare EAGER.

ANTONYMS:

calculation	caution	deadness	indifference	policy	timidity
calmness	coldness	dulness	lukewarmness	prudence	wariness

ENTRANCE

SYNONYMS:

access	approach	gate	introduction
accession	door	gateway	opening
adit	doorway	ingress	penetration
admission	entree	inlet	portal
admittance	entry		

Entrance, the act of entering, refers merely to the fact of passing from without to within some enclosure; *admission* and *admittance* refer to entering by or with some one's consent, or at least to opportunity afforded by some one's act or neglect. We may effect or force an *entrance*, but not *admittance* or *admission*; those we gain, procure, obtain, secure, win. *Admittance* refers to place, *admission* refers also to position, privilege, favor, friendship, etc. An intruder may gain *admittance* to the hall of a society who would not be allowed *admission*

to its membership. *Approach* is a movement toward another; *access* is coming all the way to his presence, recognition, and consideration. An unworthy favorite may prevent even those who gain *admittance* to a king's audience from obtaining any real *access* to the king. *Accession*, in this connection, signifies the coming into possession, as of dignity, office, or authority, the *entrance* into a position to which one has a rightful or recognized claim; as, the *accession* of the heir to the throne on the death of the king; the beginning of a king's reign is regularly spoken of as his *accession*. *Entrance* is also used figuratively for setting out upon some career, or becoming a member of some organization; as, we speak of one's *entrance* upon college life, or of *entrance* into the ministry.

ANTONYMS:

departure	ejection	exit	refusal	withdrawal
egress	exclusion	expulsion	rejection	

PREPOSITIONS:

Entrance *into* a place; *on* or *upon* a work or course of action; *into* or *upon* office; *into* battle; *by* or *through* the door; *within* the gates; *into* or *among* the company.

ENVOIOUS**SYNONYMS:**

jealous

suspicious

One is *envious* who cherishes selfish ill will toward another because of his superior success, endowments, possessions, or the like. A person is *envious* of that which is another's and to which he himself has no right or claim; he is *jealous* of intrusion upon that which is his own, or to which he maintains a right or claim. An *envious* spirit is always bad; a *jealous* spirit may be good or bad, according to its object and tendency. A free people must be *jealous* of their liberties if they would retain them. One is *suspicious* of another from unfavorable indication or from a knowledge of wrong in his previous conduct, or even without reason. Compare DOUBT.

ANTONYMS:

contented	friendly	kindly	satisfied	trustful	well-disposed
-----------	----------	--------	-----------	----------	---------------

PREPOSITIONS:

Envious *of* (formerly *at* or *against*) a person; *envious of* his

wealth or power; envious of him for, because of, on account of his wealth or power.

EQUIVOCAL

SYNONYMS:

ambiguous	enigmatical	indistinct	questionable
doubtful	indefinite	obscure	suspicious
dubious	indeterminate	perplexing	uncertain
enigmatic			

Equivocal (from L. *æquus*, equal, and *vox*, voice, word) denotes that which may equally well be understood in either of two or more ways. *Ambiguous* (from L. *ambi*, around, and *ago*, drive, lead) signifies lacking in distinctness of certainty, obscure or doubtful through indefiniteness of expression. *Ambiguous* is applied only to spoken or written statements; *equivocal* has other applications. A statement is *ambiguous* when it leaves the mind of the reader or hearer to fluctuate between two meanings, which would fit the language equally well; it is *equivocal* when it would naturally be understood in one way, but is capable of a different interpretation; an *equivocal* expression is, as a rule, intentionally deceptive, while an *ambiguous* utterance may be simply the result of a want either of clear thought or of adequate expression. That which is *enigmatical* must be guessed like a riddle; a statement may be purposely made *enigmatical* in order to provoke thought and study. That is *doubtful* which is fairly open to doubt; that is *dubious* which has become the subject of doubts so grave as scarcely to fall short of condemnation; as, a *dubious* reputation. *Questionable* may be used nearly in the sense either of *dubious* or of *doubtful*; a *questionable* statement is one that must be proved before it can be accepted. To say that one's honesty is *questionable* is a mild way of saying that in the opinion of the speaker he is likely to prove dishonest. *Equivocal* is sometimes, though more rarely, used in this sense. A *suspicious* character gives manifest reason to be suspected; a *suspicious* temper is inclined to suspect the motives and intentions of others, with or without reason. Compare CLEAR.

ANTONYMS:

certain	evident	lucid	perspicuous	unequivocal
clear	indisputable	manifest	plain	unquestionable
distinct	indubitable	obvious	unambiguous	unquestioned

ESTEEM, *v.*

SYNONYMS:

appreciate	consider	estimate	prize	think
calculate	deem	hold	regard	value

Esteem and *estimate* alike imply to set a certain mental value upon, but *esteem* is less precise and mercantile than *calculate* or *estimate*. We *esteem* a jewel precious; we *estimate* it to be worth so much money. This sense of *esteem* is now chiefly found in literary or oratorical style, and in certain conventional phrases; as, I *esteem* it an honor, a favor. In popular usage *esteem*, as said of persons, denotes a union of respect and kindly feeling and, in the highest sense, of moral approbation; as, one whom I highly *esteem*; the word may be used in a similar sense of material things or abstractions; as, one whose friendship I *esteem*; a shell greatly *esteemed* for inlaid work. To *appreciate* anything is to be deeply or keenly sensible of or sensitive to its qualities or influence, to see its full import, be alive to its value, importance, or worth; as, to *appreciate* beauty or harmony; to *appreciate* one's services in a cause; the word is similarly, though rarely, used of persons. To *prize* is to set a high value on for something more than merely commercial reasons. One may *value* some object, as a picture, beyond all price, as a family heirloom, or may *prize* it as the gift of an *esteemed* friend; without at all *appreciating* its artistic merit or commercial value. To *regard* (from *F. regarder*, look at, observe) is to have a certain mental view favorable or unfavorable; as, I *regard* him as a friend; or, I *regard* him as a villain; *regard* has a distinctively favorable sense as applied to institutions, proprieties, duties, etc., but does not share the use of the noun "regard" as applied to persons; we *regard* the Sabbath; we *regard* a person's feelings; we have a "regard" for the person. Compare *ESTEEM, n.*

ESTEEM, *n.*

SYNONYMS:

deference estimate estimation favor regard respect

Esteem for a person is a favorable opinion on the basis of worth, especially of moral worth, joined with a feeling of interest in and attraction toward the person. *Regard* for a person is the mental view or feeling that springs from a sense

of his value, excellence, or superiority, with a cordial and hearty friendliness. *Regard* is more personal and less distant than *esteem*, and adds a special kindness; *respect* is a more distant word than *esteem*. *Respect* may be wholly on one side, while *regard* is more often mutual; *respect* in the fullest sense is given to what is lofty, worthy, and honorable, or to a person of such qualities; we may pay an external *respect* to one of lofty station, regardless of personal qualities, showing *respect* for the office. *Deference*, signifying respectful submission, may be wholly formal, as yielded to age, authority, or position, or it may be founded upon deepest *regard* and *esteem*. *Estimate* has more of calculation; as, my *estimate* of the man, or of his abilities, is very high. *Estimation* involves the idea of calculation or appraisal with that of *esteem* or *regard*, and is especially used of the feeling entertained by numbers of people; as, he stood high in public *estimation*. Compare **ESTEEM**, *v.*; **FRIENDSHIP**; **LOVE**.

ANTONYMS:

abhorrence	aversion	dislike	loathing
antipathy	contempt	hatred	repugnance

ETERNAL

SYNONYMS:

deathless	fadeless	never-failing	undying
endless	immortal	perennial	unending
eonian	imperishable	perpetual	unfading
everlasting	interminable	timeless	unfailing
ever-living	never-ending	unceasing	without end

Eternal strictly signifies without beginning or end, in which sense it applies to God alone; *everlasting* applies to that which may or may not have beginning, but will never cease; *eternal* is also used in this more limited sense; *endless*, without end, in its utmost reach, is not distinguishable from *everlasting*; but *endless* is constantly used in inferior senses, especially in mechanics, as in the phrases an *endless* screw, an *endless* chain. *Everlasting* and *endless* are both used in a limited sense of protracted, indefinite, but not infinite duration; as, the *everlasting* hills; *endless* debates; so we speak of *interminable* quarrels. *Eternal* holds quite strictly to the vast and sacred meaning in which it is applied to the Divine Being and the future state. *Everlasting*, *endless*, and *eternal* may be applied

to that which has no life; as, *everlasting* chains, *endless* night, *eternal* death; *immortal* applies to that which now has life, and is forever exempt from death. *Timeless* carries, perhaps, the fullest idea of *eternal*, as above and beyond time, and not to be measured by it.

EVENT

SYNONYMS:

case	contingency	fortune	outcome
chance	end	incident	possibility
circumstance	episode	issue	result
consequence	fact	occurrence	sequel

Etymologically, the *incident* is that which falls in, the *event* that which comes out; *event* is thus greater and more signal than *incident*; we speak of trifling *incidents*, great *events*; *incidents* of daily life, *events* in history. *Circumstance* agrees with *incident* in denoting a matter of relatively slight importance, but implies a more direct connection with the principal matter; "circumstantial evidence" is evidence from seemingly minor matters directly connected with a case; "incidental evidence" would be some evidence that happened unexpectedly to touch it. An *occurrence* is, etymologically, that which we run against, without thought of its origin or tendency. An *episode* is connected with the main course of *events*, like an *incident* or *circumstance*, but is of more independent interest and importance. *Outcome* is the Saxon and *event* the Latin for expressing the same original idea. *Consequence* or *result* would express more of logical connection, and be more comprehensive. The *end* may be simple cessation; the *event* is what has been accomplished; the *event* of a war is victory or defeat; the *end* of the war is reached when a treaty of peace is signed. Since the future is contingent, *event* comes to have the meaning of a *contingency*; as, in the *event* of his death, the policy will at once fall due. Compare CIRCUMSTANCE; CONSEQUENCE; END.

EVERY

SYNONYMS:

all	any	both	each	either
-----	-----	------	------	--------

All and *both* are collective; *any*, *each* and *every* are distributive. *Any* makes no selection and may not reach to the full

limits of *all*; *each* and *every* make no exception or omission, and must extend to *all*; *all* sweeps in the units as part of a total, *each* and *every* proceed through the units to the total. A promise made to *all* omits none; a promise made to *any* may not reach *all*; a promise made to *every* one is so made that no individual shall fail to be aware of it; a promise made to *each* is made to the individuals personally, one by one. *Each* is thus more individual and specific than *every*; *every* classifies, *each* individualizes. *Each* divides, *both* unites; if a certain sum is given to *each* of two persons, *both* (together) must receive twice the amount; *both* must be aware of what has been separately communicated to *each*; a man may fire *both* barrels of a gun by a single movement; if he fires *each* barrel, he discharges them separately. *Either* properly denotes one of two, indefinitely, to the exclusion of the other. The use of *either* in the sense of *each* or *both*, though sustained by good authority, is objectionable because ambiguous. His friends sat on *either* side of the room would naturally mean on one side or the other; if the meaning is on *both* sides, it would be better to say so.

EVIDENT

SYNONYMS:

apparent	glaring	overt	tangible
clear	indubitable	palpable	transparent
conspicuous	manifest	patent	unmistakable
discernible	obvious	perceptible	visible
distinct	open	plain	

That is *apparent* which clearly appears to the senses or to the mind as soon as the attention is directed toward it; that is *evident* of which the mind is made sure by some inference that supplements the facts of perception; the marks of a struggle were *apparent* in broken shrubbery and trampled ground, and the finding of a mutilated body and a rifled purse made it *evident* that robbery and murder had been committed. That is *manifest* which we can lay the hand upon; *manifest* is thus stronger than *evident*, as touch is more absolute than sight; that the picture was a modern copy of an ancient work was *evident*, and on comparison with the original its inferiority was *manifest*. That is *obvious* which is directly in the way so that it can not be missed; as, the application of the remark was *obvious*. *Visible* applies to all that can be perceived by

the sense of sight, whether the noonday sun, a ship on the horizon, or a microscopic object. *Discernible* applies to that which is dimly or faintly *visible*, requiring strain and effort in order to be seen; as, the ship was *discernible* through the mist. That is *conspicuous* which stands out as necessarily or strikingly to attract the attention. *Palpable* and *tangible* express more emphatically the thought of *manifest*.

ANTONYMS:

concealed	impalpable	latent	secret	unknown
covert	impenetrable	obscure	undiscovered	unseen
dark	imperceptible	occult	unimagined	unthought of
hidden	invisible			

EXAMPLE**SYNONYMS:**

archetype	ideal	prototype	standard
ensample	model	sample	type
exemplar	pattern	specimen	warning
exemplification	precedent		

From its original sense of *sample* or *specimen* (from L. *exemplum*) *example* derives the seemingly contradictory meanings, on the one hand of a *pattern* or *model*, and on the other hand of a *warning*—a *sample* or *specimen* of what is to be followed, or of what is to be shunned. An *example*, however, may be more than a *sample* or *specimen* of any class; it may be the very *archetype* or *prototype* to which the whole class must conform, as when Christ is spoken of as being an *example* or leaving an *example* for his disciples. *Example* comes nearer to the possible freedom of the *model* than to the necessary exactness of the *pattern*; often we can not, in a given case, exactly *imitate* the best *example*, but only adapt its teachings to altered circumstances. In its application to a person or thing, *exemplar* can scarcely be distinguished from *example*; but *example* is most frequently used for an act, or course of action, for which *exemplar* is not used; as, one sets a good (or a bad) *example*. An *exemplification* is an illustrative working out in action of a principle or law, without any reference to its being copied or repeated; an *example* guides, an *exemplification* illustrates or explains. *Ensample* is the same as *example*, but is practically obsolete outside of Scriptural or theological language. Compare MODEL; SAMPLE.

EXCESS

SYNONYMS:

dissipation	lavishness	profusion	superfluity
exorbitance	luxuriance	redundance	surplus
extravagance	overplus	redundancy	waste
intemperance	prodigality	superabundance	wastefulness

Excess is more than enough of anything, and, since this in very many cases indicates a lack either of judgment or of self-control, the word is used frequently in an unfavorable sense. Careless expenditure in *excess* of income is *extravagance*; we may have also *extravagance* of language, professions, etc. As *extravagance* is *excess* in outlay, *exorbitance* is *excess* in demands, and especially in pecuniary demands upon others. *Overplus* and *superabundance* denote in the main a satisfactory, and *superfluity* an undesirable, *excess*; *lavishness* and *profusion*, a generous, bountiful, or amiable *excess*; as, a *profusion* of fair hair; *lavishness* of hospitality. *Surplus* is neutral, having none of the unfavorable meaning that often attaches to *excess*; a *surplus* is that which remains over after all demands are met. *Redundance* or *redundancy* refer chiefly to literary style, denoting an *excess* of words or matter. *Excess* in the moral sense is expressed by *dissipation*, *prodigality*, *intemperance*, etc.

ANTONYMS:

dearth	destitution	frugality	lack	scantiness
defect	economy	inadequacy	need	shortcoming
deficiency	failure	insufficiency	poverty	want

EXECUTE

SYNONYMS:

administer	carry out	do	enforce	perform
------------	-----------	----	---------	---------

To *execute* is to follow through to the end, put into absolute and final effect in action; to *administer* is to conduct as one holding a trust, as a minister and not an originator; the sheriff *executes* a writ; the trustee *administers* an estate, a charity, etc.; to *enforce* is to put into effect by force, actual or potential. To *administer* the laws is the province of a court of justice; to *execute* the laws is the province of a sheriff, marshal, constable, or other executive officer; to *administer* the law is to declare or apply it; to *execute* the law is to put it in force; for this *enforce* is the more general word, *execute* the more specific. From signifying to superintend officially

some application or infliction, *administer* passes by a natural transition to signify *inflict*, *mete out*, *dispense*, and blows. medicine, etc., are said to be *administered*: a usage thoroughly established and reputable in spite of pedantic objections. *Enforce* signifies also to be present and urge home by intellectual and moral force; as, to *enforce* a precept or a duty. Compare DO; KILL; MAKE.

EXERCISE

SYNONYMS:

act	application	exertion	performance
action	drill	occupation	practise
activity	employment	operation	use

Exercise, in the ordinary sense, is the easy natural action of any power; *exertion* is the putting of any power to strain and tax. An *exercise*-drive for a horse is so much as will develop strength and health and not appreciably weary. But by qualifying adjectives we may bring *exercise* up to the full sense of *exertion*; as violent *exercise*. *Exercise* is action taken at any time with a view to employing, maintaining, or increasing power, or merely for enjoyment; *practise* is systematic *exercise* with a view to the acquirement of facility and skill in some pursuit; a person takes a walk for *exercise*, or takes time for *practise* on the piano. *Practise* is also used of putting into action and effect what one has learned or holds as a theory; as, the *practise* of law or medicine: a profession of religion is good, but the *practise* of it is better. *Drill* is systematic, rigorous, and commonly enforced *practise* under a teacher or commander. Compare HABIT.

ANTONYMS:

idleness	inaction	inactivity	relaxation	rest
----------	----------	------------	------------	------

EXPENSE

SYNONYMS:

cost	expenditure	outgo	outlay
------	-------------	-------	--------

The *cost* of a thing is whatever one surrenders or gives up for it, intentionally or unintentionally, or even unconsciously: *expense* is what is laid out by calculation or intention. We say: "He won his fame at the *cost* of his life." "I know it to my *cost*," we speak of a joke at another's *expense*; at another's

cost would seem to make it a more serious matter. There is a tendency to use *cost* of what we pay for a possession, *expense* of what we pay for a service; we speak of the *cost* of goods, the *expense* of making up. *Outlay* is used of some definite *expenditure*, as for the purchase of supplies; *outgo* of a steady drain or of incidental *expenses*. See PRICE.

ANTONYMS:

gain	proceeds	profit	receipt	return
income	product	profits	receipts	returns

EXPLICIT

SYNONYM:

express

Both *explicit* and *express* are opposed to what is merely implicit or implied. That which is *explicit* is unfolded, so that it may not be obscure, doubtful, or ambiguous; that which is *express* is uttered or stated so decidedly that it may not be forgotten nor overlooked. An *explicit* statement is too clear to be misunderstood; an *express* command is too emphatic to be disregarded. Compare CLEAR.

ANTONYMS:

ambiguous	implicit	indefinite	uncertain
doubtful	implied	indeterminate	vague

EXTEMPORANEOUS

SYNONYMS:

extemporary	impromptu	offhand
extempore	improvised	unpremeditated

Extemporaneous, originally signifying *of* or *from the time* or *occasion*, has come to mean done or made with but little (if any) preparation, is now chiefly applied to addresses of which the thought has been prepared, and only the language and incidental treatment left to the suggestion of the moment, so that an *extemporaneous* speech is understood to be any one that is not read or recited; *impromptu* keeps its original sense, denoting something that springs from the instant; the *impromptu* utterance is generally brief, direct, and vigorous; the *extemporaneous* speech may chance to be prosy. *Offhand* is still more emphatic as to the readiness and freedom of the utterance. *Unpremeditated* is graver and more formal, denoting

absolute want of preparation, but is rather too heavy a word to be applied to such apt, ready utterances as is generally designated by *impromptu*.

ANTONYMS:

elaborated premeditated prepared read recited studied written

EXTERMINATE**SYNONYMS:**

annihilate	eradicate	overthrow	uproot
banish	expel	remove	wipe out
destroy	extirpate	root out	

Exterminate (from L. *ex*, out, and *terminus*, a boundary) signified primarily to drive beyond the bounds or limits of a country; the word is applied to races of men or animals, and is now almost exclusively used for removal by death; individuals are now said to be *banished* or *expelled*. *Eradicate* (from L. *e*, out, and *radix*, root) is primarily applied to numbers or groups of plants which it is desired to remove effectually from the soil; a single tree may be *uprooted*, but it is not said to be *eradicated*; we labor to *eradicate* or *root out* noxious weeds. To *extirpate* (from L. *ex*, out, and *stirps*, stem, stock) is not only to *destroy* the individuals of any race of plants or animals, but the very stock, so that the race can never be restored; we speak of *eradicating* a disease, of *extirpating* a cancer, *exterminating* wild beasts or hostile tribes; we seek to *eradicate* or *extirpate* all vices and evils. Compare ABOLISH.

ANTONYMS:

augment	breed	cherish	develop	increase	populate	replenish
beget	build up	colonize	foster	plant	propagate	settle

FAINT**SYNONYMS:**

dim	fatigued	irresolute	weak
exhausted	feeble	languid	wearied
faded	half-hearted	listless	worn
faint-hearted	ill-defined	purposeless	worn down
faltering	indistinct	timid	worn out

Faint, with the general sense of lacking strength or effectiveness, covers a wide range of meaning, signifying overcome with physical weakness or exhaustion, or lacking in purpose, courage, or energy, as said of persons; or lacking definiteness or

distinctness of color or sound, as said of written characters, voices, or musical notes. A person may be *faint* when physically *wearied*, or when overcome with fear; he may be a *faint* adherent because naturally *feeble* or *purposeless*, or because *half-hearted* in the cause; he may be a *faltering* supporter because naturally *irresolute* or because *faint-hearted* and *timid* in view of perils that threaten, a *listless* worker, through want of mental energy and purpose. Written characters may be *faint* or *dim*, either because originally written with poor ink, or because they have become *faded* by time and exposure.

ANTONYMS:

bright	clear	daring	fresh	resolute	sturdy
brilliant	conspicuous	energetic	hearty	strong	vigorous

PREPOSITIONS:

Faint *with* hunger; faint *in* color.

FAITH

SYNONYMS:

assent	confidence	credit	opinion
assurance	conviction	creed	reliance
belief	credence	doctrine	trust

Belief, as an intellectual process, is the acceptance of some thing as true on other grounds than personal observation and experience. We give *credence* to a report, *assent* to a proposition or to a proposal. *Belief* is stronger than *credence*; *credence* might be described as a *prima facie belief*; *credence* is a more formal word than *belief*, and seems to imply somewhat more of volition; we speak of giving *credence* to a report, but not of giving *belief*. Goods are sold on *credit*; we give one *credit* for good intentions. *Conviction* is a *belief* established by argument or evidence; *assurance* is *belief* beyond the reach of argument; as, the Christian's *assurance* of salvation. An *opinion* is a general conclusion held as probable, though without full certainty; a *persuasion* is a more confident *opinion*, involving the heart as well as the intellect. In religion, a *doctrine* is a statement of *belief* regarding a single point; a *creed* is a summary statement of *doctrines*. *Confidence* is a firm dependence upon a statement as true, or upon a person as worthy. *Reliance* is *confidence* on which we act or are ready to act unquestioningly; we have a calm *reliance* upon the uniformity of nature. *Trust* is a practical and tranquil resting

of the mind upon the integrity, kindness, friendship, or promises of a person; we have *trust* in God. *Faith* is a union of *belief* and *trust*. *Faith* is chiefly personal; *belief* may be quite impersonal; we speak of *belief* of a proposition, *faith* in a promise, because the promise emanates from a person. But *belief* in a person is often used with no appreciable difference from *faith*. In religion it is common to distinguish between intellectual *belief* of religious truth, as any other truth might be believed, and *belief* of the heart, or saving *faith*.

ANTONYMS:

denial	dissent	doubt	infidelity	rejection	suspicion
disbelief	distrust	incredulity	misgiving	skepticism	unbelief

PREPOSITIONS:

Have faith *in* God; the faith *of* the gospel.

FAITHFUL**SYNONYMS:**

devoted	loyal	true	trusty
firm	stanch	trustworthy	unwavering
incorruptible	sure		

A person is *faithful* who will keep faith, whether with or without power to aid or serve; a person or thing is *trusty* that possesses such qualities as to justify the fullest confidence and dependence. We may speak of a *faithful* but feeble friend; we say a *trusty* agent, a *trusty* steed, a *trusty* sword.

ANTONYMS:

capricious	false	unfaithful	untrustworthy
faithless	fickle	untrue	wavering

PREPOSITIONS:

Faithful *in* service; *to* duty; *to* comrade or commander; faithful *among* the faithless.

FALLACY**SYNONYMS:**

casuistry	quibble	shift	sophistry
equivocation	quibbling	shifting	special pleading
evasion	refinement	sophism	subterfuge
hairsplitting			

A *fallacy* in logic is a piece of misleading reasoning, such that the conclusion does not follow from the premises; the *fallacy* has strictly nothing to do with the truth or falsehood

of the conclusion; the conclusion may be true, though the reasoning be fallacious; thus:

All planets are inhabited;
The earth is a planet,
Therefore, the earth is inhabited

This argument is a *fallacy* by fault of the major premise; that "all planets are inhabited" has never been proved, and that statement can not, therefore, be used to prove anything else; nevertheless, the conclusion, "The earth is inhabited," happens to be true, though the argument does not prove it. Or, again:

Time is endless,
This hour is a portion of time;
Therefore, this hour is endless.

Here the *fallacy* is in the unexpressed assumption that "What is true of time as a whole is true of every portion of time," which is impossible to maintain, and which leads to the manifestly false conclusion, "This hour is endless." Thus, *fallacy* is not a matter of truth or falsehood, but of the soundness or unsoundness of our reasoning; but in common use a *fallacy* is understood to be false reasoning from apparently true premises to a false conclusion. In a wider sense, *fallacy* is used of anything false, deceptive, or misleading, or some misleading quality or appearance in that with which we deal; as, the *fallacy* of the senses (where the error has been shown to be, not in the action of the senses, but in our mental inferences from what they present). Compare DELUSION. *Sophistry* is the skilful use of *fallacies* in a chain of reasoning—subtly fallacious disputation, according to the methods of the ancient Greek Sophists, who "acquired great and pernicious skill in disputation under logical forms, especially in the use of specious and fallacious modes of thought designed to 'make the worse appear the better cause.'" A *sophism* is a special instance of *sophistry*; it is a *fallacy* designed to deceive. *Casuistry* (from L. *casus*, case) is strictly the application of the general rules of morality to particular cases; in this strict sense *casuistry* would include all practical morality, where the application of rules to cases is the very basis of right living; but *casuistry* was soon perverted by shrewd schoolmen into a system by which the general principles or rules of morality were quite lost in the supposedly exceptional features of

particular cases, until the most atrocious acts could be maintained to be morally right; hence, *casuistry* has become generally a word of reproach denoting *sophistry* applied to practical matters of right and wrong. In law *special pleading* has come to denote legal *casuistry*. An *evasion* is some artifice to avoid or turn aside the force of an argument that can not be fairly met. A *quibble* is a petty *evasion*, a trivial distinction or objection. A *subterfuge* is a false excuse or pretense, an *evasion* involving inherent and conscious falsity; a *subterfuge* is more directly concerned with practical matters than a *sophism*. *Equivocation* is the use of words in one sense that may naturally be understood in another (compare EQUIVOCAL); logically an *equivocation* may be unintentional or unconscious, deceiving even him who employs it, and is thus a form of *fallacy*; but in common use *equivocation* is understood as the conscious use of misleading language with express intent to deceive, and is thus simply a disguised falsehood. *Refinement* in this sense is the drawing of elaborate and subtle distinctions; as, the *refinements* of logic or metaphysics;

He was in Logic a great critic,
Profoundly skilled in Analytic;
He could distinguish and divide
A hair 'twixt south and southwest side.

BUTLER *Hudibras* pt. i, can. i, l. 65.

Because in such excessively fine distinctions the mind is apt to lose its bearings, *refinement* has become a word of reproach, suggesting shrewd and elaborate perversion of truth under logical forms. Compare DECEPTION; EQUIVOCAL.

ANTONYMS:

argument
axiom
certainty
demonstration

evidence
fact
logic

proof
soundness
sureness

surety
truth
verity

FAME

SYNONYMS:

celebrity
credit
distinction

eminence
glory
honor

laurels
notoriety
renown

reputation
repute

Fame is the widely disseminated report of a person's character, deeds, or abilities, and is oftenest used in the favorable sense. *Reputation* and *repute* are more limited than *fame*, and may be either good or bad. *Notoriety* is evil *repute* or

a dishonorable counterfeit of *fame*. *Eminence* and *distinction* may result from rank, station, or character. *Celebrity* is limited in range; we speak of local *celebrity*, or world-wide *fame*. *Fame* in its best sense may be defined as the applause of numbers; *renoun*, as such applause worthily won; we speak of the conqueror's *fame*, the patriot's *renoun*. *Glory* and *honor* are of good import; *honor* may be given for qualities or acts that should not win it, but it is always given as something good and worthy; we can speak of an evil *fame*, but not of evil *honor*; *glory* has a more exalted and often a sacred sense.

ANTONYMS:

contempt discredit dishonor humiliation infamy obscurity
contumely disgrace disrepute ignominy oblivion shame

FANATICISM

SYNONYMS:

bigotry credulity intolerance superstition

Fanaticism is extravagant or even frenzied zeal; *bigotry* is obstinate and unreasoning attachment to a cause or creed; *fanaticism* and *bigotry* usually include *intolerance*, which is unwillingness to tolerate beliefs or opinions contrary to one's own; *superstition* is ignorant and irrational religious belief. *Credulity* is not distinctively religious, but is a general readiness to believe without sufficient evidence, with a proneness to accept the marvelous. *Bigotry* is narrow, *fanaticism* is fierce, *superstition* is ignorant, *credulity* is weak, *intolerance* is severe. *Bigotry* has not the capacity to reason fairly, *fanaticism* has not the patience, *superstition* has not the knowledge and mental discipline, *intolerance* has not the disposition. *Bigotry*, *fanaticism* and *superstition* are perversions of the religious sentiment; *credulity* and *intolerance* often accompany skepticism or atheism.

ANTONYMS:

cynicism free-thinking indifference latitudinarianism

FANCIFUL

SYNONYMS:

chimerical fantastic grotesque imaginative visionary

That is *fanciful* which is dedicated or suggested by fancy independently of more serious considerations; the *fantastic* is

the *fanciful* with the added elements of whimsicalness and extravagance. The *fanciful* swings away from the real or the ordinary lightly and pleasantly, the *fantastic* extravagantly, the *grotesque* ridiculously. A *fanciful* arrangement of objects is commonly pleasing, a *fantastic* arrangement is striking, a *grotesque* arrangement is laughable. A *fanciful* theory or suggestion may be clearly recognized as such: a *visionary* scheme is erroneously supposed to have a basis in fact. Compare synonyms for DREAM; IDEA; IMAGINATION.

ANTONYMS:

accurate	commonplace	prosaic	regular	sound
calculable	literal	real	sensible	sure
calculated	ordinary	reasonable	solid	true

FANCY**SYNONYMS:**

belief	desire	imagination	predilection
caprice	humor	inclination	supposition
conceit	idea	liking	vagary
conception	image	mood	whim

An intellectual *fancy* is a mental *image* or picture founded upon slight or whimsical association or resemblance; a *conceit* has less of the picturesque and more of the theoretic than a *fancy*; a *conceit* is somewhat aside from the common laws of reasoning, as a *fancy* is lighter and more airy than the common mode of thought. A *conceit* or *fancy* may be wholly unfounded, while a *conception* always has, or is believed to have, some answering reality. (Compare REASON.) An intellectual *fancy* or *conceit* may be pleasing or amusing, but is never worth serious discussion; we speak of a mere *fancy*, a droll or odd *conceit*. An emotional or personal *fancy* is a capricious *liking* formed with slight reason and no exercise of judgment, and liable to fade as lightly as it was formed. In a broader sense, the *fancy* signifies the faculty by which *fancies* or mental images are formed, associated, or combined. Compare synonyms for DREAM; IDEA; IMAGINATION.

ANTONYMS:

actuality	certainly	fact	reality	truth	verity
-----------	-----------	------	---------	-------	--------

PREPOSITIONS:

To have a fancy *for* or take a fancy *to* a person or thing.

FAREWELL

SYNONYMS:

adien	good-by	parting salutation	valedictory
congé	leave-taking	valediction	

Good-by is the homely and hearty, *farewell* the formal English, word at parting. *Adieu*, from the French, is still more ceremonious than *farewell*; *congé*, also from the French, is commonly contemptuous or supercilious, and equivalent to dismissal. *Valediction* is a learned word never in popular use. A *valedictory* is a public farewell to a company or assembly.

PREPOSITIONS:

I bade farewell *to* my comrades, or (without preposition) I bade my comrades farewell; I took a sad farewell *of* my friends.

FEAR

SYNONYMS:

affright	disquietude	misgiving	timidity
apprehension	dread	panic	trembling
awe	fright	scare	tremor
consternation	horror	terror	trepidation
dismay			

Fear is the generic term denoting an emotion excited by threatening evil with a desire to avoid or escape it; *fear* may be sudden or lingering, in view of present, or imminent, or of distant and only possible danger; in the latter sense *dread* is oftener used. *Horror* (etymologically a shivering or shuddering) denotes a shuddering *fear* accompanied with abhorrence or such a shock to the feelings and sensibilities as may exist without *fear*, as when one suddenly encounters some ghastly spectacle; we say of a desperate but fettered criminal, "I looked upon him with *horror*." Where *horror* includes *fear*, it is *fear* mingled with abhorrence. (See ABHOR.) *Affright*, *fright*, and *terror* are always sudden, and in actual presence of that which is terrible. *Fear* may overwhelm, or may nerve one to desperate defense; *fright* and *terror* render one incapable of defense; *fear* may be controlled by force of will; *fright* and *terror* overwhelm the will; *terror* paralyzes; *fright* may cause one to fly, to scream, or to swoon. *Fright* is largely a matter of the nerves; *fear* of the intellect and the imagination; *terror* of all the faculties, bodily and mental. A *scare* is sudden *fright*, especially as due to a slight or imaginary

cause; *scarce* is a word of less dignity than *fear*, *fright*, *terror*, etc. *Panic* is a sudden *fear* or *fright*, affecting numbers at once; vast armies or crowded audiences are liable to *panic* upon slight occasion. In a like sense we speak of a financial *panic*. *Dismay* is a helpless sinking of heart in view of some overwhelming peril or sorrow. *Dismay* is more reflective, enduring, and despairing than *fright*; a horse is subject to *scare*, *fright*, or *terror*, but not to *dismay*. *Awe* is a reverential *fear*. Compare AFRAID; ALARM.

ANTONYMS:

See synonyms for FORTITUDE.

FEAST

SYNONYMS:

banquet entertainment festival festivity repast treat

A *feast* is an occasion of abundant, social, and enjoyable eating and drinking; at the *feasts* of the Homeric heroes and the Anglo-Saxon warriors there would be song and story and other pleasures, but enormous abundance of rich food and drink was the basic feature; any abundant consumption of food, however coarse, if enjoyable to those partaking of it, may be called a *feast*; as we may speak of vultures having a *feast* upon carrion. A *repast* is a partaking of food or the food to be partaken of, without reference to quantity; we may have a slight, a hasty, a hearty, or a rich *repast*; the *repast* is thought of as satisfying need; the *feast* as affording pleasure without reference to, and far in excess of, need. An *entertainment* is a joyous social occasion or gathering or the means of giving joy and pleasure at such a gathering; an *entertainment* may or may not involve the partaking of food; as, a convivial *entertainment*; a musical, or a literary, *entertainment*. A *festival* or *festivity* is an occasion or season of public rejoicing, of which feasting ordinarily forms a part; the Jewish religious *festivals*, as of Passover and Pentecost, were expressly called *feasts*, as are many *festivals* of ritualistic Christian churches, as Christmas and Easter. A *banquet* is a sumptuous *feast*, always elegant, and commonly stately and splendid; the *banquet* was originally a light refectation accompanied by wine-drinking, with music or other *entertainment*, following a *feast*, and often in a separate room.

Banquet (O F. *banquet*, cp. It. *banchetto*, a small bench or table) used generally to be restrained to a slighter repast, to the lighter and ornamental dessert or refection, or the 'banquet of wine' (Esth vii, 2), which followed and crowned the more substantial repast

TRENCH *Select Glossary*, p. 24.

Hence, *banquet* properly carries the idea of grace and elegance, as *feast* does that of abundance, which may be either rude or splendid. A *treat* is some form of *entertainment* especially provided to meet the tastes of the recipient; as, to give the children a *treat*; hence, anything that gives especial or unusual pleasure is called a *treat*; as, the music was a *treat*. In figurative use anything that affords satisfaction or delight to the intellect or the emotions may be called a *feast*; *banquet* does not lend itself so readily to figurative use. Compare CAROUSAL.

ANTONYMS:

abstinence destitution famine fast fasting need privation want

FEMININE

SYNONYMS:

effeminate female womanish womanly

We apply *female* to the sex, *feminine* to the qualities, especially the finer physical or mental qualities that distinguish the *female* sex in the human family, or to the objects appropriate for or especially employed by them. A *female* voice is the voice of a woman; a *feminine* voice may belong to a man. *Womanish* denotes the undesirable, *womanly* the admirable or lovely qualities of woman. *Womanly* tears would suggest respect and sympathy, *womanish* tears a touch of contempt. The word *effeminate* is always used reproachfully, and only of men as possessing *womanly* traits such as are inconsistent with true manliness.

ANTONYMS:

See synonyms for **MASCULINE**.

FETTER

SYNONYMS:

bondage	custody	gyves	irons
bonds	duress	handcuffs	manacles
chains		imprisonment	shackles

Bonds may be of cord, leather, or any other substance that

can bind; *chains* are of linked metal. *Manacles* and *handcuffs* are for the hands, *fetters* are primarily chains or jointed iron fastenings for the feet; *gyves* may be for either. A *shackle* is a metallic ring, clasp, or bracelet-like fastening for encircling and restraining a limb; commonly one of a pair, used either for hands or feet. *Bonds*, *fetters*, and *chains* are used in a general way for almost any form of restraint. *Gyves* is now wholly poetic, and the other words are mostly restricted to the literary style; *handcuffs* is the specific and *irons* the general term in popular usage; as, the prisoner was put in *irons*. *Bonds*, *chains*, and *shackles* are frequently used in the metaphorical sense.

FEUD

SYNONYMS:

affray	contention	enmity	quarrel
animosity	contest	fracas	riot
bitterness	controversy	fray	row
brawl	dispute	hostility	strife
broil	dissension		

A feud is *enmity* between families, clans, or parties, with acts of *hostility* mutually retaliated and avenged; *feud* is rarely used of individuals, never of nations. While all the other words of the group may refer to that which is transient, a *feud* is long-enduring, and often hereditary. *Dissension* is used of a number of persons, of a party or other organization. *Bitterness* is in feeling only; *enmity* and *hostility* involve will and purpose to oppose or injure. A *quarrel* is in word or act, or both; it may be, and commonly is, slight and transient, as we speak of childish *quarrels*; it may be fierce, noisy, and violent, or quiet, courteous, and deadly. *Contention* and *strife* may be in word or deed; *contest* ordinarily involves some form of action. *Contest* is often used in a good sense, *contention* and *strife* very rarely so. *Controversy* is commonly in words: *strife* extends from verbal *controversy* to the *contests* of armies. *Affray*, *brawl*, *broil*, and *row*, like *quarrel*, are words of inferior dignity; the *affray* always involves physical force; the *brawl*, *broil*, or *row* may be confined to violent language. *Fray*, an irregular conflict, commonly of armed opponents, is a word that holds place in literature, but is not now in common use, except in the familiar phrase, "the thick of the *fray*." A *fracas* is a disorderly and indiscriminate fight, usually in-

volving a number of combatants. A *riot* is a serious disturbance of the peace, which may reach the wildest extremes of mob violence, and of which the law takes special cognizance.

FICKLE

SYNONYMS:

capricious	inconstant	spasmodic	unsteady
changeable	irresolute	uncertain	vacillating
changeful	mutable	unfixed	variable
crotchety	purposeless	unreliable	versatile
fanciful	restless	unsettled	wavering
fitful	shifting	unstable	whimsical
fluctuating			

The words of the list above given, naturally divide themselves into three groups: *First*—words denoting mere facility of change, with no reference to any known or suggested reason; as, *changeable, changeful, fluctuating, mutable, restless, shifting, vacillating, variable, varying, versatile, wavering*. Compare FLUCTUATE. *Versatile* lifts itself out of this group as implying not mere facility of change, but of profitable and effective change—denoting abundance of power combined with wide adaptability; a *versatile* mind, a *versatile* genius may, indeed, change its activities from mere fickleness or inconstancy of purpose, but oftener changes by distinct choice and purpose in recognition of some new demand of circumstances or some new opening of opportunity; such a mind seems able to use its full power with almost equal readiness in any field in which it chooses to act, and may be as far as possible from *inconstant* or *fickle*, but decided and resolute when choice is made; *Second*—Words that denote the mere negation of fixity, the lack of steadiness of feeling, disposition, desire, purpose, character, or will; as *inconstant, irresolute, purposeless, uncertain, unfixed, unreliable, unsettled, unstable, unsteady*. Persons marked by such qualities are hable to be *fickle* for want of any reason to keep them from unexpected and incalculable change. *Third*—Words denoting a tendency to change founded upon some quality or element of disposition, intellect, or character; as, *capricious, crotchety, fanciful, fickle, freakish, spasmodic, whimsical*. *Fickle* (from AS. *ficol*, deceitful, crafty) originally denoted changing with intent to deceive or betray; the word

has now become softened in meaning, signifying unduly *changeable* in feeling, judgment, or purpose.

Fickle . . . denotes that specific changeableness which exhibits itself in matters of taste, purpose, and attachment—the changeableness of easily transferred likes and dislikes.

C. J. SMITH *Synonyms Discriminated*, p. 512.

Fickleness commonly involves a lack of appreciation of relative values; the *fickle* person may put the momentary enjoyment of an entertainment before the satisfaction of an enduring friendship; *fickle* characters are of short range, with little or no perspective, and commonly with slight appreciation of what their changefulness may involve to others. The other words of this group explain themselves by reference to the meaning of the nouns *caprice*, *crotchet*, *fancy*, *fit*, *freak*, *spasm*, *whim*. The *crotchety* person is *fickle* only in so far as his eccentric notions come into conflict with what seemed a well-considered plan; as his “crotchets” are commonly quite as much matters of feeling as of opinion, he is likely to be pettish and ill-tempered toward all who do not appreciate them at his estimate of their worth.

ANTONYMS:

changeless	firm	resolute	steady	uniform
constant	fixed	settled	sure	unwavering
decided	immutable	stable	unalterable	
determined	invariable	steadfast	unchanging	

FICTION

SYNONYMS:

allegory	fabrication	invention	novel
apologue	falsehood	legend	romance
fable	figment	myth	story

Fiction is now chiefly used of a prose work in narrative form in which the characters are partly or wholly imaginary, and which is designed to portray human life, with or without a practical lesson; a *romance* portrays what is picturesque or striking, as a mere *fiction* may not do; *novel* is a general name for any continuous fictitious narrative, especially a love-story; *fiction* and *novel* are used with little difference of meaning, except that *novel* characterizes a work in which the emotional element is especially prominent. The moral of the *fable* is expressed formally; the lesson of the *fiction*, if any, is inwrought. A *fiction* is studied; a *myth* grows up without in-

tent. A *legend* may be true, but can not be historically verified; a *myth* has been received as true at some time, but is now known to be false. A *fabrication* is designed to deceive; it is a less odious word than *falsehood*, but is really stronger, as a *falsehood* may be a sudden unpremeditated statement while a *fabrication* is a series of statements carefully studied and fitted together in order to deceive; the *falsehood* is all false; the *fabrication* may mingle the true with the false. A *figment* is something imaginary which the one who utters it may or may not believe to be true; we say, "That statement is a *figment* of his imagination." The *story* may be either true or false, and covers the various senses of all the words in the group. *Apologue*, a word simply transferred from Greek into English, is the same as *fable*. Compare ALLEGORY.

ANTONYMS:

certainty fact history literalness reality truth verity

FIERCE

SYNONYMS:

ferocious furious raging uncultivated violent
fiery impetuous savage untrained wild

Fierce signifies having a *furious* and cruel nature, or being in a *furious* and cruel mood, more commonly the latter. It applies to that which is now intensely excited, or liable to intense and sudden excitement. *Ferocious* refers to a state or disposition; that which is *fierce* flashes or blazes; that which is *ferocious* steadily burns; we speak of a *ferocious* animal, a *fierce* passion. A *fiery* spirit with a good disposition is quickly excitable in a good cause, but may not be *fierce* or *ferocious*. *Savage* signifies *untrained*, *uncultivated*. *Ferocious* always denotes a tendency to violence; it is more distinctly bloodthirsty than the other words; a person may be deeply, intensely cruel, and not at all *ferocious*; a *ferocious* countenance expresses habitual ferocity; a *fierce* countenance may express habitual fierceness, or only the sudden anger of the moment. That which is *wild* is simply unrestrained; the word may imply no anger or harshness; as, *wild* delight, *wild* alarm.

ANTONYMS:

affectionate gentle kind patient submissive tame
docile harmless mild peaceful sweet tender

FINANCIAL

SYNONYMS:

fiscal

monetary

pecuniary

These words all relate to money, receipts, or expenditures. *Monetary* relates to actual money, coin, currency; as, the *monetary* system; a *monetary* transaction is one in which money is transferred. *Pecuniary* refers to that in which money is involved, but less directly; we speak of one's *pecuniary* affairs or interests, with no special reference to the handling of cash. *Financial* applies especially to governmental revenues or expenditures, or to private transactions of considerable moment; we speak of a *pecuniary* reward, a *financial* enterprise; we give a needy person *pecuniary* (not *financial*) assistance. It is common to speak of the *fiscal* rather than the *financial* year.

FINE

SYNONYMS:

admirable

elegant

polished

small

beautiful

excellent

pure

smooth

clarified

exquisite

refined

splendid

clear

handsome

sensitive

subtile

comminuted

keen

sharp

subtle

dainty

minute

slender

tenuous

delicate

nice

slight

thin

Fine (from *L. finis*, end) denotes that which has been brought to a full end, finished. From this root-sense many derived meanings branch out, causing words quite remote from each other to be alike synonyms of *fine*. That which is truly finished, brought to an ideal end, is *excellent* of its kind, and *beautiful*, if a thing that admits of beauty; as, a *fine* house, *fine* trees, a *fine* woman, a *fine* morning; if a thing that admits of the removal of impurities, it is not finished till these are removed, and hence *fine* signifies *clarified*, *clear*, *pure*, *refined*; as, *fine* gold. That which is finished is apt to be *polished*, smooth to the touch, minutely exact in outline; hence *fine* comes to be a synonym for all words like *dainty*, *delicate*, *exquisite*; as, *fine* manners, a *fine* touch, *fine* perceptions. As that which is *delicate* is apt to be small, by an easy extension of meaning *fine* becomes a synonym for *slender*, *slight*, *minute*, *comminuted*; as, a *fine* thread, *fine* sand; or for *filmy*, *tenuous*, *thin*; as, a *fine* lace, *fine* wire; and as a *thin* edge is *keen*, *sharp*, *fine* becomes also a synonym for these words; as, a *fine* point, a *fine* edge. Compare BEAUTIFUL; MINUTE.

ANTONYMS:

big	clumsy	great	huge	large	stout
blunt	coarse	heavy	immense	rude	thick

FIRE

SYNONYMS:

blaze burning combustion conflagration flame

Combustion is the essential fact which is at the basis of that assemblage of visible phenomenon which we call *fire*; *combustion* being the continuous chemical combination of a substance with some element, as oxygen, evolving heat, and extending from slow processes, such as those by which the heat of the human body is maintained, to the processes producing the most intense light also, as in a blast-furnace, or on the surface of the sun. *Fire* is always attended with light, as well as heat; *blaze*, *flame*, etc., designate the mingled light and heat of a *fire*. *Combustion* is the scientific, *fire* the popular term. A *conflagration* is an extensive *fire*. Compare **LIGHT**.

FIT

SYNONYMS:

adapted	befitting	fitted	proper
adequate	calculated	fitting	qualified
apposite	congruous	meet	seemly
appropriate	contrived	pertinent	suitable
apt	decent	prepared	suited
becoming	decorous		

Fit (from ME. *fit*, *fitte*, from v. *fitten*, from Ice. *fitja*, knit together) signifies having qualities to meet some demand, and is a word of widest range of meaning; we may say of a statesman, he is thoroughly *fit* for some high task, or of a menial, he is *fit* to clean stables; *fit* has a double depreciatory use, according as it is positive or negative; we may say, he is *fit* to feed swine (meaning "just *fit*"), or, he is not *fit* to feed swine (meaning "not even *fit*" for that task). A person or thing is *adapted* for a work or purpose, when possessing natural or acquired qualities such as the work or purpose demands. *Adequate* (from L. *ad*, to, + *æquus*, equal) has a more definite idea of measuring up to a demand; as, an *adequate* supply of food or money; the strength of a machine may be *adequate* to a task, but the machine itself not *adapted* to deal with the material. *Suited* is less definite and more

general than *adapted*, implying natural capacity, tendency, or taste; one who is *suited* to a work will find the work congenial, and be able and ready to acquire any qualifications he yet may lack; conversely we speak of a work as *suited* to one's character, tastes, or abilities. *Fitted* refers more especially to acquired qualifications; we might say that a student is *fitted* for college, but not *fit* for college life and work. One is *qualified* who measures up to some fixed standard of ability or of official or legal requirements; in the latter sense we speak of "*qualified voters*." *Apt*, aside from its meaning of liable or likely (compare **LIKELY**), signifies, when applied to persons, naturally gifted, readily meeting certain work or requirements; as, an *apt* pupil. As applied to remarks, illustrations, or the like, *apt*, *apposite*, *pertinent*, *appropriate* are close synonyms; *apt* denotes more of keen, instant, and ready fitness; *apposite* more of close and nice adjustment; *pertinent* more of exact, comprehensive, and substantial accuracy: *appropriate* applies not only to the subject dealt with, but to the time, place, and circumstances in which the comparison is used; an illustration or remark may be *apt*, *apposite*, or *pertinent*, and yet not *appropriate* on a certain occasion. Compare **ADEQUATE**.

ANTONYMS:

amiss	ill-suited	misapplied	unfit
awkward	ill-timed	miscalculated	ungainly
improper	inadequate	miscontrived	unseemly
ill-contrived	inappropriate	misfitted	unsuitable
ill-fitted	inexpedient	misfitting	untimely
ill-fitting			

FIX**SYNONYMS:**

apply	decide	locate	secure
attach	determine	place	set
bind	establish	plant	settle
consolidate	fasten	root	tie

To *fix* (ult. from L. *figo*, *fix*) is to make firm or secure against movement or displacement; as, to *fix* a post in the ground; to *fix* a statue upon a pedestal; figuratively, to direct or hold intently; as to *fix* the gaze upon an object; to *fix* the attention upon a subject; also, to decide definitely, make sure, settle, determine; as to *fix* the meaning of a word; to *fix* a date for adjournment; to *fix* rules of procedure, or the terms of a contract, etc. Either *attach* or *fasten* is less absolute and substantial in meaning than *fix*. *Fasten* has more refer-

ence to the means of connection; if we were to say, The statue is *fastened* to the pedestal, we should at once think of the bolts or cement by which it is held in place; "They *fasten* it [the idol] with nails and hammer that it move not."—*Jer.* x, 4. *Fix* has more reference than *fasten* to the firmness and stability of the whole; broken bones are *fixed* (not *fastened*) in position by splints.

But this is *fixed*,
As are the roots of earth and base of all.

TENNYSON *Princess* can. v, st 25, l 8.

To *fasten* the eyes or the attention refers more to the original act; to *fix* them, more to settled and persistent action; so we speak of a *fixed* gaze, or of *fixed* ideas—where *fastened* or *attached* could not be employed. To *set* (from AS. *settian*, causative of *sittan*, sit) is to cause to sit, stand, or rest, as on a seat or support, and is said properly of things as having some power of self-support (thus opposed to *lay*;—we *lay* a book, but *set* a dish on the table). *Set* has reference to some specific end for which an object is put into a certain place, position, or relation; as, to *set* a glass of water on the speaker's desk; a post may be *fixed* in the ground anywhere, but is *set* with reference to some definite purpose of demarcation, support, etc.; stakes are *set* at measured distances to mark the lines of a new building, a roadway, or the like; by this idea of relative position, *set* comes close to the meaning of *adjust* (see ADJUST); as to *set* a clock or watch, a saw, etc. So in a vast variety of other uses. That which is *set* may or may not be *attached*, *fastened*, or *fixed*; the dish which is *set* in the center of the table may be removed to the side; a screw is *set* when firmly *fixed* in place. To *secure* (from L. *se*, without, + *cura*, care) is to *fasten* effectually, so that the person *securing* may be without care or anxiety as to the object *secured*; a door may be *fastened* by a light catch, easily forced open; it is *secured* by a strong lock, bolt, or bar; a surgeon *secures* an artery, as by a ligature, against hemorrhage; an object may be slightly *attached* to another; it is firmly *secured*. The bones of a fractured limb are *set* when brought into place, where they must then be *fixed* or *secured*, as by splints or a plaster cast; a prisoner is *secured*, as by fetters, against escape; a commander *secures* a position for attack upon the enemy, or against attack by the enemy; one *secures* a loan,

an inheritance, a possession, property, etc.; a debt. a mortgage, or the like, is *secured* by a legal claim upon property adequate for its payment, or when a person of adequate means becomes legally responsible for the required amount. Compare SECURITY. To *settle* is to *fix* firmly; as, to *settle* oneself in a chair; so, to establish, to free from agitation or disturbance, to put in order, to bring to a conclusion or settlement: also, to adjust differences (compare COMPROMISE); terms may be *fixed* by the party in control; they are *settled* by mutual agreement between the parties concerned. Compare ADAPT; APPLY; ARRANGE; ATTACH; BIND.

ANTONYMS:

change	displace	loose	shake	unfix	unsettle
detach	disturb	loosen	unbolt	unlatch	weaken
disarrange	free	set free	unfasten	unlock	

FLOCK**SYNONYMS:**

bevy	covey	group	herd	lot	set
brood	drove	hatch	litter	pack	swarm

Group is the general word for any gathering of a small number of objects, whether of persons, animals, or inanimate things. The individuals in a *brood* or *litter* are related to each other; those in the other *groups* may not be. *Brood* is used chiefly of fowls and birds, *litter* of certain quadrupeds which bring forth many young at a birth; we speak of a *brood* of chickens, a *litter* of puppies; *brood* is sometimes applied to a family of young children. *Bevy* is used of birds, and figuratively of any bright and lively *group* of women or children, but rarely of men. *Flock* is applied to birds and to some of the smaller animals; *herd* is confined to the larger animals; we speak of a *bevy* of quail, a *covey* of partridges, a *flock* of blackbirds, or a *flock* of sheep, a *herd* of cattle, horses, buffaloes, or elephants, a *pack* of wolves, a *pack* of hounds, a *swarm* of bees. A collection of animals driven or gathered for driving is called a *drove*.

FLUCTUATE**SYNONYMS:**

hesitate	swerve	vacillate	veer
oscillate	undulate	vary	waver

To *fluctuate* (from L. *fluctus*, a wave) is to move like a wave

with alternate rise and fall. A pendulum *oscillates*; waves *fluctuate* or *undulate*; a light or a flame *wavers*; a frightened steed *swerves* from his course; a tool or weapon *swerves* from the mark or line; the temperature *varies*; the wind *veers* when it suddenly changes its direction. That which *veers* may steadily hold the new direction; that which *oscillates*, *fluctuates*, *undulates*, or *wavers* returns upon its way. As regards mental states, he who *hesitates* sticks (from L. *hære*) on the verge of decision; he who *wavers* does not stick to a decision; he who *vacillates* decides now one way, and now another; one *vacillates* between contrasted decisions or actions; he may *waver* between decision and indecision, or between action and inaction. Persons *hesitate*, *vacillate*, *waver*; feelings *fluctuate* or *vary*. Compare SHAKE.

ANTONYMS:

abide adhere hold fast persist stand fast stay stick

FLUID**SYNONYMS:**

gas

liquid

A *fluid* is a substance that, like air or water, yields to any force that tends to change its form; a *liquid* is a body in that state in which the particles move freely among themselves, but remain in one mass, keeping the same volume, but taking always the form of the containing vessel; a *liquid* is an inelastic *fluid*; a gas is an elastic *fluid* that tends to expand to the utmost limits of the containing space. All *liquids* are *fluids*, but not all *fluids* are *liquids*; air and all the *gases* are *fluids*, but they are not *liquids* under ordinary circumstances, though capable of being reduced to a *liquid* form by special means, as by cold and pressure. Water at the ordinary temperature is at once a *fluid* and a *liquid*.

FOLLOW**SYNONYMS:**accompany
attend
chasecome after
copy
ensuego after
heed
imitateobey
observe
practisepursue
result
succeed

Anything that *comes after* or *goes after* another, either in space or in time, is said to *follow* it. A servant *follows* or *attends* his master; a victorious general may *follow* the re-

tiring enemy merely to watch and hold him in check; he *chases* or *pursues* with intent to overtake and attack; the chase is closer and hotter than the pursuit. (Compare synonyms for HUNT.) One event may *follow* another either with or without special connection; if it *ensues*, there is some orderly connection; as, the *ensuing* year; if it *results* from another, there is some relation of effect, consequence, or inference. A clerk *observes* his employer's directions. A child *obeys* his parent's commands, *follows* or *copies* his example, *imitates* his speech and manners. The compositor *follows* copy; the incoming *succeeds* the outgoing official.

FOOD

SYNONYMS:

aliment	feed	nourishment	pabulum	sustenance
diet	fodder	nutriment	provender	viands
fare	forage	nutrition	regimen	victuals

Food is, in the popular sense, whatever one eats in contradistinction to what one drinks. Thus, we speak of *food* and drink, of wholesome, unwholesome, or indigestible *food*; but in a more scientific sense whatever, when taken into the digestive organs, serves to build up structure or supply waste may be termed *food*; the word is extended to plants to signify whatever taken in any way into the organism serves similar purposes; thus, we speak of liquid *food*, plant *food*, etc.; in this wider sense *food* is closely synonymous with *nutriment*, *nourishment*, and *sustenance*. *Diet* refers to the quantity and quality of *food* habitually taken, with reference to preservation of health. *Victuals* is a plain, homely word for whatever may be eaten; we speak of choice *viands*, cold *victuals*. *Nourishment* and *sustenance* apply to whatever can be introduced into the system as a means of sustaining life; we say of a convalescent, he is taking *nourishment*. *Nutriment* and *nutrition* have more of scientific reference to the vitalizing principles of various *foods*; thus, wheat is said to contain a great amount of *nutriment*. *Regimen* considers *food* as taken by strict rule, but applies more widely to the whole ordering of life. *Fare* is a general word for all table-supplies, good or bad; as, sumptuous *fare*; wretched *fare*. *Feed*, *fodder*, and *provender* are used only of the food of the lower animals, *feed* denoting anything consumed, but more commonly grain, *fodder*

denoting hay, corn-stalks, or the like, sometimes called "long feed"; *provender* is dry *feed*, whether grain or hay, straw, etc. *Forage* denotes any kind of *food* suitable for horses and cattle, primarily as obtained by a military force in scouring the country, especially an enemy's country.

FORMIDABLE

SYNONYMS:

dangerous	indomitable	redoubted	tremendous
impregnable	invincible	terrible	

That which is *formidable* is worthy of fear if encountered or opposed; as, a *formidable* array of troops, or of evidence. *Formidable* is a word of more dignity than *dangerous*, and suggests more calm and collected power than *terrible*; *formidable* is less overwhelming than *tremendous*. A loaded gun is *dangerous*; a park of artillery is *formidable*; a charge of cavalry is *terrible*; the full shock of great armies is *tremendous*. A *dangerous* man is likely to do mischief, and needs watching; a *formidable* man may not be *dangerous* if not attacked; an enraged maniac is *terrible*; the force of ocean waves in a storm, and the silent pressure in the ocean depths, are *tremendous*.

ANTONYMS:

contemptible	feeble	harmless	helpless	powerless	weak
despicable					

PREPOSITIONS:

Formidable *by* or *in* numbers; *in* strength; formidable *to* the enemy.

FORTIFICATION

SYNONYMS:

breastwork	entrenchment	fortress	stronghold
castle	fastness	intrenchment	trenches
citadel	field-works	rifle-pit	works
defenses	fort		

Fortification is the general word for any artificial defensive work; a *fortress* is a *fortification* of especial size and strength; a *fortress* is regarded as permanent, and is ordinarily an independent work; a *fort* or *fortification* may be temporary; a *fortification* may be but part of a defensive system; we speak of the *fortifications* of a city. A *citadel* is a *fortification* within a city, or the fortified inner part of a city or *fortress*,

within which a garrison may be placed to overawe the citizens, or to which the defenders may retire if the outer works are captured; the medieval *castle* was the fortified residence of a king or baron. *Fort* is the common military term for a detached fortified building or enclosure of moderate size occupied or designed to be occupied by troops. The *fortifications* of a modern city usually consist of a chain of *forts*. Any defensible place, whether made so by nature or by art, is a *fastness* or *stronghold*. *Entrenchments* (in military use more commonly *intrenchments*) is a very general term, which may apply to the simplest and most hastily constructed *breastworks*, *rifle-pits*, or the like, or to a complicated system of defensive works, generally less substantial and permanent than *fortifications*.

FORTITUDE

SYNONYMS:

courage endurance heroism resolution

Fortitude (from L. *fortis*, strong) is the strength or firmness of mind or soul to endure pain or adversity patiently and determinedly. *Fortitude* has been defined as "passive *courage*," which is a good definition, but not complete. *Fortitude* might be termed "still *courage*," or "enduring *courage*"; it is that quality which is able not merely to endure pain or trial, but steadily to confront dangers that can not be actively opposed, or against which one has no adequate defense; it takes *courage* to charge a battery, *fortitude* to stand still under an enemy's fire. *Resolution* is of the mind; *endurance* is partly physical; it requires *resolution* to resist temptation, *endurance* to resist hunger and cold. Compare BRAVE; PATIENCE.

FORTUNATE

SYNONYMS:

**avored lucky prospered prosperous successful
happy**

A man is *successful* in any case if he achieves or gains what he seeks; he is known as a *successful* man if he has achieved or gained worthy objects of endeavor; he is *fortunate* or *lucky* if advantages have come to him without or beyond his direct planning or achieving. *Lucky* is the more common and colloquial, *fortunate* the more elegant word; *fortunate* is more

foundation

naturally applied to the graver matters, as we speak of the *fortunate*, rather than the *lucky*, issue of a great battle; *lucky* more strongly emphasizes the element of chance, as when we speak of a *lucky* hit, a *lucky* guess, or of one as "born under a *lucky* star." *Favored* is used in a religious sense, implying that one is the object of divine favor. *Happy*, in this connection, signifies possessed of the means of happiness. One is said to be *happy* or *prosperous* whether his prosperity be the result of fortune or of achievement; *prospered* rather denotes the action of a superintending Providence.

ANTONYMS:

broken
crushed
fallen

ill-starred
miserable
unfortunate

unhappy
unlucky

woful
wretched

FOUNDATION**SYNONYMS:**

base
basis
bottom
endowment

establishment
foot
ground
groundwork
institution
origin

root
substratum
substructure

A *substratum* (from L. *sub*, under, + *sterno*, spread) is something that underlies, as a natural deposit; as, a *substratum* of clay or of rock. A *substructure* (from L. *sub*, under + *struo*, build) is something built under—perhaps forming a basement, or perhaps constructed merely for support of the building above (the superstructure); a *foundation* is a *substructure* in the latter sense; a *foundation* is never a basement, but a substantial supporting mass on which the entire superstructure rests; in the finished building the *foundation* is below the surface of the ground and out of sight. *Base* and *basis* differ from *foundation*, as denoting something architecturally of less extent; we speak of the *foundation* rather than the *base* or *basis* of a "sky-scraper"; in reference to natural objects, we speak of the *base* of a rock, cliff, or mountain:

Come one, come all! This rock shall fly
From its firm *base* as soon as I

SCOTT *Lady of the Lake* can. v, st. 10.

We might speak of a bed of rock as forming a good *base* for the *foundation* of a building:

A man which built an house, and digged deep, and laid the *foundation* on a rock. LUKE vi, 48.

In figurative and poetic use, the *foundation* is commonly regarded as something laid or built—as part of a building:

Of old has thou laid the *foundation* of the earth. Ps. cii, 25.

. . . . the mortal made
Of such quicksilver clay that in his breast
No permanent *foundation* can be laid.

BYRON *Don Juan* can. ii, st. 209.

Base and *basis*, though both ultimately derived from the same Greek word (*basis*) differ from each other in use; the *base* of a column is architecturally a part of the column, the lowest part supporting the rest. *Base* has wide use as applied to material objects; we speak of the *base* of a pyramid, the *base* of a triangle, the *base* or *base-line* of a survey, the *base* of the skull, a *base* of operations, a *base* of supply, etc. *Basis* is now rarely used literally, but has extensive figurative use, while *base* is rarely used figuratively; we speak of the *basis* of an opinion, argument, report, story, hypothesis, etc. *Ground* (from A.S. *grund*) is, in figurative use, akin to *basis*, but (as is usual with Anglo-Saxon words) more allied to practical matters than its Greek correlative; we speak of *ground* for suspicion, action, or interference, where *basis* would seem more abstract and theoretical; the *groundwork* may be the *basis* or *foundation* of anything, but is oftener viewed as a fundamental and essential part:

History could not teach by examples . . . unless the *groundwork* of character were in all ages the same.

E. H. CHAPIN *Characters in the Gospels*, ch. i, p. 9.

A corner-stone is not properly a part of the *foundation*, but of the superstructure, and is commonly laid above the ground; its importance is now mainly traditional, since it contributes no more than any one of many other elements to the support of a modern building. An *endowment*, as a fund permanently invested for the use of a college, a professorship, a hospital, or the like, is often called a *foundation*, as being the firm and permanent support of the work; the work or institution so endowed is also itself called a *foundation*.

FRAUD

SYNONYMS:

artifice	deceit	duplicity	swindle	treason
cheat	deception	imposition	swindling	trick
cheating	dishonesty	imposture	treachery	

A *fraud* is an act of deliberate *deception* with the design of securing something by taking unfair advantage of another. A *deceit* or *deception* may be designed merely to gain some end of one's own, with no intent of harming another; an *imposition*, to take some small advantage of another, or simply to make another ridiculous. An *imposture* is designed to obtain money, credit, or position to which one is not entitled, and may be practised by a street beggar or by the pretender to a throne. All action that is not honest is *dishonest*, but the term *dishonesty* is generally applied in business, politics, etc., to deceitful practises which are not directly criminal. *Fraud* includes *deceit*, but *deceit* may not reach the gravity of *fraud*; a *cheat* is of the nature of *fraud*, but of a petty sort; a *swindle* is more serious than a *cheat*, involving larger values and more flagrant *dishonesty*. *Fraud* is commonly actionable at law; *cheating* and *swindling* are for the most part out of the reach of legal proceedings. *Treachery* is chiefly used of *dishonesty* in matters of friendship, social relations, government, or war; *treachery* may be more harmful than *fraud*, but is not so gross, and is not ordinarily open to legal redress. *Treason* is a specific form of *treachery* of a subject to the government to which he owes allegiance, and is definable and punishable at law. Compare ARTIFICE; DECEPTION.

ANTONYMS:

fairness good faith honesty integrity truth uprightness

FRIENDLY

SYNONYMS:

accessible	companionable	genial	neighborly
affable	complaisant	heartly	sociable
affectionate	cordial	kind	social
amicable	favorable	kindly	tender
brotherly	fond	loving	well-disposed

Friendly, as said of persons, signifies having the disposition of a friend; as said of acts, it signifies befitting or worthy of a friend. The adjective *friendly* does not reach the full significance of the nouns "friend" and "friendship"; one may

be *friendly* to those who are not his friends, and to be in *friendly* relations often signifies little more than not to be hostile. In its application to persons, *accessible* is used of public and eminent persons, who might, if disposed, hold themselves at a distance from others. *Companionable* and *sociable* refer to manner and behavior, *cordial* and *genial* express genuine kindness of heart. We speak of a *cordial* greeting, a *favorable* reception, a *neighborly* call, a *sociable* visitor, an *amicable* settlement, a *kind* interest, a *friendly* regard, a *hearty* welcome. The Saxon *friendly* is stronger than the Latin *amicable*; the *amicable* may be merely formal; the *friendly* is from the heart. *Fond* is commonly applied to an affection that becomes, or at least appears, excessive. *Affectionate*, *devoted*, and *tender* are almost always used in a high and good sense; as, an *affectionate* son; a *devoted* friend; "the *tender* mercy of our God," *Luke* i, 78. Compare FRIENDSHIP.

ANTONYMS:

adverse	belligerent	distant	ill-disposed	unkind
alienated	cold	estranged	indifferent	warlike
antagonistic	contentious	frigid	inimical	
bellicose	disaffected	hostile	unfriendly	

FRIENDSHIP**SYNONYMS:**

affection	comity	esteem	good will
amity	consideration	favor	love
attachment	devotion	friendliness	regard

Friendship is a deep, quiet, enduring *affection*, founded upon mutual respect and *esteem*. *Friendship* is always mutual; there may be unreciprocated *affection* or *attachment*, unrequited *love*, or even unrecognized and unappreciated *devotion*, but never unreciprocated or unrequited *friendship*; one may have friendly feelings toward an enemy, but while there is hostility or coldness on one side there can not be *friendship* between the two. *Friendliness* is a quality of friendly feeling, without the deep and settled *attachment* implied in the state of *friendship*. *Comity* is mutual kindly courtesy, with care of each other's right, and *amity* a friendly feeling and relation, not necessarily implying special *friendliness*; as, the *comity* of nations, or *amity* between neighboring countries. *Affection* may be purely natural; *friendship* is a growth. *Friendship* is more intellectual and less emotional than *love*; it is easier to give

reasons for *friendship* than for *love*; *friendship* is more calm and quiet, *love* more fervent; *love* often rises to intensest passion; we can not speak of the passion of *friendship*. Friendship implies some degree of equality, while *love* does not; we can speak of man's *love* toward God, not of his *friendship* for God. (There is more latitude in the use of the concrete noun *friend*; Abraham was called "the friend of God"; Christ was called "the friend of sinners.") Compare ACQUAINTANCE; LOVE.

ANTONYMS:

See synonyms for BATTLE; ENMITY; FEUD; HATRED.

PREPOSITIONS:

The friendship of one person *for* or *toward* another, or the friendship *between* them.

FRIGHTEN**SYNONYMS:**

affright	appal	cow	dismay	scare
alarm	browbeat	daunt	intimidate	terrify

One is *frightened* by a cause of fear addressed directly and suddenly to the senses; he is *intimidated* by an apprehension of contingent consequences dependent on some act of his own to be done or forborne; the means of intimidation may act through the senses, or may appeal only to the intellect or the sensibilities. The sudden rush of an armed madman may *frighten*; the quiet leveling of a highwayman's pistol *intimidates*. A savage beast is *intimidated* by the keeper's whip. Employers may *intimidate* their employees from voting contrary to their will by threat of discharge; a mother may be *intimidated* through fear for her child. To *browbeat* or *cow* is to bring into a state of submissive fear; to *daunt* is to give pause or check to a violent, threatening, or even a brave spirit. To *scare* is to cause sudden, unnerving fear; to *terrify* is to awaken fear that is overwhelming. To *appal* (from L. *ad*, to + *paleo*, be pale) is to strike with sudden fear, dismay, and horror; one may be *appalled* at the sufferings or peril of others; he is *terrified* by danger to himself. Compare ALARM; FEAR.

FRUGALITY

SYNONYMS:

economy
miserliness
parsimoniousnessparsimony
providence
prudencesaving
scrimpingsparing
thrift

Economy is a wise and careful administration of the means at one's disposal; *frugality* is a withholding of expenditure, or *sparing* of supplies or provision, to a noticeable and often to a painful degree; *parsimony* is excessive and unreasonable *saving* for the sake of *saving*. *Frugality* exalted into a virtue to be practised for its own sake, instead of as a means to an end, becomes the vice of *parsimony*. *Miserliness* is the denying oneself and others the ordinary comforts or even necessities of life, for the mere sake of hoarding money. *Prudence* and *providence* look far ahead, and sacrifice the present to the future, saving as much as may be necessary for that end. (SEE PRUDENCE.) *Thrift* seeks not merely to save, but to earn. *Economy* manages, *frugality* saves, *providence* plans, *thrift* at once earns and saves, with a view to wholesome and profitable expenditure at a fitting time. See ABSTINENCE.

ANTONYMS:

abundance
affluencebounty
extravaganceliberality
luxuryopulence
richeswaste
wealth

GARRULOUS

SYNONYMS:

chattering

loquacious

talkative

verbose

Garrulous signifies given to constant trivial talking. *Chattering* signifies uttering rapid, noisy, and unintelligible, or scarcely intelligible, sounds, whether articulate words or such as resemble them; *chattering* is often used of vocal sounds that may be intelligible by themselves but are ill understood owing to confusion of many voices or other cause. The *talkative* person has a strong disposition to talk, with or without an abundance of words, or many ideas; the *loquacious* person has an abundant flow of language and much to say on any subject suggested; either may be lively and for a time entertaining; the *garrulous* person is tedious, repetitious, petty, and self-absorbed. *Verbose* is applied to utterances more formal than conversation, as to writings or public

addresses. We speak of a *chattering* monkey or a *chattering* idiot, a *talkative* child, a *talkative* or *loquacious* woman, a *garrulous* old man, a *verbose* writer. Compare CIRCUMLOCUTION.

ANTONYMS:

laconic reserved reticent silent speechless taciturn

GENDER**SYNONYM:**

sex

Sex is a distinction among living beings; it is also the characteristic by which most living beings are distinguished from inanimate things, which are of no *sex*; *gender* is a distinction in language partially corresponding to this distinction in nature; while there are but two *sexes*, there are in some languages, as in English and German, three *genders*. The French language has but two *genders* and makes the names of all inanimate objects either masculine or feminine; some languages are without the distinction of *gender*, and those that maintain it are often quite arbitrary in its application. We speak of the masculine or feminine *gender*, the male or female *sex*.

GENERAL**SYNONYMS:**

common
commonplace
customary
everyday

familiar
frequent
habitual
normal

ordinary
popular
prevalent
public

universal
usual

Common signifies frequently occurring, not out of the regular course, not exceptional; hence, not above the average, not excellent or distinguished, inferior, or even low; *common* also signifies pertaining to or participated in by two or more persons or things; as, sorrow is *common* to the race. *General* may signify pertaining equally to all of a class, race, etc., but very commonly signifies pertaining to the greater number, but not necessarily to all. *Universal* applies to all without exception; *general* applies to all with possible or comparatively slight exceptions; *common* applies to very many without deciding whether they are even a majority. A *common* remark

is one we often hear; a *general* experience is one that comes to the majority of people; a *universal* experience is one from which no human being is exempt. It is dangerous for a debater to affirm a *universal* proposition, since that can be negatived by a single exception, while a *general* statement is not invalidated even by adducing many exceptions. We say a *common* opinion, *common* experience, a *general* rule, *general* truth, a *universal* law. Compare synonyms for NORMAL; USUAL.

ANTONYMS:

exceptional rare singular uncommon unknown unusual
infrequent

GENEROUS**SYNONYMS:**

bountiful	free	liberal	noble
chivalrous	free-handed	magnanimous	open-handed
disinterested	free-hearted	munificent	open-hearted

Generous (from L. *genus*, a race) primarily signifies having the qualities worthy of noble or honorable birth; hence, free and abundant in giving, giving freely, heartily, and self-sacrificingly. As regards giving, *generous* refers rather to the self-sacrificing heartiness of the giver, *liberal* to the amount of the gift; a child may show himself *generous* in the gift of an apple, a millionaire makes a *liberal* donation; a *generous* gift, however, is commonly thought of as both ample and hearty. A *munificent* gift is vast in amount, whatever the motive of its bestowal. One may be *free* with another's money; he can be *generous* only with his own. *Disinterested* suggests rather the thought of one's own self-denial; *generous*, of one's hearty interest in another's welfare or happiness. One is *magnanimous* by a greatness of soul (from L. *magnus*, great, and *animus*, soul) that rises above all that is poor, mean, or weak, especially above every petty or ignoble motive or feeling pertaining to one's self, and thus above resentment of injury or insult; one is *generous* by a kindness of heart that would rejoice in the welfare rather than in the punishment of the offender.

ANTONYMS:

avaricious	greedy	mean	parsimonious	rapacious
close	ignoble	miserly	penurious	stingy
covetous	illiberal	niggardly	petty	

GENIUS

SYNONYMS:

talent

talents

Genius is exalted intellectual power capable of operating independently of tuition and training, and marked by an extraordinary faculty for original creation, invention, discovery, expression, etc. *Talent* is marked mental ability, and in a special sense, a particular and uncommon aptitude for some special mental work or attainment. *Genius* is higher than *talent*, more spontaneous, less dependent upon instruction, less amenable to training; *talent* is largely the capacity to learn, acquire, appropriate, adapt oneself to demand. Yet the *genius* that has won the largest and most enduring success has been joined with tireless industry and painstaking. Compare synonyms for MIND; POWER.

ANTONYMS:

dulness folly imbecility obtuseness senselessness stupidity

GET

SYNONYMS:

achieve
acquire

attain
earn

gain
obtain

procure
receive

secure
win

Get is a most comprehensive word. A person *gets* whatever he comes to possess or experience, whether with or without endeavor, expectation, or desire; he *gets* a bargain, a blow, a fall, a fever; he *gains* what he comes to by effort or striving; the swimmer *gains* the shore; a man *acquires* by continuous and ordinarily by slow process; as, one *acquires* a foreign language. A person is sometimes said to *gain* and often to *acquire* what has not been an object of direct endeavor; in the pursuits of trade, he incidentally *gains* some knowledge of foreign countries; he *acquires* by association with others a correct or incorrect accent; he *acquires* a bronzed complexion by exposure to a tropical sun; in such use, what he *gains* is viewed as desirable, what he *acquires* as slowly and gradually resulting. A person *earns* what he gives an equivalent of labor for, though he may not *get* it. On the other hand, he may *get* what he has not *earned*; the temptation to all dishonesty is the desire to *get* a living or a fortune without *earning* it. When one *gets* the object of his desire, he is said to *obtain* it, whether

he has *gained* or *earned* it or not. *Win* denotes contest, with a suggestion of chance or hazard; in popular language, a person is often said to *win* a lawsuit, or to *win* in a suit at law, but in legal phrase he is said to *gain* his suit, case, or cause. In *receiving*, one is strictly passive; he may *get* an estate by his own exertions or by inheritance; in the latter case he is said to *receive* it. One *obtains* a thing commonly by some direct effort of his own; he *procures* it commonly by the intervention of some one else; he *procures* a dinner or an interview; he *secures* what has seemed uncertain or elusive, when he *gets* it firmly into his possession or under his control. Compare synonyms for **ATTAIN**; **MAKE**; **REACH**.

ANTONYMS:

See synonyms for **ABANDON**.

GIFT

SYNONYMS:

benefaction	boon	bribe	grant	largess
bequest	bounty	donation	gratuity	present

A *gift* is in the popular, and also in the legal sense that which is voluntarily bestowed without expectation of return or compensation. *Gift* is now almost always used in the good sense, *bribe* always in the evil sense to signify payment for a dishonorable service under the semblance of a *gift*. In Scriptural language *gift* is often used for *bribe*. "The king by judgment establisheth the land; but he that receiveth *gifts* overthroweth it." *Prov.* xxix, 4. A *benefaction* is a charitable *gift*, generally of large amount, and viewed as of enduring value, as an endowment for a college. A *donation* is something, perhaps of great, never of trivial value, given usually on some public ground, as to a cause or to a person representing a cause, but not necessarily of value beyond the immediate present; as, a *donation* to a pastor. A *gratuity* is usually something of moderate value and is always given as to an inferior, and as of favor, not of right; as, a *gratuity* to a waiter. *Largess* is archaic for a bountiful *gratuity*, usually to be distributed among many, as among the heralds at ancient tournaments. A *present* is a *gift* of friendship, or conciliation, and given as to an equal or a superior; no one's pride is hurt by accepting what is viewed as strictly a *present*. A *boon* is a *gift* that has

been desired or craved or perhaps asked, or something freely given that meets some great desire. A *grant* is commonly considerable in amount and given by public authority; as, a *grant* of public lands for a college.

ANTONYMS:

compensation earnings guerdon penalty remuneration wages

GIVE

SYNONYMS:

bestow	communicate	deliver	grant	present
cede	confer	furnish	impart	supply

To *give* is primarily to transfer to another's possession or ownership without compensation; in its secondary sense in popular use, it is to put into another's possession by any means and on any terms whatever; a buyer may say "*Give* me the goods, and I will *give* you the money"; we speak of *giving* answers, information, etc., and often of *giving* what is not agreeable to the recipient, as blows, medicine, reproof; but when there is nothing in the context to indicate the contrary, *give* is always understood in its primary sense; as, this book was *given* me. *Give* thus becomes, like *get*, a term of such general import as to be a synonym for a wide variety of words. To *grant* is to put into one's possession in some formal way, or by authoritative act; as, Congress *grants* lands to a railroad corporation. To speak of *granting* a favor carries a claim or concession of superiority on the part of the one by whom the *grant* may be made; to *confer* has a similar sense; as, to *confer* a degree or an honor; we *grant* a request or petition, but do not *confer* it. To *impart* is to *give* of that which one still, to a greater or less degree, retains; the teacher *imparts* instruction. To *bestow* is to *give* that of which the receiver stands in especial need; we *bestow* alms.

PREPOSITIONS:

We give money *to* a person *for* a thing, *for* a purpose, etc. (or without proposition, *give* a person a sum of money); we give a thing *to* or *into* one's care or keeping; the weary fugitive gave himself up *to* his pursuers.

GOVERN

SYNONYMS:

command	curb	influence	mold	reign over	rule
control	direct	manage	reign	restrain	sway

Govern carries the idea of authoritative administration or some exercise of authority that is at once effective and continuous; *control* is effective, but may be momentary or occasional. One *controls* what he holds or can hold at will absolutely in check; as, a skilful horseman *controls* a spirited horse; a person *controls* his temper; we say to one who is excited, "*control* yourself." A person *commands* another when he has, or claims, the right to make that other do his will, with power of inflicting penalty if not obeyed; he *controls* another whom he can effectually prevent from doing anything contrary to his will; he *governs* one whom he actually does cause, regularly or constantly, to obey his will; a parent may *command* a child whom he can not *govern* or *control*. The best teachers are not greatly prone to *command*, but *govern* or *control* their pupils largely by other means. *Command* is, however, often used in the sense of securing, as well as requiring, submission or obedience, as when we speak of a *commanding* influence; a man *commands* the situation when he can shape events as he pleases; a fortress *commands* the region when no enemy can pass against its resistance. *Govern* implies the exercise of knowledge and judgment as well as power. To *rule* is more absolute and autocratic than to *govern*; to *sway* is to move by quiet but effectual influence; to *mold* is not only to influence feeling and action, but to shape character; to *manage* is to secure by skilful contrivance the doing of one's will by those whom one can not directly *control*; a wise mother, by gentle means, *sways* the feelings and *molds* the lives of her children; to be able to *manage* servants is an important element of good housekeeping. The word *reign*, once so absolute, now simply denotes that one holds the official station of sovereign in a monarchy, with or without effective power; the King of England *reigns*; the Czar of Russia both *reigns* and *rules*.

ANTONYMS:

be in subjection	be subject	comply	obey	submit	yield
------------------	------------	--------	------	--------	-------

GRACEFUL

SYNONYM:

beautiful

That which is *graceful* is marked by elegance and harmony, with ease of action, attitude, or posture, or delicacy of form. *Graceful* commonly suggests motion or the possibility of motion; *beautiful* may apply to absolute fixity; a landscape or a blue sky is *beautiful*, but neither is *graceful*. *Graceful* commonly applies to beauty as addressed to the eye, though we often speak of a *graceful* poem or a *graceful* compliment. *Graceful* applies to the perfection of motion, especially of the lighter motions, which convey no suggestion of stress or strain, and are in harmonious curves. Apart from the thought of motion, *graceful* denotes a pleasing harmony of outline, proportion, etc., with a certain degree of delicacy; a Hercules is massive, an Apollo is *graceful*. We speak of a *graceful* attitude, *graceful* drapery. Compare BEAUTIFUL; BECOMING.

ANTONYMS:

See synonyms for AWKWARD.

GRIEF

SYNONYMS:

affliction	melancholy	regret	sorrow	trouble
distress	mourning	sadness	tribulation	woe

Grief is acute mental pain resulting from loss, misfortune, or deep disappointment. *Grief* is more acute and less enduring than *sorrow*. *Sorrow* and *grief* are for definite cause; *sadness* and *melancholy* may arise from a vague sense of want or loss, from a low state of health, or other ill-defined cause; *sadness* may be momentary; *melancholy* is more enduring, and may become chronic. *Affliction* expresses a deep heart-sorrow and is applied also to the misfortune producing such *sorrow*; *mourning* most frequently denotes *sorrow* publicly expressed, or the public expression of such *sorrow* as may reasonably be expected; as, it is common to observe thirty days of *mourning* on the death of an officer of state.

ANTONYMS:

See synonyms for HAPPINESS.

PREPOSITIONS:

Grief at a loss; for a friend.

HABIT

SYNONYMS:

custom	habitude	routine	system	use
fashion	practise	rule	usage	wont

Habit is a tendency or inclination toward an action or condition, which by repetition has become easy, spontaneous, or even unconscious, or an action or regular series of actions, or a condition so induced. *Custom* is the uniform doing of the same act in the same circumstance for a definite reason; *routine* is the doing of customary acts in a regular and uniform sequence and is more mechanical than *custom*. It is the *custom* of tradesmen to open at a uniform hour, and to follow a regular *routine* of business until closing-time. *Habit* always includes an involuntary tendency, natural or acquired, greatly strengthened by frequent repetition of the act, and may be uncontrollable, or even unconscious. *Habitude* is habitual relation or association. *Custom* is chiefly used of the action of many; *habit* of the action of one; we speak of the *customs* of society, the *habits* of an individual. *Fashion* is the generally recognized *custom* in the smaller matters, especially in dress. A *rule* is prescribed either by some external authority or by one's own will; as, it is the *rule* of the house; or, I make it my invariable *rule*. *System* is the coordination of many acts or things into a unity, and is more and better than *routine*. *Use* and *usage* denote the manner of using something; we speak of one person's *use* of language, but of the *usage* of many; a *use* or *usage* is almost always a *habit*. *Practise* is the active doing of something in a systematic way; we do not speak of the *practise*, but of the *habit* of going to sleep; we speak of a tradesman's *custom*, a lawyer's or a physician's *practise*. Educationally, *practise* is the voluntary and persistent attempt to make skill a *habit*; as, *practise* in penmanship. *Wont* is blind and instinctive *habit* like that which attaches an animal to a locality; the word is now almost wholly poetic. Compare DRESS.

HAPPEN

SYNONYMS:

bechance	betide	come to pass	fall out	supervene
befall	chance	fall	occur	take place

A thing is said to *happen* when no design is manifest, or

happiness

none especially thought of; it is said to *chance* when it appears to be the result of accident (compare synonyms for ACCIDENT). An incident *happens* or *occurs*; something external or actual *happens* to one; a thought or fancy *occurs* to him. *Befall* and *betide* are transitive; *happen* is intransitive; something *befalls* or *betides* a person or *happens* to him. *Betide* is especially used for anticipated evil, thought of as waiting and coming at its appointed time; as woe *betide* him! One event *supervenes* upon another event, one disease upon another, etc. ["Transpire," in the sense of *happen*, is not authorized by good usage; a thing that has *happened* is properly said to *transpire* when it becomes known.]

PREPOSITIONS:

An event happens *to* a person; a person happens *on* or *upon* a fact, discovery, etc.

HAPPINESS**SYNONYMS:**

blessedness	delight	gladness	pleasure
bliss	ecstasy	gratification	rapture
cheer	enjoyment	joy	rejoicing
comfort	felicity	merriment	satisfaction
contentment	gaiety	mirth	triumph

Gratification is the giving any mental or physical desire something that it craves; *satisfaction* is the giving such a desire all that it craves. *Happiness* is the positively agreeable experience that springs from the possession of good, the *gratification* or *satisfaction* of the desires or the relief from pain and evil. *Comfort* may be almost wholly negative, being found in security or relief from that which pains or annoys; there is *comfort* by a warm fireside on a wintry night; the sympathy of a true friend affords *comfort* in sorrow. *Enjoyment* is more positive, always implying something to be definitely and consciously delighted in; a sick person finds *comfort* in relief from pain, while he may be far from a state of *enjoyment*. *Pleasure* is still more vivid, being an arousing of the faculties to an intensely agreeable activity; *satisfaction*

is more tranquil than *pleasure*, being the agreeable consciousness of having all that our faculties demand or crave; when a worthy *pleasure* is past, a worthy *satisfaction* remains. As referring to a mental state, *gratification* is used to denote a mild form of *happiness* resulting from some incident not of very great importance; *satisfaction* should properly express a *happiness* deeper, more complete, and more abiding, but as intellect or sensibilities of a low order may find *satisfaction* in that which is very poor or unworthy, the word has come to be feeble and tame in ordinary use. *Happiness* is more positive than *comfort*, *enjoyment*, or *satisfaction*, more serene and rational than *pleasure*; *pleasure* is of necessity transient; *happiness* is abiding, and may be eternal; thus, we speak of *pleasures*, but the plural of *happiness* is scarcely used. *Happiness*, in the full sense, is mental or spiritual or both, and is viewed as resulting from some worthy *gratification* or *satisfaction*; we may speak of a brute as experiencing *comfort* or *pleasure*, but scarcely as in possession of *happiness*; we speak of vicious *pleasure*, *delight*, or *joy*, but not of vicious *happiness*. *Felicity* is a philosophical term, colder and more formal than *happiness*. *Gladness* is *happiness* that overflows, expressing itself in countenance, voice, manner, and action. *Joy* is more intense than *happiness*, deeper than *gladness*, to which it is akin, nobler and more enduring than *pleasure*. *Gaiety* is more superficial than *joy*, more demonstrative than *gladness*. *Rejoicing* is *happiness* or *joy* that finds utterance in word, song, festivity, etc. *Delight* is vivid, overflowing *happiness* of a somewhat transient kind; *ecstasy* is a state of extreme or extravagant *delight* so that the one affected by it seems almost beside himself with *joy*; *rapture* is closely allied to *ecstasy*, but is more serene, exalted, and enduring. *Triumph* is such *joy* as results from victory, success, achievement. *Blessedness* is at once the state and the sense of being divinely blessed; as, the *blessedness* of the righteous. *Bliss* is ecstatic, perfected *happiness*; as, the *bliss* of heaven. Compare COMFORT.

ANTONYMS:

See synonyms for GRIEF.

HAPPY

SYNONYMS:

blessed	cheering	gay	lucky	rejoiced
blissful	cheery	glad	merry	rejoicing
blithe	delighted	jocund	mirthful	smiling
blithesome	delightful	jolly	pleased	sprightly
bright	dexterous	jovial	prosperous	successful
buoyant	felicitous	joyful	rapturous	sunny
cheerful	fortunate	joyous		

Happy primarily refers to something that comes "by good hap," a chance that brings prosperity, benefit, or success.

And grasps the skirts of *happy* chance.

TENNYSON *In Memoriam*, st 2.

In this sense *happy* is closely allied to *fortunate* and *lucky*. (See FORTUNATE.) *Happy* has, however, so far diverged from this original sense as to apply to advantages where chance is not recognized, or is even excluded by direct reference to the divine will, when it becomes almost equivalent to *blessed*.

Behold, *happy* is the man whom God correcteth

Job v, 17.

Happy is also applied to the ready dexterity or skill by which favorable results (usually in minor matters) are secured, when it becomes a synonym for *dexterous*, *felicitous*, and the associated words; as, he has a *happy* wit; *happy* at retort (compare CLEVER). In its most frequent present use, *happy* is applied to the state of one enjoying happiness, or to that by which happiness is expressed; as, a *happy* heart; a *happy* face; *happy* laughter; *happy* tears (compare synonyms for HAPPINESS.) *Cheerful* applies to the possession or expression of a moderate and tranquil happiness. A *cheery* word spontaneously gives cheer to others; a *cheering* word is more distinctly planned to cheer and encourage. *Gay* applies to an effusive and superficial happiness (often not really worthy of that name) perhaps resulting largely from abundant animal spirits; we speak of *gay* revelers or a *gay* horse. A *jovial* person is one brimming over with easy merriment, ignoring the possibility of care, anxiety, or sorrow, and finding expression in smiles, laughter, and even boisterous merriment; *jovial* is often, but not necessarily associated with convivial gaiety.

And there is no *jovial* companionship equal to that where the jokes are rather small and the laughter abundant.

IRVING *Sketch Book* p. 281.

A *buoyant* spirit is, as it were, borne up by joy and hope. A *sunny* disposition has a constant tranquil brightness that irradiates all who come within its influence.

ANTONYMS:

Compare synonyms for GRIEF.

PREPOSITIONS:

A happy event *for* him; happy *at* a reply; happy *in* his home, *with* his friends, *among* his children; happy *at* the discovery, *over* his success.

HARMONY

SYNONYMS:

accord	concord	consistency	uniformity
accordance	concurrence	consonance	union
agreement	conformity	symmetry	unison
amity	congruity	unanimity	unity
concert	consent		

When tones, thoughts, or feelings, individually different, combine to form a consistent and pleasing whole, there is *harmony*. *Harmony* is deeper and more essential than *agreement*; we may have a superficial, forced, or patched-up *agreement*, but never a superficial, forced, or patched-up *harmony*. *Concord* is less full and spiritual than *harmony*. *Concord* implies more volition than *accord*; as, their views were found to be in perfect *accord*; or, by conference *concord* was secured; we do not secure *accord*, but discover it. We may speak of being in *accord* with a person on one point, but *harmony* is wider in range. *Concert* is *agreement*, as by mutual understanding, resulting in action toward a single purpose; as, *concert* of views; *concert* of action or "concerted" action. *Conformity* is correspondence in form, manner, or use; the word often signifies submission to authority or necessity, and may be as far as possible from *harmony*; as, the attempt to secure *conformity* to an established religion. *Congruity* involves the element of suitableness; *consistency* implies the absence of conflict or contradiction in views, statements, or acts which are brought into comparison, as in the different statements of the same person or the different periods of one man's life; *unanimity* is the complete hearty *agreement* of many; *consent* and *concurrence* refer to decision or action, but *consent* is

more *passive* than *concurrence*; one speaks by general *consent* when no one in the assembly cares to make formal objection; a decision of the Supreme Court depends upon the *concurrence* of a majority of the judges. Compare AGREE; FRIENDSHIP; MELODY.

ANTONYMS:

antagonism	controversy	dissension	opposition
battle	difference	disunion	schism
conflict	disagreement	hostility	separation
contention	discord	incongruity	variance
contest	disproportion	inconsistency	warfare

HARVEST

SYNONYMS:

crop	harvest-home	ingathering	reaping
fruit	harvesting	proceeds	result
growth	harvest-tide	produce	return
harvest-feast	harvest-time	product	yield
harvest-festival	increase		

Harvest, from the Anglo-Saxon, signified originally "autumn," and as that is the usual season of gathering ripened *crops* in Northern lands, the word came to its present meaning of the season of gathering ripened grain or *fruits*, whether summer or autumn, and hence a *crop* gathered or ready for gathering; also, the act or process of gathering a *crop* or *crops*. "The *harvest* truly is great, but the laborers are few," *Luke* x, 2. "Lift up your eyes and look on the fields, for they are white already to *harvest*," *John* iv, 35. *Harvest* is the elegant and literary word; *crop* is the common and commercial expression; we say a man sells his *crop*, but we should not speak of his selling his *harvest*; we speak of an ample or abundant *harvest*, a good *crop*. *Harvest* is applied almost wholly to grain; *crop* applies to almost anything that is gathered in; we speak of the potato-*crop*, not the potato-*harvest*; we may say either the wheat-*crop* or the wheat-*harvest*. *Produce* is a collective word for all that is produced in farming or gardening, and is, in modern usage, almost wholly restricted to this sense; we speak of *produce* collectively, but of a *product* or various *products*; vegetables, *fruits*, eggs, butter, etc., may be termed farm-*produce*, or the *products* of the farm. *Product* is a word of wider application than *produce*; we speak of the *products* of manufacturing, the *products* of thought, or the *product* obtained by multiply-

ing one number by another. The word *proceeds* is chiefly used of the *return* from an investment; we speak of the *produce* of a farm, but of the *proceeds* of the money invested in farming. The *yield* is what the land gives up to the farmer's demand; we speak of the *return* from an expenditure of money or labor, but of the *yield* of corn or oats. *Harvest* has also a figurative use, such as *crop* more rarely permits; we term a religious revival a *harvest* of souls; the *result* of lax enforcement of law is a *harvest* of crime. As regards time, *harvest*, *harvest-tide*, and *harvest-time* alike denote the period or season when the crops are or should be gathered (*tide* being simply the old Saxon word for *time*). *Harvest-home* ordinarily denotes the *festival* of *harvest*, and when used to denote simply the season always gives a suggestion of festivity and rejoicing, such as *harvest* and *harvest-time* by themselves do not express.

HATRED

SYNONYMS:

abhorrence	detestation	hostility	rancor
anger	dislike	ill will	repugnance
animosity	enmity	malevolence	resentment
antipathy	grudge	malice	revenge
aversion	hate	malignity	spite

Repugnance applies to that which one feels himself summoned or impelled to do or to endure, and from which he instinctively draws back. *Aversion* is the turning away of the mind or feelings from some person or thing, or from some course of action, etc. *Hate*, or *hatred*, as applied to persons, is intense and continued *aversion*, usually with disposition to injure; *anger* is sudden and brief, *hatred* is lingering and enduring; "Her wrath became a *hate*," TENNYSON *Pelleas and Ettarre* st. 16. As applied to things, *hatred* is intense *aversion*, with desire to destroy or remove; *hatred* of evil is a righteous passion, akin to *abhorrence*, but more vehement. *Malice* involves the active intent to injure; in the legal sense, *malice* is the intent to injure, even though with no personal *ill will*; as, a highwayman would be said to entertain *malice* toward the unknown traveler whom he attacks. *Malice* is direct, pressing toward a result; *malignity* is deep, lingering, and venomous, though often impotent to act; *rancor* (akin to *rancid*) is cherished *malignity* that has soured and festered and is virulent and

implacable. *Spite* is petty *malice* that delights to inflict stinging pain; *grudge* is deeper than *spite*; it is sinister and bitter; *grudge*, *resentment*, and *revenge* are all retaliatory, *grudge* being the disposition, *revenge* the determination to repay real or supposed offense with injury; *revenge* may denote also the retaliatory act; *resentment*, the best word of the three, always holds itself to be justifiable, but looks less certainly to action than *grudge* or *revenge*. Simple goodness may arouse the *hatred* of the wicked; they will be moved to *revenge* only by what they deem an injury or affront. Compare ABOMINATION; ANGER; ANTIPATHY; ENMITY.

ANTONYMS:

See synonyms for FRIENDSHIP; LOVE.

HAVE

SYNONYMS:

be in possession of
be possessed of

hold
occupy

own
possess

Have is the most general word, and is applied to whatever belongs to or is connected with one; a man *has* a head or a headache, a fortune or an opinion, a friend or an enemy; he *has* time, or *has* need; he may be said to *have* what is his own, what he has borrowed, what has been entrusted to him, or what he has stolen. To *possess* a thing is to *have* the ownership with control and enjoyment of it. To *hold* is to *have* in one's hand, or securely in one's control; a man *holds* his friend's coat for a moment, or he *holds* a struggling horse; he *holds* a promissory note, or *holds* an office. To *own* is to *have* the right of property in; to *possess* is to *have* that right in actual exercise; to *occupy* is to *have* possession and use, with some degree of permanency, with or without ownership. A man *occupies* his own house or a room in a hotel; a man may *own* a farm of which he is not in possession because a tenant *occupies* it and is determined to *hold* it; the proprietor *owns* the property, but the tenant *is in possession*. To *be in possession* differs from *possess* in that to *possess* denotes both right and fact, while to *be in possession* denotes simply the fact with no affirmation as to the right. To *have* reason is to be endowed with the faculty; to *be in possession of* one's reason denotes that the faculty is in actual present exercise.

HAZARD

SYNONYMS:

accident	chance	danger	jeopardy	risk
casualty	contingency	fortuity	peril	venture

Hazard is the incurring the possibility of loss or harm for the possibility of benefit; *danger* may have no compensating alternative. In *hazard* the possibilities of gain or loss are nearly balanced; in *risk* the possibility of loss is the chief thought; the fool-hardy take great *risks* in mere wantonness; in *chance* and *venture* the hope of good predominates; we speak of a merchant's *venture*, but of an insurance company's *risk*; one may be driven by circumstances to run a *risk*; he freely seeks a *venture*; we speak of the *chance* of winning, the *hazard* or *risk* of losing. *Accidents* are incalculable; *casualties* may be to a certain extent anticipated; death and wounds are *casualties* of battle, certain to happen to some, but uncertain as to whom or how many. A *contingency* is simply an indeterminable future event, which may or may not be attended with *danger* or *risk*. See ACCIDENT; DANGER.

ANTONYMS:

assurance	necessity	protection	safety	surety
certainty	plan	safeguard	security	

HEALTHY

SYNONYMS:

hale	hygienic	sanitary	vigorous
healthful	salubrious	sound	well
hearty	salutary	strong	wholesome

Healthy is most correctly used to signify possessing or enjoying health or its results; as, a *healthy* person; a *healthy* condition. *Healthful* signifies promotive of health, tending or adapted to confer, preserve, or promote health; as a *healthful* climate. *Wholesome* food in a *healthful* climate makes a *healthy* man. With *healthful* are ranged the words *hygienic*, *salubrious*, *salutary*, *sanitary*, and *wholesome*, while the other words are associated with *healthy*. *Salubrious* is always used in the physical sense, and is chiefly applied to air or climate. *Salutary* is now chiefly used in the moral sense; as, a *salutary* lesson.

ANTONYMS:

delicate	exhausted	fragile	sick	wasted	worn down
diseased	failing	frail	unhealthy	weak	worn out
emaciated	fainting	ill	unsound	worn	

HELP

SYNONYMS:

abet	befriend	foster	succor	sustain
aid	cooperate	second	support	uphold
assist	encourage	stand by		

Help expresses greater dependence and deeper need than *aid*. In extremity we say "God *help* me!" rather than "God *aid* me!" In time of danger we cry "*help! help!*" rather than "*aid! aid!*" To *aid* is to *second* another's own exertions. We can speak of *helping* the helpless, but not of *aiding* them. *Help* includes *aid*, but *aid* may fall short of the meaning of *help*. In law to *aid* or *abet* makes one a principal. (Compare synonyms for ACCESSORY.) To *cooperate* is to *aid* as an equal; to *assist* implies a subordinate and secondary relation. One *assists* a fallen friend to rise; he *cooperates* with him in helping others. *Encourage* refers to mental *aid*, as *uphold* now usually does; *succor* and *support*, oftenest to material assistance. We *encourage* the timid or despondent, *succor* the endangered, *support* the weak, *uphold* those who else might be shaken or cast down. Compare ABET; PROMOTE.

ANTONYMS:

counteract discourage oppose resist thwart withstand

PREPOSITIONS:

Help *in* an enterprise *with* money; help *to* success; *against* the enemy.

HERETIC

SYNONYMS:

apostate	dissenter	nonconformist	renegade	traitor
deserter	heresiarch	pervert	schismatic	

Etymologically, a *heretic* is one who takes or chooses his own belief, instead of the belief of his church; hence, a *heretic* is one who denies commonly accepted views, or who holds opinions contrary to the recognized standard or tenets of any established religious, philosophical, or other system, school, or party; the religious sense of the word is the predominant one; a *schismatic* is primarily one who produces a split or rent in the church. A *heretic* differs in doctrine from the religious body with which he is connected; a *schismatic* differs in doctrine or practise, or in both. A *heretic* may be reticent, or even silent; a *schismatic* introduces divisions. A

heresiarch is the author of a heresy or the leader of a heretical party, and is thus at once a *heretic* and a *schismatic*. An *apostate* is one who forsakes a faith that he formerly professed.

He [the Roman emperor Julian] had been a professed Christian, but he fell from Christianity, and turned Pagan; and, therefore, is called the *apostate*.
EDWARDS *Hist. Redemption*, per. iii, ch. 3, p. 321.

A *pervert* is one who is regarded as "perverted" from a true to a false faith; the same person is often called a *pervert* by those whom he leaves and a "convert" by those whom he joins. With advancing ideas of religious liberty, the odious sense once attached to these words is largely modified, and *heretic* is often used playfully. *Dissenter* and *nonconformist* are terms specifically applied to English subjects who hold themselves aloof from the Church of England; the former term is extended to non-adherents of the established church in some other countries, as Russia. A *deserter* is one who forsakes duty or allegiance; a soldier who becomes a *deserter* may simply abscond, or he may "desert to the enemy,"—one of the most unpardonable of military offenses; a *renegade* may be a *deserter* in either sense, though the latter is the prevailing one; in the ancient struggles against the Mohammedan powers a Christian who joined the Turks or Moors was distinctively called a *renegade*. A *traitor* is one who basely betrays his associates either in religious, civil, or military life (compare TREASON under FRAUD).

Judas Iscariot, which also was the *traitor*.

Luke vi, 16.

HETEROGENEOUS

SYNONYMS:

confused
conglomerate
discordant
dissimilar

mingled
miscellaneous
mixed
non-homogeneous

unhomogeneous
unlike
variant
various

Substances quite *unlike* are *heterogeneous* as regards each other. A *heterogeneous* mixture is one whose constituents are not only unlike in kind, but unevenly distributed; cement is composed of substances such as lime, sand, and clay, which are *heterogeneous* as regards each other, but the cement is said to be homogeneous if the different constituents are evenly mixed throughout, so that any one portion of the mixture is

exactly like any other. A substance may fail of being homogeneous and yet not be *heterogeneous*, in which case it is said to be *non-homogeneous* or *unhomogeneous*; a bar of iron that contains flaws, air-bubbles, etc., or for any other reason is not of uniform structure and density throughout, though no foreign substance be mixed with the iron, is said to be *non-homogeneous*. A *miscellaneous* mixture may or may not be *heterogeneous*; if the objects are alike in kind, but different in size, form, quality, use, etc., and without special order or relation, the collection is *miscellaneous*; if the objects differ in kind, such a mixture is also, and more strictly, *heterogeneous*; a pile of unassorted lumber is *miscellaneous*; the contents of a school-boy's pocket are commonly *miscellaneous* and might usually be termed *heterogeneous* as well. See COMPLEX.

ANTONYMS:alike
homogeneousidentical
likepure
samesimilar
uniform**HIDE****SYNONYMS:**bury
cloak
concealcover
disguise
dissembleentomb
inter
maskoverwhelm
screen
secretesuppress
veil

Hide is the general term, including all the rest, signifying to put out of sight or beyond ready observation or approach; a thing may be *hidden* by intention, by accident, or by the imperfection of the faculties of the one from whom it is *hidden*; in their games, children *hide* the slipper, or *hide* themselves from each other; a man unconsciously *hides* a picture from another by standing before it, or *hides* a thing from himself by laying something else over it. Even an unconscious object may *hide* another; as, a cloud *hides* the sun, or a building *hides* some part of the prospect by intervening between it and the observer's position. As an act of persons, to *conceal* is always intentional; one may *hide* his face in anger, grief, or abstraction; he *conceals* his face when he fears recognition. A house is *hidden* by foliage; the bird's nest is artfully *concealed*. *Secrete* is a stronger word than *conceal*, and is used chiefly of such material objects as may be separated from the person, or from their ordinary surroundings, and put in unlooked-for places; a man *conceals* a scar on his

face, but does not *secrete* it; a thief *secretes* stolen goods; an officer may also be said to *secrete* himself to watch the thief. A thing is *covered* by putting something over or around it, whether by accident or design; it is *screened* by putting something before it, always with some purpose of protection from observation, inconvenience, attack, censure, etc. In the figurative use, a person may *hide* honorable feelings; he *conceals* an evil or hostile intent. Anything which is effectually *covered* and *hidden* under any mass or accumulation is *buried*. Money is *buried* in the ground; a body is *buried* in the sea; a paper is *buried* under other documents. Whatever is *buried* is *hidden* or *concealed*; but there are many ways of *hiding* or *concealing* a thing without *burying* it. So a person may be *covered* with wraps, and not *buried* under them. *Bury* may be used of any object, *entomb* and *inter* only of a dead body. Figuratively, one may be said to be *buried* in business, in study, etc. Compare IMMERSE; PAL-
LIATE.

ANTONYMS:

admit	disclose	exhume	manifest	show
advertise	discover	expose	promulgate	tell
avow	disinter	lay bare	publish	uncover
betray	divulge	lay open	raise	unmask
confess	exhibit	make known	reveal	unveil

HIGH**SYNONYMS:**

elevated	exalted	noble	steep	towering
eminent	lofty	proud	tall	uplifted

Deep, while an antonym of *high* in usage, may apply to the very same distance simply measured in an opposite direction, *high* applying to vertical distance measured from below upward, and *deep* to vertical distance measured from above downward; as, a *deep* valley nestling between *high* mountains. *High* is a relative term signifying greatly raised above any object, base, or surface, in comparison with what is usual, or with some standard; a table is *high* if it exceeds thirty inches; a hill is not *high* at a hundred feet. That is *tall* whose height is greatly in excess of its breadth or diameter, and whose actual height is great for an object of its kind; as, a *tall* tree; a *tall* man; *tall* grass. That is *lofty* which is imposing or majestic in height; we term a spire *tall* with reference to its altitude, or *lofty* with reference to its majestic appearance. That is

elevated which is raised somewhat above its surroundings; that is *eminent* which is far above them; as, an *elevated* platform, an *eminent* promontory. In the figurative sense, *elevated* is less than *eminent*, and this less than *exalted*; we speak of *high*, *lofty*, or *elevated* thoughts, aims, etc., in the good sense, but sometimes of *high* feelings, looks, words, etc., in the invidious sense of haughty or arrogant. A *high* ambition may be merely selfish; a *lofty* ambition is worthy and *noble*. *Towering*, in the literal sense compares with *lofty* and majestic; but in the figurative sense, its use is almost invidious; as a *towering* passion; a *towering* ambition disregards and crushes all opposing considerations, however rational, lovely, or holy. Compare STEEP.

ANTONYMS:

base	degraded	dwarfed	low	short
deep	depressed	inferior	mean	stunted

HINDER**SYNONYMS:**

baffle	counteract	foil	obstruct	resist
balk	defer	frustrate	oppose	retard
bar	delay	hamper	postpone	stay
block	deter	impede	prevent	stop
check	embarrass	interrupt	prolong	thwart
clog	encumber			

To *hinder* is to keep from action, progress, motion, or growth, or to make such action, progress, motion, or growth later in beginning or completion than it would otherwise have been. An action is *prevented* by anything that comes in before it to make it impossible; it is *hindered* by anything that keeps it from either beginning or ending so soon as it otherwise would, or as expected or intended. It is more common, however, to say that the start is *delayed*, the progress *hindered*. An action that is *hindered* does not take place at the appointed or appropriate time; that which is *prevented* does not take place at all; to *hinder* a thing long enough may amount to *preventing* it. A railroad-train may be *hindered* by a snow-storm from arriving on time; it may by special order be *prevented* from starting. To *retard* is simply to make slow by any means whatever. To *obstruct* is to *hinder*, or possibly to *prevent* advance or passage by putting something in the way; to *oppose* or *resist* is to *hinder*, or possibly to *prevent* by directly contrary or hostile action,

resist being the stronger term and having more suggestion of physical force; *obstructed* roads *hinder* the march of an enemy, though there may be no force strong enough to *oppose* it; one *opposes* a measure, a motion, an amendment, or the like; it is a criminal offense to *resist* an officer in the discharge of his duty; the physical system may *resist* the attack of disease or the action of a remedy. Compare CONQUER; DEFER; IMPEDIMENT; OBSTRUCT; PROTRACT.

ANTONYMS:

See synonyms for QUICKEN.

PREPOSITIONS:

Hinder one *in* his progress; *from* acting promptly; *by* opposition.

HISTORY**SYNONYMS:**

account	biography	muniment	record
annals	chronicle	narration	register
archives	memoir	narrative	story
autobiography	memorial	recital	

History is a systematic record of past events. *Annals* and *chronicles* relate events with little regard to their relative importance, and with complete subserviency to their succession in time. *Annals* are yearly records; *chronicles* follow the order of time. Both necessarily lack emphasis, selection, and perspective. *Archives* are public records, which may be *annals*, or *chronicles*, or deeds of property, etc. *Memoirs* generally record the lives of individuals or facts pertaining to individual lives. A *biography* is distinctly a written account of one person's life and actions; an *autobiography* is a *biography* written by the person whose life it records. *Annals*, *archives*, *chronicles*, *biographies*, and *memoirs* and other records furnish the materials of *history*. *History* recounts events with careful attention to their importance, their mutual relations, their causes and consequences, selecting and grouping events on the ground of interest or importance. *History* is usually applied to such an account of events affecting communities and nations, though sometimes we speak of the *history* of a single eminent life. Compare RECORD.

ANTONYMS:

See synonyms for FICTION.

HOLY

SYNONYMS:

blessed	devoted	hallowed	saintly
consecrated	divine	sacred	set apart

Sacred is applied to that which is to be regarded as inviolable on any account, and so is not restricted to divine things; therefore in its lower applications it is less than *holy*. That which is *sacred* may be made so by institution, decree, or association; that which is *holy* is so by its own nature, possessing intrinsic moral purity, and, in the highest sense, absolute moral perfection. God is *holy*; his commands are *sacred*. *Holy* may be applied also to that which is *hallowed*; as, "the place whereon thou standest is *holy* ground," *Ex.* iii, 5. In such use *holy* is more than *sacred*, as if the very qualities of a spiritual or divine presence were imparted to the place or object. *Divine* has been used with great looseness, as applying to anything eminent or admirable, in the line either of goodness or of mere power, as to eloquence, music, etc., but there is a commendable tendency to restrict the word to its higher sense, as designating that which belongs to or is worthy of the Divine Being. Compare PERFECT; PURE.

ANTONYMS:

abominable	impure	unconsecrated	unsanctified
common	polluted	unhallowed	wicked
cursed	secular	unholy	worldly

HOME

SYNONYMS:

abode	dwelling	habitation	hearthstone	ingleside
domicil	fireside	hearth	house	residence

Abode, *dwelling*, and *habitation* are used with little difference of meaning to denote the place where one habitually lives; *abode* and *habitation* belong to the poetic or elevated style. Even *dwelling* is not used in familiar speech; a person says "my house," "my home," or more formally "my residence." *Home*, from the Anglo-Saxon, denoting originally a *dwelling*, came to mean an endeared *dwelling* as the scene of domestic love and happy and cherished family life, a sense to which there is an increasing tendency to restrict the word—desirably so, since we have other words to denote the mere dwelling-place; we say "The wretched tenement could not be called *home*," or

"The humble cabin was dear to him as the *home* of his childhood."

Home's not merely four square walls,
Though with pictures hung and gilded;
Home is where affection calls—
Where its shrine the heart has builded.

Thus the word comes to signify any place of rest and peace, and especially heaven, as the soul's peaceful and eternal dwelling-place.

HONEST

SYNONYMS:

candid	frank	ingenuous	true
equitable	genuine	just	trustworthy
fair	good	sincere	trusty
faithful	honorable	straightforward	upright

One who is *honest* in the ordinary sense acts or is always disposed to act with careful regard for the rights of others, especially in matters of business or property; one who is *honorable* scrupulously observes the dictates of a personal honor that is higher than any demands of mercantile law or public opinion, and will do nothing unworthy of his own inherent nobility of soul. The *honest* man does not steal, cheat, or defraud; the *honorable* man will not take an unfair advantage that would be allowed him; he will make a sacrifice which no one could require of him, when his own sense of right demands it. One who is *honest* in the highest and fullest sense is scrupulously careful to adhere to all known truth and right even in thought. In this sense *honest* differs from *honorable* as having regard rather to absolute truth and right than to even the highest personal honor. Compare CANDID; JUSTICE.

ANTONYMS:

deceitful	faithless	hypocritical	perfidious	unfaithful
dishonest	false	lying	traitorous	unscrupulous
disingenuous	fraudulent	mendacious	treacherous	untrue

HORIZONTAL

SYNONYMS:

even	flat	level	plain	plane
-------------	-------------	--------------	--------------	--------------

Horizontal signifies in the direction of or parallel to the horizon. For practical purposes *level* and *horizontal* are identical, though *level*, as the more popular word, is more loosely used of that which has no especially noticeable elevations or

inequalities; as, a *level* road. *Flat*, according to its derivation from the Anglo-Saxon *flet*, a floor, applies to a surface only, and, in the first and most usual sense, to a surface that is *horizontal* or *level* in all directions; a line may be *level*, a floor is *flat*; *flat* is also applied in a derived sense to any *plane* surface without irregularities or elevations, as a picture may be painted on the *flat* surface of a perpendicular wall. *Plane* applies only to a surface, and is used with more mathematical exactness than *flat*. The adjective *plain*, originally the same word as *plane*, is now rarely used except in the figurative senses, but the original sense appears in the noun, as we speak of "a wide *plain*." We speak of a *horizontal* line, a *flat* morass, a *level* road, a *plain* country, a *plane* surface (especially in the scientific sense). That which is *level* may not be *even*, and that which is *even* may not be *level*; a *level* road may be very rough; a slope may be *even*.

ANTONYMS:

broken hilly	inclined irregular	rolling rough	rugged slanting	sloping uneven
-----------------	-----------------------	------------------	--------------------	-------------------

HUMANE

SYNONYMS:

benevolent	compassionate	human	pitying
benignant	forgiving	kind	sympathetic
charitable	gentle	kind-hearted	tender
clement	gracious	merciful	tender-hearted

Human denotes what pertains to mankind, with no suggestion as to its being good or evil; as, the *human* race; *human* qualities; we speak of *human* achievements, virtues, or excellences, *human* follies, vices, or crimes. *Humane* denotes what may rightly be expected of mankind at its best in the treatment of sentient beings; a *humane* enterprise or endeavor is one that is intended to prevent or relieve suffering. The *humane* man will not needlessly inflict pain upon the meanest thing that lives; a *merciful* man is disposed to withhold or mitigate the suffering even of the guilty. The *compassionate* man sympathizes with and desires to relieve actual suffering, while one who is *humane* would forestall and prevent the suffering which he sees to be possible. Compare MERCY; PITIFUL; PITY.

ANTONYMS:

See synonyms for BARBAROUS.

HUNT

SYNONYMS:

chase hunting inquisition pursuit search

A *hunt* may be either the act of pursuing or the act of seeking, or a combination of the two. A *chase* or *pursuit* is after that which is fleeing or departing; a *search* is for that which is hidden; a *hunt* may be for that which is either hidden or fleeing; a *search* is a minute and careful seeking, and is especially applied to a locality; we make a *search* of or through a house, for an object, in which connection it would be colloquial to say a *hunt*. *Hunt* never quite loses its association with field-sports, where it includes both *search* and *chase*; the *search* till the game is hunted out, and the *chase* till it is hunted down. Figuratively, we speak of literary *pursuits*, or of the *pursuit* of knowledge; a *search* for reasons; the *chase* of fame or honor; *hunt*, in figurative use, inclines to the unfavorable sense of *inquisition*, but with more of dash and aggressiveness; as, a *hunt* for heresy.

HYPOCRISY

SYNONYMS:

affectation	formalism	pretense	sham
cant	pharisaism	sanctimoniousness	
dissimulation	pietism	sanctimony	

Pretense (from L. *præterendo*) primarily signifies the holding something forward as having certain rights or claims, whether truly or falsely; in the good sense, it is now rarely used except with a negative; as, there can be no *pretense* that this is due; a false *pretense* implies the possibility of a true *pretense*; but, alone and unlimited, *pretense* commonly signifies the offering of something for what it is not. *Hypocrisy* is the false *pretense* of moral excellence, either as a cover for actual wrong, or for the sake of the credit and advantage attaching to virtue. *Cant* (from L. *cantus*, a song), primarily the singsong iteration of the language of any party, school, or sect, denotes the mechanical and pretentious use of religious phraseology, without corresponding feeling or character; *sanctimoniousness* is the assumption of a saintly manner without a saintly character. As *cant* is *hypocrisy* in utterance, so *sanctimoniousness* is *hypocrisy* in appearance, as in looks, tones, etc. *Pietism*, originally a word of good import, is now chiefly used for an unregulated

emotionalism; *formalism* is an exaggerated devotion to forms, rites, and ceremonies, without corresponding earnestness of heart; *sham* (identical in origin with *shame*) is a trick or device that puts one to shame, or that shamefully disappoints expectation or falsifies appearance. *Affectation* is in matters of intellect, taste, etc., much what *hypocrisy* is in morals and religion; *affectation* might be termed petty *hypocrisy*. Compare DECEPTION.

ANTONYMS:

candor	genuineness	ingenuousness	sincerity	truth
frankness	honesty	openness	transparency	truthfulness

HYPOCRITE

SYNONYMS:

cheat deceiver dissembler impostor pretender

A *hypocrite* (from Gr. *hypokrites*, one who answers on the stage, an actor, especially a mimic actor) is one who acts a false part, or assumes a character other than the real. *Deceiver* is the most comprehensive term, including all the other words of the group. The *deceiver* seeks to give false impressions of any matter where he has an end to gain; the *dissembler* or *hypocrite* seeks to give false impressions in regard to himself. The *dissembler* is content if he can keep some base conduct or evil purpose from being discovered; the *hypocrite* seeks not merely to cover his vices, but to gain credit for virtue. The *cheat* and *impostor* endeavor to make something out of those they may deceive. The *cheat* is the inferior and more mercenary, as the thimble-rig gambler; the *impostor* may aspire to a fortune or a throne. Compare HYPOCRISY.

ANTONYMS:

The antonyms of *hypocrite* are to be found only in phrases embodying the adjectives candid, honest, ingenuous, sincere, true, etc.

HYPOTHESIS

SYNONYMS:

conjecture	scheme	supposition	system
guess	speculation	surmise	theory

A *hypothesis* is a statement of what is deemed possibly true, assumed and reasoned upon as if certainly true, with a view of

reaching truth not yet surely known; especially, in the sciences, a *hypothesis* is a comprehensive tentative explanation of certain phenomena, which is meant to include all other facts of the same class, and which is assumed as true till there has been opportunity to bring all related facts into comparison; if the *hypothesis* explains all the facts, it is regarded as verified; till then it is regarded as a working *hypothesis*, that is, one that may answer for present practical purposes. A *hypothesis* may be termed a comprehensive *guess*. A *guess* is a swift conclusion from data directly at hand, and held as probable or tentative, while one confessedly lacks material for absolute certainty. A *conjecture* is more methodical than a *guess*, while a *supposition* is still slower and more settled; a *conjecture*, like a *guess*, is preliminary and tentative; a *supposition* is more nearly final; a *surmise* is more floating and visionary, and often sinister; as, a *surmise* that a stranger may be a pickpocket. *Theory* is used of the mental coordination of facts and principles, that may or may not prove correct; a machine may be perfect in *theory*, but useless in fact. *Scheme* may be used as nearly equivalent to *theory*, but is more frequently applied to proposed action, and in the sense of a somewhat visionary plan. A *speculation* may be wholly of the brain, resting upon no facts worthy of consideration; *system* is the highest of these terms, having most of assurance and fixity; a *system* unites many facts, phenomena, or doctrines into an orderly and consistent whole; we speak of a *system* of theology, of the Copernican *system* of the universe. Compare SYSTEM.

ANTONYMS:

certainty demonstration discovery evidence fact proof

IDEA**SYNONYMS:**

apprehension	design	impression	plan
archetype	fancy	judgment	purpose
belief	fantasy	model	sentiment
conceit	ideal	notion	supposition
concept	image	opinion	theory
conception	imagination	pattern	thought

Idea is in Greek a *form* or an *image*. The word signified in early philosophical use the *archetype* or primal *image* which the Platonic philosophy supposed to be the *model* or *pattern* that

existing objects imperfectly embody. This high sense has nearly disappeared from the word *idea*, and has been largely appropriated by *ideal*, though something of the original meaning still appears when in theological or philosophical language we speak of the *ideas* of God. The present popular use of *idea* makes it to signify any product of mental *apprehension* or activity, considered as an object of knowledge or thought; this coincides with the primitive sense at but a single point—that an *idea* is mental as opposed to anything substantial or physical; thus, almost any mental product, as a *belief*, *conception*, *design*, *opinion*, etc., may now be called an *idea*. Compare FANCY; IDEAL.

ANTONYMS:

actuality

fact

reality

substance

IDEAL**SYNONYMS:**archetype
ideamodel
originalpattern
prototype

standard

An *ideal* is that which is conceived or taken as the highest type of excellence or ultimate object of attainment. The *archetype* is the primal form, actual or imaginary, according to which any existing thing is constructed; the *prototype* has or has had actual existence; in the derived sense, as in metrology, a *prototype* may not be the original form, but one having equal authority with that as a *standard*. An *ideal* may be primal, or may be slowly developed even from failures and by negations; an *ideal* is meant to be perfect, not merely the thing that has been attained or is to be attained, but the best conceivable thing that could by possibility be attained. The artist's *ideal* is his own mental image, of which his finished work is but an imperfect expression. The *original* is the first specimen, good or bad; the *original* of a master is superior to all copies. The *standard* may be below the *ideal*. The *ideal* is imaginary, and ordinarily unattainable; the *standard* is concrete, and ordinarily attainable, being a measure to which all else of its kind must conform; as, the *standard* of weights and measures, of corn, or of cotton. The *idea* of virtue is the mental concept or image of virtue in general; the *ideal* of virtue is the mental concept or image of virtue in its highest conceivable perfection. Compare EXAMPLE; IDEA.

ANTONYMS:

accomplishment	action	doing	fact	practise
achievement	attainment	embodiment	incarnation	reality
act	development	execution	performance	realization

IDIOCY**SYNONYMS:**

fatuity	foolishness	incapacity	stupidity
folly	imbecility	senselessness	

Idiocy is a state of mental unsoundness amounting almost or quite to total absence of understanding. *Imbecility* is a condition of mental weakness, which may or may not be as complete as that of *idiocy*, but is at least such as to incapacitate for the serious duties of life. *Incapacity*, or lack of legal qualification for certain acts, necessarily results from *imbecility*, but may also result from other causes, as from insanity or from age, sex, etc.; as, the *incapacity* of a minor to make a contract. *Idiocy* or *imbecility* is weakness of mind, while insanity is disorder or abnormal action of mind. *Folly* and *foolishness* denote a want of mental and often of moral balance. *Fatuity* is sometimes used as equivalent to *idiocy*, but more frequently signifies conceited and excessive *foolishness* or *folly*. *Stupidity* is dulness and slowness of mental action which may range all the way from lack of normal readiness to absolute *imbecility*. Compare INSANITY.

ANTONYMS:

acuteness	brilliancy	common sense	sagacity	soundness
astuteness	capacity	intelligence	sense	wisdom

IDLE**SYNONYMS:**

inactive	inert	slothful	trifling	unoccupied
indolent	lazy	sluggish	unemployed	vacant

Idle in all uses rests upon its root meaning, as derived from the Anglo-Saxon *idel*, which signifies vain, empty, useless. *Idle* thus denotes not primarily the absence of action, but vain action—the absence of useful, effective action; the *idle* schoolboy may be very actively whittling his desk or tormenting his neighbors. Doing nothing whatever is the secondary meaning of *idle*. One may be temporarily *idle* of necessity; if he is habitually *idle*, it is his own fault. *Lazy* signifies indisposed to exertion, averse to labor; idleness is in fact; laziness is in disposition or inclina-

tion. A *lazy* person may chance to be employed in useful work, but he acts without energy or impetus. We speak figuratively of a *lazy* stream. The *inert* person seems like dead matter (characterized by inertia), powerless to move; the *sluggish* moves heavily and toilsomely; the most active person may sometimes find the bodily or mental powers *sluggish*. *Slothful* belongs in the moral realm, denoting a self-indulgent aversion to exertion. "The *slothful* hideth his hand in his bosom; it grieveth him to bring it again to his mouth," *Prov.* xxvi, 15. *Indolent* is a milder term for the same quality; the *indolent* man loves inaction. Compare VAIN.

ANTONYMS:

active busy diligent employed industrious occupied working

IGNORANT

SYNONYMS:

ill-informed	unenlightened	unlearned	untaught
illiterate	uninformed	unlettered	untutored
uneducated	uninstructed	unskilled	

Ignorant signifies destitute of education or knowledge, or lacking knowledge or information; it is thus a relative term. The most learned man is still *ignorant* of many things; persons are spoken of as *ignorant* who have not the knowledge that has become generally diffused in the world; the *ignorant* savage may be well instructed in matters of the field and the chase, and is thus more properly *untutored* than *ignorant*. *Illiterate* is without letters and the knowledge that comes through reading. *Unlettered* is similar in meaning to *illiterate*, but less absolute; the *unlettered* man may have acquired the art of reading and writing and some elementary knowledge; the *uneducated* man has never taken any systematic course of mental training. *Ignorance* is relative; *illiteracy* is absolute; we have statistics of *illiteracy*; no statistics of *ignorance* are possible.

ANTONYMS:

educated	learned	skilled	well-informed
instructed	sage	trained	wise

IMAGINATION

SYNONYMS:

fancy	fantasy	phantasy
-------	---------	----------

The old psychology treated of the *Reproductive Imagination*,

which simply reproduces the images that the mind has in any way acquired, and the *Productive Imagination* which modifies and combines mental images so as to produce what is virtually new. To this *Reproductive Imagination* President Noah Porter and others have given the name of *phantasy* or *fantasy* (many psychologists preferring the former spelling). *Phantasy* or *fantasy*, so understood, presents numerous and varied images, often combining them into new forms with exceeding vividness, yet without any true constructive power, but with the mind adrift, blindly and passively following the laws of association, and with reason and will in torpor; the mental images being perhaps as varied and as vivid, but also as purposeless and unsystematized as the visual images in a kaleidoscope, such *fantasy* (often loosely called *imagination*) appears in dreaming, reverie, somnambulism, and intoxication. *Fantasy* in ordinary usage simply denotes capricious or erratic *fancy*, as appears in the adjective *fantastic*. *Imagination* and *fancy* differ from *fantasy* in bringing the images and their combinations under the control of the will; *imagination* is the broader and higher term, including *fancy*; *imagination* is the act or power of imaging or of reimagining objects of perception or thought, of combining the products of knowledge in modified, new, or ideal forms—the creative or constructive power of the mind; while *fancy* is the act or power of forming pleasing, graceful, whimsical, or odd mental images, or of combining them with little regard to rational processes of construction; *imagination* in its lower form. Both *fancy* and *imagination* recombine and modify mental images; either may work with the other's materials; *imagination* may glorify the tiniest flower; *fancy* may play around a mountain or a star; the one great distinction between them is that *fancy* is superficial, while *imagination* is deep, essential, spiritual. Wordsworth, who was the first clearly to draw the distinction between the *fancy* and the *imagination*, states it as follows:

To aggregate and to associate, to evoke and to combine, belong as well to the *imagination* as to the *fancy*; but either the materials evoked and combined are different; or they are brought together under a different law, and for a different purpose. *Fancy* does not require that the materials which she makes use of should be susceptible of changes in their constitution from her touch; and where they admit of modification, it is enough for her purpose if it be slight, limited, and evanescent. Directly the reverse of these are the desires and demands of the *imagination*. She recoils from

imagination

everything but the plastic, the phant, and the indefinite. She leaves it to *fancy* to describe Queen Mab as coming:

In shape no bigger than an agate stone
On the forefinger of an alderman.

Having to speak of stature, she does not tell you that her gigantic angel was as tall as Pompey's Pillar; much less that he was twelve cubits or twelve hundred cubits high, or that his dimensions equalled these of Teneriffe or Atlas; because these, and if they were a million times as high, it would be the same, are bounded. The expression is, "His stature reached the sky! the illimitable firmament!"—When the *imagination* frames a comparison, . . . a sense of the truth of the likeness from the moment that it is perceived grows—and continues to grow—upon the mind, the resemblance depending less upon outline of form and feature than upon expression and effect, less upon casual and outstanding than upon inherent and internal properties *

Poetical Works, Pref to Ed. of 1815, p. 646, app. [T. & H. 1851.]

So far as actual images are concerned, both *fancy* and *imagination* are limited to the materials furnished by the external world; it is remarkable that among all the representations of gods or demigods, fiends and demons, griffins and chimæras, the human mind has never invented one organ or attribute that is not presented in human or animal life; the lion may have a human head and an eagle's wings and claws, but in the various features, individually, there is absolutely nothing new. But *imagination* can transcend the work of *fancy*, and compare an image drawn from the external world with some spiritual truth born in the mind itself, or infuse a series of images with such a spiritual truth, molding them as needed for its more vivid expression.

The *imagination* modifies images, and gives unity to variety; it sees all things in one. . . . There is the epic *imagination*, the perfection of which is in Milton; and the dramatic, of which Shakespeare is the absolute master.

COLERIDGE *Table Talk* June 23, 1834.

Fancy keeps the material image prominent and clear, and works not only with it, but for it; *imagination* always uses the material object as the minister of something greater than itself, and often almost loses the object in the spiritual idea with which she has associated it, and for which alone she values it. *Fancy* flits about the surface, and is airy and playful, sometimes petty and sometimes false; *imagination* goes to the heart of

* The whole discussion from which the quotation is taken is worthy of, and will well repay careful study.

things, and is deep, earnest, serious, and seeks always and everywhere for essential truth. *Fancy* sets off, variegates, and decorates; *imagination* transforms and exalts. *Fancy* delights and entertains; *imagination* moves and thrills. *Imagination* is not only poetic or literary, but scientific, philosophical, and practical. By *imagination* the architect sees the unity of a building not yet begun, and the inventor sees the unity and varied interactions of a machine never yet constructed, even a unity that no human eye ever can see, since when the machine is in actual motion, one part may hide the connecting parts, and yet all keep the unity of the inventor's thought. By *imagination* a Newton sweeps sun, planets, and stars into unity with the earth and the apple that is drawn irresistibly to its surface, and sees them all within the circle of one grand law. Science, philosophy, and mechanical invention have little use for *fancy*, but the creative, penetrative power of *imagination* is to them the breath of life, and the condition of all advance and success. See also FANCY; IDEA.

IMMEDIATELY

SYNONYMS:

at once	instantly	presently	straightway
directly	instantly	right away	this instant
forthwith	now	right off	without delay

The strong and general human tendency to procrastination is shown in the progressive weakening of the various words in this group. *Immediately* primarily signifies without the intervention of anything as a medium, hence without the intervention of any, even the briefest, interval or lapse of time. *By and by*, which was once a synonym, has become an antonym of *immediately*, meaning at some (perhaps remote) future time. *Directly*, which once meant with no intervening time, now means after some little while; *presently* no longer means in this very present, but before very long. Even *immediately* is sliding from its instantaneousness, so that we are fain to substitute *at once*, *instantly*, etc., when we would make promptness emphatic. *Right away* and *right off* are vigorous conversational expressions in the United States.

ANTONYMS:

after a while by and by hereafter in the future some time

IMMERSE

SYNONYMS:

bury dip douse duck immerse plunge sink submerge

Dip is Saxon, while *immerse* is Latin for the same initial act: *dip* is accordingly the more popular and commonplace, *immerse* the more elegant and dignified expression in many cases. To speak of baptism by immersion as *dipping* now seems rude; though entirely proper and usual in early English. Baptists now universally use the word *immerse*. To *dip* and to *immerse* alike signify to *bury* or *submerge* some object in a liquid; but *dip* implies that the object *dipped* is at once removed from the liquid, while *immerse* is wholly silent as to the removal. *Immerse* also suggests more absolute completeness of the action; one may *dip* his sleeve or *dip* a sponge in a liquid, if he but touches the edge; if he *immerses* it, he completely *sinks* it under, and covers it with the liquid. *Submerge* implies that the object can not readily be removed, if at all; as, a *submerged* wreck. To *plunge* is to *immerse* suddenly and violently, for which *douse* and *duck* are colloquial terms. *Dip* is used, also, unlike the other words, to denote the putting of a hollow vessel into a liquid in order to remove a portion of it; in this sense we say *dip up*, *dip out*. Compare synonyms for **BURY**.

PREPOSITION:

The object is immersed *in* water.

IMMINENT

SYNONYMS:

impending

threatening

Imminent, from the Latin, with the sense of projecting over, signifies liable to happen at once, as some calamity, dangerous and close at hand. *Impending*, also from the Latin, with the sense of hanging over, is closely akin to *imminent*, but somewhat less emphatic. *Imminent* is more immediate, *impending* more remote, *threatening* more contingent. An *impending* evil is almost sure to happen at some uncertain time, perhaps very near; an *imminent* peril is one liable to befall very speedily; a *threatening* peril may be near or remote, but always with hope that it may be averted.

ANTONYMS:

chimerical
contingent

doubtful
improbable

problematical
unexpected

unlikely

IMPEDIMENT

SYNONYMS:

bar	clog	encumbrance	obstacle
barrier	difficulty	hindrance	obstruction

Difficulty makes an undertaking otherwise than easy. That which rests upon one as a burden is an *encumbrance*. An *impediment* is primarily something that checks the foot or in any way makes advance slow or difficult; an *obstacle* is something that stands across the way, an *obstruction* something that is built or placed across the way. An *obstruction* is always an *obstacle*, but an *obstacle* may not always be properly termed an *obstruction*; boxes and bales placed on the sidewalk are *obstructions* to travel; an ice-floe is an *obstacle* to navigation, and may become an *obstruction* if it closes an inlet or channel. A *hindrance* (kindred with *hind*, *behind*) is anything that makes one come behind or short of his purpose. An *impediment* may be either what one finds in his way or what he carries with him; *impedimenta* was the Latin name for the baggage of a soldier or of an army. The tendency is to view an *impediment* as something constant or, at least for a time, continuous; as, an *impediment* in one's speech. A *difficulty* or a *hindrance* may be either within one or without; a speaker may find *difficulty* in expressing himself, or *difficulty* in holding the attention of restless children. An *encumbrance* is always what one carries with him; an *obstacle* or an *obstruction* is always without. To a marching soldier the steepness of a mountain path is a *difficulty*, loose stones are *impediments*, a fence is an *obstruction*, a cliff or a boulder across the way is an *obstacle*; a knapsack is an *encumbrance*.

ANTONYMS:

advantage aid assistance benefit help relief succor

IMPORTANT

SYNONYMS:

considerable	essential	of consequence	relevant
critical	grave	of importance	serious
deciding	great	of moment	significant
decisive	influential	powerful	substantial
determinative	material	prominent	weighty
determining	momentous		

That is *considerable* which is worthy to be considered; *considerable* is thus a word of much latitude, and is a concessive

word; to say that any matter is *considerable* implies that it is not to be overlooked, but may very possibly be surpassed. That is important which imports or means much with reference to some desired result; *important* is thus a stronger word than *considerable*. *Momentous* is stronger still, signifying of such weight or consequence as to make other matters seem trivial by comparison. The Anglo-Saxon *weighty* is less emphatic than *momentous*, more substantial than *important*; *weighty* matters have power by and of themselves, with less reference to an effect upon the result than *important* matters; many *weighty* reasons may be overmatched by one *momentous* consideration. That which is *essential*, or *material*, is so involved in the essence, or subject-matter of what is in hand that it can not be separated from it in fact or thought; *material* adheres closely to the matter as existing; as, a *material* difference; *material* evidence; or a *material* witness; *essential* starts at the existing essence; as the *essential* properties of matter; but goes on to a result to be secured; as, an *essential* condition of success. That which is *determinative* tends to determine or fix a result; that which is *determining* does fix it. That which is *decisive* or *deciding* forces decision. That which is *critical* may determine the result at a crisis; as, a *critical* moment; a *critical* issue. That which is *relevant* has real and necessary relation to the matter in hand. *Indispensable*, *necessary*, and *supreme* reach far beyond what is *considerable*, *important* or *momentous* to that which is absolutely controlling, and are thus closely allied with *essential*. Compare NECESSARY.

ANTONYMS:

feeble	insignificant	non-essential	trivial
flimsy	light	paltry	unimportant
frivolous	mean	petty	uninfluential
idle	minor	secondary	unnecessary
immaterial	needless	slight	useless
inconsiderable	negligible	trifling	worthless
indifferent			

IMPUDENCE

SYNONYMS:

assurance	impertinence	intrusiveness	presumption
boldness	incivility	officiousness	rudeness
effrontery	insolence	pertness	sauciness
forwardness			

Impertinence primarily denotes what does not pertain or belong to the occasion or the person, and hence comes to signify

interference by word or act not consistent with the age, position, or relation of the person interfered with or of the one who interferes; especially, forward, presumptuous, or meddlesome speech. *Impudence* is shameless *impertinence*. What would be arrogance in a superior becomes *impertinence* or *impudence* in an inferior. *Impertinence* has less of intent and determination than *impudence*. We speak of thoughtless *impertinence*, shameless *impudence*. *Insolence* is literally that which is against custom, i. e., the violation of customary respect and courtesy. *Officiousness* is thrusting upon others unasked and undesired service, and is often as well-meant as it is annoying. *Rudeness* is the behavior that might be expected from a thoroughly uncultured person, and may be either deliberate and insulting or unintentional and even unconscious. Compare ARROGANCE; ASSURANCE; EFFRONTERY; PERTNESS.

ANTONYMS:

bashfulness	diffidence	lowliness	modesty
coyness	humility	meekness	submissiveness

PREPOSITIONS:

The impudence *of*, or impudence *from*, a subordinate to a superior.

INCONGRUOUS**SYNONYMS:**

absurd	inapposite	inharmonious
conflicting	inappropriate	irreconcilable
contradictory	incoherent	mismatched
contrary	incommensurable	mismatched
discordant	incompatible	repugnant
discrepant	inconsistent	unsuitable
ill-matched		

Two or more things that do not fit well together, or are not adapted to each other, are said to be *incongruous*; a thing is said to be *incongruous* that is not adapted to the time, place, or occasion; the term is also applied to a thing made up of ill-assorted parts or *inharmonious* elements. *Discordant* is applied to all things that jar in association like musical notes that are not in accord; *inharmonious* has the same original sense, but is a milder term. *Incompatible* primarily signifies unable to sympathize or feel alike; *inconsistent* means unable to stand together. That which is *incoherent* lacks coherence or cohesion; the word may be used of material substances; as, *incoherent*

volcanic ashes; or it may be used of thought or argument which lacks logical cohesion. It is oftenest applied to speech, as of one under excitement, delirium, or intoxication. Things are *incompatible* which can not exist together in harmonious relations, and whose action when associated tends to ultimate extinction of one by the other. *Inconsistent* applies to things that can not be made to agree in thought with each other, or with some standard of truth or right; slavery and freedom are *inconsistent* with each other in theory, and *incompatible* in fact. *Incongruous* applies to relations, *unsuitable* to purpose or use; two colors are *incongruous* which can not be agreeably associated; either may be *unsuitable* for a person, a room, or an occasion. *Incommensurable* is a mathematical term, applying to two or more quantities that have no common measure or aliquot part.

ANTONYMS:

accordant
agreeing

compatible
consistent

harmonious
suitable

PREPOSITION:

The illustrations were incongruous *with* the theme.

INDUCTION

SYNONYMS:

deduction

inference

Deduction is reasoning from the general to the particular; *induction* is reasoning from the particular to the general. *Deduction* proceeds from a general principle through an admitted instance to a conclusion. *Induction*, on the other hand, proceeds from a number of collated instances, through some attribute common to them all, to a general principle. The proof of an *induction* is by using its conclusion as the premise of a new *deduction*. Thus what is ordinarily known as scientific *induction* is a constant interchange of *induction* and *deduction*. In *deduction*, if the general rule is true, and the special case falls under the rule, the conclusion is certain; *induction* can ordinarily give no more than a probable conclusion, because we can never be sure that we have collated all instances. An *induction* is of the nature of an *inference*, but while an *inference* may be partial and hasty, an *induction* is careful, and aims to be complete. Compare DEMONSTRATION; HYPOTHESIS.

INDUSTRIOUS

SYNONYMS:

active
assiduousbusy
diligentemployed
engagedoccupied
sedulous

Industrious signifies zealously or habitually applying oneself to any work or business. *Busy* applies to an activity which may be temporary, *industrious* to a habit of life. We say a man is *busy* just now; that is, *occupied* at the moment with something that takes his full attention. It would be ridiculous or satirical to say, he is *industrious* just now. But *busy* can be used in the sense of *industrious*, as when we say he is a *busy* man. *Diligent* indicates also a disposition, which is ordinarily habitual, and suggests more of heartiness and volition than *industrious*. We say one is a *diligent*, rather than an *industrious*, reader of the Bible. In the use of the nouns, we speak of plodding *industry* but not of plodding *diligence*. Compare ACTIVE; INDUSTRY.

ANTONYMS:

See synonyms for IDLE.

INDUSTRY

SYNONYMS:

application
assiduity
attention
constancydiligence
effort
exertion
intentnesslabor
pains
patience
perseverancepersistence
sedulousness

Industry is the quality, action, or habit of earnest, steady, and continued attention or devotion to any useful or productive work or task, manual or mental. *Assiduity* (from L. *ad*, to, and *sedeo*, sit), as the etymology suggests, sits down to a task until it is done. *Diligence* (from L. *deligo*, love, choose) invests more effort and exertion, with love of the work or deep interest in its accomplishment; *application* (from L. *ad*, to, and *plico*, fold) bends to its work and concentrates all one's powers upon it with utmost intensity; hence, *application* can hardly be as unremitting as *assiduity*. *Constancy* is a steady devotion of heart and principle. *Patience* works on in spite of annoyances; *perseverance* overcomes hindrances and difficulties; *persistence* strives relentlessly against opposition; *persistence* has very frequently an unfavorable meaning, implying that one persists in spite of considerations that should induce him to desist.

Industry is *diligence* applied to some avocation, business, or profession. *Labor* and *pains* refer to the *exertions* of the worker and the tax upon him, while *assiduity*, *perseverance*, etc., refer to his continuance in the work.

ANTONYMS:

changeableness	idleness	inconstancy	neglect	remissness
fickleness	inattention	indolence	negligence	sloth

INFINITE

SYNONYMS:

absolute	illimitable	limitless	unconditioned
boundless	immeasurable	measureless	unfathomable
countless	innumerable	numberless	unlimited
eternal	interminable	unbounded	unmeasured

Infinite (from L. *in*, not, and *finis*, limit) signifies without bounds or limits in any way, and may be applied to space, time, quantity, or number. *Countless*, *innumerable*, and *numberless*, which should be the same as *infinite*, are in common usage vaguely employed to denote what it is difficult or practically impossible to count or number, though perhaps falling far short of *infinite*; as, *countless* leaves, the *countless* sands on the seashore, *numberless* battles, *innumerable* delays. So, too, *boundless*, *illimitable*, *limitless*, *measureless*, and *unlimited* are loosely used in reference to what has no apparent or readily determinable limits in space or time; as, we speak of the *boundless* ocean. *Infinite* space is without bounds, not only in fact, but in thought; *infinite* time is truly *eternal*. Compare synonyms for **ETERNAL**.

ANTONYMS:

bounded	finite	moderate	short
brief	limited	narrow	small
circumscribed	little	restricted	transient
evanescent	measurable	shallow	transitory

INFLUENCE

SYNONYMS:

actuate	draw	impel	induce	move	stir
compel	drive	incite	instigate	persuade	sway
dispose	excite	incline	lead	prompt	urge

To *influence* (from L. *in*, in or into, and *fluo*, flow) is to affect, modify, or act upon by physical, mental, or moral power, especially in some gentle, subtle, and gradual way; as, vegetation is *influenced* by light; every one is *influenced* to

some extent by public opinion; *influence* is chiefly used of power acting from without, though it may be used of motives regarded as forces acting upon the will. *Actuate* refers solely to mental or moral power *impelling* one from within. One may *influence*, but can not directly *actuate* another; but one may be *actuated* to cruelty by hatred which another's misrepresentation has aroused. *Prompt* and *stir* are words of mere suggestion toward some course of action; *dispose*, *draw*, *incline*, *influence*, and *lead* refer to the use of mild means to awaken in another a purpose or disposition to act. To *excite* is to arouse one from lethargy or indifference to action. *Incite* and *instigate*, to spur or goad one to action, differ in the fact that *incite* may be to good, while *instigate* is always to evil (compare ABET). To *urge* and *impel* signify to produce strong excitation toward some act. We are *urged* from without, *impelled* from within. *Drive* and *compel* imply irresistible influence accomplishing its object. One may be *driven* either by his own passions or by external force or urgency; one is *compelled* only by some external power; as, the owner was *compelled* by his misfortunes to sell his estate. Compare COMPEL; DRIVE.

ANTONYMS:

deter
discourage
dissuade

hinder
impede

inhibit
prevent

restrain
retard

PREPOSITIONS:

Actuated *to* crime *by* revenge.

INHERENT**SYNONYMS:**

congenital
essential
immanent
inborn
inbred

indispensable
indwelling
infix
ingrained
inhering

innate
inseparable
internal
intrinsic
inwrought

native
natural
subjective

Inherent signifies permanently united as an element or original quality, naturally existent or incorporated in something so as to have become an integral part. *Immanent* is a philosophic word, to denote that which dwells in or pervades any substance or spirit without necessarily being a part of it, and without reference to any working out (compare SUBJECTIVE). That which is *inherent* is an *inseparable* part of that in which it inheres, and is usually thought of with reference to some out-

working or effect; as, an *inherent* difficulty. God is said to be *immanent* (not *inherent*) in the universe. Frequently *intrinsic* and *inherent* can be interchanged, but *inherent* applies to qualities, while *intrinsic* applies to essence, so that to speak of *intrinsic* excellence conveys higher praise than if we say *inherent* excellence. *Inherent* and *intrinsic* may be said of persons or things; *congenital*, *inborn*, *inbred*, *innate* apply to living beings. *Congenital* is frequent in medical and legal use with special application to defects; as, *congenital* idiocy. *Innate* and *inborn* are almost identical, but *innate* is preferred in philosophic use, as when we speak of *innate* ideas; that which is *inborn*, *congenital*, or *innate* may be original with the individual, but that which is *inbred* is inherited. *Ingrained* signifies dyed in the grain, and denotes that which is deeply wrought into substance or character.

ANTONYMS:

accidental	extrinsic	outward	superficial	supplemental
casual	fortuitous	subsidiary	superfluous	transient
external	incidental	superadded	superimposed	unconnected

INJURY

SYNONYMS:

blemish	evil	injustice	outrage
damage	harm	loss	prejudice
detriment	hurt	mischieff	wrong
disadvantage	impairment		

Injury (from L. *in*, not, and *jus*, *juris*, right, law) signifies primarily something done contrary to law or right; hence, something contrary to some standard of right or good; whatever reduces the value, utility, beauty, or desirableness of anything is an *injury* to that thing; of persons, whatever is so done as to operate adversely to one in his person, rights, property, or reputation is an *injury*; the word is especially used of whatever mars the integrity of the body or causes pain; as, when rescued from the wreck his *injuries* were found to be very slight. *Injury* is the general term including all the rest. *Damage* (from L. *damnum*, loss) is that which occasions *loss* to the possessor; hence, any impairment of value, often with the suggestion of fault on the part of the one causing it; *damage* reduces value, utility, or beauty; *detriment* (from L. *deterere*, to rub or wear away) is similar in meaning, but far milder. *Detriment* may affect value only: *damage* always affects real worth

or utility; as a rule, the slightest use of an article by a purchaser operates to its *detriment* if again offered for sale, though the article may have received not the slightest *damage*. *Damage* is partial; *loss* is properly absolute as far as it is predicated at all; the *loss* of a ship implies that it is gone beyond recovery; the *loss* of the rudder is a *damage* to the ship; but since the *loss* of a part still leaves a part, we may speak of a partial or a total *loss*. *Evil* commonly suggests suffering or sin, or both; as, the *evils* of poverty, the social *evil*. *Harm* is closely synonymous with *injury*; it may apply to body, mind, or estate, but always affects real worth, while *injury* may concern only estimated value. A *hurt* is an *injury* that causes pain, physical or mental; a slight *hurt* may be no real *harm*. *Mischief* is disarrangement, trouble, or *harm* usually caused by some voluntary agent, with or without injurious intent; a child's thoughtless sport may do great *mischief*; *wrong* is *harm* done with *evil* intent. An *outrage* combines insult and injury. Compare synonyms for BLEMISH; CRIMINAL; INJUSTICE.

ANTONYMS:

advantage	benefit	boon	improvement	service
amelioration	blessing	help	remedy	utility

PREPOSITIONS:

The injury *of* the cause; an injury *to* the structure; injury *by* fire; *by* or *from* collision, interference, etc.

INJUSTICE**SYNONYMS:**

grievance injury unfairness unrighteousness wrong iniquity

Injustice is a violation or denial of justice, an act or omission that is contrary to equity or justice; as, the *injustice* of unequal taxes. In legal usage, a *wrong* involves *injury* to person, property, or reputation, as the result of evil intent; *injustice* applies to civil damage or loss, not necessarily involving *injury* to person or property, as by misrepresentation of goods which does not amount to a legal warranty. In popular usage, *injustice* may involve no direct *injury* to person, property, interest, or character, and no harmful intent, while *wrong* always involves both; one who attributes another's truly generous act to a selfish motive does him an *injustice*. *Iniquity*, in the original

sense, is a want of or a deviation from equity; but it is now applied in the widest sense to any form of ill-doing. Compare synonyms for CRIMINAL; SIN.

ANTONYMS:

equity	faithfulness	impartiality	lawfulness	righteousness
fairness	honesty	integrity	rectitude	uprightness
fair play	honor	justice	right	

INNOCENT

SYNONYMS:

blameless	guileless	innocuous	sinless
clean	guiltless	inoffensive	spotless
clear	harmless	pure	stainless
exemplary	immaculate	right	upright
faultless	innocuous	righteous	virtuous

Innocent, in the full sense, signifies not tainted with sin; not having done wrong or violated legal or moral precept or duty; as, an *innocent* babe. *Innocent* is a negative word, expressing less than *righteous*, *upright*, or *virtuous*, which imply knowledge of good and evil, with free choice of the good. A little child or a lamb is *innocent*; a tried and faithful man is *righteous*, *upright*, *virtuous*. *Immaculate*, *pure*, and *sinless* may be used either of one who has never known the possibility of evil or of one who has perfectly and triumphantly resisted it. *Innocent* is used of inanimate substances in the sense of *harmless*; as, an *innocent* remedy, that is, one not dangerous, even if not helpful. *Innocent*, in a specific case, signifies free from the guilt of a particular act, even though the total character may be very evil; as, the thief was found to be *innocent* of the murder. *Exemplary* is applied to conduct so excellent as to set a good and worthy example (compare CONDIGN). See CANDID; PURE.

ANTONYMS:

Compare synonyms for CRIMINAL.

INQUISITIVE

SYNONYMS:

curious	meddlesome	peeping	scrutinizing
inquiring	meddling	prying	searching
intrusive			

An *inquisitive* person is one who is bent on finding out all that can be found out by inquiry, especially of little and personal matters, and hence is generally *meddlesome* and *prying*.

Inquisitive may be used in a good sense, though in such connection *inquiring* is to be preferred; as, an *inquiring* mind. As applied to a state of mind, *curious* denotes a keen and rather pleasurable desire to know fully something to which one's attention has been called, but without the active tendency that *inquisitive* implies; a well-bred person may be *curious* to know, but will not be *inquisitive* in trying to ascertain, what is of interest in the affairs of another.

ANTONYMS:

apathetic	heedless	indifferent	uninterested
careless	inattentive	unconcerned	

PREPOSITIONS:

Inquisitive about, concerning, in regard to, regarding trifles.

INSANITY**SYNONYMS:**

aberration	delirium	frenzy	mania
alienation	dementia	hallucination	monomania
craziness	derangement	lunacy	madness

Of these terms *insanity* is the most exact and comprehensive, including in its widest sense all morbid conditions of mind due to diseased action of the brain or nervous system, but in its more frequent restricted use applied to those forms in which the mental disorder is persistent, as distinguished from those in which it is temporary or transient. *Craziness* is a vague popular term for any sort of disordered mental action, or for conduct suggesting it. *Lunacy* originally denoted intermittent *insanity*, supposed to be dependent on the changes of the moon (from L. *luna*): the term is now applied in general and legal use to any form of mental unsoundness except idiocy. *Madness* is the old popular term, now less common, for *insanity* in its widest sense, but with suggestion of excitement, akin to *mania*. In the derived sense, *lunacy* denotes what is insanely foolish, *madness* what is insanely desperate. *Derangement* is a common euphemism for *insanity*. *Delirium* is always temporary, and is specifically the *insanity* of disease, as in acute fevers. *Dementia* is a general weakening of the mental powers: the word is specifically applied to senile *insanity*, dotage. *Aberration* is eccentricity of mental action due to an abnormal state of the perceptive faculties, and is manifested by error in perceptions and rambling thought. *Hallucination* is the apparent perception

of that which does not exist or is not present to the senses, as the seeing of specters or of reptiles in delirium tremens. *Mono-mania* is mental *derangement* as to one subject or object. *Frenzy* and *mania* are forms of raving and furious *insanity*. Compare synonyms for DELUSION; IDIOCY.

ANTONYMS:

clearness good sense lucidity rationality sanity

INTERPOSE

SYNONYMS:

arbitrate	intercept	intermeddle	meddle
intercede	interfere	interrupt	mediate

To *interpose* is to place or come between other things or persons, usually as a means of obstruction or prevention of some effect or result that would otherwise occur, or be expected to take place. *Intercede* and *interpose* are used in a good sense; *intermeddle* always in a bad sense, and *interfere* frequently so. To *intercede* is to come between persons who are at variance, and plead with the stronger in behalf of the weaker. One may *interpose* with authority; he *intercedes* by petition. To *intermeddle* is to thrust oneself into the concerns of others with a petty officiousness; *meddling* commonly arises from idle curiosity; "every fool will be *meddling*," *Prov. xx, 3*; to *interfere* is to intrude into others' affairs with more serious purpose, with or without acknowledged right or propriety. *Intercept* is applied to an object that may be seized or stopped while in transit; as, to *intercept* a letter or a messenger; *interrupt* is applied to an action which might or should be continuous, but is broken in upon (from *L. rumpere*, to break) by some disturbing power; as, the conversation was *interrupted*. One who *arbitrates* or *mediates* must do so by the request or at least with the consent of the contending parties; the other words of the group imply that he steps in of his own accord.

ANTONYMS:

avoid	keep aloof	keep out	retire	stand back
hold aloof	keep away	let alone	stand aside	stand off
hold off	keep clear	let be	stand away	withdraw

PREPOSITION:

Interpose *between* the combatants; *in* the matter.

INVOLVE

SYNONYMS:

complicate	embarrass	entangle	imply	overwhelm
contain	embroil	implicate	include	

To *involve* (from L. *in*, in, and *volvo*, roll) is to roll or wind up with or in so as to combine inextricably or inseparably, or nearly so; as, the nation is *involved* in war; the bookkeeper's accounts, or the writer's sentences are *involved*. *Involve* is a stronger word than *implicate*, denoting more complete entanglement. As applied to persons, *implicate* is always used in an unfavorable sense, and *involve* ordinarily so; but *implicate* applies only to that which is wrong, while *involve* is more commonly used of that which is unfortunate; one is *implicated* in a crime, *involved* in embarrassments, misfortunes, or perplexities. As regards logical connection, that which is *included* is usually expressly stated; that which is *implied* is not stated, but is naturally to be inferred; that which is *involved* is necessarily to be inferred; as, a slate roof is *included* in the contract; that the roof shall be water-tight is *implied*; the contrary supposition *involves* an absurdity. See COMPLEX.

ANTONYMS:

disconnect	distinguish	extricate	separate
disentangle	explicate	remove	

JOURNEY

SYNONYMS:

excursion	pilgrimage	transit	trip
expedition	tour	travel	voyage

A *journey* (from F. *journée*, from L. *diurnus*, daily) was primarily a day's work; hence, a movement from place to place within one day, which we now describe as "a day's journey"; in its extended modern use a *journey* is a direct going from a starting-point to a destination, ordinarily over a considerable distance; we speak of a day's *journey*, or the *journey* of life. *Travel* is a passing from place to place, not necessarily in a direct line or with fixed destination; a *journey* through Europe would be a passage to some destination beyond or at the farther boundary; *travel* in Europe may be in no direct course, but may include many *journeys* in different directions. A *voyage*, which was formerly a *journey* of any kind, is now a going to a considerable distance by water, especially by sea; as, a *voyage* to India. A *trip* is a short and direct *journey*. A *tour* is a

journey that returns to the starting-point, generally over a considerable distance; as, a *bridal tour* or *business tour*. An *excursion* is a brief *tour* or *journey*, taken for pleasure, often by many persons at once; as, an *excursion* to Chautauqua. *Passage* is a general word for a *journey* by any conveyance, especially by water; as, a rough *passage* across the Atlantic; *transit*, literally the act of passing over or through, is used specifically of the conveyance of passengers or merchandise; rapid *transit* is demanded for suburban residents or perishable goods. *Pilgrimage*, once always of a sacred character, retains in derived uses something of that sense; as, a *pilgrimage* to Stratford-on-Avon.

PREPOSITIONS:

A journey *from* Naples *to* Rome; *through* Mexico; *across* the continent; *over* the sea; a journey *into* Asia; *among* savages; *by* land, *by* rail, *for* health, *on* foot, *on* the cars, etc.

JUDGE

SYNONYMS:

arbiter arbitrator justice referee umpire

A *judge*, in the legal sense, is a judicial officer appointed or elected to preside in courts of law, and to decide legal questions duly brought before him; the name is sometimes given to other legally constituted officers; as, the *judges* of election; in other relations, any person duly appointed to pass upon the merits of contestants or of competing articles may be called a *judge*; as, the *judges* at an agricultural fair or at a race-track; in the widest sense, any person who has good capacity for judging is called a *judge*; as, a person is said to be a *judge* of pictures, or a good *judge* of a horse, etc. In most games the *judge* is called an *umpire*; as, the *umpire* of a game of ball or cricket. A *referee* is appointed by a court to decide disputed matters between litigants; an *arbitrator* is chosen by the contending parties to decide matters in dispute without action by a court. In certain cases an *umpire* is appointed by a court to decide where *arbitrators* disagree. *Arbiter*, with its suggestion of final and absolute decision, has come to be used only in a high or sacred sense; as, war must now be the *arbiter*; the Supreme *Arbiter* of our destinies. The *judges* of certain courts, as the United States Supreme Court, are technically known as *justices*.

JUSTICE

SYNONYMS:

equity	impartiality	legality	rightfulness
fairness	integrity	rectitude	truth
fair play	justness	right	uprightness
faithfulness	law	righteousness	virtue
honor	lawfulness		

In its governmental relations, human or divine, *justice* is the giving to every person exactly what he deserves, not necessarily involving any consideration of what any other may deserve; *equity* (the quality of being equal) is giving every one as much advantage, privilege, or consideration as is given to any other; it is that which is equally right or just to all concerned; *equity* is equal *justice* and is thus a close synonym for *fairness* and *impartiality*, but it has a philosophical and legal precision that those words have not. In legal proceedings cases arise for which the law has not adequately provided, or in which general provisions, just in the main, would work individual hardship. The system of *equity*, devised to supply the insufficiencies of *law*, deals with cases "to which the *law* by reason of its universality can not apply." "*Equity*, then, . . . is the soul and spirit of all *law*; positive *law* is construed and rational *law* is made by it." BLACKSTONE bk. iii, ch. 27, p. 429. In personal and social relations *justice* is the rendering to every one what is due or merited, whether in act, word, or thought; in matters of reasoning, or literary work of any kind, *justice* is close, faithful, unprejudiced, and unbiased adherence to essential truth or fact; we speak of the *justice* of a statement, or of doing *justice* to a subject. *Integrity*, *rectitude*, *right*, *righteousness* and *virtue* denote conformity of personal conduct to the moral law, and thus necessarily include *justice*, which is giving others that which is their due. *Lawfulness* is an ambiguous word, meaning in its narrower sense mere *legality*, which may be very far from *justice*, but in its higher sense signifying accordance with the supreme *law* of *right*, and thus including perfect *justice*. *Justness* refers rather to logical relations than to practical matters; as, we speak of the *justness* of a statement or of a criticism. See JUDGE, *n*.

ANTONYMS:

dishonesty	inequity	partiality	unlawfulness	untruth
favoritism	injustice	unfairness	unreasonableness	wrong

PREPOSITIONS:

The justice of the king; *to* or *for* the oppressed.

KEEP

SYNONYMS:

carry	defend	hold	preserve	retain
carry on	detain	maintain	protect	support
celebrate	fulfil	obey	refrain	sustain
conduct	guard	observe	restrain	withhold
conserve				

Keep, signifying generally to have and retain in possession, is the terse, strong Saxon term for many acts which are more exactly discriminated by other words. We *keep*, *observe*, or *celebrate* a festival; we *keep* or *hold* a prisoner in custody; we *keep* or *preserve* silence, *keep* the peace, *preserve* order—*preserve* being the more formal word; we *keep* or *maintain* a horse, a servant, etc.; a man *supports* his family; we *keep* or *obey* a commandment; *keep* or *fulfil* a promise. To *conserve* anything is to *keep* or *preserve* it in its present state; as, to *conserve* the interests of employers or of workingmen. In the expressions to *keep* a secret, *keep* one's own council, *keep* faith, or *keep* the faith, such words as *preserve* or *maintain* could not be substituted without loss. A person *keeps* a shop or store, *conducts* or *carries on* a business; he *keeps* or *carries* a certain line of goods; we may *keep* or *restrain* one from folly, crime, or violence; we *keep* from or *refrain* from evil, ourselves. *Keep* in the sense of *guard* or *defend* implies that the defense is effectual. Compare CELEBRATE; RESTRAIN.

PREPOSITIONS:

Keep in hand, *in* mind, *in* or *within* the house; *from* evil; *out of* mischief, *keep to* the subject; *keep for* a person, an occasion, etc.

KILL

SYNONYMS:

assassinate	despatch	massacre	put to death	slay
butcher	execute	murder	slaughter	

To *kill* is simply to deprive of life, human, animal, or vegetable, with no suggestion of how or why. *Assassinate*, *execute*, *murder* apply only to the taking of human life; to *murder* is to *kill* with premeditation and malicious intent; to *execute* is to *kill* in fulfilment of a legal sentence; to *assassinate* is to *kill*

by assault; this word is chiefly applied to the *killing* of public or eminent persons through alleged political motives, whether secretly or openly. To *slay* is to *kill* by a blow, or by a weapon. *Butcher* and *slaughter* apply primarily to the *killing* of cattle; *massacre* is applied primarily and almost exclusively to human beings, signifying to *kill* them indiscriminately in large numbers; to *massacre* is said when there is no chance of successful resistance; to *butcher* when the *killing* is especially brutal; soldiers mown down in a hopeless charge are said to be *slaughtered* when no brutality on the enemy's part is implied. To *despatch* is to *kill* swiftly and in general quietly, always with intention, with or without right.

PREPOSITIONS:

To kill *with* or *by* sword, famine, pestilence, care, grief, etc.; killed *for* his money, *by* a robber, *with* a dagger.

KIN

SYNONYMS:

affinity	blood	family	race
alliance	consanguinity	kind	relationship
birth	descent	kindred	

Kind is broader than *kin*, denoting the most general *relationship*, as of the whole human species in *mankind*, *humankind*, etc.; *kin* and *kindred* denote direct *relationship* that can be traced through either blood or marriage, preferably the former; either of these words may signify collectively all persons of the same blood or members of the same family, relatives or relations. *Affinity* is *relationship* by marriage, *consanguinity* is *relationship* by blood. There are no true antonyms of *kin* or *kindred*, except those made by negatives, since strangers, aliens, foreigners, and foes may still be *kin* or *kindred*.

KNOWLEDGE

SYNONYMS:

acquaintance	erudition	learning	recognition
apprehension	experience	light	scholarship
cognition	information	lore	science
cognizance	intelligence	perception	wisdom
comprehension	intuition		

Knowledge is all that the mind knows, from whatever source derived or obtained, or by whatever process; the aggregate of

facts, truths, or principles acquired or retained by the mind, including alike the *intuitions* native to the mind and all that has been learned respecting phenomena, causes, laws, principles, literature, etc. There is a tendency to regard *knowledge* as accurate and systematic, and to a certain degree complete. *Information* is *knowledge* of fact, real or supposed, derived from persons, books, or observation, and is regarded as casual and haphazard. We say of a studious man that he has a great store of *knowledge*, or of an intelligent man of the world, that he has a fund of varied *information*. *Lore* is used only in poetic or elevated style, for accumulated *knowledge*, as of a people or age, or in a more limited sense for *learning* or *erudition*. We speak of *perception* of external objects, *apprehension* of intellectual truth. Simple *perception* gives a limited *knowledge* of external objects, merely as such; the *cognition* of the same objects is a *knowledge* of them in some relation; *cognizance* is the formal or official *recognition* of something as an object of *knowledge*; we take *cognizance* of it. *Intuition* is primary *knowledge* antecedent to all teaching or reasoning, *experience* is *knowledge* that has entered directly into one's own life; as, a child's *experience* that fire will burn. *Learning* is much higher than *information*, being preeminently wide and systematic *knowledge*, the result of long, assiduous study; *erudition* is recondite *learning* secured only by extraordinary industry, opportunity, and ability. Compare ACQUAINTANCE; EDUCATION; SCIENCE; WISDOM.

ANTONYMS:

ignorance	inexperience	misconception	rudeness
illiteracy	misapprehension	misunderstanding	unfamiliarity

LANGUAGE

SYNONYMS:

barbarism	expression	patois	vernacular
dialect	idiom	speech	vocabulary
diction	mother tongue	tongue	

Language (from F. *langage*, from L. *lingua*, the tongue) signified originally *expression* of thought by spoken words, but now in its widest sense it signifies *expression* of thought by any means; as, the *language* of the eyes, the *language* of flowers. As regards the use of words, *language* in its broadest sense denotes all the uttered sounds and their combinations into words

and sentences that human beings employ for the communication of thought, and, in a more limited sense, the words or combinations forming a means of communication among the members of a single nation, people, or race. *Speech* involves always the power of articulate utterance; we can speak of the *language* of animals, but not of their *speech*. A *tongue* is the *speech* or *language* of some one people, country, or race. A *dialect* is a special mode of speaking a *language* peculiar to some locality or class, not recognized as in accordance with the best usage; a *barbarism* is a perversion of a *language* by ignorant foreigners, or some usage akin to that. *Idiom* refers to the construction of phrases and sentences, and the way of forming or using words; it is the peculiar mold in which each *language* casts its thought. The great difficulty of translation is to give the thought expressed in one *language* in the *idiom* of another. A *dialect* may be used by the highest as well as the lowest within its range; a *patois* is distinctly illiterate, belonging to the lower classes; those who speak a *patois* understand the cultured form of their own language, but speak only the degraded form, as in the case of the Italian lazzaroni or the former negro slaves in the United States. *Vernacular*, from the Latin, has the same general sense as the Saxon *mother tongue*, of one's native *language*, or that of a people; as, the Scriptures were translated into the *vernacular*. Compare **DICTION**.

LARGE

SYNONYMS:

abundant	coarse	gigantic	long
ample	colossal	grand	massive
big	commodious	great	spacious
broad	considerable	huge	vast
bulky	enormous	immense	wide
capacious	extensive		

Large denotes extension in more than one direction, and beyond the average of the class to which the object belongs; we speak of a *large* surface or a *large* solid, but of a *long* line; a *large* field, a *large* room, a *large* apple, etc. A *large* man is a man of more than ordinary size; a *great* man is a man of remarkable mental power. *Big* is a more emphatic word than *large*, but of less dignity. We do not say that George Washington was a *big* man.

ANTONYMS:

brief	limited	minute	scanty	small
diminutive	little	narrow	short	tiny
inconsiderable	mean	paltry	slender	trifling
infinitesimal	microscopic	petty	slight	trivial
insignificant				

LATENT**SYNONYMS:**

concealed	included	potential	undeveloped
dormant	inherent	recondite	unknown
hidden	invisible	secret	unobserved
imperceptible	involved	torpid	unperceived
implicit	occult	uncomprehended	unseen
implied			

That which is *latent* (from *L. lateo*, be hidden) is *hidden* from ordinary observation (compare *HIDE*); as, *latent* powers; a *latent* motive; a disease is said to be *latent* between the time of its contraction and its manifestation. *Dormant* (from *L. dormio*, sleep) applies to the winter condition of hibernating animals, when they seem asleep, or are even apparently lifeless; we speak of *dormant* energies (which have acted, and may yet again be aroused); a *dormant* volcano; *torpid* (from *L. torpeo*, be numb) is practically equivalent to *dormant* as applied to a hibernating animal; *torpid* merely denotes the insensibility, which *dormant* accounts for as a form of sleep; hence, *torpid* applies to whatever is sluggish, dull, and lethargic, without the same suggestion of possible arousal as in *dormant*; we should not speak of *torpid* energy. *Potential* applies to that which is possible, but not actual; a *potential* poet or orator has the qualities, though yet undeveloped, that may make a poet or an orator; *potential* energy or force is energy or force that under certain conditions is sure to come into action; *potential* has not the same suggestion as *dormant* of power that has been previously active. That is *recondite* which is hidden from ordinary and easy perception and intelligence, and only to be known (if at all) by unusual and difficult research. *Occult* always carries the sense of mystery; originally applied to the unknown or ill-understood forces or facts of physical science, the word is now extended to whatever is *recondite* and mysterious, not to be discovered or understood by the ordinary action of the human faculties, or not to be known by any action of the material senses, but only by an illuminated spiritual perception. Compare *MYSTERIOUS*.

ANTONYMS:active
apparent
conspicuousdeveloped
evident
explicitexposed
manifest
perceptibleunconcealed
visible**LAW****SYNONYMS:**canon
code
command
commandment
decreeeconomy
edict
enactment
formula
jurisprudencelegislation
mandate
order
ordinance
polityprinciple
regulation
rule
statute

Law, in its ideal, is the statement of a *principle* of right in mandatory form, by competent authority, with adequate penalty for disobedience; in common use, the term is applied to any legislative act, however imperfect or unjust. *Command* and *commandment* are personal and particular; as, the *commands* of a parent; the ten *commandments*. An *edict* is the act of an absolute sovereign or other authority; we speak of the *edict* of an emperor, the *decree* of a court. A *mandate* is specific, for an occasion or a purpose; a superior court issues its *mandate* to an inferior court to send up its records. *Statute* is the recognized legal term for a specific *law*; *enactment* is the more vague and general expression. We speak of algebraic or chemical *formulas*, municipal *ordinances*, military *orders*, army *regulations*, ecclesiastical *canons*, the *rules* of a business house. *Law* is often used, also, for a recognized *principle*, whose violation is attended with injury or loss that acts like a penalty; as, the *laws* of business; the *laws* of nature. In more strictly scientific use, a natural *law* is simply a recognized system of sequences or relations; as, Kepler's *laws* of planetary distances. A *code* is a system of *laws*; *jurisprudence* is the science of *law*, or a system of *laws* scientifically considered, classed, and interpreted; *legislation*, primarily the act of legislating, denotes also the body of *statutes* enacted by a legislative body. An *economy* (from Gr. *oikonomia*, primarily the management of a house) is any comprehensive system of administration; as, domestic *economy*; but the word is extended to the administration or government of a state or people, signifying a body of *laws* and *regulations*, with the entire system, political or religious, especially the latter, of which they form a part; as, the *code* of Draco, Roman *jurisprudence*, British *legislation*, the Mosaic

economy. *Law* is also used as a collective noun for a system of laws or recognized rules or regulations, including not only all special laws, but the principles on which they are based. The Mosaic *economy* is known also as the Mosaic law, and we speak of the English common law, or the law of nations. *Polity* (from Gr. *politeia*, from *polis*, a city) signifies the form, constitution, or method of government of a nation, state, church, or other institution; in usage it differs from *economy* as applying rather to the system, while *economy* applies especially to method, or to the system as administered; an *economy* might be termed a *polity* considered with especial reference to its practical administration, hence commonly with special reference to details or particulars, while *polity* has more reference to broad principles.

LIBERTY

SYNONYMS:

emancipation freedom independence license

In general terms, it may be said that *freedom* is absolute, *liberty* relative; *freedom* is the absence of restraint, *liberty* is primarily the removal or avoidance of restraint; in its broadest sense, it is the state of being exempt from the domination of others or from restricting circumstances. *Freedom* and *liberty* are constantly interchanged; the slave is set at *liberty*, or gains his *freedom*; but *freedom* is the nobler word. *Independence* is said of states or nations, *freedom* and *liberty* of individuals; the *independence* of the United States did not secure *liberty* or *freedom* to its slaves. *Liberty* keeps quite strictly to the thought of being clear of restraint or compulsion; *freedom* takes a wider range, applying to other oppressive influences; thus we speak of *freedom* from annoyance or intrusion. *License* is, in its limited sense, a permission or privilege granted by adequate authority, a bounded *liberty*; in the wider sense, *license* is an ignoring and defiance of all that should restrain, and a reckless doing of all that individual caprice or passion may choose to do—a base and dangerous counterfeit of *freedom*. Compare ALLOW; PERMISSION.

ANTONYMS:

captivity
compulsion
constraint

imprisonment
necessity
obligation

oppression
serfdom
servitude

slavery
superstition
thralldom

LIGHT

SYNONYMS:

beam	glare	glow	shimmer
blaze	gleam	illumination	shine
brilliance	gleaming	incandescence	shining
effulgence	glimmer	luster	sparkle
flame	glistening	radiance	splendor
flare	glistening	scintillation	twinkle
flash	glitter	sheen	twinkling
flicker			

Light, strictly denoting a form of radiant energy, is used as a general term for any luminous effect discernible by the eye, from the faintest phosphorescence to the *blaze* of the noonday sun. A *flame* is both hot and luminous; if it contains few solid particles it will yield little *light*, though it may afford intense heat, as in the case of a hydrogen-flame. A *blaze* is an extensive, brilliant *flame*. A *flare* is a wavering *flame* or *blaze*; a *flash* is a *light* that appears and disappears in an instant; as, a *flash* of lightning; the *flash* of gunpowder. The *glare* and *glow* are steady, the *glare* painfully bright, the *glow* subdued; as, the *glare* of torches; the *glow* of dying embers. *Shine* and *shining* refer to a steady or continuous emission of *light*; *sheen* is a faint *shining*, usually by reflection.

And the *sheen* of their spears was like stars on the sea,
Where the blue wave rolls nightly on deep Galilee.

BYRON *Destruction of Sennacherib*, st. 7.

Glimmer, *glitter*, and *shimmer* denote wavering *light*. We speak of the *glimmer* of distant lamps through the mist; of the *shimmer* of waves in sunlight or moonlight. A *gleam* is not wavering, but transient or intermittent; a sudden *gleam* of *light* came through the half-open door; a *glitter* is a hard *light*; as, the *glitter* of burnished arms. *Glistening* is a *shining* as from a wet surface. *Luster* denotes commonly a reflection from a polished surface, as of silk or gems. A *sparkle* is a sudden *light*, as of sparks thrown out; *scintillation* is the more exact and scientific term for the actual emission of sparks, also the figurative term for what suggests such emission; as, *scintillations* of wit or of genius. *Twinkle* and *twinkling* are used of the intermittent *light* of the fixed stars. *Splendor* denotes an especial abundance and glory of *light* that may be beautiful, dazzling, or overwhelming; as the *splendor* of sunrise or sunset; the *splendor* of the Great White Throne. *Illumination*

is a wide-spread, brilliant *light*, as when all the windows of a house or of a street are lighted. The *light* of *incandescence* is intense and white like that from metal at a white heat. Compare BRIGHT.

ANTONYMS:

blackness	darkness	dusk	gloominess	shade
dark	dimness	gloom	obscurity	shadow

LIKELY**SYNONYMS:**

apt	conceivable	liable	probable
credible	conjectural	presumable	reasonable

Apt implies a natural fitness or tendency; an impetuous person is *apt* to speak hastily. *Liable* refers to a contingency regarded as unfavorable; as, the ship was *liable* to founder at any moment. *Likely* refers to a contingent event regarded as very probable, and usually, though not always, favorable; as, an industrious worker is *likely* to succeed. *Credible* signifies readily to be believed; as, a *credible* narrative; *likely* in such connection is used ironically to signify the reverse; as, a *likely* story! A thing is *conceivable* of which the mind can entertain the possibility; a thing is *conjectural* which is conjectured as possible or probable without other support than a conjecture, or tentative judgment; a thing is *presumable* which, from what is antecedently known, may be taken for granted in advance of proof. *Reasonable* in this connection signifies such as the reason can be satisfied with, independently of external grounds for belief or disbelief; as, that seems a *reasonable* supposition. Compare APPARENT.

ANTONYMS:

doubtful	improbable	questionable	unreasonable
dubious	incredible	unlikely	

LISTEN**SYNONYMS:**

attend	hark	harken	hear	heed	list
---------------	-------------	---------------	-------------	-------------	-------------

Between *listen* and *hear* is a difference like that between the words look and see. (Compare synonyms for LOOK.) To *hear* is simply to become conscious of sound, to *listen* is to make a conscious effort or endeavor to *hear*. We may *hear* without *listening*, as words suddenly uttered in an adjoining room; or we

may *listen* without *hearing*, as to a distant speaker. In *listening* the ear is intent upon the sound; in *attending* the mind is intent upon the thought, though *listening* implies some attention to the meaning or import of the sound. To *heed* is not only to *attend*, but remember and observe. *Harken* is nearly obsolete.

ANTONYMS:

be deaf to ignore neglect scorn slight

PREPOSITIONS:

We listen *for* what we expect or desire to hear; we listen *to* what we actually do hear; listen *for* a step, a signal, a train; listen *to* the debate.

LITERATURE**SYNONYMS:**

belles-lettres	literary productions	publications
books	literary works	writings

Literature is collective, including in the most general sense all the written or printed productions of the human mind in all lands and ages, or in a more limited sense, referring to all that has been published in some land or age, or in some department of human knowledge; as, the *literature* of Greece; the *literature* of the Augustan age; the *literature* of politics or of art. *Literature*, used absolutely, denotes what has been called "po-lite *literature*" or *belles-lettres*, *i. e.*, the works collectively that embody taste, feeling, loftiness of thought, and purity and beauty of style, as poetry, history, fiction, and dramatic compositions, including also much of philosophical writing, as the "Republic" of Plato, and oratorical productions, as the orations of Demosthenes. In the broad sense, we can speak of the *literature* of science; in the narrower sense, we speak of *literature* and science as distinct departments of knowledge. *Literature* is also used to signify literary pursuits or occupations; as, to devote one's life to *literature*. Compare KNOWLEDGE; SCIENCE.

LOAD, n.**SYNONYMS:**

burden	charge	encumbrance	incubus	pack
cargo	clog	freight	lading	weight

A *burden* (from the Anglo-Saxon *byrthen*, from the verb *beran*, bear) is what one has to bear, and the word is used

always of that which is borne by a living agent. A *load* (from the Anglo-Saxon *lād*, a way, course, carrying, or carriage) is what is laid upon a person, animal, or vehicle for conveyance, or what is customarily so imposed; as, a two-horse *load*. *Weight* measures the pressure due to gravity; the same *weight* that one finds a moderate *load* when in his full strength becomes a heavy *burden* in weariness or weakness. A ship's *load* is called distinctively a *cargo*, or it may be known as *freight* or *lading*. *Freight* denotes merchandise in or for transportation and is used largely of transportation or of merchandise transported by rail, which is, in commercial language, said to be "shipped." A *load* to be fastened upon a horse or mule is called a *pack*, and the animal is known as a pack-horse or pack-mule.

LOCK

SYNONYMS:

bar
bolt

catch
clasp

fastening
hasp

hook
latch

A *bar* is a piece of wood or metal, usually of considerable size, by which an opening is obstructed, a door held fast, etc. A *bar* may be movable or permanent; a *bolt* is a movable rod or pin of metal, sliding in a socket and adapted for securing a door or window. A *lock* is an arrangement by which an enclosed *bolt* is shot forward or backward by a key, or other device; the *bolt* is the essential part of the *lock*. A *latch* or *catch* is an accessible *fastening* designed to be easily movable, and simply to secure against accidental opening of the door, cover, etc. A *hasp* is a metallic strap that fits over a staple, calculated to be secured by a padlock; a simple *hook* that fits into a staple is also called a *hasp*. A *clasp* is a *fastening* that can be sprung into place, to draw and hold the parts of some enclosing object firmly together, as the *clasp* of a book.

LOOK

SYNONYMS:

behold
contemplate
desery

discern
gaze
glance

inspect
regard
scan

see
stare
survey

view
watch

To *see* is simply to become conscious of an object of vision; to *look* is to make a conscious and direct endeavor to *see*. To

behold is to fix the sight and the mind with distinctness and consideration upon something that has come to be clearly before the eyes. We may *look* without *seeing*, as in pitch-darkness, and we may *see* without *looking*, as in case of a flash of lighting. To *gaze* is to *look* intently, long, and steadily upon an object. To *glance* is to *look* casually or momentarily. To *stare* is to *look* with a fixed intensity such as is the effect of surprise, alarm, or rudeness. To *scan* is to *look* at minutely, to note every visible feature. To *inspect* is to go below the surface, uncover, study item by item. *View* and *survey* are comprehensive, *survey* expressing the greater exactness of measurement or estimate. *Watch* brings in the element of time and often of wariness; we *watch* for a movement or change, a signal, the approach of an enemy, etc. Compare **APPEAR**.

LOVE

SYNONYMS:

affection
attachment
attraction

charity
devotion
fondness

friendship
liking

regard
tenderness

Affection is kindly feeling, deep, tender, and constant, going out to some person or object, being less fervent and ardent than *love*, whether applied to persons or things. *Love* is an intense and absorbing emotion, drawing one toward a person or object and causing one to appreciate, delight in, and crave the presence or possession of the person or object loved, and to desire to please and benefit the person, or to advance the cause, truth, or other object of *affection*; it is the yearning or outgoing of soul toward something that is regarded as excellent, beautiful, or desirable; *love* may be briefly defined as strong and absorbing *affection* for and *attraction* toward a person or object. *Love* may denote the sublimest and holiest spiritual *affection* as when we are taught that "God is *love*." *Charity* has so far swung aside from this original meaning that probably it never can be recalled (compare **BENEVOLENCE**). The Revised Version uses *love* in place of *charity* in 1 Cor. xiii, and elsewhere. *Love* is more intense, absorbing, and tender than *friendship*, more intense, impulsive, and perhaps passionate than *affection*; we speak of fervent *love*, but of deep or tender *affection*, or of close, firm, strong *friendship*. *Love* is

used specifically for personal *affection* between the sexes in the highest sense, the *love* that normally leads to marriage, and subsists throughout all happy wedded life. *Love* can never properly denote mere animal passion, which is expressed by such words as appetite, desire, lust. One may properly be said to have *love* for animals, for inanimate objects, or for abstract qualities that enlist the affections, as we speak of *love* for a horse or a dog, for mountains, woods, ocean, or of *love* of nature, and *love* of virtue. *Love* of articles of food is better expressed as *liking*, as *love*, in its full sense, expresses something spiritual and reciprocal, such as can have no place in connection with objects that minister merely to the senses. Compare ATTACHMENT; FRIENDSHIP.

ANTONYMS:

See synonyms for ANTIPATHY; ENMITY; HATRED.

PREPOSITIONS:

Love *of* country; *for* humanity; love *to* God and man.

MAKE

SYNONYMS:

become	constitute	fabricate	occasion
bring about	constrain	fashion	originate
bring into being	construct	force	perform
bring to pass	create	frame	produce
build	do	get	reach
cause	effect	make out	render
compel	establish	make up	require
compose	execute	manufacture	shape

Make is essentially causative; to the idea of *cause* all its various senses may be traced (compare synonyms for CAUSE). To *make* is to *cause* to exist, or to *cause* to exist in a certain form or in certain relations; the word thus includes the idea of *create*, as in *Gen. i, 31*, "And God saw everything that he had *made*, and, behold, it was very good." *Make* includes also the idea of *compose*, *constitute*; as, the parts *make up* the whole. Similarly, to *cause* a voluntary agent to do a certain act is to *make* him do it, or *compel* him to do it, *compel* fixing the attention more on the process, *make* on the accomplished fact. Compare COMPEL; DO; INFLUENCE; (make better) AMEND; (make haste) QUICKEN; (make known) ANNOUNCE; AVOW; CONFESS; (make prisoner) ARREST; (make up) ADD; (make void) CANCEL.

ANTONYMS:

See synonyms for ABOLISH; BREAK; DEMOLISH.

PREPOSITIONS:

Make *of*, *out of*, or *from* certain materials, *into* a certain form, *for* a certain purpose or person; made *with* hands, *by* hand; made *by* a prisoner, *with* a jack-knife.

MARRIAGE**SYNONYMS:**

conjugal union	matrimony	spousals	wedlock
espousal	nuptials	union	
espousals	spousal	wedding	

Matrimony denotes the state of those who are united in the relation of husband and wife; *marriage* denotes primarily the act of so uniting, but is extensively used for the state as well. *Wedlock*, a word of specific legal use, is the Saxon term for the state or relation denoted by *matrimony*. *Wedding* denotes the ceremony, with any attendant festivities, by which two persons are united as husband and wife, *nuptials* being the more formal and stately term to express the same idea.

ANTONYMS:

bachelorhood	divorce	maidenhood	virginity	widowhood
celibacy				

PREPOSITIONS:

Marriage *of* or *between* two persons; *of* one person *to* or *with* another; *among* the Greeks.

MASCULINE**SYNONYMS:**

male	manful	manlike	manly	mannish	virile
------	--------	---------	-------	---------	--------

We apply *male* to the sex, *masculine* to the qualities, especially to the stronger, hardier, and more imperious qualities that distinguish the *male* sex; as applied to women, *masculine* has often the depreciatory sense of unwomanly, rude, or harsh; as, a *masculine* face or voice, or the like; though one may say in a commendatory way, she acted with *masculine* courage or decision. *Manlike* may mean only having the outward appearance or semblance of a man, or may be closely equivalent to *manly*. *Manly* refers to all the qualities and traits worthy of a man; *manful*, especially to the valor and prowess that be-

come a man; we speak of a *manful* struggle, *manly* decision; we say *manly* gentleness or tenderness; we could not say *manful* tenderness. *Mannish* is a depreciatory word referring to the mimicry or parade of some superficial qualities of manhood; as a *mannish* boy or woman. *Masculine* may apply to the distinctive qualities of the *male* sex at any age; *virile* applies to the distinctive qualities of mature manhood only, as opposed not only to *feminine* or *womanly* but to *childish*, and is thus an emphatic word for *sturdy*, *intrepid*, etc.

ANTONYMS:

See synonyms for FEMININE.

MASSACRE

SYNONYMS:

bloodshed butchery carnage havoc slaughter

A *massacre* is the indiscriminate killing in numbers of the unresisting or defenseless; *butchery* is the killing of men rudely and ruthlessly as cattle are killed in the shambles. *Havoc* may not be so complete as *massacre*, nor so coldly brutal as *butchery*, but is more widely spread and furious; it is destruction let loose, and may be applied to organizations, interests, etc., as well as to human life; "as for Saul, he made *havoc* of the church," *Acts* viii, 3. *Carnage* (from Latin *caro*, *carnis*, flesh) refers to widely scattered or heaped up corpses of the slain; *slaughter* is similar in meaning, but refers more to the process, as *carnage* does to the result; these two words only of the group may be used of great destruction of life in open and honorable battle, as when we say the enemy was repulsed with great *slaughter*, or the *carnage* was terrible.

MEDDLESOME

SYNONYMS:

impertinent intrusive meddling obtrusive officious

The *meddlesome* person interferes unasked in the affairs of others; the *intrusive* person thrusts himself uninvited into their company or conversation; the *obtrusive* person thrusts himself or his opinions conceitedly and undesirably upon their notice; the *officious* person thrusts his services, unasked and undesired, upon others. *Obtrusive* is oftener applied to words,

qualities, actions, etc., than to persons; *intrusive* is used chiefly of persons, as is *officious*, though we speak of *officious* attentions, *intrusive* remarks; *meddlesome* is used indifferently of persons, or of words, qualities, actions, etc. Compare IMPUDENCE; INQUISITIVE; INTERPOSE; MIX.

ANTONYMS:

modest reserved retiring shy unassuming unobtrusive

MEEK**SYNONYMS:**

compliant	humble	soft	unostentatious
deferential	lowly	subdued	unpretentious
demure	mild	submissive	yielding
gentle	modest	unassuming	

Humble and *lowly* referred originally to position or station; *humble* (from L. *humilis*, from *humus*, the ground or earth), signifying on or near the ground; as, a *humble* cottage; *lowly* (from ME. *low*) signifies lying or being low; as, a *lowly* abode; a *lowly* flower; hence, all that is below the average or recognized standard of means, position, authority, etc., is *humble* or *lowly*; thus *humble* and *lowly* came to include all that is *compliant*, *deferential*, *submissive*, *unpretentious* and *yielding*, esteemed such virtues on the part of inferiors toward superiors in an aristocratic or monarchical society; a *humble* apology expresses either great sense of demerit or special deference toward the person offended, the former courteous phrase for closing a letter was "Your *humble* servant." With the spread of democratic principles these qualities are made less of as between man and man, but every true student or thinker is *humble* in view of the vast reach of knowledge, the limits of human thought, the immensity of the universe; every righteous soul is *humble* before the perfect standard of moral right and the deficiency of human attainment; every devout spirit before the divine majesty. *Lowly* expresses less of abasement than *humble*, and more of *subdued* and *gentle* resignation;

From the recesses of a *lowly* spirit

Our *humble* prayer ascends.

O, Father, hear it!

SIR JOHN BOWRING *Chant*

One who is *gentle* is free from sternness or rudeness—kindly,

peaceful, calm, and mild; we speak of *gentle* words; a *gentle* hand; a *gentle* touch; one who is *meek* is at once *gentle*, *patient*, and *peaceable*, and disposed to be *submissive* and *yielding* under injury and provocation, rather than to resist; to be *meek* is not necessarily to be weak or timid, for meekness has been characteristic of very strong natures, faithful to affection or righteousness through all danger, even to death; on the other hand one may be timid, weak, and outwardly *gentle* and *submissive*, but by no means *meek*, as has often been proved by some sudden change of fortune. Meekness is of the spirit. *Demure* relates to demeanor and appearance; it is oftenest used of women; one who is *demure* has the mien and air of modesty, gentleness, and meekness, but there is always in the word the suggestion of latent feelings or qualities that may be quite different from the controlled appearance. Compare MODESTY.

ANTONYMS:

arrogant	furious	obstinate	self-asserting
assuming	haughty	presuming	stubborn
bold	high-spirited	presumptuous	vengeful
choleric	impertinent	raging	vindictive
contentious	impudent	resentful	wilful
fierce	lofty	revengeful	wrathful
fiery			

Compare synonyms for PRIDE.

MELODY

SYNONYMS:

harmony	music	symphony	unison
---------	-------	----------	--------

Harmony is simultaneous; *melody* is successive; *harmony* is the pleasing correspondence of two or more notes sounded at once, *melody* the pleasing succession of a number of notes continuously following one another. A *melody* may be wholly in one part; *harmony* must be of two or more parts. Accordant notes of different pitch sounded simultaneously produce *harmony*; *unison* is the simultaneous sounding of two or more notes of the same pitch. When the pitch is the same there may be *unison* between sounds of very different volume and quality, as a voice and a bell may sound in *unison*. Tones sounded at the interval of an octave are also said to be in *unison*, although this is not literally exact; this usage arises from the fact that bass and tenor voices in attempting to sound

the same note as the soprano and alto will in fact sound a note an octave below. *Music* may denote the simplest *melody* or the most complex and perfect *harmony*. A *symphony* (apart from its technical orchestral sense) is any pleasing consonance of musical sounds, vocal or instrumental, as of many accordant voices or instruments.

MEMORY

SYNONYMS:

recollection
remembrance

reminiscence
retrospect

retrospection

Memory is the faculty by which knowledge is retained or recalled; in a more general sense, *memory* is a retention of knowledge within the grasp of the mind, while *remembrance* is the having what is known consciously before the mind. *Remembrance* may be voluntary or involuntary; a thing is brought to *remembrance* or we call it to *remembrance*; the same is true of *memory*. *Recollection* involves volition, the mind making a distinct effort to recall something, or fixing the attention actively upon it when recalled. *Reminiscence* is a half-dreamy *memory* of scenes or events long past; *retrospection* is a distinct turning of the mind back upon the past, bringing long periods under survey. *Retrospection* is to *reminiscence* much what *recollection* is to *remembrance*.

ANTONYMS:

forgetfulness oblivion obliviousness oversight unconsciousness

MERCY

SYNONYMS:

benevolence
benignity
blessing
clemency
compassion

favor
forbearance
forgiveness
gentleness
grace

kindness
lenience
leniency
lenity

mildness
pardon
pity
tenderness

Mercy is the exercise of less severity than one deserves, or in a more extended sense, the granting of *kindness* or *favor* beyond what one may rightly claim. *Grace* is *favor*, *kindness*, or *blessing* shown to the undeserving; *forgiveness*, *mercy*, and *pardon* are exercised toward the ill-deserving. *Pardon* remits the outward penalty which the offender deserves; *forgiveness* dismisses resentment or displeasure from the heart of the one

offended; *mercy* seeks the highest possible good of the offender. There may be *mercy* without *pardon*, as in the mitigation of sentence, or in all possible alleviation of necessary severity; there may be cases where *pardon* would not be *mercy*, since it would encourage to repetition of the offense, from which timely punishment might have saved. *Mercy* is also used in the wider sense of refraining from harshness or cruelty toward those who are in one's power without fault of their own; as, they besought the robber to have *mercy*. *Clemency* is a colder word than *mercy*, and without its religious associations, signifying *mildness* and moderation in the use of power where severity would have legal or military, rather than moral sanction; it often denotes a habitual *mildness* of disposition on the part of the powerful, and is a matter rather of good nature or policy than of principle. *Leniency* or *lenity* denotes an easy-going avoidance of severity; these words are more general and less magisterial than *clemency*; we should speak of the *leniency* of a parent, the *clemency* of a conqueror. Compare **PITY**.

ANTONYMS:

cruelty	implacability	punishment	severity
hardness	justice	revenge	sternness
harshness	penalty	rigor	vengeance

PREPOSITIONS:

The mercy of God *to* or *toward* sinners; have mercy *on* or *upon* one.

METER

SYNONYMS:

euphony	measure	rhythm	verse
----------------	----------------	---------------	--------------

Euphony is agreeable linguistic sound, however produced; *meter*, *measure*, and *rhythm* denote agreeable succession of sounds in the utterance of connected words; *euphony* may apply to a single word or even a single syllable; the other words apply to lines, sentences, paragraphs, etc.; *rhythm* and *meter* may be produced by accent only, as in English, or by accent and quantity combined, as in Greek or Italian; *rhythm* or *measure* may apply either to prose or to poetry, or to music, dancing, etc.; *meter* is more precise than *rhythm*, applies only to poetry, and denotes a measured *rhythm* with regular divisions into *verses*, stanzas, strophes, etc. A *verse* is strictly a metrical line, but the word is often used as synonymous with

stanza. *Verse*, in the general sense, denotes metrical writing without reference to the thought involved; as, prose and *verse*. Compare MELODY; POETRY.

MIND

SYNONYMS:

brain	instinct	reason	spirit
consciousness	intellect	sense	thought
disposition	intelligence	soul	understanding

Mind, in a general sense, includes all the powers of sentient being apart from the physical factors in bodily faculties and activities; in a limited sense, *mind* is nearly synonymous with *intellect*, but includes *disposition*, or the tendency toward action, as appears in the phrase, "to have a *mind* to work." As the seat of mental activity, *brain* (colloquially *brains*) is often used as a synonym for *mind*, *intellect*, *intelligence*. *Thought*, the act, process, or power of thinking, is often used to denote the thinking faculty, and especially the *reason*. The *instinct* of animals is now held by many philosophers to be of the same nature as the *intellect* of man, but inferior and limited; yet the apparent difference is very great.

An *instinct* is a propensity prior to experience and independent of instruction.

PALEY *Natural Philosophy* ch. 18.

In this sense we speak of human *instincts*, thus denoting tendencies independent of reasoning or instruction. The *soul* includes the *intellect*, sensibilities, and will; beyond what is expressed by the word *mind*, the *soul* denotes especially the moral, the immortal nature; we say of a dead body, the *soul* (not the *mind*) has fled. *Spirit* is used especially in contradistinction from matter; it may in many cases be substituted for *soul*, but *soul* has commonly a fuller and more determinate meaning; we can conceive of *spirits* as having no moral nature; the fairies, elves, and brownies of mythology might be termed *spirits*, but not *souls*. In the figurative sense, *spirit* denotes animation, excitability, perhaps impatience; as, a lad of *spirit*; he sang with *spirit*; he replied with *spirit*. *Soul* denotes energy and depth of feeling, as when we speak of soulful eyes; or it may denote the very life of anything; as, "the hidden *soul* of harmony," MILTON *L'Allegro* l. 144. *Sense* may be an antonym of *intellect*, as when we speak of the

sense of hearing; but *sense* is used also as denoting clear mental action, good judgment, acumen; as, he is a man of *sense*, or, he showed good *sense*; *sense*, even in its material signification, must be reckoned among the activities of *mind*, though dependent on bodily functions; the *mind*, not the eye, really sees; the *mind*, not the ear, really hears. *Consciousness* includes all that a sentient being perceives, knows, thinks, or feels, from whatever source arising and of whatever character, kind, or degree, whether with or without distinct thinking, feeling, or willing; we speak of the *consciousness* of the brute, of the savage, or of the sage. The *intellect* is that assemblage of faculties which is concerned with knowledge, as distinguished from emotion and volition. *Understanding* is the Saxon word of the same general import, but is chiefly used of the reasoning powers; the *understanding*, which Sir Wm. Hamilton has called "the faculty of relations and comparisons," is distinguished by many philosophers from *reason*, in that "*reason* is the faculty of the higher cognitions or a priori truth."

ANTONYMS:

body brawn brute force material substance matter

MINUTE

SYNONYMS:

circumstantial	diminutive	little	slender
comminuted	exact	particular	small
critical	fine	precise	tiny
detailed			

That is *minute* which is of exceedingly limited dimensions, as a grain of dust, or which attends to matters of exceedingly slight amount or apparent importance; as, a *minute* account; *minute* observation. That which is broken up into *minute* particles is said to be *comminuted*; things may be termed *fine* which would not be termed *comminuted*; as, *fine* sand; *fine* gravel; but, in using the adverb, we say a substance is finely *comminuted*, *comminuted* referring more to the process, *fine* to the result. An account extended to very *minute* particulars is *circumstantial*, *detailed*, *particular*; an examination so extended is *critical*, *exact*, *precise*. Compare FINE.

ANTONYMS:

See synonyms for LARGE.

MISFORTUNE

SYNONYMS:

adversity	disaster	ill fortune	ruin
affliction	distress	ill luck	sorrow
bereavement	eclipse	misadventure	stroke
blow	failure	mischance	trial
calamity	hardship	misery	tribulation
chastening	harm	mishap	trouble
chastisement	ill	reverse	visitation
disappointment			

Misfortune is adverse fortune or any instance thereof, any untoward event, usually of lingering character or consequences, and such as the sufferer is not deemed directly responsible for; as, he had the *misfortune* to be born blind. Any considerable *disappointment*, *failure*, or *misfortune*, as regards outward circumstances, as loss of fortune, position, and the like, when long continued or attended with enduring consequences, constitutes *adversity*. For the loss of friends by death we commonly use *affliction* or *bereavement*. *Calamity* and *disaster* are used of sudden and severe *misfortunes*, often overwhelming; *ill fortune* and *ill luck*, of lighter troubles and failures. We speak of the *misery* of the poor, the *hardships* of the soldier. *Affliction*, *chastening*, *trial*, and *tribulation* have all an especially religious bearing, suggesting some disciplinary purpose of God with beneficent design. *Affliction* may be keen and bitter, but brief; *tribulation* is long and wearing. We speak of an *affliction*, but rarely of a *tribulation*, since *tribulation* is viewed as a continuous process, which may endure for years or for a lifetime; but we speak of our daily *trials*. Compare CATASTROPHE.

ANTONYMS:

blessing	consolation	gratification	pleasure	success
boon	good fortune	happiness	prosperity	triumph
comfort	good luck	joy	relief	

MIX

SYNONYMS:

amalgamate	commingle	confuse	join
associate	commix	fuse	meddle
blend	compound	incorporate	mingle
combine	confound	intermingle	unite

To *mix* is to put together promiscuously and indiscriminately, so that the parts or elements become, for the time at least, one mass, assemblage, or body; we may *mix* milk and water, but

water and oil can not be *mixed*. *Mingle* is almost equivalent to *mix*, but in *mingling* there is often more consideration of the separate units; *mingled* races may live together in the same city or country, and yet preserve their racial individuality so as not to become *mixed* races; we may speak of a descendant as of the *mingled* blood of distinct races; *mixed* blood, the same in sense, is inferior in usage; "a person of *mixed* blood" is said reproachfully, implying lack of pure descent from the point of view of the speaker; *mingle* is everywhere a word of more dignity than *mix*. *Mingle* is commonly preferred to *mix* in figurative use; we speak of *mingled* emotions, rather than of *mixed* emotions; in fact, the use of *mix* outside the material realm is rare. *Combine* denotes a closer union than *mingle* or *mix*; this is especially noticeable in chemistry, where substances chemically *combined* form a compound, with properties different from those of either constituent; oxygen and nitrogen are mechanically *mingled* or *mixed* in the atmosphere, which supports life; if they were chemically *combined*, the earth would be overflowed with nitric acid, destroying the possibility of life. To *compound* is to *mix* in definite proportions, so as to form a composite product; as, to *compound* an ointment; to *compound* two or more words so as to produce another of extended, diminished, or otherwise different meaning. To *blend* is to *mix* or *mingle* in such a way as to retain some of the properties of each of the things *blended*; this word is used especially of colors and tones, implying gradual and harmonious union, one shading off almost or quite imperceptibly into the other, as the bands of color in the rainbow *blend* at their edges, so that the eye can fix no definite dividing line.

Moonlight, and the first timid tremblings of the dawn were by this time *blending*.

DEQUINOY *Miscell. Essays, Vision of Sudden Death*, p. 170.

So, different races, languages, qualities, or feelings may be said to be *blended*. To *confuse* is to *mix* in a disorderly or irrational way; a *confused* statement, argument, or composition has the different parts so out of order or relation that the mind can not follow them to any clear result. To *confound* in this connection is to *confuse* identity, to take one thing for another that is in some way similar; as, to *confound* means with ends; do not *confound* Isaac D'Israeli with Benjamin Disraeli;

When we *confuse*, we throw into indistinctness; when we *confound* we falsely identify. In the former we wrongly put one or more things among others, in the latter we substitute them wrongly for others.

C. J. SMITH *Synonyms Discriminated*, p. 261.

But the distinction thus strictly drawn is not strictly observed in usage; we read in Genesis that God *confounded* the language of the builders of Babel; yet the event is technically known as the "confusion of tongues";

Confuse, v. 4. To take one idea or thing for another.—*Century Dictionary*.

Confuse, v. 3. To mistake for another; to confound; . . . he has *confused* the two authors of the same name.—*Webster's New International Dictionary* (1910).

Let us not *confuse* liberty with license

FARRAR *Sermons and Addresses in Am.*, ser. xiv.

With ruin upon ruin, rout on rout,

Confusion worse *confounded*.

MILTON *Paradise Lost*, bk. ii, l. 995.

Intransitively *mingle* or *mix* signifies to take part, be, act, or move with, in, or among; as, a man *mingles* in a crowd, or *mixes* with politicians or in politics; *mingle*, so used, denotes less closeness of association than *mix*; both words, so used, are often close synonyms for *associate* (see ASSOCIATE). To *meddle* is to *mix* or *mingle* unnecessarily, officiously, or impertinently in or with the affairs of others; one may *mingle* with a company, but not *meddle* with their affairs (compare MEDDLESOME). Things which are *mixed* or *mingled* may become *joined*, as the different materials in conglomerate rock; but distinct pieces of wood may be so perfectly *joined* in cabinet work that neither eye nor hand can detect the juncture except by tracing the grain, and yet be neither *mixed* nor *mingled*. Compare ATTACH.

ANTONYMS:

analyze
assort
classify
detach
disconnect
discriminate
disengage

disjoin
dissever
dissociate
disunite
divide
eliminate

part
remove
segregate
separate
sever
sift

sort
sort out
sunder
unravel
untangle
untwine

MOB

SYNONYMS:

canaille dregs of the people
crowd lower classes

masses rabble
populace the vulgar

The *populace* are poor and ignorant, but may be law-abiding;

a *mob* is disorderly and lawless, but may be rich and influential. The *rabble* is despicable, worthless, purposeless; a *mob* may have effective desperate purpose. A *crowd* may be drawn by mere curiosity; some strong, pervading excitement is needed to make it a *mob*. Compare PEOPLE.

MODEL

SYNONYMS:

archetype	facsimile	original	representation
copy	image	pattern	standard
design	imitation	prototype	type
example	mold		

A *pattern* is always, in modern use, that which is to be copied; a *model* may be either the thing to be copied or the *copy* that has been made from it; as, the *models* in the Patent Office. A *pattern* is commonly superficial; a *model* is usually in relief. A *pattern* must be closely followed in its minutest particulars by a faithful copyist; a *model* may allow a great degree of freedom. A sculptor may idealize his living *model*; his workmen must exactly *copy* in marble or metal the *model* he has made in clay. Compare EXAMPLE; IDEA; IDEAL.

MODESTY

SYNONYMS:

backwardness	constraint	reserve	timidity
bashfulness	coyness	shyness	unobtrusiveness
coldness	diffidence		

Bashfulness is a shrinking from notice without assignable reason. *Coyness* is a half encouragement, half avoidance of offered attention, and may be real or affected. *Diffidence* is self-distrust; *modesty*, a humble estimate of oneself in comparison with others, or with the demands of some undertaking. *Modesty* has also the specific meaning of a sensitive shrinking from anything indelicate. *Shyness* is a tendency to shrink from observation; *timidity*, a distinct fear of criticism, error, or failure. *Reserve* is the holding oneself aloof from others, or holding back one's feelings from expression, or one's affairs from communication to others. *Reserve* may be the retreat of *shyness*, or, on the other hand, the contemptuous withdrawal of pride and haughtiness. Compare ABASH; PRIDE; TACITURN

ANTONYMS:

abandon	confidence	haughtiness	pertness
arrogance	egotism	impudence	sauciness
assumption	forwardness	indiscretion	self-conceit
assurance	frankness	loquaciousness	self-sufficiency
boldness	freedom	loquacity	sociability
conceit			

MONEY**SYNONYMS:**

bills	capital	coin	funds	notes	silver
bullion	cash	currency	gold	property	specie

Money is the authorized medium of exchange; coined *money* is called *coin* or *specie*. What are termed in England bank-notes are in the United States commonly called *bills*; as, a five-dollar *bill*. The *notes* of responsible men are readily transferable in commercial circles, but they are not *money*; as, the stock was sold for \$500 in *money* and the balance in merchantable paper. *Cash* is *specie* or *money* in hand, or paid in hand; as, the *cash* account; the *cash* price. In the legal sense, *property* is not *money*, and *money* is not *property*; for *property* is that which has inherent value, while *money*, as such, has but representative value, and may or may not have intrinsic value. *Bullion* is either *gold* or *silver* uncoined, or the coined metal considered without reference to its coinage, but simply as merchandise, when its value as *bullion* may be very different from its value as *money*. The word *capital* is used chiefly of accumulated *property* or *money* invested in productive enterprises or available for such investment.

MOROSE**SYNONYMS:**

acrimonious	dogged	ill-natured	splenetic
churlish	gloomy	severe	sulky
crabbed	gruff	snappish	sullen
crusty	ill-humored	sour	surly

The *sullen* and *sulky* are discontented and resentful in regard to that against which they are too proud to protest, or consider all protest vain; *sullen* denotes more of pride, *sulky* more of resentful obstinacy. The *morose* are bitterly dissatisfied with the world in general, and disposed to vent their ill nature upon others. The *sullen* and *sulky* are for the most part silent; the *morose* growl out bitter speeches. A *surly* person is in a state of latent anger, resenting approach as in-

trusion, and ready to take offense at anything; thus we speak of a *surly* dog. *Sullen* and *sulky* moods may be transitory; one who is *morose* or *surly* is commonly so by disposition or habit.

ANTONYMS:

amiable	complaisant	gentle	kind	pleasant
benignant	friendly	good-natured	loving	sympathetic
bland	genial	indulgent	mild	tender

MOTION

SYNONYMS:

act	change	movement	process	transition
action	move	passage	transit	

Motion is *change* of place or position in space; *transition* is passing from one point or position in space to another. *Motion* may be either abstract or concrete, more frequently the former; *movement* is always concrete, that is, considered in connection with the thing that moves or is moved; thus, we speak of the *movements* of the planets, but of the laws of planetary *motion*; of military *movements*, but of perpetual *motion*. *Move* is used chiefly of contests or competition, as in chess or politics; as, it is your *move*; a shrewd *move* of the opposition. *Action* is a more comprehensive word than *motion*. We now rarely speak of mental or spiritual *motions*, but rather of mental or spiritual *acts* or *processes*, or of the laws of mental *action*, but a formal proposal of *action* in a deliberative assembly is termed a *motion*. Compare ACT.

ANTONYMS:

immobility	quiescence	quiet	repose	rest	stillness
------------	------------	-------	--------	------	-----------

MOURN

SYNONYMS:

bemoan	deplore	lament	rue
bewail	grieve	regret	sorrow

To *mourn* is to feel or express sadness or distress because of some loss, affliction, or misfortune; *mourning* is thought of as prolonged, grief or regret may be transient. One may *grieve* or *mourn*, *regret*, *rue*, or *sorrow* without a sound; he *bemoans* with suppressed and often inarticulate sounds of grief; he *bewails* with passionate utterance, whether of inarticulate cries or of spoken words. He *laments* in plaintive or pathetic words, as the prophet Jeremiah in his "Lamentations." One *deplores*

with settled sorrow which may or may not find relief in words. One is made to *rue* an act by some misfortune resulting, or by some penalty or vengeance inflicted because of it. One *regrets* a slight misfortune or a hasty word; he *sorrows* over the death of a friend.

ANTONYMS:

be joyful exult joy make merry rejoice triumph

MUTUAL**SYNONYMS:**

common correlative interchangeable joint reciprocal

That is *common* to which two or more persons have the same or equal claims, or in which they have equal interest or participation; in the strictest sense, that is *mutual* (from L. *mutare*, to change) which is freely interchanged; that is *reciprocal* in respect to which one act or movement is met by a corresponding act or movement in return; we speak of our *common* country, *mutual* affection, *reciprocal* obligations, the *reciprocal* action of cause and effect, where the effect becomes in turn a cause. Many good writers hold it incorrect to say "a *mutual* friend," and insist that "a *common* friend" would be more accurate; but "*common* friend" is practically never used, because of the disagreeable suggestion that attaches to *common*, of ordinary or inferior. "*Mutual* friend" has high literary authority (of Burke, Scott, Dickens, and others), and a considerable usage of good society in its favor, the expression being quite naturally derived from the thoroughly correct phrase *mutual* friendship.

ANTONYMS:

detached	distinct	separated	unconnected	unrequited
disconnected	disunited	severed	unreciprocated	unshared
dissociated	separate	sundered		

MYSTERIOUS**SYNONYMS:**

abstruse	inexplicable	recondite
cabalistic	inscrutable	secret
dark	mystic	transcendental
enigmatical	mystical	unfathomable
hidden	obscure	unfathomed
incomprehensible	occult	unknown

That is *mysterious* in the true sense which is beyond human

comprehension, as the decrees of God or the origin of life. That is *mystic* or *mystical* which has associated with it some *hidden* or *recondite* meaning, especially of a religious kind; as, the *mystic* Babylon of the Apocalypse. That is *dark* which we can not personally see through, especially if sadly perplexing; as, a *dark* providence. That is *secret* which is intentionally *hidden*. Compare DARK; LATENT.

ANTONYMS:

See synonyms for CLEAR.

NAME

SYNONYMS:

agnomen	denomination	prenomen	surname
appellation	designation	style	title
cognomen	epithet		

Name in the most general sense, signifying the word by which a person or thing is called or known, includes all other words of this group; in this sense every noun is a *name*; in the more limited sense a *name* is personal, an *appellation* is descriptive, a *title* is official. In the phrase, William the Conqueror, king of England, William is the man's *name*, which belongs to him personally, independently of any rank or achievement; Conqueror is the *appellation* which he won by his acquisition of England; king is the *title* denoting his royal rank. An *epithet* (from Gr. *epitheton*, something added, from *epi*, on, and *tithemi*, put) is something placed upon a person or thing; the *epithet* does not strictly belong to an object like a *name*, but is given to mark some assumed characteristic, good or bad; an *epithet* is always an adjective, or a word or phrase used as an adjective, and is properly used to emphasize a characteristic but not to add information, as in the phrase "the *sounding sea*"; the idea that an *epithet* is always opprobrious, and that any word used opprobriously is an *epithet* is a popular error. *Designation* may be used much in the sense of *appellation*, but is more distinctive or specific in meaning; a *designation* properly so-called rests upon some inherent quality, while an *appellation* may be fanciful. Among the Romans the *prenomen* was the individual part of a man's *name*, the "nomen" designated the gens to which he belonged, the *cognomen* showed his family and was borne by all patricians,

and the *agnomen* was added to refer to his achievements or character. When scientists *name* an animal or a plant, they give it a binary or binomial technical *name* comprising a generic and a specific *appellation*. In modern use, a personal *name*, as John or Mary, is given in infancy, and is often called the given *name* or Christian *name*, or simply the first *name* (rarely the *prenom*); the *cognomen* or *surname* is the family *name* which belongs to one by right of birth or marriage. *Style* is the legal *designation* by which a person or house is known in official or business relations; as, the *name* and *style* of Baring Brothers. The term *denomination* is applied to a separate religious organization, without the opprobrious meaning attaching to the word "sect"; also, to designate any class of like objects collectively, especially money or notes of a certain value; as, the sum was in notes of the *denomination* of one thousand dollars. Compare TERM.

NATIVE

SYNONYMS:

indigenous innate natal natural original

Native denotes that which belongs to one by birth; *natal* that which pertains to the event of birth; *natural* denotes that which rests upon inherent qualities of character or being. We speak of one's *native* country, or of his *natal* day; of *natural* ability, *native* genius. Compare INHERENT; PRIMEVAL; RADICAL.

ANTONYMS:

acquired alien artificial assumed foreign unnatural

NAUTICAL

SYNONYMS:

marine maritime naval ocean oceanic

Marine (from L. *mare*, sea) signifies belonging to the ocean, *maritime*, a secondary derivative from the same root, bordering on or connected with the *ocean*; as, *marine* products; *marine* animals; *maritime* nations; *maritime* laws. *Nautical* (from Gr. *nautes*, a sailor) denotes primarily anything connected with sailors, and hence with ships or navigation; *naval* (from L. *navis*, from Gr. *naus*, a ship) refers to the armed force of a

nation on the sea, and, by extension, to similar forces on lakes and rivers; as, a *naval* force; a *nautical* almanac. *Ocean*, used adjectively, is applied to that which belongs to or is part of the *ocean*; *oceanic* may be used in the same sense, but is especially applied to that which borders on (or upon) or is connected with, or which is similar to or suggestive of an *ocean*; we speak of *ocean* currents, *oceanic* islands, or, perhaps, of an *oceanic* intellect.

NEAT

SYNONYMS:

clean	dapper	nice	prim	tidy
cleanly	natty	orderly	spruce	trim

That which is *clean* is simply free from soil or defilement of any kind. Things are *orderly* when in due relation to other things; a room or desk is *orderly* when every article is in place; a person is *orderly* who habitually keeps things so. *Tidy* denotes that which conforms to propriety in general; an unlaced shoe may be perfectly *clean*, but is not *tidy*. *Neat* refers to that which is *clean* and *tidy* with nothing superfluous, conspicuous, or showy, as when we speak of plain but *neat* attire; the same idea of freedom from the superfluous appears in the phrases "a *neat* speech," or "a *neat* turn," "a *neat* reply," etc. A *clean* cut has no ragged edges; a *neat* stroke just does what is intended. *Nice* is stronger than *neat*, implying value and beauty; a *cheap*, coarse dress may be perfectly *neat*, but would not be termed *nice*. *Spruce* is applied to the show and affectation of neatness with a touch of smartness, and is always a term of mild contempt; as, a *spruce* serving-man. *Trim* denotes a certain shapely and elegant firmness, often with suppleness and grace; as, a *trim* suit; a *trim* figure. *Prim* applies to a precise, formal, affected nicety. *Dapper* is *spruce* with the suggestion of smallness and slightness; *natty*, a diminutive of *neat*, suggests minute elegance, with a tendency toward the exquisite; as, a *dapper* little fellow in a *natty* business suit.

ANTONYMS:

dirty	negligent	slouchy	uncared for
disorderly	rough	slovenly	unkempt
dowdy	rude	soiled	untidy

NECESSARY

SYNONYMS:

essential inevitable needed required unavoidable
indispensable infallible needful requisite undeniable

That is *necessary* which must exist, occur, or be true; which in the nature of things can not be otherwise. That which is *essential* belongs to the essence of a thing, so that the thing can not exist in its completeness without it; that which is *indispensable* may be only an adjunct, but it is one that can not be spared; vigorous health is *essential* to an arctic explorer; warm clothing is *indispensable*. That which is *requisite* (or *required*) is so in the judgment of the person requiring it, but may not be so absolutely; thus, the *requisite* is more a matter of personal feeling than the *indispensable*. *Inevitable* (from *L. in*, not, and *evito*, shun) is primarily the exact equivalent of the Saxon *unavoidable*; both words are applied to things which some at least would escape or prevent, while that which is *necessary* may meet with no objection; food is *necessary*, death is *inevitable*; a *necessary* conclusion satisfies a thinker; an *inevitable* conclusion silences opposition. An *infallible* proof is one that necessarily leads the mind to a sound conclusion. *Needed* and *needful* are more concrete than *necessary*, and respect an end to be attained; we speak of a *necessary* inference; *necessary* food is what one can not live without, while *needful* food is that without which he can not enjoy comfort, health, and strength.

ANTONYMS:

casual	needless	optional	useless
contingent	non-essential	unnecessary	worthless

PREPOSITIONS:

Necessary *to* a sequence or a total; *for* or *to* a result or a person; unity is necessary *to* (to constitute) completeness; decision is necessary *for* command, or *for* a commander.

NECESSITY

SYNONYMS:

compulsion	fatality	requisite
destiny	fate	sine qua non
emergency	indispensability	unavoidableness
essential	indispensableness	urgency
exigency	need	want
extremity	requirement	

Necessity is the quality of being necessary, or the quality of

that which can not but be, become, or be true, or be accepted as true. *Need* and *want* always imply a lack; *necessity* may be used in this sense, but in the higher philosophical sense *necessity* simply denotes the exclusion of any alternative either in thought or fact; righteousness is a *necessity* (not a *need*) of the divine nature. *Need* suggests the possibility of supplying the deficiency which *want* expresses; to speak of a person's *want* of decision merely points out a weakness in his character; to say that he has *need* of decision implies that he can exercise or attain it. As applied to a deficiency, *necessity* is more imperative than *need*; a weary person is in *need* of rest; when rest becomes a *necessity* he has no choice but to stop work. An *essential* is something, as a quality, or element, that belongs to the essence of something else so as to be inseparable from it in its normal condition, or in any complete idea or statement of it. Compare NECESSARY; PREDESTINATION.

ANTONYMS:

choice	doubt	dubiousness	freedom	possibility
contingency	doubtfulness	fortuity	option	uncertainty

PREPOSITIONS:

The necessity *of* surrender; a necessity *for* action; this is a necessity *to* me.

NEGLECT**SYNONYMS:**

carelessness	inadvertence	oversight
default	inattention	remissness
disregard	indifference	scorn
disrespect	neglectfulness	slackness
failure	negligence	slight
heedlessness	omission	thoughtlessness

Neglect (from L. *neg*, not, and *lego*, gather) is the failing to take such care, show such attention, pay such courtesy, etc., as may be rightfully or reasonably expected. *Negligence*, which is the same in origin, may be used in almost the same sense, but with a slighter force, as when Whittier speaks of "the *negligence* which friendship loves"; but *negligence* is often used to denote the quality or trait of character of which the act is a manifestation, or to denote the habit of neglecting that which ought to be done. *Neglect* is transitive, *negligence* is intransitive; we speak of *neglect* of his books, friends, or

duties, in which cases we could not use *negligence*; *negligence* in dress implies want of care as to its arrangement, tidiness, etc.; *neglect* of one's garments would imply leaving them exposed to defacement or injury, as by dust, moths, etc. *Neglect* has a passive sense which *negligence* has not; the child was suffering from *neglect*, i. e., from being neglected by others; the child was suffering from *negligence* would imply that he himself was neglectful. The distinction sometimes made that *neglect* denotes the act, and *negligence* the habit, is but partially true; one may be guilty of habitual *neglect* of duty; the wife may suffer from her husband's constant *neglect*, while the *negligence* which causes a railroad accident may be that of a moment, and on the part of one ordinarily careful and attentive; in such cases the law provides punishment for criminal *negligence*.

ANTONYMS:

See synonyms for CARE.

PREPOSITIONS:

Neglect of duty, of the child by the parent; there was neglect on the part of the teacher.

NEW**SYNONYMS:**

fresh	modern	new-made	upstart
juvenile	new-fangled	novel	young
late	new-fashioned	recent	youthful

That which is *new* has lately come into existence, possession, or use; a *new* house is just built, or in a more general sense is one that has just come into the possession of the present owner or occupant. *Modern* denotes that which has begun to exist in the present age, and is still existing; *recent* denotes that which has come into existence within a comparatively brief period, and may or may not be existing still. *Modern* history pertains to any period since the middle ages; *modern* literature, *modern* architecture, etc., are not strikingly remote from the styles and types prevalent to-day. That which is *late* is somewhat removed from the present, but not far enough to be called *old*. That which is *recent* is not quite so sharply distinguished from the past as that which is *new*; *recent* publications range over a longer time than *new* books. That which is *novel* is either ab-

solutely or relatively unprecedented in kind; a *novel* contrivance is one that has never before been known; a *novel* experience is one that has never before occurred to the same person; that which is *new* may be of a familiar or even of an ancient sort, as a *new* copy of an old book. *Young* and *youthful* are applied to that which has life; that which is *young* is possessed of a comparatively *new* existence as a living thing, possessing actual youth; that which is *youthful* manifests the attributes of youth. (Compare YOUTHFUL.) *Fresh* applies to that which has the characteristics of newness or youth, while capable of deterioration by lapse of time; that which is unworn, unspoiled, or unfaded; as, a *fresh* countenance, *fresh* eggs, *fresh* flowers. *New* is opposed to *old*, *modern* to *ancient*, *recent* to *remote*, *young* to *old*, *aged*, etc.

ANTONYMS:

See synonyms for OLD.

NIMBLE**SYNONYMS:**

active	alert	bustling	prompt	speedy	spry
agile	brisk	lively	quick	sprightly	swift

Nimble refers to lightness, freedom, and quickness of motion within a somewhat narrow range, with readiness to turn suddenly to any point; *swift* applies commonly to more sustained motion over greater distances; a pickpocket is *nimble*-fingered, a dancer *nimble*-footed; an arrow, a race-horse, or an ocean steamer is *swift*; Shakespeare's "*nimble* lightnings" is said of the visual appearance in sudden zigzag flash across the sky. Figuratively, we speak of a *nimble* wit, *swift* intelligence, *swift* destruction. *Alert*, which is strictly a synonym for *ready*, comes sometimes near the meaning of *nimble* or *quick*, from the fact that the ready, wide-awake person is likely to be *lively*, *quick*, *speedy*. Compare ACTIVE; ALERT.

ANTONYMS:

clumsy dilatory dull heavy inactive inert slow sluggish unready

NORMAL**SYNONYMS:**

common natural ordinary regular typical usual

That which is *natural* is according to nature; that which is *normal* is according to the standard or rule which is observed

or claimed to prevail in nature; a deformity may be *natural*, symmetry is *normal*; the *normal* color of the crow is black, while the *normal* color of the sparrow is gray, but one is as *natural* as the other. *Typical* refers to such an assemblage of qualities as makes the specimen, genus, etc., a type of some more comprehensive group, while *normal* is more commonly applied to the parts of a single object; the specimen was *typical*; color, size, and other characteristics, *normal*. The *regular* is etymologically that which is according to rule, hence that which is steady and constant, as opposed to that which is fitful and changeable; the *normal* action of the heart is *regular*. That which is *common* is shared by a great number of persons or things; disease is *common*, a *normal* state of health is rare. Compare GENERAL; USUAL.

ANTONYMS:

abnormal	irregular	peculiar	singular	unprecedented
exceptional	monstrous	rare	uncommon	unusual

NOTWITHSTANDING, conj.**SYNONYMS:**

although	howbeit	nevertheless	though
but	however	still	yet

However simply waives discussion, and (like the archaic *howbeit*) says "be that as it may, this is true"; *nevertheless* concedes the truth of what precedes, but claims that what follows is none the less true; *notwithstanding* marshals the two statements face to face, admits the one and its seeming contradiction to the other, while insisting that it can not, after all, withstand the other; as, *notwithstanding* the force of the enemy is superior, we shall conquer. *Yet* and *still* are weaker than *notwithstanding*, while stronger than *but*. *Though* and *although* make as little as possible of the concession, dropping it, as it were, incidentally; as, "*though* we are guilty, thou art good"; to say "we are guilty, *but* thou art good," would make the concession of guilt more emphatic. Compare BUT; YET.

NOTWITHSTANDING, prep.**SYNONYMS:**

despite	in spite of
---------	-------------

Notwithstanding simply states that circumstances shall not be or have not been allowed to withstand; *despite* and *in spite*

of refer primarily to personal and perhaps spiteful opposition; as, he failed *notwithstanding* his good intentions; or, he persevered *in spite of* the most bitter hostility. When *despite* and *in spite of* are applied to inanimate things, it is with something of personification; "*in spite of* the storm" is said as if the storm had a hostile purpose to oppose the undertaking.

OATH

SYNONYMS:

adjuration	curse	profane swearing
affidavit	cursing	profanity
anathema	denunciation	reprobation
ban	execration	swearing
blaspheming	imprecation	sworn statement
blasphemy	malediction	vow

In the highest sense, as in a court of justice, "an *oath* is a reverent appeal to God in corroboration of what one says," ABBOTT *Law Dict.*; an *affidavit* is a *sworn statement* made in writing in the presence of a competent officer; an *adjuration* is a solemn appeal to a person in the name of God to speak the truth. An *oath* is made to man in the name of God; a *vow*, to God without the intervention, often without the knowledge, of man. In the lower sense, an *oath* may be mere *blasphemy* or *profane swearing*. *Anathema*, *curse*, *execration*, and *imprecation* are modes of invoking vengeance or retribution from a superhuman power upon the person against whom they are uttered. *Anathema* is a solemn ecclesiastical condemnation of a person or of a proposition. *Curse* may be just and authoritative; as, the *curse* of God; or, it may be wanton and powerless; "so the *curse* causeless shall not come," *Prov.* xxvi, 2. *Execration* expresses most of personal bitterness and hatred; *imprecation* refers especially to the coming of the desired evil upon the person against whom it is uttered. *Malediction* is a general wish of evil, a less usual but very expressive word. Compare TESTIMONY.

ANTONYMS:

benediction	benison	blessing
-------------	---------	----------

OBJECT, v.

SYNONYMS:

contravene	disapprove	gainsay	oppose	take exception
demur	except	hesitate	scruple	

To *object* (from L. *ob*, before, against, + *jacio*, throw) is,

as it were, to throw something across the way of what is advanced or proposed, to bring, offer, or urge (something) in opposition, usually followed by *to* (sometimes by *against*) before the thing opposed; as, to *object to* suspension of the rules; to *object to* the introduction of personalities. *Object* may be used transitively; as, to *object* the youth of the candidate *against* the appointment; this use is now somewhat rare in the active voice, but common in the passive, especially with a clause for the subject; as, that we can not help all should not be *objected* as a reason against helping any. To *except* or *take exception*, in this connection, is to *object* at or to a single point or item: followed by *to* or *against*; as, I favor the purpose of the resolution, but *take exception* to the closing words; the use of the verb *except* in this sense is now rare, but the phrase, *take exception*, is common;

But anything that is new will be *excepted to* by minds of a certain order.

FITZEDWARD HALL *Modern English*, p. 334.

To *demur* (ult, from L. *de*, from, + *mora*, delay) is to *object* irresolutely, as one who delays in hope of preventing: followed by *at* or *to*; as, *at* that he *demurred*; the counsel *demurred to* the evidence; to *demur to* a view or proposal; also, frequently used without a preposition;

If he accepts it, why should you *demur*?

BROWNING *Ring and Book*, pt. i, p. 159.

To *demur* is to *hesitate* in the spirit of opposition; to *scruple* is to *hesitate* on conscientious grounds. Compare HESITATE under FLUCTUATE; OPPOSE under HINDER.

ANTONYMS:

accede	admire	applaud	assent	concur
accept	admit	approve	comply	consent

OBSCURE

SYNONYMS:

abstruse	darksome	dark	involved
ambiguous	deep	enigmatical	muddy
cloudy	dense	hidden	mysterious
complex	difficult	incomprehensible	profound
complicated	dim	indistinct	turbid
dark	doubtful	intricate	unintelligible

That is *obscure* which the eye or the mind can not clearly discern or see through, whether because of its own want of

transparency, its depth or intricacy, or because of mere defect of light. That which is *complicated* is likely to be *obscure*, but that may be *obscure* which is not at all *complicated* and scarcely *complex*, as a *muddy* pool. In that which is *abstruse* (from L. *abs*, from, and *trudo*, push) as if removed from the usual course of thought or out of the way of apprehension or discovery, the thought is *remote*, *hidden*; in that which is *obscure* there may be nothing to hide; it is hard to see the bottom of the *profound*, because of its depth, but the most shallow turbidness is *obscure*. Compare COMPLEX; DARK; DIFFICULT; MYSTERIOUS.

ANTONYMS:

See synonyms for CLEAR.

OBSOLETE

SYNONYMS:

ancient	archaic	obsolescent	out of date
antiquated	disused	old	rare

Some of the *oldest* or most *ancient* words are not *obsolete*, as father, mother, etc. A word is *obsolete* which has quite gone out of reputable use; a word is *archaic* which is falling out of reputable use, or, on the other hand, having been *obsolete*, is taken up tentatively by writers or speakers of influence, so that it may perhaps regain its position as a living word; a word is *rare* if there are few present instances of its reputable use. Compare OLD.

ANTONYMS:

See synonyms for NEW.

OBSTINATE

SYNONYMS:

contumacious	headstrong	mulish	resolute
decided	heady	obdurate	resolved
determined	immovable	opinionated	stubborn
dogged	indomitable	persistent	unconquerable
firm	inflexible	pertinacious	unflinching
fixed	intractable	refractory	unyielding

The *headstrong* person is not to be stopped in his own course of action, while the *obstinate* and *stubborn* is not to be driven to another's way. The *headstrong* act; the *obstinate* and *stubborn* may simply refuse to stir. The most amiable person may

be *obstinate* on some one point; the *stubborn* person is for the most part habitually so, we speak of *obstinate* determination, *stubborn* resistance. *Stubborn* is the term most frequently applied to the lower animals and inanimate things. *Refractory* implies more activity of resistance; the *stubborn* horse balks; the *refractory* animal plunges, rears, and kicks; metals that resist ordinary processes of reduction are termed *refractory*. One is *obdurate* who adheres to his purpose in spite of appeals that would move any tender-hearted or right-minded person. *Contumacious* refers to a proud and insolent defiance of authority, as of the summons of a court. *Pertinacious* demand is contrasted with *obstinate* refusal. The *unyielding* conduct which we approve we call *decided*, *firm*, *inflexible*, *resolute*; that which we condemn we are apt to term *headstrong*, *obstinate*, *stubborn*. Compare PERVERSE.

ANTONYMS:

amenable	dutiful	pliable	tractable
compliant	gentle	pliant	undecided
compliant	irresolute	submissive	wavering
docile	obedient	teachable	yielding

OBSTRUCT**SYNONYMS:**

arrest	block	clog	impede	retard
bar	check	embarrass	interrupt	stay
barricade	choke	hinder	oppose	stop

To *obstruct* is literally to build up against; the road is *obstructed* by fallen trees; the passage of liquid through a tube is *obstructed* by solid deposits. To *bar* or *block* is to prevent advance by some substantial obstacle, as by a bar or block across a path or entrance; these words are thus closely allied to *check*, but express more finality; a movement which is *checked* may be resumed; if *barred* or *blocked*, it is effectually brought to an end, unless the obstacle can be removed; as, action is *barred* by the statute of limitations; the roads were *blocked* with snow;

It required [by the Articles of Confederation] the vote of nine States to pass any bill, and five could *block* the wheels of government.

DEFEW *Orations*, April 30, 1889.

We may *hinder* one's advance by following and clinging to him; we *obstruct* his course by standing in his way or putting a barrier across his path. Anything that makes one's progress slower, whether from within or from without, *impedes*; an

obstruction is always from without. To *stop* is to bring movement to an end, or a moving object to enforced rest. To *arrest* is to cause to *stop* suddenly; *obstructing* the way may have the effect of *arresting* progress. Compare **BAFFLE**; **CHECK**; **HINDER**; **IMPEDIMENT**.

ANTONYMS:

accelerate	aid	facilitate	free	open	promote
advance	clear	forward	further	pave the way for	

OLD**SYNONYMS:**

aged	decrepit	immemorial	senile
ancient	elderly	olden	time-honored
antiquated	gray	patriarchal	time-worn
antique	hoary	remote	venerable

That is termed *old* which has existed long, or which existed long ago. *Ancient*, from the Latin, through the French, is the more stately, *old*, from the Saxon, the more familiar word. Familiarity, on one side, is near to contempt; thus we say, an *old* coat, an *old* hat. On the other hand, familiarity is akin to tenderness, and thus *old* is a word of endearment; as, "the *old* homestead," "the *old* oaken bucket." "Tell me the *old*, *old* story!" has been sung feelingly by millions; "tell me that *ancient* story" would remove it out of all touch of human sympathy. *Olden* is a statelier form of *old*, and is applied almost exclusively to time, not to places, buildings, persons, etc. As regards periods of time, the familiar are also the near; thus, the *old* times are not too far away for familiar thought and reference; the *olden* times are more remote, *ancient* times still further removed. *Gray*, *hoary*, and *moldering* refer to outward and visible tokens of age. *Aged* applies chiefly to long-extended human life. *Decrepit*, *gray*, and *hoary* refer to the effects of age on the body exclusively; *senile* upon the mind also; as, a *decrepit* frame, *senile* garrulousness. One may be *aged* and neither *decrepit* nor *senile*. *Elderly* is applied to those who have passed middle life, but scarcely reached *old* age. *Remote* (from L. *re*, back or away, and *moveo*, move), primarily refers to space, but is extended to that which is far off in time; as, at some *remote* period. *Venerable* expresses the involuntary reverence that we yield to the majestic and long-enduring, whether in the material

world or in human life and character. Compare **ANTIQUE**; **OBSOLETE**; **PRIMEVAL**.

ANTONYMS:

Compare synonyms for **NEW**; **YOUTHFUL**.

OPERATION

SYNONYMS:

action	effect	force	performance	result
agency	execution	influence	procedure	

Operation is *action* considered with reference to the thing acted upon, and may apply to the *action* of an intelligent agent or of a material substance or *force*; as, the *operation* of a medicine. *Performance* and *execution* denote intelligent *action*, considered with reference to the actor or to that which he accomplishes; *performance* accomplishing the will of the actor, *execution* often the will of another; we speak of the *performance* of a duty, the *execution* of a sentence. Compare **ACT**.

ANTONYMS:

failure	ineffectiveness	inutility	uselessness
inaction	inefficiency	powerlessness	

ORDER

SYNONYMS:

command	injunction	mandate	requirement
direction	instruction	prohibition	

Instruction implies superiority of knowledge, *direction* of authority on the part of the giver; a teacher gives *instructions* to his pupils, an employer gives *directions* to his workmen. *Order* is still more authoritative than *direction*; soldiers, sailors, and railroad employees have simply to obey the *orders* of their superiors, without explanation or question; an *order* in the commercial sense has the authority of the money which the one *ordering* the goods pays or is to pay. *Command* is a loftier word, as well as highly authoritative, less frequent in common life; we speak of the *commands* of God, or sometimes, by polite hyperbole, ask of a friend, "Have you any *commands* for me?" A *requirement* is imperative, but not always formal, nor made by a personal agent; it may be in the nature of things; as, the *requirements* of the position. *Prohibition* is wholly negative; it is a *command* not to do; *injunction* is now

oftenest so used, especially as the *requirement* by legal authority that certain action be suspended or refrained from, pending final legal decision. Compare ARRAY; CLASS; LAW; PROHIBIT; SYSTEM.

ANTONYMS:

allowance consent leave liberty license permission permit

OSTENTATION

SYNONYMS:

boast	bravado	pageant	pomp	show
boasting	display	pageantry	pomposity	vaunt
brag	flourish	parade	pompousness	vaunting

Ostentation is an ambitious showing forth of whatever is thought adapted to win admiration or praise; *ostentation* may be without words; as, the *ostentation* of wealth in fine residences, rich clothing, costly equipage, or the like; when in words, *ostentation* is rather in manner than in direct statement; as, the *ostentation* of learning. *Boasting* is in direct statement, and is louder and more vulgar than *ostentation*. A *brag* or *bravado* is a *boast* or *ostentation* of courage, which may, perhaps, be real, but is more commonly false and pretentious. There may be great *display* or *show* with little substance; *ostentation* suggests something substantial to be shown. *Pageant*, *pageantry*, *parade*, and *pomp* refer principally to affairs of arms or state; as, a royal *pageant*; a military *parade*. *Pomp* is some material demonstration of wealth and power, as in grand and stately ceremonial, rich furnishings, processions, etc., considered as worthy of the person or occasion in whose behalf it is manifested; *pomp* is the noble side of that which as *ostentation* is considered as arrogant and vain. *Pageant* and *pageantry* are inferior to *pomp*, denoting spectacular *display* designed to impress the public mind, and since the multitude is largely ignorant and thoughtless, the words *pageant* and *pageantry* have a suggestion of the transient and unsubstantial. *Parade* (from L. *paro*, prepare) is an exhibition as of troops in camp going through the evolutions that are to be used in battle, and suggests a lack of earnestness and direct or immediate occasion or demand; hence, in the more general sense, a *parade* is an uncalled for exhibition, and so used is a more disparaging word than *ostentation*; *ostentation* may spring merely from undue self-gratulation, *parade*

implies a desire to impress others with a sense of one's abilities or resources, and is always offensive and somewhat contemptible; as, a *parade* of wealth or learning. *Pomposity* and *pompousness* are the affectation of *pomp*.

ANTONYMS:diffidence
modestyquietness
reserveretirement
shrinkingtimidity
unobtrusiveness**OUGHT****SYNONYM:****should**

One *ought* to do that which he is under moral obligation or in duty bound to do. *Ought* is the stronger word, holding most closely to the sense of moral obligation, or sometimes of imperative logical necessity; *should* may have the sense of moral obligation or may apply merely to propriety or expediency, as in the proverb, "The liar *should* have a good memory," *i. e.*, he will need it. *Ought* is sometimes used of abstractions or inanimate things as indicating what the mind deems to be imperative or logically necessary in view of all the conditions; as, these goods *ought* to go into that space; these arguments *ought* to convince him; *should* in such connections would be correct, but less emphatic. Compare **DUTY**.

OVERSIGHT**SYNONYMS:**care
charge
commandcontrol
direction
inspectionmanagement
superintendence
supervisionsurveillance
watch
watchfulness

A person may look over a matter in order to survey it carefully in its entirety, or he may look over it with no attention to the thing itself because his gaze and thought are concentrated on something beyond; *oversight* has thus two contrasted senses, in the latter sense denoting inadvertent error or omission, and in the former denoting watchful *supervision*, commonly implying constant personal presence; *superintendence* requires only so much of presence or communication as to know that the superintendent's wishes are carried out; the superintendent of a railroad will personally oversee very few of its operations; the railroad company has supreme *direction* of all its affairs without *superintendence* or *oversight*. *Control* is used chiefly

with reference to restraint or the power of restraint; a good horseman has a restless horse under perfect *control*; there is no high character without self-*control*. *Surveillance* is an invidious term signifying watching with something of suspicion. Compare CARE; NEGLECT.

PAIN

SYNONYMS:

ache	distress	suffering	torture
agony	pang	throe	twinge
anguish	paroxysm	torment	woe

Pain is the most general term of this group, including all the others; *pain* is a disturbing sensation from which nature revolts, resulting from some injurious external interference (as from a wound, bruise, a harsh word, etc.), or from some lack of what one needs, craves, or cherishes (as, the *pain* of hunger or bereavement), or from some abnormal action of bodily or mental functions (as, the *pains* of disease, envy, or discontent). *Suffering* is one of the severer forms of *pain*. The prick of a needle causes *pain*, but we should scarcely speak of it as *suffering*. *Distress* is too strong a word for little hurts, too feeble for the intensest *suffering*, but commonly applied to some continuous or prolonged trouble or need; as, the *distress* of a shipwrecked crew, or of a destitute family. *Ache* is lingering *pain*, more or less severe; *pang*, a *pain* short, sharp, intense, and perhaps repeated. We speak of the *pangs* of hunger or of remorse. *Throe* is a violent and thrilling *pain*. *Paroxysm* applies to an alternately recurring and receding *pain*, which comes as it were in waves; the *paroxysm* is the rising of the wave. *Torment* and *torture* are intense and terrible *sufferings*. *Agony* and *anguish* express the utmost *pain* or *suffering* of body or mind. *Agony* of body is that with which the system struggles; *anguish* that by which it is crushed.

ANTONYMS:

comfort delight ease enjoyment peace rapture relief solace

PALLIATE

SYNONYMS:

apologize for	conceal	extenuate	hide	screen
cloak	cover	gloss over	mitigate	veil

Cloak, from the French, and *palliate*, from the Latin, are

the same in original signification, but have diverged in meaning; a *cloak* may be used to *hide* completely the person or some object carried about the person, or it may but partly *veil* the figure, making the outlines less distinct; *cloak* is used in the former, *palliate* in the latter sense; to *cloak* a sin is to *hide* it from discovery; to *palliate* it is to attempt to *hide* some part of its blameworthiness. "When we *palliate* our own or others' faults we do not seek to *cloke* them altogether, but only to *extenuate* the guilt of them in part." TRENCH *Study of Words* lect. vi, p. 266. Either to *palliate* or to *extenuate* is to admit the fault: but to *extenuate* is rather to *apologize* for the offender, while to *palliate* is to disguise the fault; hence, we speak of *extenuating* but not of *palliating* circumstances, since circumstances can not change the inherent wrong of an act, though they may lessen the blameworthiness of him who does it; *palliating* a bad thing by giving it a mild name does not make it less evil. In reference to diseases, to *palliate* is really to diminish their violence, or partly to relieve the sufferer. Compare ALLEVIATE; HIDE.

PARDON, *v.*

SYNONYMS:

absolve	condone	forgive	pass by	remit
acquit	excuse	overlook	pass over	

To *pardon* is to let pass, as a fault or sin, without resentment, blame, or punishment. *Forgive* has reference to feelings, *pardon* to consequences; hence, the executive may *pardon*, but has nothing to do officially with *forgiving*. Personal injury may be *forgiven* by the person wronged; thus, God at once *forgives* and *pardons*; the *pardoned* sinner is exempt from punishment; the *forgiven* sinner is restored to the divine favor. To *pardon* is the act of a superior, implying the right to punish; to *forgive* is the privilege of the humblest person who has been wronged or offended. In law, to *remit* the whole penalty is equivalent to *pardoning* the offender; but a part of the penalty may be *remitted* and the remainder inflicted, as where the penalty includes both fine and imprisonment. To *condone* is to put aside a recognized offense by some act which restores the offender to forfeited right or privilege, and is the act of a private individual, without legal formalities. To

excuse is to *overlook* some slight offense, error, or breach of etiquette; *pardon* is often used by courtesy in nearly the same sense. A person may speak of *excusing* or *forgiving* himself, but not of *pardonning* himself. Compare ABSOLVE; PARDON, *n.*

ANTONYMS:

castigate	chastise	convict	doom	recompense	sentence
chasten	condemn	correct	punish	scourge	visit

PARDON, *n.*

SYNONYMS:

absolution	amnesty	forgiveness	oblivion
acquittal	forbearance	mercy	remission

Acquittal is a release from a charge, after trial, as not guilty, *Pardon* is a removal of penalty from one who has been adjudged guilty. *Acquittal* is by the decision of a court, commonly of a jury; *pardon* is the act of the executive. An innocent man may demand *acquittal*, and need not plead for *pardon*. *Pardon* supposes an offense; yet, as our laws stand, to grant a *pardon* is sometimes the only way to release one who has been wrongly convicted. *Oblivion*, from the Latin, signifies overlooking and virtually forgetting an offense, so that the offender stands before the law in all respects as if it had never been committed. *Amnesty* brings the same idea through the Greek. *Pardon* affects individuals; *amnesty* and *oblivion* are said of great numbers. *Pardon* is oftenest applied to the ordinary administration of law; *amnesty*, to national and military affairs. An *amnesty* is issued after war, insurrection, or rebellion; it is often granted by "an act of *oblivion*," and includes a full *pardon* of all offenders who come within its provisions. *Absolution* is a religious word (compare synonyms for ABSOLVE). *Remission* is a discharge from penalty; as, the *remission* of a fine.

ANTONYMS:

penalty	punishment	retaliation	retribution	vengeance
---------	------------	-------------	-------------	-----------

PREPOSITIONS:

A pardon *to* or *for* the offenders; *for* all offenses; the pardon *of* offenders or offenses.

PART, *v.*

SYNONYMS:

Compare synonyms for PART, *n.*

PREPOSITIONS:

Part *into* shares; part *in* the middle; part *one from* another; part *among* the claimants; part *between* contestants (archaic); in general, to part *from* is to relinquish companionship; to part *with* is to relinquish possession; we part *from* a person or *from* something thought of with some sense of companionship; a traveler parts *from* his friends; he may be said also to part *from* his native shore; a man parts *with* an estate, a horse, a copyright; part *with* may be applied to a person thought of in any sense as a possession; an employer parts *with* a clerk or servant; but *part with* is sometimes used by good writers as meaning simply to separate from.

PART, n.**SYNONYMS:**

atom	fraction	particle	section
component	fragment	partition	segment
constituent	ingredient	piece	share
division	instalment	portion	subdivision
element	member		

Part, a substance, quantity, or amount that is the result of the division of something greater, is the general word, including all the others of this group. A *fragment* is the result of breaking, rending, or disruption of some kind, while a *piece* may be smoothly or evenly separated and have a certain completeness in itself. A *piece* is often taken for a sample; a *fragment* scarcely would be. *Division* and *fraction* are always regarded as in connection with the total; *divisions* may be equal or unequal; a *fraction* is one of several equal *parts* into which the whole is supposed to be divided. A *portion* is a *part* viewed with reference to some one who is to receive it or some special purpose to which it is to be applied; in a restaurant one *portion* (*i. e.*, the amount designed for one person) is sometimes, by special order, served to two; a *share* is a *part* to which one has or may acquire a right in connection with others; an *instalment* is one of a series of proportionate payments that are to be continued till the entire claim is discharged; a *particle* is an exceedingly small *part*. A *component*, *constituent*, *ingredient*, or *element* is a *part* of some compound or mixture; an *element* is necessary to the existence, as a *component* or *constituent* is necessary to the completeness

of that which it helps to compose; an *ingredient* may be foreign or accidental. A *subdivision* is a *division* of a *division*. We speak of a *segment* of a circle. Compare PARTICLE; PORTION.

PARTICLE

SYNONYMS:

atom	element	jot	scintilla	tittle
bit	grain	mite	scrap	whit
corpuscle	iota	molecule	shred	

A *particle* is a very small part of any material substance; as, a *particle* of sand or of dust; it is a general term, not accurately determinate in meaning. A *bit* is primarily a *bite*, and applies to solids. One may say, "a *bit* of bread," "a *bit* of money," but not "a little *bit* of water"; "a *bit* of soap," but not "a *bit* of soup." *Atom* (from Gr. *a-* privative, not, and *temno*, cut) etymologically signifies that which can not be cut or divided, and is the smallest conceivable *particle* of matter, regarded as absolutely homogeneous and as having but one set of properties; *atoms* are the ultimate *particles* of matter. A *molecule* is made up of *atoms*, and is regarded as separable into its constituent parts; as used by physicists, a *molecule* is the smallest conceivable part which retains all the characteristics of the substance; thus, a *molecule* of water is made up of two *atoms* of hydrogen and one *atom* of oxygen. *Element* in chemistry denotes, without reference to quantity, a substance regarded as simple, *i. e.*, one incapable of being resolved by any known process into simpler substances; the *element* gold may be represented by an ingot or by a *particle* of gold-dust. In popular language, an *element* is any essential constituent; the ancients believed that the universe was made up of the four *elements*, earth, air, fire, and water; a storm is spoken of as a manifestation of the fury of the *elements*. We speak of *corpuscles* of blood. Compare PART.

ANTONYMS:

aggregate entirety mass quantity sum sum total total whole

PATIENCE

SYNONYMS:

calmness	forbearance	long-suffering	submission
composure	fortitude	passiveness	sufferance
endurance	leniency	resignation	

Patience is the quality or habit of mind shown in bearing

passively and uncomplainingly any pain, evil, or hardship that may fall to one's lot. *Endurance* hardens itself against suffering, and may be merely stubborn; *fortitude* is *endurance* animated by courage; *endurance* may by modifiers be made to have a passive force, as when we speak of "passive endurance"; *patience* is not so hard as *endurance* nor so self-effacing as *submission*. *Submission* is ordinarily and *resignation* always applied to matters of great moment, while *patience* may apply to slight worries and annoyances. As regards our relations to our fellow men, *forbearance* is abstaining from retaliation or revenge; *patience* is keeping kindliness of heart under vexatious conduct; *long-suffering* is continued *patience*. *Patience* may also have an active force denoting uncomplaining steadiness in doing, as in tilling the soil. Compare APATHY; INDUSTRY.

ANTONYMS:

See synonyms for ANGER.

PREPOSITIONS:

Patience in or *amid* sufferings; *patience with* (rarely *toward*) opposers or offenders; *patience under* afflictions; (rarely) *patience of* heat or cold, etc.

PAY, *n.*

SYNONYMS:

allowance	hire	recompense	salary
compensation	honorarium	remuneration	stipend
earnings	payment	requital	wages
fee			

An *allowance* is a stipulated amount furnished at regular intervals as a matter of discretion or gratuity, as of food to besieged soldiers, or of money to a child or ward. *Compensation* is a comprehensive word signifying a return for a service done. *Remuneration* is applied to matters of great amount or importance. *Recompense* is a still wider and loftier word, with less suggestion of calculation and market value; there are services for which affection and gratitude are the sole and sufficient *recompense*; *earnings*, *fees*, *hire*, *pay*, *salary*, and *wages* are forms of *compensation* and may be included in *compensation*, *remuneration*, or *recompense*. *Pay* is commercial and strictly signifies an exact pecuniary equivalent for a thing

or service, except when the contrary is expressly stated, as when we speak of "high pay" or "poor pay." *Wages* denotes what a worker receives. *Earnings* is often used as exactly equivalent to *wages*, but may be used with reference to the real value of work done or service rendered, and even applied to inanimate things; as, the *earnings* of capital. *Hire* is distinctly mercenary or menial, but as a noun has gone out of popular use, though the verb to *hire* is common. *Salary* is for literary or professional work, *wages* for handicraft or other comparatively inferior service; a *salary* is regarded as more permanent than *wages*; an editor receives a *salary*, a compositor receives *wages*. *Stipend* has become exclusively a literary word. A *fee* is given for a single service or privilege, and is sometimes in the nature of a gratuity. Compare **REQUITE**.

PEOPLE

SYNONYMS:

commonwealth
community

nation
population

race
state

tribe

A *community* is in general terms the aggregate of persons inhabiting any territory in common and viewed as having common interests; a *commonwealth* is such a body of persons having a common government, especially a republican government; as, the *commonwealth* of Massachusetts. A *community* may be very small; a *commonwealth* is ordinarily of considerable extent. A *people* is the aggregate of any public *community*, either in distinction from their rulers or as including them; a *race* is a division of mankind in the line of origin and ancestry; the *people* of the United States includes members of almost every *race*. The use of *people* as signifying persons collectively, as in the statement "The hall was full of *people*," has been severely criticized, but is old and accepted English, and may fitly be classed as idiomatic, and often better than *persons*, by reason of its collectivism. As Dean Alford suggests, it would make a strange transformation of the old hymn "All *people* that on earth do dwell" to sing "All *persons* that on earth do dwell." A *state* is an organized political *community* considered in its corporate capacity as "a body politic and corporate"; as, a legislative act is the act of the *state*; every citizen is entitled to the protection of the *state*.

A *nation* is an organized political *community* considered with reference to the persons composing it as having certain definite boundaries, a definite number of citizens, etc. The members of a *people* are referred to as persons or individuals; the individual members of a *state* or *nation* are called citizens or subjects. The *population* of a country is simply the aggregate of persons residing within its borders, without reference to *race*, organization, or allegiance; unnaturalized residents form part of the *population*, but not of the *nation*, possessing none of the rights and being subject to none of the duties of citizens. In American usage, *State* signifies one *commonwealth* of the federal union known as the United States. *Tribe* is now almost wholly applied to rude *peoples* with very imperfect political organization; as, the Indian *tribes*; nomadic *tribes*. Compare MOB.

PERCEIVE

SYNONYMS:

apprehend comprehend conceive understand

We *perceive* what is presented through the senses. We *apprehend* what is presented to the mind, whether through the senses or by any other means. Yet *perceive* is used in the figurative sense of seeing through to a conclusion, in a way for which usage would not allow us to substitute *apprehend*; as, "Sir, I *perceive* that thou art a prophet," *John* iv, 19. That which we *apprehend* we catch, as with the hand; that which we *conceive* we are able to analyze and recompose in our mind; that which we *comprehend*, we, as it were, grasp around, take together, seize, embrace wholly within the mind. Many things may be *apprehended* which can not be *comprehended*; a child can *apprehend* the distinction between right and wrong, yet the philosopher can not *comprehend* it in its fulness. We can *apprehend* the will of God as revealed in conscience or the Scriptures; we can *conceive* of certain attributes of Deity, as his truth and justice; but no finite intelligence can *comprehend* the Divine Nature, in its majesty, power, and perfection. Compare ANTICIPATE; ARREST; CATCH; KNOWLEDGE.

ANTONYMS:

fail of ignore lose misapprehend misconceive miss overlook

PERFECT

SYNONYMS:

absolute	consummate	holy	spotless
accurate	correct	ideal	stainless
blameless	entire	immaculate	unblemished
complete	faultless	sinless	undefiled
completed	finished		

That is *perfect* to which nothing can be added, and from which nothing can be taken without impairing its excellence, marring its symmetry, or detracting from its worth; in this fullest sense God alone is *perfect*, but in a limited sense anything may be *perfect* in its kind; as a *perfect* flower; a copy of a document is *perfect* when it is *accurate* in every particular; a vase may be called *perfect* when *entire* and *unblemished*, even though not artistically *faultless*; the best judges never pronounce a work of art *perfect*, because they see always *ideal* possibilities not yet attained; even the *ideal* is not *perfect*, by reason of the imperfection of the human mind; a human character faultlessly *holy* would be morally *perfect* though finite. That which is *absolute* is free from admixture (as *absolute* alcohol) and in the highest and fullest sense free from imperfection or limitation; as, *absolute* holiness and love are attributes of God alone. In philosophical language, *absolute* signifies free from all necessary, or even from all possible relations, not dependent or limited, unrelated and unconditioned; truth immediately known, as intuitive truth, is *absolute*; God, as self-existent and free from all limitation or dependence, is called the *absolute Being*, or simply the *Absolute*. Compare INNOCENT; INFINITE; RADICAL.

ANTONYMS:

bad	defective	imperfect	meager	scant
blemished	deficient	incomplete	perverted	short
corrupt	deformed	inferior	poor	spoiled
corrupted	fallible	insufficient	ruined	worthless
defaced	faulty	marred		

PERMANENT

SYNONYMS:

abiding	fixed	invariable	stable
changeless	immutable	lasting	steadfast
constant	imperishable	perpetual	unchangeable
durable	indelible	persistent	unchanging
enduring	indestructible		

Durable (from L. *durus*, hard) is said almost wholly of

material substances that resist wear; *lasting* is said of either material or immaterial things. *Permanent* is a word of wider meaning; a thing is *permanent* which is not liable to change; as, a *permanent* color; buildings upon a farm are called *permanent* improvements. *Enduring* is a higher word, applied to that which resists both time and change; as, *enduring* fame.

ANTONYMS:

See synonyms for TRANSIENT.

PERMISSION**SYNONYMS:**

allowance
authority

authorization
consent

leave
liberty

license
permit

Authority unites the right and power of control; age, wisdom, and character give *authority* to their possessor; a book of learned research has *authority*, and is even called an *authority*. *Permission* justifies another in acting without interference or censure, and usually implies some degree of approval. *Authority* gives a certain right of control over all that may be affected by the action. There may be a failure to object, which constitutes an implied *permission*, though this is more properly expressed by *allowance*; we *allow* what we do not oppose, *permit* what we expressly authorize. The noun *permit* implies a formal written *permission*. *License* is a formal *permission* granted by competent *authority* to an individual to do some act or pursue some business which would be or is made to be unlawful without such *permission*; as, a *license* to preach, to solemnize marriages, or to sell intoxicating liquors. A *license* is *permission* granted rather than *authority* conferred; the sheriff has *authority* (not *permission* nor *license*) to make an arrest. *Consent* is *permission* by the concurrence of wills in two or more persons, a mutual approval or acceptance of something proposed. Compare ALLOW.

ANTONYMS:

denial
hindrance

objection
opposition

prevention
prohibition

refusal
resistance

PERNICIOUS

SYNONYMS:

bad	evil	mischievous	pestilential
baneful	foul	noisome	poisonous
deadly	harmful	noxious	ruinous
deleterious	hurtful	obnoxious	unhealthful
destructive	injuriously	perverting	unwholesome
detrimental	insalubrious	pestiferous	

Pernicious (from L. *per*, through, and *neco*, kill) signifies having the power of destroying or injuring, tending to hurt or kill. *Pernicious* is stronger than *injurious*; that which is *injurious* is capable of doing harm; that which is *pernicious* is likely to be *destructive*. *Noxious* (from L. *noceo*, hurt) is a stronger word than *noisome*, as referring to that which is *injurious* or *destructive*. *Noisome* now always denotes that which is extremely disagreeable or disgusting, especially to the sense of smell; as, the *noisome* stench proclaimed the presence of *noxious* gases.

ANTONYMS:

advantageous	favorable	helpful	profitable	serviceable
beneficent	good	invigorating	rejuvenating	useful
beneficial	healthful	life-giving	salutary	wholesome

PERPLEXITY

SYNONYMS:

amazement	bewilderment	distraction	doubt
astonishment	confusion	disturbance	embarrassment

Perplexity (from L. *per*, through, and *plecto*, plait) is the drawing or turning of the thoughts or faculties by turns in different directions or toward contrasted or contradictory conclusions; *confusion* (from L. *confusus*, from *confundo*, pour together) is a state in which the mental faculties are, as it were, thrown into chaos, so that the clear and distinct action of the different powers, as of perception, memory, reason, and will is lost; *bewilderment* is akin to *confusion*, but is less overwhelming, and more readily recovered from; *perplexity*, accordingly, has not the unsettling of the faculties implied in *confusion*, nor the overwhelming of the faculties implied in *amazement* or *astonishment*; it is not the magnitude of the things to be known, but the want of full and definite knowledge, that causes *perplexity*. The dividing of a woodland path may cause the traveler the greatest *perplexity*, which may become *bewilderment* when he has tried one path after another

and lost his bearings completely. With an excitable person *bewilderment* may deepen into *confusion* that will make him unable to think clearly or even to see or hear distinctly. *Amazement* results from the sudden and unimagined occurrence of great good or evil or the sudden awakening of the mind to unthought-of truth. *Astonishment* often produces *bewilderment*, which the word was formerly understood to imply. Compare AMAZEMENT; ANXIETY; DOUBT; PREDICAMENT.

PERSUADE

SYNONYMS:

allure	dispose	incline	move
bring over	entice	induce	prevail on or upon
coax	impel	influence	urge
convince	incite	lead	win over

Of these words *convince* alone has no direct reference to moving the will, denoting an effect upon the understanding only; one may be *convinced* of his duty without doing it, or he may be *convinced* of truth that has no manifest connection with duty or action, as of a mathematical proposition. To *persuade* is to bring the will of another to a desired decision by some influence exerted upon it short of compulsion; one may be *convinced* that the earth is round; he may be *persuaded* to travel round it; but persuasion is so largely dependent upon conviction that it is commonly held to be the orator's work first to *convince* in order that he may *persuade*. *Coax* is a slighter word than *persuade*, seeking the same end by shallower methods, largely by appeal to personal feeling, with or without success; as, a child *coaxes* a parent to buy him a toy. One may be *brought over*, *induced*, or *prevailed upon* by means not properly included in persuasion, as by bribery or intimidation; he is *won over* chiefly by personal influence. Compare INFLUENCE.

ANTONYMS:

deter discourage dissuade hinder hold back repel restrain

PERTNESS

SYNONYMS:

boldness	forwardness	liveliness	smartness
briskness	impertinence	sauciness	sprightliness
flippancy	impudence		

Liveliness and *sprightliness* are pleasant and commendable;

smartness is a limited and showy acuteness or shrewdness, usually with unfavorable suggestion; *pertness* and *sauciness* are these qualities overdone, and regardless of the respect due to superiors. *Impertinence* and *impudence* may be gross and stupid; *pertness* and *sauciness* are always vivid and keen. Compare IMPUDENCE.

ANTONYMS:

bashfulness demureness diffidence humility modesty shyness

PERVERSE

SYNONYMS:

contrary	froward	petulant	untoward
factious	intractable	stubborn	wayward
fractious	obstinate	ungovernable	wilful

Perverse (from L. *perversus*, turned the wrong way) signifies wilfully wrong or erring, unreasonably set against right, reason, or authority. The *stubborn* or *obstinate* person will not do what another desires or requires; the *perverse* person will do anything contrary to what is desired or required of him. The *petulant* person frets, but may comply; the *perverse* individual may be smooth or silent, but is wilfully *intractable*. *Wayward* refers to a *perverse* disregard of morality and duty; *froward* is practically obsolete; *untoward* is rarely heard except in certain phrases; as, *untoward* circumstances. Compare OBSTINATE.

ANTONYMS:

accommodating	complaisant	genial	kind
amenable	compliant	governable	obliging

PHYSICAL

SYNONYMS:

bodily	corporeal	natural	tangible
corporal	material	sensible	visible

Whatever is composed of or pertains to matter may be termed *material*; *physical* (from Gr. *physis*, nature) applies to *material* things considered as parts of a system or organic whole; hence, we speak of *material* substances, *physical* forces, *physical* laws. *Bodily*, *corporal*, and *corporeal* apply primarily to the human body; *bodily* and *corporal* both denote pertaining or relating to the body; *corporeal* signifies of the nature of or like the body; *corporal* is now almost wholly restricted

to signify applied to or inflicted upon the body; we speak of *bodily* sufferings, *bodily* presence, *corporal* punishment, the *corporeal* frame.

ANTONYMS:

hyperphysical	intangible	invisible	moral	unreal
immaterial	intellectual	mental	spiritual	unsubstantial

PIQUE**SYNONYMS:**

displeasure	irritation	resentment	umbrage
grudge	offense		

Pique, from the French, signifies primarily a prick or a sting, as of a nettle; the word denotes a sudden feeling of mingled pain and anger, but slight and usually transient, arising from some neglect or *offense*, real or imaginary. *Umbrage* is a deeper and more persistent *displeasure* at being overshadowed (from L. *umbra*, a shadow) or, subjected to any treatment that one deems unworthy of him. It may be said, as a general statement, that *pique* arises from wounded vanity or sensitiveness, *umbrage* from wounded pride or sometimes from suspicion. *Resentment* rests on more solid grounds, and is deep and persistent. Compare **ANGER**.

ANTONYMS:

approval	contentment	gratification	satisfaction
complacency	delight	pleasure	

PITIFUL**SYNONYMS:**

abject	mean	paltry	sorrowful
base	miserable	pathetic	touching
contemptible	mournful	piteous	woeful
despicable	moving	pitiable	wretched
lamentable			

Pitiful originally signified full of pity; as, "the Lord is very *pitiful* and of tender mercy," *James* v, 11, but this usage is now archaic, and the meaning in question is appropriated by such words as merciful and compassionate. *Pitiful* and *piti-able* now refer to what may be deserving of pity, *pitiful* being used chiefly for that which is merely an object of thought, *piti-able* for that which is brought directly before the senses; as, a *pitiful* story; a *piti-able* object; a *piti-able* condition. Since pity, however, always implies weakness or inferiority in

that which is pitied, *pitiful* and *pitiable* are often used, by an easy transition, for what might awaken pity, but does awaken contempt; as, a *pitiful* excuse; he presented a *pitiable* appearance. *Piteous* is now rarely used in its earlier sense of feeling pity, but in its derived sense applies to what really excites the emotion; as, a *piteous* cry. Compare HUMANE; MERCY; PITY.

ANTONYMS:

august
beneficent
commanding
dignified

exalted
glorious
grand
great

helpful
lofty
mighty
noble

sublime
superb
superior

PITY

SYNONYMS:

commiseration
compassion

condolence
mercy

sympathy
tenderness

Pity is a feeling of grief or pain aroused by the weakness, misfortunes, or distresses of others, joined with a desire to help or relieve. *Sympathy* (feeling or suffering with) implies some degree of equality, kindred, or union; *pity* is for what is weak or unfortunate, and so far, at least, inferior to ourselves; hence, *pity* is often resented where *sympathy* would be welcome. We have *sympathy* with one in joy or grief, in pleasure or pain, *pity* only for those in suffering or need; we may have *sympathy* with the struggles of a giant or the triumphs of a conqueror; we are moved with *pity* for the captive or the slave. *Pity* may be only in the mind, but *mercy* does something for those who are its objects. *Compassion*, like *pity*, is exercised only with respect to the suffering or unfortunate, but combines with the tenderness of *pity* the dignity of *sympathy* and the active quality of *mercy*. *Commiseration* is as tender as *compassion*, but more remote and hopeless; we have *commiseration* for sufferers whom we can not reach or can not relieve. *Condolence* is the expression of *sympathy*. Compare MERCY.

ANTONYMS:

barbarity
brutality
cruelty
ferocity
hard-heartedness
hardness

harshness
inhumanity
mercilessness
pitilessness
rigor
ruthlessness
severity
sternness
truculence

PREPOSITIONS:

Pity on or upon that which we help or spare; *pity for* that which we merely contemplate; "have pity *upon* me, O ye my

friends," *Job* xix, 21; "pity for a horse o'er-driven," TENNYSON *In Memoriam* lxii, st. 1.

PLANT

SYNONYMS:

seed **seed down** **set** **set out** **sow**

We *set* or *set out* slips, cuttings, young trees, etc., though we may also be said to *plant* them; we *plant* corn, potatoes, etc., which we put in definite places, as in hills, with some care; we *sow* wheat or other small grains and seeds which are scattered in the process. Though by modern agricultural machinery the smaller grains are almost as precisely *planted* as corn, the old word for broadcast scattering is retained. Land is *seeded* or *seeded down* to grass.

ANTONYMS:

eradicate **extirpate** **root up** **uproot** **weed out**

PLEAD

SYNONYMS:

advocate **ask** **beseech** **implore** **solicit**
argue **beg** **entreat** **press** **urge**

To *plead* for one is to employ argument or persuasion, or both in his behalf, usually with earnestness or importunity; similarly one may be said to *plead* for himself or for a cause, etc., or with direct object, to *plead* a case; in legal usage, *pleading* is argumentative, but in popular usage, *pleading* always implies some appeal to the feelings. One *argues* a case solely on rational grounds and supposably with fair consideration of both sides; he *advocates* one side for the purpose of carrying it, and under the influence of motives that may range all the way from cold self-interest to the highest and noblest impulses; he *pleads* a cause, or *pleads* for a person with still more intense feeling. *Beseech*, *entreat*, and *implore* imply impassioned earnestness, with direct and tender appeal to personal considerations. *Press* and *urge* imply more determined or perhaps authoritative insistence. *Solicit* is a weak word denoting merely an attempt to secure one's consent or cooperation, sometimes by sordid or corrupt motives.

PREPOSITIONS:

Plead *with* the tyrant, *for* the captive; plead *against* the op-

pression or the oppressor; plead to the indictment; *at* the bar; *before* the court; *in* open court.

PLEASANT

SYNONYMS:

agreeable	good-natured	kindly	pleasing
attractive	kind	obliging	pleasurable

That is *pleasing* from which pleasure is received, or may readily be received, without reference to any action or intent in that which confers it; as, a *pleasing* picture; a *pleasing* landscape. Whatever has active qualities adapted to give pleasure is *pleasant*; as, a *pleasant* breeze; a *pleasant* (not a *pleasing*) day. As applied to persons, *pleasant* always refers to a disposition ready and desirous to please; one is *pleasant*, or in a *pleasant* mood, when inclined to make happy those with whom he is dealing, to show kindness and do any reasonable favor. In this sense *pleasant* is nearly akin to *kind*, but *kind* refers to act or intent, while *pleasant* stops with the disposition; many persons are no longer in a *pleasant* mood if asked to do a troublesome kindness. *Pleasant* keeps always something of the sense of actually giving pleasure, and thus surpasses the meaning of *good-natured*; there are *good-natured* people who by reason of rudeness and ill-breeding are not *pleasant* companions. A *pleasing* face has good features, complexion, expression, etc.; a *pleasant* face indicates a *kind* heart and an *obliging* disposition, as well as *kindly* feelings in actual exercise; we can say of one usually *good-natured*, "on that occasion he did not meet me with a *pleasant* face." *Pleasant*, in the sense of gay, merry, jocose (the sense still retained in *pleasantry*), is now rare, and would not be understood outside of literary circles. Compare AMIABLE; COMFORTABLE; DELIGHTFUL.

ANTONYMS:

arrogant	displeasing	glum	ill-humored	repelling
austere	dreary	grim	ill-natured	repulsive
crabbed	forbidding	harsh	offensive	unkind
disagreeable	gloomy	hateful	repellent	unpleasant

PREPOSITIONS:

Pleasant to, *with*, or *toward* persons; *about* a matter.

PLENTIFUL

SYNONYMS:

abounding	bountiful	generous	plenteous
abundant	complete	large	profuse
adequate	copious	lavish	replete
affluent	enough	liberal	rich
ample	exuberant	luxuriant	sufficient
bounteous	full	overflowing	teeming

Enough is relative, denoting a supply equal to a given demand. A temperature of 70° Fahrenheit is *enough* for a living-room; of 212° *enough* to boil water; neither is *enough* to melt iron. *Sufficient*, from the Latin, is an equivalent of the Saxon *enough*, with no perceptible difference of meaning, but only of usage, *enough* being the more blunt, homely, and forcible word, while *sufficient* is in many cases the more elegant or polite. *Sufficient* usually precedes its noun; *enough* usually and preferably follows. That is *ample* which gives a safe, but not a large, margin beyond a given demand; that is *abundant*, *affluent*, *bountiful*, *liberal*, *plentiful*, which is largely in excess of manifest need. *Plentiful* is used of supplies, as of food, water, etc.; as, "a *plentiful* rain," *Ps.* lxxviii, 9. We may also say a *copious* rain; but *copious* can be applied to thought, language, etc., where *plentiful* can not well be used. *Affluent* and *liberal* both apply to riches, resources; *liberal*, with especial reference to giving or expending. (Compare synonyms for ADEQUATE; WEALTH.) *Affluent*, referring especially to riches, may be used of thought, feeling, etc. Neither *affluent*, *copious*, nor *plentiful* can be used of time or space; a field is sometimes called *plentiful*, not with reference to its extent, but to its productiveness. *Complete* expresses not excess or overplus, and yet not mere sufficiency, but harmony, proportion, fitness to a design or ideal. *Ample* and *abundant* may be applied to any subject. We have *time enough*, means that we can reach our destination without haste, but also without delay; if we have *ample* time, we may move leisurely, and note what is by the way; if we have *abundant* time, we may pause to converse with a friend, to view the scenery, or to rest when weary. *Lavish* and *profuse* imply a decided excess, oftenest in the ill sense. We rejoice in *abundant* resources, and honor *generous* hospitality; *lavish* or *profuse* expenditure suggests extravagance and wastefulness. *Luxuriant* is used especially of that which is *abundant* in growth; as, a *luxuriant* crop.

ANTONYMS:

deficient	inadequate	narrow	scanty	small
drained	insufficient	niggardly	scarce	sparing
exhausted	mean	poor	scrimped	stingy
impoverished	miserly	scant	short	straitened

PREPOSITION:

Plentiful *in* resources.

POETRY**SYNONYMS:**

meter	numbers	poesy	song
metrical composition	poem	rime	verse

Poetry is that form of literature that embodies beautiful thought, feeling, or action in melodious, rhythmical, and (usually) metrical language, in imaginative and artistic constructions. *Poetry* in a very wide sense may be anything that pleasingly addresses the imagination; as, the *poetry* of motion. In ordinary usage, *poetry* is both imaginative and metrical. There may be *poetry* without *rime*, but hardly without *meter*, or what in some languages takes its place, as the Hebrew parallelism; but *poetry* involves, besides the artistic form, the exercise of the fancy or imagination in a way always beautiful, often lofty or even sublime. Failing this, there may be *verse*, *rime*, and *meter*, but not *poetry*. There is much in literature that is beautiful and sublime in thought and artistic in construction, which is yet not *poetry*, because quite devoid of the element of *song*, whereby *poetry* differs from the most lofty, beautiful, or impassioned prose. Compare **METER**.

ANTONYMS:

prosaic speech	prosaic writing	prose
----------------	-----------------	-------

POLITE**SYNONYMS:**

accomplished	courtly	genteel	urbane
ceremonious	cultivated	gracious	well-behaved
civil	cultured	obliging	well-bred
complaisant	elegant	polished	well-mannered
courteous			

A *civil* person observes such propriety of speech and manner as to avoid being rude; one who is *polite* (literally *polished*) observes more than the necessary proprieties, conforming to all that is graceful, becoming, and thoughtful in the inter-

course of refined society. A man may be *civil* with no consideration for others, simply because self-respect forbids him to be rude; but one who is *polite* has at least some care for the opinions of others, and if *polite* in the highest and truest sense, which is coming to be the prevailing one, he cares for the comfort and happiness of others in the smallest matters. *Civil* is a colder and more distant word than *polite*; *courteous* is fuller and richer, dealing often with greater matters, and is used only in the good sense; *ceremonious* is akin in meaning to *civil*; *ceremonious* observance, like *civility*, may accompany true politeness, or may be used as a substitute for it; becoming thus particularly bitter and galling;

. . . . assent with *civil* leer,
And without sneering, teach the rest to sneer.

POPE *Prologue to Satires*, l. 201

When love begins to sicken and decay,
It useth an enforced ceremony.

SHAKESPEARE *Julius Caesar* act iv, sc. 2, l. 20.

Courtly suggests that which befits a royal court, and is used of external grace and stateliness without reference to the prompting feeling; as, the *courtly* manners of the ambassador. *Genteel* refers to an external elegance, which may be showy and superficial, and the word is thus inferior to *polite* or *courteous*. *Urbane* refers to a politeness that is genial and successful in giving others a sense of ease and cheer. *Polished* refers to external elegancies of speech and manner without reference to spirit or purpose; as, a *polished* gentleman or a *polished* scoundrel; *cultured* refers to a real and high development of mind and soul, of which the external manifestation is the smallest part. *Complaisant* denotes a disposition to please or favor beyond what politeness would necessarily require.

ANTONYMS:

awkward	clownish	ill-mannered	insulting	uncouth
bluff	coarse	impertinent	raw	unmannerly
blunt	discourteous	impolite	rude	unpolished
boorish	ill-behaved	impudent	rustic	untaught
brusk	ill-bred	insolent	uncivil	untutored

POLITY

SYNONYMS:

constitution policy form or system of government

Polity is the permanent system of government of a state, a

church, or a society; *policy* is the method of management with reference to the attainment of certain ends; the national *polity* of the United States is republican; each administration has a *policy* of its own. *Policy* is often used as equivalent to expediency; as, many think honesty to be good *policy*. *Polity* used in ecclesiastical use serves a valuable purpose in distinguishing that which relates to administration and government from that which relates to faith and doctrine; two churches identical in faith may differ in *polity*, or those agreeing in *polity* may differ in faith. Compare LAW.

PORTION

SYNONYMS:

lot **parcel** **part** **proportion** **share**

When any whole is divided into *parts*, any *part* that is allotted to some person, thing, subject, or purpose is called a *portion*, though the division may be by no fixed rule or relation; a father may divide his estate by will among his children so as to make their several *portions* great or small, according to his arbitrary and unreasonable caprice. When we speak of a *part* as a *proportion*, we think of the whole as divided according to some rule or scale, so that the different *parts* bear a contemplated and intended relation or ratio to one another; thus, the *portion* allotted to a child by will may not be a fair *proportion* of the estate. *Proportion* is often used where *part* or *portion* would be more appropriate. Compare PART.

POVERTY

SYNONYMS:

beggary **indigence** **pauperism** **privation**
destitution **mendicancy** **penury** **want**
distress **need**

Poverty denotes strictly lack of property or adequate means of support, but in common use is a relative term denoting any condition below that of easy, comfortable living; *privation* denotes a condition of painful lack of what is useful or desirable, though not to the extent of absolute *distress*; *indigence* is lack of ordinary means of subsistence; *destitution* is lack of the comforts, and in part even of the necessities of life; *penury* is especially cramping *poverty*, possibly not so sharp as *destitution*.

tution, but continuous, while that may be temporary; *pauperism* is such *destitution* as throws one upon organized public charity for support; *beggary* and *mendicancy* denote *poverty* that appeals for indiscriminate private charity.

POWER

SYNONYMS:

ability	command	expertness	readiness
aptitude	competency	faculty	rule
authority	dexterity	force	skill
capability	dominion	might	strength
capacity	efficacy	potency	susceptibility
cleverness	efficiency	potentiality	sway
cogency	energy	qualification	talent

Power is the most general term of this group, including every quality, property, or *faculty* by which any change, effect, or result is, or may be, produced; as, the *power* of the legislature to enact laws, or of the executive to enforce them; the *power* of an acid to corrode a metal; the *power* of a polished surface to reflect light. *Ability* is nearly coextensive with *power*, but does not reach the positiveness and vigor that may be included in the meaning of *power*, *ability* often implying latent, as distinguished from active *power*; we speak of an exertion of *power*, but not of an exertion of *ability*. *Power* and *ability* include *capacity*, which is *power* to receive; but *ability* is often distinguished from *capacity*, as *power* that may be manifested in doing, as *capacity* is in receiving; one may have great *capacity* for acquiring knowledge, and yet not possess *ability* to teach. *Efficacy* is active *power* to effect a definite result, the *power* that actually does, as distinguished from that which may do. *Competency* is equal to the occasion, *readiness* prompt for the occasion. *Faculty* is an inherent quality of mind or body; *talent*, some special mental *ability*. *Dexterity* and *skill* are readiness and facility in action, having a special end; *talent* is innate, *dexterity* and *skill* are largely acquired. Our *abilities* include our natural *capacity*, *faculties*, and *talents*, with all the *dexterity*, *skill*, and *readiness* that can be acquired. *Efficacy* is the power to produce an intended effect as shown in the production of it; as, the *efficacy* of a drug. *Efficiency* is effectual agency, competent *power*; *efficiency* is applied in mechanics as denoting the ratio of the effect produced to the *power* expended in producing it; but this word is chiefly used

of intelligent agents as denoting the quality that brings all one's *power* to bear promptly and to the best purpose on the thing to be done. Compare ADDRESS; DEXTERITY; SKILFUL.

ANTONYMS:

awkwardness	helplessness	inability	incompetence	stupidity
dulness	imbecility	inaptitude	inefficiency	unskilfulness
feebleness	impotence	incapacity	maladroitness	weakness

PRAISE

SYNONYMS:

acclaim	approval	compliment	laudation
acclamation	blandishment	encomium	panegyric
adulation	cheering	eulogy	plaudit
applause	cheers	flattery	sycophancy
approbation	commendation		

Praise is the hearty approval of an individual, or of a number or multitude considered individually, and is expressed by spoken or written words; *applause*, the spontaneous outburst of many at once. *Applause* is expressed in any way, by stamping of feet, clapping of hands, waving of handkerchiefs, etc., as well as by voice; *acclamation* is the spontaneous and hearty approval of many at once, and strictly by the voice alone. Thus one is chosen moderator by *acclamation* when he receives a unanimous *viva voce* vote; we could not say he was nominated by *applause*. *Acclaim* is the more poetic term for *acclamation*, commonly understood in a loftier sense; as, a nation's *acclaim*. *Plaudit* is a shout of *applause*, and is commonly used in the plural; as, the *plaudits* of a throng. *Applause* is also used in the general sense of *praise*. *Approbation* is a milder and more qualified word than *praise*; while *praise* is always uttered, *approbation* may be silent. "*Approbation* speaks of the thing or action. . . . *Praise* is always personal." A. W. AND J. C. HARE *Guesses at Truth* first series, p. 549. [MACM. 1866.] *Acceptance* refers to an object or action; *approbation* may refer to character or natural traits. *Approval* always supposes a testing or careful examination, and frequently implies official sanction; *approbation* may be upon a general view. The industry and intelligence of a clerk win his employer's *approbation*; his decision in a special instance receives his *approval*. *Commendation* is *approbation* or *approval* formally expressed. *Praise* is always understood as genuine and sincere, unless the contrary is ex-

pressly stated; *compliment* is a light form of *praise* that may or may not be sincere; *flattery* is insincere and ordinarily fulsome *praise*; *blandishment* is one of the smooth, cajoling arts of the flatterer in speech or action.

ANTONYMS:

abuse	contempt	hissing	repudiation
animadversion	denunciation	ignominy	scorn
blame	disapprobation	obloquy	slander
censure	disapproval	reproach	vilification
condemnation	disparagement	reproof	vituperation

PRAY**SYNONYMS:**

ask	bid	entreat	invoke	request
beg	call upon	implore	petition	supplicate
beseech	conjure	importune	plead	

To *pray*, in the religious sense, is devoutly to address the Supreme Being with reverent petition for divine grace or any favor or blessing, and in the fullest sense with thanksgiving and praise for the divine goodness and mercy; the once common use of the word to express any earnest *request*, as "I *pray* you to come in," is now rare, unless in writings molded on older literature, or in certain phrases, as "*Pray* sit down"; even in these "please" is more common; "I *beg* you" is also frequently used, as expressing a polite humility of *request*. *Beseech* and *entreat* express great earnestness of *petition*; *implore* and *supplicate* denote the utmost fervency and intensity, *supplicate* implying also humility. Compare **ASK**; **PLEAD**.

PRECARIOUS**SYNONYMS:**

doubtful	hazardous	risky	unsettled
dubious	insecure	unassured	unstable
equivocal	perilous	uncertain	unsteady

Uncertain is applied to things that human knowledge can not certainly determine or that human power can not certainly control; *precarious* originally meant dependent on the will of another, and now, by extension of meaning, dependent on chance or hazard, with manifest unfavorable possibility verging toward probability; as, one holds office by a *precarious* tenure, or land by a *precarious* title; the strong man's hold on life is *uncertain*, the invalid's is *precarious*.

ANTONYMS:

actual	firm	infallible	stable	sure	undoubted
assured	immutable	real	steady	undeniable	unquestionable
certain	incontestable	settled	strong		

PRECEDENT

SYNONYMS:

antecedent	case	instance	pattern
authority	example	obiter dictum	warrant

A *precedent* is an authoritative *case*, *example*, or *instance*. The communism of the early Christians in Jerusalem is a wonderful *example* or *instance* of Christian liberality, but not a *precedent* for the universal church through all time. *Cases* decided by irregular or unauthorized tribunals are not *precedents* for the regular administration of law. An *obiter dictum* is an opinion outside of the *case* in hand, which can not be quoted as an authoritative *precedent*. Compare CAUSE; EXAMPLE.

PREDESTINATION

SYNONYMS:

fate	foreknowledge	foreordination	necessity
-------------	----------------------	-----------------------	------------------

Predestination is a previous determination or decision, which, in the divine action, reaches on from eternity. *Fate* is heathen, an irresistible, irrational power determining all events with no manifest connection with reason or righteousness; *necessity* is philosophical, a blind something in the nature of things binding the slightest action or motion in the chain of inevitable, eternal sequence; *foreordination* and *predestination* are Christian, denoting the rational and righteous order or decree of the supreme and all-wise God. *Foreknowledge* is simply God's antecedent knowledge of all events, which some hold to be entirely separable from his *foreordination*, while others hold *foreordination* to be inseparably involved in *foreknowledge*.

ANTONYMS:

accident	choice	freedom	independence
chance	free agency	free will	uncertainty

PREPOSITIONS:

Predestination *of* believers *to* eternal life.

PREDICAMENT

SYNONYMS:

difficulty	fix	plight	quandary	strait
dilemma	perplexity	puzzle	scrape	

Dilemma, *perplexity*, *puzzle*, *quandary*, and *strait*, as applied to practical matters, denote some difficulty of choice. The *dilemma* was originally a form of argument driving the disputant to a choice between two (later extended to more than two) conclusions equally unfavorable, called "the horns of the *dilemma*"; the *dilemma* has also been called "horned syllogism." An example from the Greek (whence the name originated) is:

"Do not engage in public affairs; for, if you do what is just, men will hate you, but, if you do what is unjust, the gods will hate you."

Hence, in practical affairs, a *dilemma* is a situation where one must choose between opposite ends or courses of action that seem equally undesirable. A *quandary* is a situation of *perplexity* or *puzzle* where one must study anxiously to avoid a disagreeable outcome; a *quandary* has been defined as "a puzzling *predicament*." A *strait*, in this connection, is a perplexing situation commonly involving some difficult but necessary choice, while the alternatives may be favorable or unfavorable; it was when offered the choice of famine, pestilence, or defeat at the hands of the enemy that David said:

I am in a great *strait*: Let me fall now into the hand of the Lord, for very great are his mercies, but let me not fall into the hand of man.

1 Chron. xxi, 13.

With the vision of heaven contrasted with continued misery to human needs, Paul wrote:

For I am in a *strait* betwixt two, having a desire to depart, etc.

Phil. i, 23.

In such a *strait* the wisest may well be perplexed, and the boldest staggered. BURKE *Thoughts on* . . . *Present Discontents*, 1, 516.

A *predicament* or *plight*, as these words are now used, is a situation or condition that is unfavorable or disagreeable, or may be shocking or even dangerous, or on the contrary may be merely comical; a *predicament* may be mental or social, as well as physical; *plight* is restricted almost wholly to some physical condition; one who mistakenly intrudes into a

stranger's dining-room is in an awkward *predicament*; one who falls into a ditch emerges in sorry, shocking, or wretched *plight*. *Scrape* is a colloquial term for any difficult or embarrassing situation, a *predicament* or *plight*, especially as resulting from one's own acts; *fix* is used colloquially in nearly the same sense, but with special emphasis on the perplexity involved. Compare ALTERNATIVE; DOUBT; PERPLEXITY; RIDDLE.

ANTONYMS:

assurance	content	firmness	satisfaction
calmness	contentment	fixity	self-reliance
certainly	decision	resolution	self-confidence
comfort	ease	rest	self-satisfaction
confidence			

PREJUDICE

SYNONYMS:

bias	preconception	presumption
partiality	prepossession	unfairness

A *presumption* (literally, a taking beforehand) is a partial decision formed in advance of argument or evidence, usually grounded on some general principle, and always held subject to revision upon fuller information. A *prejudice* or *prepossession* is grounded often on feeling, fancy, associations, etc. A *prejudice* against foreigners is very common in retired communities. There is always a *presumption* in favor of what exists, so that the burden of proof is upon one who advocates a change. A *prepossession* is always favorable, a *prejudice* always unfavorable, unless the contrary is expressly stated. Compare INJURY.

ANTONYMS:

certainly	conviction	evidence	reason
conclusion	demonstration	proof	reasoning

PREPOSITIONS:

Against; rarely *in favor of*, *in one's favor*.

PRETENSE

SYNONYMS:

affectation	disguise	pretext	simulation
air	dissimulation	ruse	subterfuge
assumption	excuse	seeming	trick
cloak	mask	semblance	wile
color	pretension	show	

A *pretense*, in the unfavorable, which is also the usual sense,

is something advanced or displayed for the purpose of concealing the reality. A person makes a *pretense* of something for the credit or advantage to be gained by it; he makes what is allowed or approved a *pretext* for doing what would be opposed or condemned; a tricky schoolboy makes a *pretense* of doing an errand which he does not do, or he makes the actual doing of an errand a *pretext* for playing truant. A *ruse* is something (especially something slight or petty) employed to blind or deceive so as to mask an ulterior design, and enable a person to gain some end that he would not be allowed to approach directly. A *pretension* is a claim that is or may be contested; the word is now commonly used in an unfavorable sense. Compare ARTIFICE; HYPROCRISY.

ANTONYMS:

actuality	frankness	ingenuousness	simplicity
candor	guilelessness	openness	sincerity
fact	honesty	reality	truth

PREVENT**SYNONYMS:**

anticipate	forestall	obviate	preclude
-------------------	------------------	----------------	-----------------

The original sense of *prevent*, to come before, act in advance of, which is now practically obsolete, was still in good use when the authorized version of the Bible was made, as appears in such passages as, "When Peter was come into the house, Jesus *prevented* him" (*i. e.*, addressed him first), *Matt.* xvii, 25; "Thou *preventest* him with the blessings of goodness" (*i. e.*, by sending the blessings before the desire is formulated or expressed), *Ps.* xxi, 3. *Anticipate* is now the only single word usable in this sense; to *forestall* is to take or act in advance in one's own behalf and to the prejudice of another or others, as in the phrase "to *forestall* the market." But to *anticipate* is very frequently used in the favorable sense; as, his thoughtful kindness *anticipated* my wish (*i. e.*, met the wish before it was expressed): or we say, "I was about to accost him when he *anticipated* me" (by speaking first); or one *anticipates* a payment (by making it before the time); in neither of these cases could we use *forestall* or *prevent*. To *obviate* (literally, to stop the way of or remove from the way), is to *prevent* by interception, so that something that would naturally withstand or disturb may be kept from doing so; to

preclude (literally, to close or shut in advance) is to *prevent* by anticipation or by logical necessity; walls and bars *precluded* the possibility of escape; a supposition is *precluded*; a necessity or difficulty is *obviated*. *Prevent*, which at first had only the anticipatory meaning, has come to apply to the stopping of an action at any stage, the completion or conclusion only being thought of as negatived by anticipation; the enemy passed the outworks and were barely *prevented* from capturing the fortress. Compare *HINDER*; *PROHIBIT*.

PREPOSITION:

He was prevented by illness *from* joining the expedition.

PREVIOUS**SYNONYMS:**

above-mentioned	anterior	forward	preceding
above-named	earlier	front	preliminary
aforesaid	foregoing	introductory	prior
antecedent	former	precedent	

Antecedent may denote simple priority in time, implying no direct connection between that which goes before and that which follows; as, the striking of one clock may be always *antecedent* to the striking of another with no causal connection between them. *Antecedent* and *previous* may refer to that which goes or happens at any distance in advance, *preceding* is limited to that which is immediately or next before; an *antecedent* event may have happened at any time before; the *preceding* transaction is the one completed just before the one with which it is compared; a *previous* statement or chapter may be in any part of the book that has gone before; the *preceding* statement or chapter comes next before without an interval. *Previous* often signifies first by right; as, a *previous* engagement. *Foregoing* is used only of that which is spoken or written; as, the *foregoing* statements. *Anterior*, while it can be used of time, is coming to be employed chiefly with reference to place; as the *anterior* lobes of the brain. *Prior* bears exclusive reference to time, and commonly where that which is first in time is first also in right; as, a *prior* demand. *Former* is used of time, or of position in written or printed matter, not of space in general. We can say *former* times, a *former* chapter, etc., but not the *former* part of a garden; we

should say the *front* part of the garden, the *forward* car of a train. *Former* has a close relation, or sharp contrast, with something following; the *former* always implies the latter, even when not fully expressed, as in Acts i, 1, and Eccles. vii, 10.

ANTONYMS:

after	consequent	hind	hindmost	latter	subsequent
concluding	following	hinder	later	posterior	succeeding

PREPOSITION:

Such was the state of things *previous to* the revolution. [*Previous to* is often used adverbially, in constructions where *previously to* would be more strictly correct; as, these arrangements were made *previous to* my departure.]

PRICE**SYNONYMS:**

charge	expenditure	outlay	worth
cost	expense	value	

The *cost* of a thing is all that has been expended upon it, whether in discovery, production, refinement, decoration, transportation, or otherwise, to bring it to its present condition in the hands of its present possessor; the *price* of a thing is what the seller asks for it. In regular business, as a rule, the seller's *price* on his wares must be more than their *cost* to him; when goods are sold, the *price* the buyer has paid becomes their *cost* to himself. In exceptional cases, when goods are sold at *cost*, the seller's *price* is made the same as the *cost* of the goods to him, the *cost* to the seller and the *cost* to the buyer becoming then identical. *Price* always implies that an article is for sale; what a man will not sell he declines to put a *price* on; hence the significance of the taunting proverb that "every man has his *price*." *Value* is the estimated equivalent for an article, whether the article is for sale or not; the market *value* is what it would bring if exposed for sale in the open market; the intrinsic *value* is the inherent utility of the article considered by itself alone; the market *value* of an old and rare volume may be very great, while its intrinsic *value* may be practically nothing. *Value* has always more reference to others' estimation (literally, what the thing will avail with others) than *worth*, which regards the thing in and by itself;

thus, *intrinsic value* is a weaker expression than *intrinsic worth*. *Charge* has especial reference to services, *expense* to minor outlays; as, the *charges* of a lawyer or physician; traveling *expenses*; household *expenses*.

PRIDE

SYNONYMS:

arrogance
assumption
conceit
disdain
haughtiness
insolence

ostentation
presumption
reserve
self-complacency
self-conceit
self-esteem

self-exaltation
self-respect
superciliousness
vainglory
vanity

Haughtiness thinks highly of itself and poorly of others. *Arrogance* claims much for itself and concedes little to others. *Pride* is an absorbing sense of one's own greatness; *haughtiness* feels one's own superiority to others; *disdain* sees contemptuously the inferiority of others to oneself. *Presumption* claims place or privilege above one's right; *pride* deems nothing too high. *Insolence* is open and rude expression of contempt and hostility, generally from an inferior to a superior, as from a servant to a master or mistress. In the presence of superiors overweening *pride* manifests itself in *presumption* or *insolence*; in the presence of inferiors, or those supposed to be inferior, *pride* manifests itself by *arrogance*, *disdain*, *haughtiness*, *superciliousness*, or in either case often by cold *reserve*. (See RESERVE under MODESTY.) *Pride* is too self-satisfied to care for praise; *vanity* intensely craves admiration and applause. *Superciliousness*, as if by the uplifted eyebrow, as its etymology suggests (from L. *supercilium*, eyebrow, from *super*, over, and *cilium*, eyelid), silently manifests mingled *haughtiness* and *disdain*. *Assumption* quietly takes for granted superiority and privilege which others would be slow to concede. *Conceit* and *vandy* are associated with weakness, *pride* with strength. *Conceit* may be founded upon nothing; *pride* is founded upon something that one is, or has, or has done; *vanity*, too, is commonly founded on something real, though far slighter than would afford foundation for *pride*. *Vanity* is eager for admiration and praise, is elated if they are rendered, and pained if they are withheld, and seeks them; *pride* could never solicit admiration or praise. *Conceit* is somewhat stronger than *self-conceit*. *Self-conceit* is ridiculous; *conceit*

is offensive. *Self-respect* is a thoroughly worthy feeling; *self-esteem* is a more generous estimate of one's own character and abilities than the rest of the world are ready to allow. *Vain-glory* is more pompous and boastful than *vanity*. Compare EGOTISM; OSTENTATION.

ANTONYMS:

humility lowliness meekness modesty self-abasement self-distrust

PRIMEVAL**SYNONYMS:**

aboriginal	indigenous	patriarchal	primitive
ancient	native	primal	primordial
autochthonic	old	primary	pristine
immemorial	original	prime	uncreated

Aboriginal (from L. *ab*, from, and *origo*, origin) signifies pertaining to the *aborigines* or earliest known inhabitants of a country in the widest sense, including not merely human beings but inferior animals and plants as well. *Autochthonic* (from Gr. *autos*, self, and *chthōn*, earth) signifies sprung from the earth, especially from the soil of one's native land. *Primeval* (from L. *primum*, first, and *ævum*, age), signifies strictly belonging to the first ages, earliest in time, but often only the earliest of which man knows or conceives, *immemorial*. *Aboriginal*, *autochthonic*, and *primeval* combine the meanings of *ancient* and *original*; *aboriginal* inhabitants, *autochthonic* races, *primeval* forests. *Prime* and *primary* may signify either first in time, or more frequently first in importance; *primary* has also the sense of elementary or preparatory; we speak of a *prime* minister, a *primary* school. *Primal* is chiefly poetic, in the sense of *prime*; as, the *primal* curse. *Primordial* is first in an order of succession or development; as, a *primordial* leaf. *Primitive* frequently signifies having the original characteristics of that which it represents, as well as standing first in time; as, the *primitive* church. *Primitive* also very frequently signifies having the original or early characteristics without remoteness in time. *Primeval* simplicity is the simplicity of the earliest ages; *primitive* simplicity may be found in retired villages now. *Pristine* is an elegant word, used almost exclusively in a good sense of that which is *original* and perhaps *ancient*; as, *pristine* purity, innocence, vigor. That which is both an *original* and natural product of a soil or coun-

try is said to be *indigenous*; that which is actually produced there is said to be *native*, though it may be of foreign extraction; humming-birds are *indigenous* to America; canaries may be *native*, but are not *indigenous*. *Immemorial* refers solely to time, independently of quality, denoting, in legal phrase, "that whereof the memory of man runneth not to the contrary"; as, an *immemorial* custom; an *immemorial* abuse. Compare OLD.

ANTONYMS:

adventitious	fresh	late	new	
exotic	foreign	modern	novel	recent

Compare synonyms for NEW.

PRINCIPAL, a.

SYNONYMS:

capital	foremost	preeminent	prominent
cardinal	greatest	predominant	supereminent
chief	highest	predominating	superior
controlling	leading	prevailing	supreme
dominant	main	prime	surpassing
first			

Capital (from L. *caput*, head) signifies standing at the head, being of the first rank or importance; *chief* (from F. *chef*, ult. from L. *caput*, head) is often nearly equivalent to *capital*, but differs much in usage; *chief* lays more emphasis on the idea of importance than of rank; a *capital* city may not be the *chief* city; a *capital* letter stands foremost in a word or sentence, but is not called the *chief* letter. *Cardinal* (from L. *cardo*, hinge) denotes that on which something else turns or hinges; hence signifying of fundamental or vital importance; as, the *cardinal* virtues; the *cardinal* points (north, south, east, and west) of the compass. *Main* (partly from AS. *mægen*, power, and partly from L. *magnus*, great) is often interchangeable with *chief*, but in most exact usage *main* denotes what is more deeply essential and pervading; as, the *main* point; the *main* chance; we say "by *main* force" or "*main* strength," where "*chief* force" or "*chief* strength" could not be substituted; one many assume as the *chief* point of debate what is not the *main* question at issue. *Principal* (from L. *principalis*, in the same sense) signifies *first*, *chief*, or *highest* in rank, character, authority, value, or importance; *principal* is largely interchangeable with *chief* and *main*, but with various differences of usage; we speak of the *principal* street

or the *main* street, but not of the *chief* street; of the *principal* citizens or the *chief* citizens, but not of the *main* citizens. *Principal*, which is both adjective and noun (compare *CHIEF*, *n.*) can not be too carefully distinguished from *principle* (a source, cause, general truth or law, etc.); *principle* is never an adjective, and as a noun differs wholly in meaning from the noun *principal*. *Prominent* signifies literally jutting out; *predominant*, ruling, having mastery, excelling in power. influence, number, degree, etc.; *surpassing*, reaching beyond or over, overpassing, or overtopping. *Supreme* applies to that than which no greater can exist in fact or thought; as, the *Supreme Being*.

ANTONYMS:

accessory	auxiliary	inferior	subject
added	contributory	minor	subordinate
additional	helping	negligible	subsidiary
assistant	inconsiderable	secondary	supplemental

PROFIT**SYNONYMS:**

advantage	expediency	proceeds	service
avail	gain	receipts	usefulness
benefit	good	return	utility
emolument	improvement	returns	value

The *returns* or *receipts* include all that is received from an outlay or investment; the *profit* is the excess (if any) of the *receipts* over the outlay; hence, in government, morals, etc., the *profit* is what is really good, helpful, useful, valuable. *Utility* is chiefly used in the sense of some immediate or personal and generally some material *good*. *Advantage* is that which gives one a vantage-ground, either for coping with competitors or with difficulties, needs, or demands; as to have the *advantage* of a good education; it is frequently used of what one has beyond another or secures at the expense of another; as, to have the *advantage* of another in an argument, or take *advantage* of another in a bargain. *Gain* is what one secures beyond what he previously possessed. *Benefit* is anything that does one *good*. *Emolument* is *profit*, *return*, or *value* accruing through official position. *Expediency* has respect to *profit* or *advantage*, real or supposed, considered apart from or perhaps in opposition to right, in actions having a moral character. Compare *UTILITY*.

ANTONYMS:

damage	detriment	harm	injury	ruin
destruction	disadvantage	hurt	loss	waste

PREPOSITIONS:

The profit *of* labor; *on* capital; *in* business.

PROGRESS

SYNONYMS:

advance	development	increase
advancement	growth	proficiency
attainment	improvement	progression

Progress (from L. *pro*, forward, and *gradior*, go) is a moving onward or forward, whether in space or in the mental or moral realm, and may be either mechanical, individual, or social. *Attainment*, *development*, and *proficiency* are more absolute than the other words of the group, denoting some point of advantage or of comparative perfection reached by forward or onward movement; we speak of *attainments* in virtue or scholarship, *proficiency* in music or languages, the *development* of new powers or organs; *proficiency* includes the idea of skill. *Advance* may denote either a forward movement or the point gained by forward movement, but always relatively with reference to the point from which the movement started; as, this is a great *advance*. *Advance* admits the possibility of retreat; *progress* (from L. *progređi*, to walk forward) is steady and constant forward movement, admitting of pause, but not of retreat; *advance* suggests more clearly a point to be reached, while *progress* lays the emphasis upon the forward movement; we may speak of slow or rapid *progress*, but more naturally of swift *advance*. *Progress* is more frequently used in abstractions; as, the *progress* of ideas; *progression* fixes the attention chiefly upon the act of moving forward. In a thing good in itself all *advance* or *progress* is *improvement*; there is a growing tendency to restrict the words to this favorable sense, using *increase* indifferently of good or evil; one may say without limitation, "I am an advocate of *progress*."

ANTONYMS:

check	delay	falling off	retrogression	stop
decline	falling back	relapse	stay	stoppage

PREPOSITIONS:

The progress of truth; progress in virtue; toward perfection; from a lower to a higher state.

PROHIBIT**SYNONYMS:**

debar
disallow

forbid
hinder

inhibit
interdict

preclude
prevent

To *prohibit* is to give some formal command against, and especially to make some authoritative legal enactment against. *Debar* is said of persons, *disallow* of acts; one is *debarred* from anything when shut off, as by some irresistible authority or necessity; one is *prohibited* from an act in express terms; he may be *debarred* by silent necessity. An act is *disallowed* by the authority that might have allowed it; the word is especially applied to acts which are done before they are pronounced upon; thus, a government may *disallow* the act of its commander in the field or its admiral on the high seas. *Inhibit* and *interdict* are chiefly known by their ecclesiastical use. As between *forbid* and *prohibit*, *forbid* is less formal and more personal, *prohibit* more official and judicial, with the implication of readiness to use such force as may be needed to give effect to the enactment; a parent *forbids* a child to take part in some game or to associate with certain companions; the slave-trade is now *prohibited* by the leading nations of the world. Many things are *prohibited* by law which can not be wholly *prevented*, as gambling and prostitution; on the other hand, things may be *prevented* which are not *prohibited*, as the services of religion, the payment of debts, or military conquest. That which is *precluded* need not be *prohibited*. Compare ABOLISH; HINDER; PREVENT.

ANTONYMS:

allow
authorize
command
consent to
direct

empower
enjoin
give consent
give leave
give permission

let
license
order
permit
put up with

require
sanction
suffer
tolerate
warrant

PREPOSITIONS:

An act is prohibited by law; a person is prohibited by law from doing a certain act. *Prohibit* was formerly construed, as *forbid* still is, with the infinitive, but the construction with

from and the verbal noun has now entirely superseded the older usage.

PROMOTE

SYNONYMS:

advance	encourage	forward	prefer	raise
aid	exalt	foster	push	urge forward
assist	excite	further	push on	urge on
elevate	foment	help		

To *promote* (from L. *pro*, forward, and *moveo*, move) is to cause to move forward toward some desired end or to raise to some higher position, rank, or dignity. We *promote* a person by *advancing*, *elevating*, or *exalting* him to a higher position or dignity. A person *promotes* a scheme or an enterprise which others have projected or begun, and which he *encourages*, *forwards*, *further*s, *pushes*, or *urges on*, especially when he acts as the agent of the prime movers and supporters of the enterprise. One who *excites* a quarrel originates it; to *promote* a quarrel is strictly to *foment* and *urge* it on, the one who *promotes* keeping himself in the background. Compare ABET; QUICKEN.

ANTONYMS:

See synonyms for ABASE; ALLAY.

PROPITIATION

SYNONYMS:

atonement	expiation	reconciliation	satisfaction
------------------	------------------	-----------------------	---------------------

Atonement (at-one-ment), originally denoting *reconciliation*, or the bringing into agreement of those who have been estranged, is now chiefly used, as in theology, in the sense of some offering, sacrifice, or suffering sufficient to win forgiveness or make up for an offense; especially and distinctively of the sacrificial work of Christ in his humiliation, suffering, and death. *Expiation* is the enduring of the full penalty of a wrong or crime. *Propitiation* is an offering, action, or sacrifice that makes the governing power propitious toward the offender. *Satisfaction* in this connection denotes the rendering a full legal equivalent for the wrong done. *Propitiation* appeases the lawgiver; *satisfaction* meets the requirements of the law.

ANTONYMS:alienation
chastisement
condemnationcurse
estrangement
offensepenalty
punishment
reprobationretribution
vengeance
wrath**PROFITIOUS****SYNONYMS:**

auspicious	benignant	favorable	gracious	kindly
benign	clement	friendly	kind	merciful

That which is *auspicious* is of *favorable* omen; that which is *propitious* is of favoring influence or tendency; as, an *auspicious* morning; a *propitious* breeze. *Propitious* applies to persons, implying *kind* disposition and *favorable* inclinations, especially toward the suppliant; *auspicious* is not used of persons.

ANTONYMS:

adverse	forbidding	ill-disposed	repellent	unfriendly
antagonistic	hostile	inauspicious	unfavorable	unpropitious

PREPOSITION:

May heaven be propitious *to* the enterprise.

PROPOSAL**SYNONYMS:**

bid	offer	overture	proposition
------------	--------------	-----------------	--------------------

An *offer* or *proposal* puts something before one for acceptance or rejection, *proposal* being the more formal word; a *proposition* sets forth truth (or what is claimed to be truth) in formal statement. The *proposition* is for consideration, the *proposal* for action; as, a *proposition* in geometry, a *proposal* of marriage; but *proposition* is often used nearly in the sense of *proposal* when it concerns a matter for deliberation; as, a *proposition* for the surrender of a fort. A *bid* is commercial and often verbal; as, a *bid* at an auction; *proposal* is used in nearly the same sense, but is more formal. An *overture* opens negotiation or conference, and the word is especially used of some movement toward reconciliation; as, *overtures* of peace.

ANTONYMS:

acceptance	denial	disapproval	refusal	rejection	repulse
------------	--------	-------------	---------	-----------	---------

PROPOSE

SYNONYM:

purpose

In its most frequent use, *propose* differs from *purpose* in that what we *purpose* lies in our own mind, as a decisive act of will, a determination; what we *propose* is offered or stated to others. In this use of the word, what we *propose* is open to deliberation, as what we *purpose* is not. In another use of the word, one *proposes* something to or by himself which may or may not be stated to others. In this latter sense *propose* is nearly identical with *purpose*, and the two words have often been used interchangeably. But in the majority of cases what we *purpose* is more general, what we *propose* more formal and definite; I *purpose* to do right; I *propose* to do this specific thing because it is right. In the historic sentence, "I *propose* to move immediately on your works," *purpose* would not have the same sharp directness.

PROTRACT

SYNONYMS:

continue
defer
delaydraw out
elongate
extendlengthen
postponeprocrastinate
prolong

To *protract* is to cause to occupy a longer time than is usual, expected, or desired. We *defer* a negotiation which we are slow to enter upon; we *protract* a negotiation which we are slow to conclude; *delay* may be used of any stage in the proceedings; we may *delay* a person as well as an action, but *defer* and *protract* are not used of persons. *Elongate* is not used of actions or abstractions, but only of material objects or extension in space; *protract* is very rarely used of concrete objects or extension in space; we *elongate* a line, *protract* a discussion. *Protract* has usually an unfavorable sense, implying that the matter referred to is already unduly long, or would be so if longer *continued*; *continue* is neutral, applying equally to the desirable or the undesirable. *Postpone* implies a definite intention to resume, as *defer* also does, though less decidedly; both are often used with some definite limitation of time; as, to *postpone* till, until, or to a certain day or hour. One may *defer*, *delay*, or *postpone* a matter intelligently and

for good reason; he *procrastinates* through indolence and irresolution. Compare **HINDER**.

ANTONYMS:

abbreviate	conclude	curtail	hurry	reduce
abridge	contract	hasten	limit	shorten

PREPOSITIONS:

To protract a speech *by* verbosity, *through* an unreasonable time, *to*, *till* or *until* a late hour.

PROVERB**SYNONYMS:**

adage	apothegm	byword	maxim	precept	saying
aphorism	axiom	dictum	motto	saw	truism

The *proverb* or *adage* gives homely truth in condensed, practical form, the *adage* often pictorial. "Hope deferred maketh the heart sick" is a *proverb*; "The cat loves fish, but dares not wet her feet," is an *adage*. Both the *proverb* and the *adage*, but especially the latter, are thought of as ancient and widely known. An *aphorism* partakes of the character of a definition; it is a summary statement of what the author sees and believes to be true. An *apothegm* is a terse statement of what is plain or easily proved. The *aphorism* is philosophical, the *apothegm* practical. A *dictum* is a statement of some person or school, on whom it depends for authority; as, a *dictum* of Aristotle. A *saying* is impersonal, current among the common people, deriving its authority from its manifest truth or good sense; as, it is an old *saying*, "the more haste, the worse speed." A *saw* is a *saying* that is old, but somewhat worn and tiresome. *Precept* is a command to duty; *motto* or *maxim* is a brief statement of cherished truth, the *maxim* being more uniformly and directly practical; "God is love" may be a *motto*, "Fear God and fear naught," a *maxim*. The *precepts* of the Sermon on the Mount will furnish the Christian with invaluable *maxims* or *motatoes*. A *byword* is a phrase or *saying* used reproachfully or contemptuously.

PROWESS**SYNONYMS:**

bravery **courage** **gallantry** **heroism** **intrepidity** **valor**

Bravery, *courage*, *heroism*, and *intrepidity* may be silent, spiritual, or passive; they may be exhibited by a martyr at the stake. *Prowess* and *valor* imply both daring and doing; we do

not speak of the *prowess* of a martyr, a child, or a passive sufferer. *Valor* meets odds or perils with courageous action, doing its utmost to conquer at any risk or cost; *prowess* has power adapted to the need; dauntless *valor* is often vain against superior *prowess*. *Courage* is a nobler word than *bravery*, involving more of the deep, spiritual, and enduring elements of character; such an appreciation of peril as would extinguish *bravery* may only intensify *courage*, which is resistant and self-conquering; *courage* applies to matters in regard to which *valor* and *prowess* can have no place, as submission to a surgical operation, or the facing of censure or detraction for conscience sake. Compare BRAVE; FORTITUDE.

ANTONYMS:

cowardice cowardliness effeminacy fear pusillanimity timidity

PRUDENCE

SYNONYMS:

care
carefulness
caution
circumspection
consideration

discretion
forecast
foresight
forethought
frugality

judgment
judiciousness
providence
wisdom

Prudence may be briefly defined as good *judgment* and *foresight*, inclining to *caution* and *frugality* in practical affairs. *Care* may respect only the present; *prudence* and *providence* look far ahead and sacrifice the present to the future, *prudence* watching, saving, guarding, *providence* planning, doing, preparing, and perhaps expending largely to meet the future demand. *Frugality* is in many cases one form of *prudence*. In a besieged city *prudence* will reduce the rations, *providence* will strain every nerve to introduce supplies and to raise the siege. *Discretion* is an instinctive perception of what is wise or proper, with caution and resolution to act accordingly; in a different sense *discretion* may mean freedom to act according to one's personal judgment; as, in face of an express provision of law, a judge has no *discretion*. *Foresight* merely sees the future, and may even lead to the recklessness and desperation to which *prudence* and *providence* are so strongly opposed. *Forethought* is thinking in accordance with wise views of the future, and is nearly equivalent to *providence*, but it is a more popular and less comprehensive term; w

speaking of man's *forethought*, God's *providence*. Compare CARE; FRUGALITY; WISDOM.

ANTONYMS:

folly	imprudence	rashness	thoughtlessness
heedlessness	indiscretion	recklessness	wastefulness
improvidence	prodigality		

PURCHASE**SYNONYMS:**

acquire	barter for	get	procure
bargain for	buy	obtain	secure

Buy and *purchase* are close synonyms, signifying to *obtain* or *secure* as one's own by paying or promising to pay a price; in numerous cases the two words are freely interchangeable, but with the difference usually found between words of Saxon and those of French or Latin origin. The Saxon *buy* is used for all the homely and petty concerns of common life, the French *purchase* is often restricted to transactions of more dignity; yet the Saxon word *buy* is commonly more emphatic, and in the higher ranges of thought appeals more strongly to the feelings. One may either *buy* or *purchase* fame, favor, honor, pleasure, etc., but when our feelings are stirred we speak of victory or freedom as dearly *bought*. "*Buy* the truth, and sell it not" (*Prov.* xxiii, 23) would be greatly weakened by the rendering "*Purchase* the truth, and do not dispose of it." Compare BUSINESS; GET; PRICE; SALE.

ANTONYMS:

barter	dispose of	exchange	put to sale	sell
--------	------------	----------	-------------	------

PREPOSITIONS:

Purchase *at* a price; *at* a public sale; *of* or *from* a person; *for* cash; *with* money; *on* time.

PURE**SYNONYMS:**

absolute	guiltless	simple	unmixed
chaste	holy	spotless	unpolluted
classic	immaculate	stainless	unspotted
classical	incorrupt	true	unstained
clean	innocent	unadulterated	unsullied
clear	mere	unblemished	untainted
continent	perfect	uncorrupted	untarnished
genuine	real	undefiled	upright
guileless	sheer	unmingled	virtuous

That is *pure* which is free from mixture or contact with any-

thing that weakens, impairs, or pollutes. Material substances are called *pure* in the strict sense when free from foreign admixture of any kind; as, *pure* oxygen; the word is often used to signify free from any defiling or objectionable admixture (the original sense); we speak of water as *pure* when it is bright, clear, and refreshing, though it may contain mineral salts in solution; in the medical and chemical sense, only distilled water (*aqua pura*) is *pure*. In moral and religious use *pure* is a strong word, denoting positive excellence of a high order; one is *innocent* who knows nothing of evil, and has experienced no touch of temptation; one is *pure* who, with knowledge of evil and exposure to temptation, keeps heart and soul *unstained*. *Virtuous* refers primarily to right action; *pure* to right feeling and motives; as, "Blessed are the *pure* in heart: for they shall see God," *Matt.* v, 8. Compare FINE; INNOCENT.

ANTONYMS:

adulterated	gross	lewd	sullied
defiled	immodest	mixed	tainted
dirty	impure	obscene	tarnished
filthy	indecent	polluted	unchaste
foul	indelicate	stained	unclean

PUT

SYNONYMS:

deposit	lay	place	set
---------	-----	-------	-----

Put is the most general term for bringing an object to some point or within some space, however exactly or loosely; we may *put* a horse in a pasture, or *put* a bullet in a rifle or into an enemy. *Place* denotes more careful movement and more exact location; as, to *place* a crown on one's head, or a garrison in a city. To *lay* is to *place* in a horizontal position; to *set* is to *place* in an upright position; we *lay* a cloth, and *set* a dish upon a table. To *deposit* is to *put* in a place of security for future use; as, to *deposit* money in a bank; the original sense, to *lay* down or let down (quietly), is also common; as, the stream *deposits* sediment.

QUEER

SYNONYMS:

anomalous	erratic	odd	strange
bizarre	extraordinary	peculiar	uncommon
comical	fantastic	preposterous	unique
crotchety	funny	quaint	unmatched
curious	grotesque	ridiculous	unusual
droll	laughable	singular	whimsical
eccentric	ludicrous		

Odd is unmated, as an *odd* shoe, and so uneven, as an *odd* number. *Singular* is alone of its kind; as, the *singular* number. What is *singular* is *odd*, but what is *odd* may not be *singular*; as, a drawerful of *odd* gloves. A *strange* thing is something hitherto unknown in fact or in cause. A *singular* coincidence is one the happening of which is *unusual*; a *strange* coincidence is one the cause of which is hard to explain. That which is *peculiar* belongs especially to a person as his own; as, Israel was called Jehovah's "*peculiar* people," i. e., especially chosen and cherished by him; in its ordinary use there is the implication that the thing *peculiar* to one is not common to the majority nor quite approved by them, though it may be shared by many; as, the Shakers are *peculiar*. *Eccentric* is off or aside from the center, and so off or aside from the ordinary and what is considered the normal course; as, genius is commonly *eccentric*. *Eccentric* is a higher and more respectful word than *odd* or *queer*. *Erratic* signifies wandering, a stronger and more censorious term than *eccentric*. *Queer* is transverse or oblique, aside from the common in a way that is *comical* or perhaps slightly *ridiculous*. *Quaint* denotes that which is pleasingly *odd* and fanciful, often with something of the antique; as, the *quaint* architecture of medieval towns. That which is *funny* is calculated to provoke laughter; that which is *droll* is more quietly amusing. That which is *grotesque* in the material sense is irregular or misshapen in form or outline or ill-proportioned so as to be somewhat *ridiculous*; the French *bizarre* is practically equivalent to *grotesque*.

ANTONYMS:

common	familiar	normal	regular
customary	natural	ordinary	usual

QUICKEN

SYNONYMS:

accelerate	drive on	hasten	promote
advance	expedite	hurry	speed
despatch	facilitate	make haste	urge
drive	further	press forward	urge on

To *quicken*, in the sense here considered, is to increase speed, move or cause to move more rapidly, as through more space or with a greater number of motions in the same time. To *accelerate* is to increase the speed of action or of motion. A motion whose speed increases upon itself is said to be *accelerated*, as the motion of a falling body, which becomes swifter with every second of time. To *accelerate* any 'work is to *hasten* it toward a finish, commonly by *quicken*ing all its operations in orderly unity toward the result. To *despatch* is to do and be done with, to get a thing off one's hands. To *despatch* an enemy is to kill him outright and quickly; to *despatch* a messenger is to send him in haste; to *despatch* a business is to bring it quickly to an end. *Despatch* is commonly used of single items. To *promote* a cause is in any way to bring it forward, *advance* it in power, prominence, etc. To *speed* is really to secure swiftness; to *hasten* is to attempt it, whether successfully or unsuccessfully. *Hurry* always indicates something of confusion. The *hurried* man forgets dignity, appearance, comfort, courtesy, everything but speed; he may forget something vital to the matter in hand; yet, because reckless haste may attain the great object of speed, *hurry* has come to be the colloquial and popular word for acting quickly. To *facilitate* is to *quicken* by making easy; to *expedite* is to *quicken* by removing hindrances. A good general will improve roads to *facilitate* the movements of troops, *hasten* supplies and perfect discipline to *promote* the general efficiency of the force, *despatch* details of business, *expedite* all preparations, in order to *accelerate* the advance and victory of his army.

ANTONYMS:

check clog delay drag hinder impede obstruct retard

QUOTE

SYNONYMS:

cite	extract	plagiarize	repeat
excerpt	paraphrase	recite	

To *quote* is to give an author's words, either exactly, as in

direct quotation, or in substance, as in indirect quotation; to *cite* is, etymologically, to call up a passage, as a witness is summoned. In *cuing* a passage its exact location by chapter, page, or otherwise, must be given, so that it can be promptly called into evidence; in *quoting*, the location may or may not be given, but the words or substance of the passage must be given. In *citing*, neither the author's words nor his thought may be given, but simply the reference to the location where they may be found. To *quote*, in the proper sense, is to give credit to the author whose words are employed. To *paraphrase* is to state an author's thought more freely than in indirect quotation, keeping the substance of thought and the order of statement, but changing the language, and commonly interweaving more or less explanatory matter as if part of the original writing. One may *paraphrase* a work with worthy motive for homiletic, devotional, or other purposes (as in the metrical versions of the Psalms), or he may *plagiarize* atrociously in the form of *paraphrase*, appropriating all that is valuable in another's thought, with the hope of escaping detection by change of phrase. To *plagiarize* is to *quote* without credit, appropriating another's words or thought as one's own. To *recite* or *repeat* is usually to *quote* orally, though *recite* is applied in legal phrase to a particular statement of facts which is not a quotation; a kindred use obtains in ordinary speech; as, to *recite* one's misfortunes.

RACY

SYNONYMS:

flavorous
forceible

lively
piquant

pungent
rich

spicy
spirited

Racy applies in the first instance to the pleasing flavor characteristic of certain wines, often attributed to the soil from which they come. *Pungent* denotes something sharply irritating to the organs of taste or smell, as pepper, vinegar, ammonia; *piquant* denotes a quality similar in kind to *pungent* but less in degree, stimulating and agreeable; *pungent* spices may be deftly compounded into a *piquant* sauce. As applied to literary products, *racy* refers to that which has a striking, vigorous, pleasing originality; *spicy* to that which is stimulating to the mental taste, as spice is to the physical; *piquant*

and *pungent* in their figurative use keep very close to their literal sense.

ANTONYMS:

cold	flat	insipid	stale	tasteless
dull	flavorless	prosy	stupid	vapid

RADICAL

SYNONYMS:

basic	ingrained	perfect
complete	innate	positive
constitutional	native	primitive
entire	natural	thorough
essential	organic	thoroughgoing
extreme	original	total
fundamental		

The widely divergent senses in which the word *radical* is used, by which it can be at some time interchanged with any word in the above list, are all formed upon the one primary sense of having to do with or proceeding from the root (from L. *radix*); a *radical* difference is one that springs from the root, and is thus *constitutional*, *essential*, *fundamental*, *organic*, *original*; a *radical* change is one that does not stop at the surface, but reaches down to the very root, and is *entire*, *thorough*, *total*; since the majority find superficial treatment of any matter the easiest and most comfortable, *radical* measures, which strike at the root of evil or need, are apt to be looked upon as *extreme*.

ANTONYMS:

conservative	incomplete	palliative	slight	tentative
inadequate	moderate	partial	superficial	trial

RARE

SYNONYMS:

curious	odd	scarce	unique
extraordinary	peculiar	singular	unparalleled
incomparable	precious	strange	unprecedented
infrequent	remarkable	uncommon	unusual

Unique is alone of its kind; *rare* is *infrequent* of its kind; great poems are *rare*; "Paradise Lost" is *unique*. To say of a thing that it is *rare* is simply to affirm that it is now seldom found, whether previously common or not; as, a *rare* old book; a *rare* word; to call a thing *scarce* implies that it was at some time more plentiful, as when we say food or money is *scarce*. A

particular fruit or coin may be *rare*; *scarce* applies to demand and use, and almost always to concrete things; to speak of virtue, genius, or heroism as *scarce* would be somewhat ludicrous. *Rare* has the added sense of *precious*, which is sometimes, but not necessarily, blended with that above given; as, a *rare* gem. *Extraordinary*, signifying greatly beyond the ordinary, is a neutral word, capable of a high and good sense or of an invidious, opprobrious, or contemptuous signification; as, *extraordinary* genius; *extraordinary* wickedness; an *extraordinary* assumption of power; *extraordinary* antics; an *extraordinary* statement is incredible without overwhelming proof.

ANTONYMS:

See synonyms for GENERAL; NORMAL; USUAL.

REACH**SYNONYMS:**

arrive attain come to enter gain get to land

To *reach*, in the sense here considered, is to *come to* by motion or progress. *Attain* is now oftenest used of abstract relations; as, to *attain* success. When applied to concrete matters, it commonly signifies the overcoming of hindrance and difficulty; as, the storm-beaten ship at length *attained* the harbor. *Come* is the general word for moving to or toward the place where the speaker or writer is or supposes himself to be. To *reach* is to *come to* from a distance that is actually or relatively considerable; to stretch the journey, so to speak, across the distance, as, in its original meaning, one *reaches* an object by stretching out the hand. To *gain* is to *reach* or *attain* something eagerly sought; the wearied swimmer *reaches* or *gains* the shore. One *comes* in from his garden; he *reaches* home from a journey. To *arrive* is to *come to* a destination, to *reach* a point intended or proposed. The European steamer *arrives* in port, or *reaches* the harbor; the dismantled wreck drifts ashore, or *comes to* land. Compare ATTAIN.

ANTONYMS:

depart	go	leave	set sail	weigh anchor
embark	go away	set out	start	

REAL

SYNONYMS:

actual	demonstrable	genuine	true
authentic	developed	positive	unquestionable
certain	essential	substantial	veritable

Real (from L. *res*, a thing) signifies having existence, not merely in thought, but in fact, or being in fact according to appearance or claim; denoting the thing as distinguished from the name, or the existent as opposed to the non-existent. *Actual* has respect to a thing accomplished by doing, *real* to a thing as existing by whatever means or from whatever cause, *positive* to that which is fixed or established, *developed* to that which has reached completion by a natural process of unfolding. *Actual* is in opposition to the supposed, conceived, or reported, and furnishes the proof of its existence in itself; *real* is opposed to feigned or imaginary, and is capable of demonstration; *positive*, to the uncertain or doubtful; *developed*, to that which is undeveloped or incomplete. The *developed* is susceptible of proof; the *positive* precludes the necessity for proof. The present condition of a thing is its *actual* condition; ills are *real* that have a substantial reason; proofs are *positive* when they give the mind certainty; a plant is *developed* when it has reached its completed stage. *Real* estate is land, together with trees, water, minerals, or other natural accompaniments, and any permanent structures that man has built upon it. Compare **AUTHENTIC**.

ANTONYMS:

conceived	feigned	illusory	supposed	unreal
fabulous	fictitious	imaginary	supposititious	untrue
fanciful	hypothetical	reported	theoretical	visionary

REASON, v.

SYNONYMS:

argue	debate	dispute	question
contend	demonstrate	establish	wrangle
controvert	discuss	prove	

To *reason* is to examine by means of the reason, to *prove* by reasoning, or to influence or seek to influence others by reasoning or reasons. Persons may *contend* either from mere ill will or self-interest, or from the highest motives; "That ye should earnestly *contend* for the faith which was once de-

livered to the saints," *Jude* 3. To *argue* (from L. *arguo*, show) is to make a matter clear by reasoning; to *discuss* (from L. *dis*, apart, and *quatio*, shake) is, etymologically, to shake it apart for examination and analysis. *Demonstrate* strictly applies to mathematical or exact reasoning; *prove* may be used in the same sense, but is often applied to reasoning upon matters of fact by what is called probable evidence, which can give only moral and not absolute or mathematical certainty. To *demonstrate* is to force the mind to a conclusion by irresistible reasoning; to *prove* is rather to *establish* a fact by evidence; as, to *prove* one innocent or guilty. That which has been either *demonstrated* or *proved* so as to secure general acceptance is said to be *established*. *Reason* is a neutral word, not, like *argue*, *debate*, *discuss*, etc., naturally or necessarily implying contest. We *reason* about a matter by bringing up all that reason can give us on any side. A dispute may be personal, fractious, and petty; a debate is formal and orderly; if otherwise, it becomes a mere wrangle.

PREPOSITIONS:

We reason *with* a person *about* a subject, *for* or *against* an opinion; we reason a person *into* or *out of* a course of action; or we may reason *down* an opponent or opposition; one reasons *from* a cause to an effect.

REASON, *n.*

SYNONYMS:

account	cause	end	object
aim	consideration	ground	principle
argument	design	motive	purpose

While the *cause* of any event, act, or fact, as commonly understood, is the power that makes it to be, the *reason* of or for it is the explanation given by the human mind; but *reason* is, in popular language, often used as equivalent to *cause*, especially in the sense of *final cause*. In the statement of any reasoning, the *argument* may be an entire syllogism, or the premises considered together apart from the conclusion, or in logical strictness the middle term only by which the particular conclusion is connected with the general statement. But when the *reasoning* is not in strict logical form, the middle term following the conclusion is called the *reason*; thus in the state-

ment "All tyrants deserve death; Cæsar was a tyrant; Therefore Cæsar deserved death," "Cæsar was a tyrant" would in the strictest sense be called the *argument*; but if we say "Cæsar deserved death because he was a tyrant," the latter clause would be termed the *reason*. Compare CAUSE; REASON, *v.*; MIND; REASONING.

PREPOSITIONS:

The reason *of* a thing that is to be explained; the reason *for* a thing that is to be done.

REASONING**SYNONYMS:**

argument argumentation debate ratiocination

Argumentation and *debate*, in the ordinary use of the words, suppose two parties alleging reasons for and against a proposition; the same idea appears figuratively when we speak of a *debate* or an *argument* with oneself, or of a *debate* between reason and conscience. *Reasoning* may be the act of one alone, as it is simply the orderly setting forth of reasons, whether for the instruction of inquirers, the confuting of opponents, or the clear establishment of truth for oneself. *Reasoning* may be either deductive or inductive. *Argument* or *argumentation* was formerly used of deductive *reasoning* only. With the rise of the inductive philosophy these words have come to be applied to inductive processes also; but while *reasoning* may be informal or even (as far as tracing its processes is concerned) unconscious, *argument* and *argumentation* strictly imply logical form. *Reasoning*, as denoting process, is a broader term than *reason* or *argument*; many *arguments* or *reasons* may be included in a single chain of *reasoning*.

REBELLIOUS**SYNONYMS:**

**contumacious
disobedient
insubordinate
intractable**

**mutinous
refractory
seditious**

**uncontrollable
ungovernable
unmanageable**

Rebellious signifies being in a state of rebellion (see REBELLION under REVOLUTION), and is even extended to inanimate things that resist control or adaptation to human use. *Un-*

governable applies to that which successfully defies authority and power; *unmanageable* to that which resists the utmost exercise of skill or of skill and power combined; *rebellious*, to that which is defiant of authority, whether successfully or unsuccessfully; *sedition*, to that which partakes of or tends to excite a *rebellious* spirit, *sedition* suggesting more of covert plan, scheming, or conspiracy, *rebellious* more of overt act or open violence. While the *unmanageable* or *ungovernable* defies control, the *rebellious* or *sedition* may be forced to submission; as, the man has an *ungovernable* temper; the horses became *unmanageable*; he tamed his *rebellious* spirit. *Insubordinate* applies to the disposition to resist and resent control as such; *mutinous*, to open defiance of authority, especially in the army, navy, or merchant marine. A *contumacious* act or spirit is contemptuous as well as defiant. Compare OBSTINATE; REVOLUTION.

ANTONYMS:

compliant
controllable
deferential

docile
dutiful
gentle

manageable
obedient
submissive

subservient
tractable
yielding

PREPOSITIONS:

Rebellious *to* or *against* lawful authority.

RECORD**SYNONYMS:**

account
archive
catalog(ue
chronicle
document

enrolment
entry
enumeration
history
inscription

instrument
inventory
memorandum
memorial
monument

register
roll
schedule
scroll

A *memorial* is any object, whether a writing, a monument, or other permanent thing that is designed or adapted to keep something in remembrance. *Record* is a word of wide signification, applying to any writing, mark, or trace that serves as a *memorial* giving enduring attestation of an event or fact; an extended *account*, *chronicle*, or *history* is a *record*; so, too, may be a brief *inventory* or *memorandum*; the *inscription* on a tombstone is a *record* of the dead; the *striae* on a rock-surface are the *record* of a glacier's passage. A *register* is a formal or official written *record*, especially a series of entries made for preservation or reference; as, a *register* of births and deaths. *Archives*, in the sense here considered, are *documents* or

records, often legal *records*, preserved in a public or official depository; the word *archives* is also applied to the place where such *documents* are regularly deposited and preserved. *Muniments* (from L. *munio*, fortify) are *records* that enable one to defend his title. Compare HISTORY; STORY.

RECOVER

SYNONYMS:

be cured or healed	heal	recuperate	restore
be restored	reanimate	regain	resume
cure	recruit	repossess	retrieve

The transitive use of *recover* in the sense of *cure*, *heal*, etc., as in 2 Kings v, 6, "That thou mayest *recover* him of his leprosy," is now practically obsolete. The chief transitive use of *recover* is in the sense to obtain again after losing, *regain*, *repossess*, etc.; as, to *recover* stolen goods; to *recover* health. The intransitive sense, *be cured*, *be restored*, etc., is very common; as, to *recover* from sickness, terror, or misfortune.

ANTONYMS:

die	fail	grow worse	relapse	sink
-----	------	------------	---------	------

PREPOSITIONS:

From; rarely *of*; (*Law*) to *recover* judgment *against*, to *recover* damages *of* or *from* a person.

REFINEMENT

SYNONYMS:

civilization cultivation culture elegance politeness

Civilization applies to nations, denoting the sum of those civil, social, economic, and political attainments by which a community is removed from barbarism; a people may be civilized while still far from *refinement* or *culture*, but *civilization* is susceptible of various degrees and of continued progress. *Refinement* applies either to nations or individuals, denoting the removal of what is coarse and rude, and a corresponding attainment of what is delicate, elegant, and beautiful. *Cultivation*, denoting primarily the process of cultivating the soil or growing crops, then the improved condition of either which is the result, is applied in similar sense to the human mind and character, but in this usage is now largely superseded by the term *culture*, which denotes a high development of the best

qualities of man's mental and spiritual nature, with especial reference to the esthetic faculties and to graces of speech and manner, regarded as the expression of a refined nature. *Culture* in the fullest sense denotes that degree of *refinement* and development which results from continued *cultivation* through successive generations; a man's faculties may be brought to a high degree of *cultivation* in some specialty, while he himself remains uncultured even to the extent of coarseness and rudeness. Compare HUMANE; POLITE.

ANTONYMS:

barbarism	brutality	coarseness	rudeness	savagery
boorishness	clownishness	grossness	rusticity	vulgarity

REFUTE**SYNONYMS:**

confound confute disprove overthrow repel

To *refute* and to *confute* are to answer so as to admit of no reply. To *refute* a statement is to demonstrate its falsity by argument or countervailing proof; *confute* is substantially the same in meaning, though differing in usage. *Refute* applies either to arguments and opinions or to accusations; *confute* is not applied to accusations and charges, but to arguments or opinions. *Refute* is not now applied to persons, but *confute* is in good use in this application; a person is *confuted* when his arguments are *refuted*.

RELIABLE**SYNONYMS:**

trustworthy trusty

The word *reliable* has been sharply challenged, but seems to have established its place in the language. The objection to its use on the ground that the suffix *-able* can not properly be added to an intransitive verb is answered by the citation of such words as "available," "conversable," "laughable," and the like, while, in the matter of usage, *reliable* has the authority of Coleridge, Martineau, Mill, Irving, Newman, Gladstone, and others of the foremost of recent English writers. The objection to the application of *reliable* to persons is not sustained by the use of the verb "rely," which is applied to persons in the authorized version of the Scriptures, in the writings of Shakespeare and Bacon, and in the usage of good speakers

and writers. *Trusty* and *trustworthy* refer to inherent qualities of a high order, *trustworthy* being especially applied to persons, and denoting moral integrity and truthfulness; we speak of a *trusty* sword, a *trusty* servant; we say the man is thoroughly *trustworthy*. *Reliable* is inferior in meaning, denoting merely the possession of such qualities as are needed for safe reliance; as, a *reliable* pledge; *reliable* information. A man is said to be *reliable* with reference not only to moral qualities, but to judgment, knowledge, skill, habit, or perhaps pecuniary ability; a thoroughly *trustworthy* person might not be *reliable* as a witness on account of unconscious sympathy, or as a security by reason of insufficient means. A *reliable* messenger is one who may be depended on to do his errand correctly and promptly; a *trusty* or *trustworthy* messenger is one who may be admitted to knowledge of the views and purposes of those who employ him, and who will be faithful beyond the mere letter of his commission. We can speak of a railroad-train as *reliable* when it can be depended on to arrive on time; but to speak of a *reliable* friend would be cold, and to speak of a warrior girding on his *reliable* sword would be ludicrous.

RELIGION

SYNONYMS:

devotion	godliness	morality	piety	theology
faith	holiness	pietism	righteousness	worship

Piety is primarily filial duty, as of children to parents, and hence, in its highest sense, a loving obedience and service to God as the Heavenly Father; *pietism* often denotes a mystical, sometimes an affected *piety*; *religion* is the reverent acknowledgment both in heart and in act of a divine being. *Religion*, in the fullest and highest sense, includes all the other words of this group. *Worship* may be external and formal, or it may be the adoring reverence of the human spirit for the divine, seeking outward expression. *Devotion*, which in its fullest sense is self-consecration, is often used to denote an act of *worship*, especially prayer or adoration; as, he is engaged in his *devotions*. *Morality* is the system and practise of duty as required by the moral law, consisting chiefly in outward acts, and thus may be observed without spiritual rectitude of heart; *morality* is of necessity included in all true *re-*

ligion, which involves both outward act and spiritual service. *Godliness* (primarily godlikeness) is a character and spirit like that of God. *Holiness* is the highest, sinless perfection of any spirit, whether divine or human, though often used for purity or for consecration. *Theology* is the science of *religion*, or the study and scientific statement of all that the human mind can know of God. *Faith*, strictly the belief and trust which the soul exercises toward God, is often used as a comprehensive word for a whole system of *religion* considered as the object of *faith*; as, the Christian *faith*; the Mohammedan *faith*.

ANTONYMS:

atheism	godlessness	irreligion	sacrilege	ungodliness
blasphemy	impiety	profanity	unbelief	wickedness

RELUCTANT**SYNONYMS:**

averse	disinclined	loath	slow
backward	indisposed	opposed	unwilling

Reluctant (from L. *re*, back, and *lucto*, strive, struggle) signifies struggling against what one is urged or impelled to do, or is actually doing; *averse* (from L. *a*, from, and *verto*, turn) signifies turned away as with dislike or repugnance; *loath* (from AS. *lath*, evil, hateful) signifies having a repugnance, disgust, or loathing for, though the adjective *loath* is not so strong as the verb *loathe*. A dunce is always *averse* to study; a good student is *disinclined* to it when a fine morning tempts him out; he is *indisposed* to it in some hour of weariness. A man may be *slow* or *backward* in entering upon that to which he is by no means *averse*. A man is *loath* to believe evil of his friend, *reluctant* to speak of it, absolutely *unwilling* to use it to his injury. A legislator may be *opposed* to a certain measure, while not *averse* to what it aims to accomplish. Compare ANTIPATHY.

ANTONYMS:

desirous	disposed	eager	favorable	inclined	willing
----------	----------	-------	-----------	----------	---------

REMARK**SYNONYMS:**

annotation	comment	note	observation	utterance
------------	---------	------	-------------	-----------

A *remark* is a saying or brief statement, oral or written,

commonly made without much premeditation; a *comment* is an explanatory or critical *remark*, as upon some passage in a literary work or some act or speech in common life. A *note* is something to call attention, hence a brief written statement; in correspondence, a *note* is briefer than a letter. A *note* upon some passage in a book is briefer and less elaborate than a *comment*. *Annotations* are especially brief *notes*, commonly marginal, and closely following the text. *Comments*, *observations*, or *remarks* may be oral or written, *comments* being oftenest written, and *remarks* oftenest oral. An *observation* is properly the result of fixed attention and reflection; a *remark* may be the suggestion of the instant. *Remarks* are more informal than a speech.

REND

SYNONYMS:

break	cleave	mangle	rive	sever	sunder
burst	lacerate	rip	rupture	slit	tear

Rend and *tear* are applied to the separating of textile substances into parts by force violently applied (*rend* also to frangible substances), *tear* being the milder, *rend* the stronger word. *Rive* is a woodworkers' word for parting wood in the grain without a clean cut. To *lacerate* is to *tear* roughly the flesh or animal tissue, as by the teeth of a wild beast; a *lacerated* wound is distinguished from a wound made by a clean cut or incision. *Mangle* is a stronger word than *lacerate*; *lacerate* is more superficial, *mangle* more complete. To *burst* or *rupture* is to *tear* or *rend* by force from within, *burst* denoting the greater violence; as, to *burst* a gun; to *rupture* a blood-vessel; a steam-boiler may be *ruptured* when its substance is made to divide by internal pressure without explosion. To *rip*, as usually applied to garments or other articles made by sewing or stitching, is to divide along the line of a seam by cutting or breaking the stitches; the other senses bear some resemblance or analogy to this; as, to *rip* open a wound. Compare **BREAK**.

ANTONYMS:

heal join mend reunite secure sew solder stitch unite weld

RENOUNCE

SYNONYMS:

abandon	disavow	disown	recant	repudiate
abjure	discard	forswear	refuse	retract
deny	disclaim	recall	reject	revoke

Abjure, *discard*, *forswear*, *recall*, *recant*, *renounce*, *retract*, and *revoke*, like *abandon*, imply some previous connection. *Renounce* (from L. *re*, back, and *nuntio*, bear a message) is to declare against and give up formally and definitively; as, to *renounce* the pomps and vanities of the world. *Recant* (from L. *re*, back, and *canto*, sing) is to take back or *deny* formally and publicly, as a belief that one has held or professed. *Retract* (from L. *re*, back, and *traho*, draw) is to take back something that one has said as not true or as what one is not ready to maintain; as, to *retract* a charge or accusation; one *recants* what was especially his own, he *retracts* what was directed against another. *Repudiate* (from L. *re*, back, or away, and *pudeo*, feel shame) is primarily to *renounce* as shameful, hence to divorce, as a wife; thus in general to put away with emphatic and determined repulsion; as, to *repudiate* a debt. To *deny* is to affirm to be not true or not binding; as, to *deny* a statement or a relationship; or to *refuse* to grant as something requested; as, his mother could not *deny* him what he desired. To *discard* is to cast away as useless or worthless; thus, one *discards* a worn garment; a coquette *discards* a lover. *Revoke* (from L. *re*, back, and *voco*, call), etymologically the exact equivalent of the English *recall*, is to take back something given or granted; as, to *revoke* a command, a will, or a grant; *recall* may be used in the exact sense of *revoke*, but is often applied to persons, as *revoke* is not; we *recall* a messenger and *revoke* the order with which he was charged. *Abjure* (from L. *ab*, away, and *juro*, swear) is etymologically the exact equivalent of the Saxon *forswear*, signifying to put away formally and under oath, as an error, heresy, or evil practise, or a condemned and detested person. A man *abjures* his religion, *recants* his belief, *abjures* or *renounces* his allegiance, *repudiates* another's claim, *renounces* his own, *retracts* a false statement. A person may *deny*, *disavow*, *disclaim*, *disown* what has been truly or falsely imputed to him or supposed to be his. He may *deny* his signature, *disavow* the act of his agent, *disown* his child; he may *re-*

puddle a just claim or a base suggestion. A native of the United States can not *abjure* or *renounce* allegiance to the King of England, but will promptly *deny* or *repudiate* it. Compare ABANDON.

ANTONYMS:

acknowledge	assert	cherish	defend	maintain	proclaim	uphold
advocate	avow	claim	hold	own	retain	vindicate

REPENTANCE

SYNONYMS:

compunction	contrition	regret	self-condemnation
contriteness	penitence	remorse	sorrow

Regret is sorrow for any painful or annoying matter. One is moved with *penitence* for wrong-doing. To speak of *regret* for a fault of our own marks it as slighter than one regarding which we should express *penitence*. *Repentance* is sorrow for sin with *self-condemnation*, and complete turning from the sin. *Penitence* is transient, and may involve no change of character or conduct. There may be *sorrow* without *repentance*, as for consequences only, but not *repentance* without *sorrow*. *Compunction* is a momentary sting of conscience, in view either of a past or of a contemplated act. *Contrition* is a subduing *sorrow* for sin, as against the divine holiness and love. *Remorse* is, as its derivation indicates, a biting or gnawing back of guilt upon the heart, with no turning of heart from the sin, and no suggestion of divine forgiveness.

ANTONYMS:

approval	content	obduracy	self-complacency
comfort	hardness	obstinacy	self-congratulation
complacency	impenitence	self-approval	stubbornness

PREPOSITIONS:

Repentance *of* or *in* heart, or *from* the heart; repentance *for* sins; *before* or *toward* God; *unto* life.

REPORT

SYNONYMS:

account	narrative	rehearsal	statement
description	recital	relation	story
narration	record	rumor	tale

Account carries the idea of a commercial summary. A *statement* is definite, confined to essentials and properly to

matters within the personal knowledge of the one who states them; as, an ante-mortem *statement*. A *narrative* is a somewhat extended and embellished *account* of events in order of time, ordinarily with a view to please or entertain. A *description* gives especial scope to the pictorial element. A *report* (from L. *re*, back, and *porto*, bring), as its etymology implies, is something brought back, as by one sent to obtain information, and may be concise and formal or highly descriptive and dramatic. Compare ALLEGORY; HISTORY; RECORD.

REPROOF

SYNONYMS:

admonition	chiding	disapproval	reprimand
animadversion	comment	objurgation	reproach
blame	condemnation	rebuke	reproval
censure	criticism	reflection	upbraiding
check	denunciation	reprehension	

Blame, *censure*, and *disapproval* may either be felt or uttered; *comment*, *criticism*, *rebuke*, *reflection*, *reprehension*, and *reproof* are always expressed. The same is true of *admonition* and *animadversion*. *Comment* and *criticism* may be favorable as well as censorious; they imply no superiority or authority on the part of him who utters them; nor do *reflection* or *reprehension*, which are simply turning the mind back upon what is disapproved. *Reprehension* is supposed to be calm and just, and with good intent; it is therefore a serious matter, however mild, and is capable of great force, as expressed in the phrase severe *reprehension*. *Reflection* is often from mere ill feeling, and is likely to be more personal and less impartial than *reprehension*; we often speak of unkind or unjust *reflections*. *Rebuke*, literally a stopping of the mouth, is administered to a forward or hasty person; *reproof* is administered to one intentionally or deliberately wrong; both words imply authority in the reprover, and direct expression of *disapproval* to the face of the person *rebuked* or *reproved*. *Reprimand* is official *censure* formally administered by a superior to one under his command. *Animadversion* is *censure* of a high, authoritative, and somewhat formal kind. *Rebuke* may be given at the outset, or in the midst of an action; *animadversion*, *reflection*, *reprehension*, *reproof*, always follow the act; *admonition* is anticipatory, and meant to be pre-

ventive. *Check* is allied to *rebuke*, and given before or during action; *chiding* is nearer to *reproof*, but with more of personal bitterness and less of authority. Compare CONDEMN; REPROVE.

ANTONYMS:

applause
approbation

approval
commendation

encomium
eulogy

panegyric
praise

REPROVE

SYNONYMS:

admonish
blame
censure
chasten
check
chide

condemn
expostulate with
find fault with
rebuke
remonstrate with
reprehend

reprimand
reproach
take to task
upbraid
warn

To *censure* is to pronounce an adverse judgment that may or may not be expressed to the person *censured*; to *reprove* is to *censure* authoritatively, openly, and directly to the face of the person *reproved*; to *rebuke* is to *reprove* with sharpness, and often with abruptness, usually in the midst of some action or course of action deemed censurable; to *reprimand* is to *reprove* officially; to *blame* is a familiar word signifying to pass *censure* upon, make answerable, as for a fault; *blame* and *censure* apply either to persons or acts; *reprove* and *rebuke* are applied chiefly, and *reprimand* exclusively, to persons. To *reproach* is to *censure* openly and vehemently, and with intense personal feeling as of grief or anger; as, to *reproach* one for ingratitude; *reproach* knows no distinction of rank or character; a subject may *reproach* a king or a criminal judge. To *expostulate* or *remonstrate with* is to mingle reasoning and appeal with *censure* in the hope of winning one from his evil way, *expostulate* being the gentler, *remonstrate* the severer word. *Admonish* is the mildest of *reproving* words, and may even be used of giving a caution or warning where no wrong is implied, or of simply reminding of duty which might be forgotten. *Censure*, *rebuke*, and *reprove* apply to wrong that has been done; *warn* and *admonish* refer to anticipated error or fault. When one is *admonished* because of wrong already done, the view is still future, that he may not repeat or continue in the wrong. Compare CONDEMN; REPROOF.

ANTONYMS:

abet	approve	countenance	impel	instigate
applaud	cheer	encourage	incite	urge on

REQUIRE**SYNONYMS:**

avenge	punish	remunerate	revenge
compensate	quit	repay	reward
pay	reciprocate	retaliate	satisfy
pay off	recompense	return	settle with

To *repay* or to *retaliate*, to *punish* or to *reward*, may be to make some return very inadequate to the benefit or injury received, or the right or wrong done; but to *require* (according to its etymology) is to make so full and adequate a *return* as to *quit* oneself of all obligation of favor or hostility, of punishment or *reward*. *Require* is often used in the more general sense of *recompense* or *repay*, but always with the suggestion, at least, of the original idea of full equivalent; when one speaks of *requiting* kindness with ingratitude, the expression gains force from the comparison of the actual with the proper and appropriate *return*. Compare *PAY*.

ANTONYMS:

absolve	excuse	forgive	overlook	pass over
acquit	forget	neglect	pardon	slight

PREPOSITION:

To *require* injury *with* injury is human, but not Christian.

RESPONSIBLE**SYNONYMS:**

accountable	amenable	answerable	liable
-------------	----------	------------	--------

Accountable, *answerable*, and *responsible* are so close to each other in meaning that it is difficult to separate them except along fine lines of usage; a steward or agent is *accountable* to the extent of his trust; he is *answerable* for money or goods misappropriated; *answerable* has more suggestion of challenge, implying that one may be formally or legally cited to answer; *accountable* has more of commercial suggestion, as of one balancing a trust committed against return or service rendered; one is *accountable* to some superior, *answerable* to some law or tribunal; *responsible* is the more general term, including both *accountable* and *answerable*, but carrying a

more diffused and less technical sense of obligation; when we say, "Every man is *responsible* for his own actions," we do not think definitely of any authority, law, or tribunal before which he must answer, but rather of the general law of right, the moral constitution of the universe; *responsible* may be said with reference to some specific authority, as the British government is said to be by a *responsible* ministry—*responsible*, that is, to the people through the parliament; we do not speak of an *accountable* or *answerable* ministry. *Amenable* is almost exactly equivalent to *answerable*, but more rarely used, denoting subjection to authority or jurisdiction, so that one may be called to make formal answer.

The sovereign of this country is not *amenable* to any form of trial known to the laws.

Letters of Junius, pref.

(For the derived meaning of *amenable* see DOCTILE.) *Liable* signifies subject to some action or effect—usually unfavorable; as, metals are *liable* to be corroded by acids; hence *liable* refers to some legal obligation which may or may not come into exercise; one may be *liable* for the debts of another (who may, however, pay them himself); a person may be *liable* for damages (which no legal action may be taken to collect); because of this element of contingency, we do not say that a steward or agent is *liable* for the amount of his trust, but *accountable*, *answerable*, or *responsible*. In a derived sense a *responsible* man, a *responsible* citizen is one able and ready to meet any reasonable responsibility, pecuniary or other, that may devolve upon him.

ANTONYMS:

absolute
arbitrary
free

irresponsible
lawless
supreme

unconditioned
uncontrolled
unfettered

unlimited
unrestrained

REST

SYNONYMS:

calm
calmness
cessation
ease
intermission

pause
peace
peacefulness
quiescence
quiet

quietness
quietude
recreation
repose
sleep

slumber
stay
stillness
stop
tranquillity

Ease denotes freedom from cause of disturbance, whether external or internal. *Quiet* denotes freedom from agitation, or

especially from annoying sounds. *Rest* is a *cessation* of activity, especially of wearying or painful activity. *Recreation* is some pleasing activity of certain organs or faculties that affords *rest* to other parts of our nature that have become weary. *Repose* is a laying down, primarily of the body, and figuratively a similar freedom from toil or strain of mind. *Repose* is more complete than *rest*; a *pause* is a momentary *cessation* of activity; a blacksmith finds a temporary *rest* while the iron is heating, but he does not yield to *repose*; in a *pause* of battle a soldier *rests* on his arms; after the battle the victor *reposes* on his laurels. *Sleep* is the perfection of *repose*, the most complete *rest*; *slumber* is a light and ordinarily pleasant form of *sleep*. In the figurative sense, *rest* of mind, soul, conscience, is not mere *cessation* of activity, but a pleasing, tranquil relief from all painful and wearying activity; *repose* is even more deep, tranquil, and complete.

ANTONYMS:

agitation	disturbance	movement	stir	tumult
commotion	excitement	restlessness	strain	unrest
disquiet	motion	rush	toil	work

RESTIVE**SYNONYMS:**

balky	impatient	rebellious	restless
fidgety	intractable	recalcitrant	skittish
fractious	mulish	refractory	stubborn
fretful	mutinous	resentful	unruly
frisky	obstinate	restiff	vicious

Balky, *mulish*, *obstinate*, and *stubborn* are synonyms of *restive* only in an infrequent if not obsolete use; the supposed sense of "tending to rest," "standing stubbornly still," is scarcely supported by any examples, and those cited to support that meaning often fail to do so. The disposition to offer active resistance to control by any means whatever is what is commonly indicated by *restive* in the best English speech and literature. Dryden speaks of "the pampered colt" as "*restiff* to the rein"; but the rein is not used to propel a horse forward, but to hold him in, and it is against this that he is "*restiff*." A horse may be made *restless* by flies or by martial music, but with no refractoriness; the *restive* animal impatiently resists or struggles to break from control, as by bolting, flinging his rider, or otherwise. With this the metaphorical use of the

word agrees, which is always in the sense of such terms as *impatient*, *intractable*, *rebellious*, and the like; a people *restive* under despotism are not disposed to "rest" under it, but to resist it and fling it off.

ANTONYMS:

docile	manageable	passive	quiet	tractable
gentle	obedient	peaceable	submissive	yielding

RESTRAIN

SYNONYMS:

abridge	constrain	hold in	keep under
bridle	curb	keep	repress
check	hinder	keep back	restrict
circumscribe	hold	keep down	suppress
confine	hold back	keep in	withhold

To *restrain* is to *hold back* from acting, proceeding, or advancing, either by physical or moral force. *Constrain* is positive; *restrain* is negative; one is *constrained* to an action; he is *restrained* from an action. *Constrain* refers almost exclusively to moral force, *restrain* frequently to physical force, as when we speak of putting one under restraint. To *restrain* an action is to hold it partially or wholly in check, so that it is under pressure even while it acts; to *restrict* an action is to fix a limit or boundary which it may not pass, but within which it is free. To *repress*, literally to press back, is to hold in *check*, and perhaps only temporarily, that which is still very active; it is a feebler word than *restrain*; to *suppress* is finally and effectually to put down; *suppress* is a much stronger word than *restrain*; as, to *suppress* a rebellion. Compare ARREST; BIND; KEEP.

ANTONYMS:

aid	arouse	encourage	free	incite	release
animate	emancipate	excite	impel	let loose	set free

RETIREMENT

SYNONYMS:

loneliness	privacy	seclusion	solitude
------------	---------	-----------	----------

In *retirement* one withdraws from association he has had with others; we speak of the *retirement* of a public man to private life, though he may still be much in company. In *seclusion* one shuts himself away from the society of all ex-

cept intimate friends or attendants; in *solitude* no other person is present. While *seclusion* is ordinarily voluntary, *solituae* may be enforced; we speak of the *solitude* rather than the *seclusion* of a prisoner. As "private" denotes what concerns ourselves individually, *privacy* denotes freedom from the presence or observation of those not concerned or whom we desire not to have concerned in our affairs; *privacy* is more commonly temporary than *seclusion*; we speak of a moment's *privacy*. There may be *loneliness* without *solitude*, as amid an unsympathizing crowd, and *solitude* without *loneliness*, as when one is glad to be alone.

ANTONYMS:

association companionship company converse fellowship society

REVELATION**SYNONYMS:****apocalypse****disclosure****manifestation**

Revelation (from L. *re*, back, and *velum*, veil), literally an unveiling, is the act or process of making known what was before secret or hidden, or what may still be future. *Apocalypse* (from Gr. *apo*, from, and *kalypto*, cover), literally an uncovering, comes into English as the name of the closing book of the Bible. The *Apocalypse* unveils the future, as if to the very gaze of the seer; the whole gospel is a *disclosure* of the mercy of God; the character of Christ is a *manifestation* of the divine holiness and love: all Scripture is a *revelation* of the divine will. Or we might say that nature is a *manifestation* of the divine character and will, of which Scripture is the fuller and more express *revelation*.

ANTONYMS:cloud
cloudinessconcealment
hidingmystery
obscurationshrouding
veiling**REVENGE****SYNONYMS:**avenging
requital

retaliation

retribution

vengeance

Revenge is the act of making return for an injury done to oneself by doing injury to another person. *Retaliation* and *revenge* are personal and often bitter. *Retaliation* may be

partial; *revenge* is meant to be complete, and may be excessive. *Vengeance*, which once meant an indignant vindication of justice, now signifies the most furious and unsparing *revenge*. *Revenge* emphasizes more the personal injury in return for which it is inflicted, *vengeance* the ill desert of those upon whom it is inflicted. A *requital* is strictly an even return, such as to quit one of obligation for what has been received, and even if poor and unworthy is given as complete and adequate. *Avenging* and *retribution* give a solemn sense of exact justice, *avenging* being more personal in its infliction, whether by God or man, and *retribution* the impersonal visitation of the doom of righteous law. Compare AVENGE; HATRED; RE-
QUITE.

ANTONYMS:

compassion	forgiveness	mercy	pity
excuse	grace	pardon	reconciliation

PREPOSITIONS:

To take revenge *upon* the enemy, *for* the injury.

REVOLUTION

SYNONYMS:

anarchy	insurrection	revolt
confusion	lawlessness	riot
disintegration	mutiny	sedition
disorder	rebellion	tumult
insubordination		

The essential idea of *revolution* is a change in the form of government or constitution, or a change of rulers, otherwise than as provided by the laws of succession, election, etc.; while such change is apt to involve armed hostilities, these make no necessary part of the *revolution*. The *revolution* by which Dom Pedro was dethroned, and Brazil changed from an empire to a republic, was accomplished without a battle, and almost without a shot. *Anarchy* refers to the condition of a state when human government is superseded or destroyed by factions or other causes. *Lawlessness* is a temper of mind or condition of the community which may result in *anarchy*. *Confusion*, *disorder*, *riot*, and *tumult* are incidental and temporary outbreaks of *lawlessness*, but may not be *anarchy*. *Insubordination* is individual disobedience. *Sedition* is the plotting, *rebellion* the fighting, against the existing govern-

ment, but always with the purpose of establishing some other government in its place. When *rebellion* is successful it is called *revolution*; but there may be *revolution* without *rebellion*; as, the English Revolution of 1688. A *revolt* is an uprising against existing authority without the comprehensive views of change in the form or administration of government that are involved in *revolution*. *Anarchy*, when more than temporary *disorder*, is a proposed *disintegration* of society, in which it is imagined that social order might exist without government. Slaves make *insurrection*; soldiers or sailors break out in *mutiny*; subject provinces rise in *revolt*. Compare SOCIALISM.

ANTONYMS:

authority	domination	government	obedience	sovereignty
command	dominion	law	order	submission
control	empire	loyalty	rule	supremacy

REVOLVE**SYNONYMS:**

roll	rotate	turn
-------------	---------------	-------------

Any round body *rolls* which continuously touches with successive portions of its surface successive portions of another surface; a wagon-wheel *rolls* along the ground. To *rotate* is said of a body that has a circular motion about its own center or axis; to *revolve* is said of a body that moves in a curving path, as a circle or an ellipse, about a center outside of itself, so as to return periodically to the same relative position that it held at some previous time. A *revolving* body may also either *rotate* or *roll* at the same time; the earth *revolves* around the sun, and *rotates* on its own axis; in popular usage, the earth is often said to *revolve* about its own axis, or to have a daily "revolution," but *rotate* and "rotation" are the more accurate terms. A cylinder over which an endless belt is drawn is said to *roll* as regards the belt, though it *rotates* as regards its own axis. Any object that is in contact with or connected with a *rolling* body is often said to *roll*; as, the car *rolls* smoothly along the track. Objects whose motion approximates or suggests a rotary motion along a supporting surface are also said to *roll*; as, ocean waves *roll* in upon the shore, or the ship *rolls* in the trough of the sea. *Turn* is a conversational and popular word often used vaguely for *rotate* or *re-*

volve, or for any motion about a fixed point, especially for a motion less than a complete "rotation" or "revolution"; a man *turns* his head or *turns* on his heel; the gate *turns* on its hinges.

ANTONYMS:

bind chafe grind slide slip stand stick

REWARD**SYNONYMS:**

amends	meed	reparation	retribution
compensation	recompense	requital	satisfaction
guerdon	remuneration		

Compensation, *recompense*, and *remuneration* denote return recognized as adequate for something given or given up; no one of these words has the strictly commercial meaning of *earnings*, *hire*, *pay*, *wages*, or the like (compare **PAY**); a soldier's *pay* is neither *compensation*, *recompense*, nor *remuneration* for the hardships, toils, and perils of war; these three words are especially used of return for service done or loss sustained; *recompense* and *remuneration* are personal, but *compensation* is extended to inanimate things, as the counterbalancing effects of physical or chemical forces, mechanical devices in machinery, etc. *Amends*, *reparation*, and *satisfaction* are used specifically of some return that is designed to make good some loss sustained or injury suffered. *Requital* is an exact word, denoting complete and full return for either good or evil (compare **REQUITE**), and thus extending all the way from favor to retaliation or *retribution*. *Reward* denotes something given in return for good or evil done or received;

To him that soweth righteousness shall be a sure *reward*.

Prov. xi, 18.

Woe unto the wicked! it shall be ill with him, for the *reward* of his hands shall be given him.

Is. iii, 11.

Reward is thus as wide in range as *requital*, but does not carry the same sense of full equivalence. *Reward*, without any limiting word or phrase, is now commonly understood in the favorable sense of some desirable return for service rendered, as when a *reward* is offered for the return of lost property or the capture of a criminal; a *reward* may not be a material object, nor of value except to the recipient; a parent's grateful

smile may be a child's sufficient *reward* for service rendered, a nation's gratitude may be a patriot's *reward*; an old and often repeated saying has described "virtue as its own *reward*";

This is the one and sufficient *reward* of all virtue, . . . that right and wrong actions gradually harden into character

J. F. CLARKE *Every-Day Religion*, ch. 8, p. 123.

A *prize* is a *reward* won in competition or contest. *Meed* and *guerdon* are somewhat archaic words, *guerdon* denoting a *reward* given as an honor or favor, and *meed* a *reward* of desert or merit.

Spare not for spoiling of thy steed,
The best of mine shall be thy *meed*.

SCOTT *Lady of the Lake*.

Retribution, a word of high and solemn import, signifies the just *requital* of any act or course of moral wrong by the infliction of loss or suffering as a punishment. Compare REVENGE.

RIDDLE, *n.*

SYNONYMS:

conundrum enigma paradox problem puzzle

Conundrum, a word of unknown origin, signifies some question or statement in which some hidden and fanciful resemblance is involved, the answer often depending upon a pun; an *enigma* is a dark saying, a *paradox* is a true statement that at first appears absurd or contradictory; a *problem* is something thrown out for solution; *puzzle* (from *oppose*) referred originally to the intricate arguments by which disputants opposed each other in the old philosophic schools. The *riddle* is an ambiguous or paradoxical statement with a hidden meaning to be guessed by the mental acuteness of the one to whom it is proposed; the *riddle* is not so petty as the *conundrum*, and may require much acuteness for its answer; a *problem* may require simply study and scholarship, as a *problem* in mathematics; a *puzzle* may be in something other than verbal statement, as a dissected map or any perplexing mechanical contrivance. Both *enigma* and *puzzle* may be applied to any matter difficult of answer or solution, *enigma* conveying an idea of greater dignity, *puzzle* applying to something more commonplace and mechanical; there are many dark *enigmas* in

human life and in the course of providence; the location of a missing object is often a *puzzle*.

ANTONYMS:

answer axiom explanation proposition solution

RIGHT, *n.*

SYNONYMS:

claim	franchise	liberty	prerogative
exemption	immunity	license	privilege

A *right* is that which one may properly demand upon considerations of justice, morality, equity, or of natural or positive law. A *right* may be either general or special, natural or artificial. "Life, liberty, and the pursuit of happiness" are the natural and inalienable *rights* of all men; *rights* of property, inheritance, etc., are individual and special, and often artificial, as the *right* of inheritance by primogeniture. A *privilege* is always special, exceptional, and artificial; it is something not enjoyed by all, or only to be enjoyed on certain special conditions, a peculiar benefit, favor, advantage, etc. A *privilege* may be of doing or avoiding; in the latter case it is an *exemption* or *immunity*; as, a *privilege* of hunting or fishing; *exemption* from military service; *immunity* from arrest. A *franchise* is a specific *right* or *privilege* granted by the government or established as such by governmental authority; as, the elective *franchise*; a railroad *franchise*. A *prerogative* is an official *right* or *privilege*, especially one inherent in the royal or sovereign power; in a wider sense it is an exclusive and peculiar *privilege* which one possesses by reason of being what he is; as, reason is the *prerogative* of man; kings and nobles have often claimed *prerogatives* and *privileges* opposed to the inherent *rights* of the people. Compare DUTY; JUSTICE.

RISE

SYNONYMS:

arise ascend emanate flow issue proceed spring

To *rise* is to move up or upward whether slowly or quickly, whether through the least or greatest distance; the waves *rise*; the mists *rise*; the river *rises* after heavy rains; as said of persons, to *rise* is to come to an erect position after kneeling,

sitting, reclining, or lying down; as, to *rise* from a sick-bed; my friend *rose* as I entered; the guests *rose* to depart; so a deliberate assembly or a committee is said to *rise* when it breaks up a session; a sun or star *rises* when to our apprehension it comes above the horizon and begins to go up the sky. To *ascend* is to go far upward, and is often used in a stately sense; as, Christ *ascended* to heaven. The shorter form *rise* is now generally preferred to the longer form *arise*, except in poetic or elevated style. The sun *rises* or *arises*; the river *springs* at a bound from the foot of the glacier and *flows* through the lands to the ocean. Smoke *issues* from a chimney and *ascends* toward the sky. Light and heat *emanate* from the sun.

ANTONYMS:

decline descend drop fall go down set settle sink

PREPOSITIONS:

Rise *from* slumber; rise *to* duty; rise *at* the summons; we rose *with* the lark.

ROBBER**SYNONYMS:**

bandit	depredator	freebooter	pirate
brigand	despoiler	highwayman	plunderer
buccaneer	footpad	marauder	raider
burglar	forager	pillager	thief

A *robber* seeks to obtain the property of others by force or intimidation; a *thief* by stealth and secrecy. In early English *thief* was freely used in both senses, as in Shakespeare and the Authorized Version of the English Bible, which has "two *thieves*" (*Matt.* xxvii, 38), where the Revised Version more correctly substitutes "two *robbers*."

ROYAL**SYNONYMS:**

august	kingly	majestic	princely
kinglike	magnificent	munificent	regal

Royal denotes that which actually belongs or pertains to a monarch; the *royal* residence is that which the king occupies, *royal* raiment that which the king wears. *Regal* denotes that which in outward state is appropriate for a king; a subject may assume *regal* magnificence in residence, dress, and equipage.

Kingly denotes that which is worthy of a king in personal qualities, especially of character and conduct; as, a *kingly* bearing; a *kingly* resolve. *Princely* is especially used of treasure, expenditure, gifts, etc., as *princely* munificence, a *princely* fortune, where *regal* could not so well be used and *royal* would change the subject. The distinctions between these words are not absolute, but the tendency of the best usage is as here suggested.

ANTONYMS:

beggarly contemptible mean poor servile slavish vile

RUSTIC

SYNONYMS:

agricultural	coarse	pastoral	uncouth
artless	countrified	plain	unpolished
awkward	country	rude	unsophisticated
boorish	hoidenish	rural	untaught
bucolic	inelegant	sylvan	verdant
clownish	outlandish		

Rural and *rustic* are alike derived from the Latin *rus*, country, and may be alike defined as pertaining to, characteristic of, or dwelling in the country; but in usage *rural* refers especially to scenes or objects in the country, considered as the work of nature; *rustic* refers to their effect upon man or to their condition as affected by human agency; as, a *rural* scene; a *rustic* party; a *rustic* lass. We speak, however, of the *rural* population, *rural* simplicity, etc. *Rural* has always a favorable sense; *rustic* frequently an unfavorable one, as denoting a lack of culture and refinement; thus, *rustic* politeness expresses that which is well-meant, but awkward; similar ideas are suggested by a *rustic* feast, *rustic* garb, etc. *Rustic* is, however, often used of a studied simplicity, an artistic rudeness, which is pleasing and perhaps beautiful; as, a *rustic* cottage; a *rustic* chair. *Pastoral* refers to the care of flocks, and to the shepherd's life with the pleasing associations suggested by the old poetic ideal of that life; as, *pastoral* poetry. *Bucolic* is kindred to *pastoral*, but is a less elevated term, and sometimes slightly contemptuous.

ANTONYMS:

accomplished	cultured	polished	refined	urbane
city-like	elegant	polite	urban	well-bred

SACRAMENT

SYNONYMS:

ceremony
communion
eucharistLord's Supper
observanceordinance
riteservice
solemnity

Any religious act, especially a public act, viewed as a means of serving God is called a *service*; the word commonly includes the entire series of exercises of a single occasion of public worship. A religious *service* ordained as an outward and visible sign of an inward and spiritual grace is called a *sacrament*. *Ceremony* is a form expressing reverence, or at least respect; we may speak of religious *ceremonies*, the *ceremonies* of polite society, the *ceremonies* of a coronation, an inauguration, etc. An *observance* has more than a formal obligation, reaching or approaching a religious sacredness: a stated religious *observance*, viewed as established by authority, is called an *ordinance*; viewed as an established custom, it is a *rite*. The terms *sacrament* and *ordinance*, in the religious sense, are often used interchangeably; the *ordinance* derives its sacredness from the authority that ordained it, while the *sacrament* possesses a sacredness due to something in itself, even when viewed simply as a representation or memorial. The Lord's Supper is the Scriptural name for the *observance* commemorating the death of Christ; the word *communion* is once applied to it (1 Cor. x, 16), but not as a distinctive name; at an early period, however, the name *communion* was so applied, as denoting the communing of Christians with their Lord, or with one another. The term *eucharist* describes the Lord's Supper as a thanksgiving *service*; it is also called by preeminence the *sacrament*, as the ratifying of a solemn vow of consecration to Christ.

SAGACIOUS

SYNONYMS:

able
acute
apt
clear-sighted
discerningintelligent
keen
keen-sighted
keen-witted
judiciousperspicacious
quick of scent
quick-scented
rational
sagesensible
sharp
sharp-witted
shrewd
wise

Sagacious refers to a power of tracing the hidden or recon-dite by slight indications, as by instinct or intuition; the word was formerly applied to mere keenness of sense-perception, as of a hound in following a trail. *Sagacious* is now restricted

to acuteness of mental discernment, or to a swift certainty of instinct that accomplishes results such as might seem due to reflection and reasoning; as the beaver has been held *sagacious* in cutting down trees and building dams. In human affairs *sagacious* refers to a power of ready, far-reaching, and accurate inference from observed facts perhaps in themselves very slight, that seems like a special sense; or to a similar readiness to foresee the results of any action, especially upon human motives or conduct—a kind of prophetic common sense. *Sagacious* is a broader and nobler word than *shrewd*, and not capable of the invidious sense which the latter word often bears; on the other hand, *sagacious* is less lofty and comprehensive than *wise* in its full sense, and more limited to matters of direct practical moment. Compare *ASTUTE*; *WISDOM*.

ANTONYMS:

absurd foolish ignorant obtuse silly sottish undiscerning
dull futile irrational senseless simple stupid unintelligent

SALE

SYNONYMS:

bargain barter change deal exchange trade

A *bargain* is strictly an agreement or contract to buy and sell, though the word is often used to denote the entire transaction and also as a designation for the thing sold or purchased. *Change* and *exchange* are words of wider signification, applying only incidentally to the transfer of property or value; a *change* secures something different in any way or by any means; an *exchange* secures something as an equivalent or return, though not necessarily as payment for what is given. *Barter* is the *exchange* of one commodity for another, the word being used generally with reference to portable commodities. *Trade* in the broad sense may apply to vast businesses (as the book-trade), but as denoting a single transaction is used chiefly in regard to things of moderate value, when it becomes nearly synonymous with *barter*. *Sale* is commonly, and with increasing strictness, limited to the transfer of property for money, or for something estimated at a money value or considered as equivalent to so much money in hand or to be paid. A *deal* in the political sense is a *bargain*, substitution, or transfer for the

benefit of certain persons or parties against all others; as, the nomination was the result of a *deal*; in business it may have a similar meaning, but it frequently signifies simply a *sale* or *exchange*, a *dealing*; as, a *heavy deal* in stocks.

SAMPLE

SYNONYMS:

case
example

exemplification
illustration

instance
specimen

A *sample* is a portion taken at random out of a quantity supposed to be homogeneous, so that the qualities found in the *sample* may reasonably be expected to be found in the whole: as, a *sample* of sugar; a *sample* of cloth. A *specimen* is one unit of a series, or a fragment of a mass, all of which is supposed to possess the same essential qualities; as, a *specimen* of coinage, or of architecture, or a *specimen* of quartz. No other unit or portion may be exactly like the *specimen*, while all the rest is supposed to be exactly like the *sample*. An *instance* is a *sample* or *specimen* of action. Compare **EXAMPLE**.

ANTONYMS:

abnormality aggregate exception monstrosity total whole

SATISFY

SYNONYMS:

cloy
content

fill
glut

sate
satisfy

suffice
surfeit

To *satisfy* is to furnish just enough to meet physical, mental, or spiritual desire. To *sate* or *satisfy* is to gratify desire so fully as for a time to extinguish it. To *cloy* or *surfeit* is to gratify to the point of revulsion or disgust. *Glut* is a strong but somewhat coarse word applied to the utmost satisfaction of vehement appetites and passions; as, to *glut* a vengeful spirit with slaughter; we speak of *glutting* the market with a supply so excessive as to extinguish the demand. Much less than is needed to *satisfy* may *suffice* a frugal or abstemious person; less than a sufficiency may *content* one of a patient and submissive spirit. Compare **PAY**; **REQUIRE**.

ANTONYMS:

check
deny

disappoint
refuse

restrain
restrict

starve
stint

straiten
tantalize

PREPOSITIONS:

Satisfy *with* food, *with* gifts, etc.; satisfy one (in the sense of make satisfaction) *for* labors and sacrifices; satisfy oneself *by* or *upon* inquiry.

SCHOLAR**SYNONYMS:**

disciple learner pupil savant student

The primary sense of a *scholar* is one who is being schooled; thence the word passes to denote one who is apt in school work, and finally one who is thoroughly schooled, master of what the schools can teach, an erudite, accomplished person; when used without qualification, the word is generally understood in this latter sense; as, he is manifestly a *scholar*. *Pupil* signifies one under the close personal supervision or instruction of a teacher or tutor. Those under instruction in schools below the academic grade are technically and officially termed *pupils*. The word *pupil* is uniformly so used in the Reports of the Commissioner of Education of the United States, but popular American usage prefers *scholar* in the original sense; as, teachers and *scholars* enjoyed a holiday. Those under instruction in Sunday-schools are uniformly designated as Sunday-school *scholars*. *Student* is applied to those in the higher grades or courses of study, as the academic, collegiate, scientific, etc. *Student* suggests less proficiency than *scholar* in the highest sense, the *student* being one who is learning, the *scholar* one who has learned. On the other hand, *student* suggests less of personal supervision than *pupil*; thus, the college *student* often becomes the private *pupil* of some instructor in special studies. For *disciple*, etc., compare synonyms for ADHERENT.

ANTONYMS:

dunce fool idiot idler ignoramus illiterate person

SCIENCE**SYNONYMS:**

art knowledge

Knowledge of a single fact, not known as related to any other, or of many facts not known as having any mutual relations or as comprehended under any general law, does not reach the meaning of *science*; *science* is *knowledge* reduced to

law and embodied in system. The *knowledge* of various countries gathered by an observant traveler may be a heterogeneous medley of facts, which gain real value only when coordinated and arranged by the man of *science*. *Art* always relates to something to be done, *science* to something to be known. Not only must *art* be discriminated from *science*, but *art* in the industrial or mechanical sense must be distinguished from *art* in the esthetic sense; the former aims chiefly at utility, the latter at beauty. The mechanic *arts* are the province of the artisan, the esthetic or fine *arts* are the province of the artist: all the industrial *arts*, as of weaving or printing, arithmetic or navigation, are governed by exact rules. *Art* in the highest esthetic sense, while it makes use of rules, transcends all rule; no rules can be given for the production of a painting like Raffael's "Transfiguration," a statue like the Apollo Belvedere, or a poem like the Iliad. *Science* does not, like the mechanic *arts*, make production its direct aim, yet its possible productive application in the *arts* is a constant stimulus to scientific investigation; the *science*, as in the case of chemistry or electricity, is urged on to higher development by the demands of the *art*, while the *art* is perfected by the advance of the *science*. Creative *art* seeking beauty for its own sake is closely akin to pure *science* seeking *knowledge* for its own sake. Compare KNOWLEDGE; LITERATURE.

SECURITY

SYNONYMS:

bail earnest gage pledge surety

The first four words agree in denoting something given or deposited as an assurance of something to be given, paid, or done. An *earnest* is of the same kind as that to be given, a portion of it delivered in advance, as when part of the purchase-money is paid, according to the common expression, "to bind the bargain." A *pledge* or *security* may be wholly different in kind from that to be given or paid, and may greatly exceed it in value. *Security* may be of real or personal property—anything of sufficient value to make the creditor secure; a *pledge* is always of personal property or chattels. Every pawnshop contains unredeemed *pledges*; land, merchandise, bonds, etc., are frequently offered and accepted as *security*.

A person may become *security* or *surety* for another's payment of a debt, appearance in court, etc.; in the latter case, he is said to become *bail* for that person; the person accused gives *bail* for himself. *Gage* survives only as a literary word, chiefly in certain phrases; as, "the *gage* of battle."

PREPOSITIONS:

Security *for* the payment of a debt; security *to* the state, *for* the prisoner, *in* the sum of a thousand dollars.

SELF-ABNEGATION

SYNONYMS:

self-control	self-devotion	self-renunciation
self-denial	self-immolation	self-sacrifice

Self-control is holding oneself within due limits in pleasures and duties, as in all things else; *self-denial*, the giving up of pleasures for the sake of duty. *Self-renunciation* surrenders conscious rights and claims; *self-abnegation* forgets that there is anything to surrender. There have been devotees who practised very little *self-denial* with very much *self-renunciation*. A mother will care for a sick child with complete *self-abnegation*, but without a thought of *self-denial*. *Self-devotion* is heart-consecration of self to a person or cause with readiness for any needed sacrifice. *Self-sacrifice* is the strongest and completest term of all, and contemplates the gift of self as actually made. We speak of the *self-sacrifice* of Christ, where any other of the above terms would be feeble or inappropriate. Compare ABNEGATION; ABSTINENCE.

ANTONYMS:

self-gratification self-indulgence selfishness self-seeking self-will

SEND

SYNONYMS:

cast	despatch	emit	impel	propel
dart	discharge	fling	lance	sling
delegate	dismiss	forward	launch	throw
depute	drive	hurl	project	transmit

To *send* is to cause to go or pass from one place to another, and always in fact or thought away from the agent or agency that controls the act. *Send* in its most common use involves

personal agency without personal presence; according to the adage, "If you want your business done, go; if not, *send*"; one *sends* a letter or a bullet, a messenger or a message. In all the derived uses this same idea controls; if one *sends* a ball into his own heart, the action is away from the directing hand, and he is viewed as the passive recipient of his own act; it is with an approach to personification that we speak of the bow *sending* the arrow, or the gun the shot. To *despatch* is to *send* hastily or very promptly, ordinarily with a destination in view; to *dismiss* is to *send* away from oneself without reference to a destination; as, to *dismiss* a clerk, an application, or an annoying subject. To *discharge* is to *send* away so as to relieve a person or thing of a load; we *discharge* a gun or *discharge* the contents; as applied to persons, *discharge* is a harsher term than *dismiss*. To *emit* is to *send* forth from within, with no reference to a destination; as, the sun *emits* light and heat. *Transmit*, from the Latin, is a dignified term, often less vigorous than the Saxon *send*, but preferable at times in literary or scientific use; as, to *transmit* the crown, or the feud, from generation to generation; to *transmit* a charge of electricity. *Transmit* fixes the attention more on the intervening agency, as *send* does upon the points of departure and destination.

ANTONYMS:

bring	convey	give	hold	receive
carry	get	hand	keep	retain

PREPOSITIONS:

To *send from* the hand *to* or *toward* (rarely *at*) a mark; *send to* a friend *by* a messenger or *by* mail; *send* a person *into* banishment; *send* a shell *among* the enemy.

SENSATION**SYNONYMS:**

emotion	feeling	perception	sense
---------	---------	------------	-------

Sensation is the mind's consciousness due to a bodily affection, as of heat or cold; *perception* is the cognition of some external object which is the cause or occasion of the *sensation*; the *sensation* of heat may be connected with the *perception* of a fire. While *sensations* are connected with the body, *emotions*, as joy, grief, etc., are wholly of the mind. "As the most of

them [the *sensations*] are positively agreeable or the opposite, they are nearly akin to those *emotions*, as hope or terror, or those passions, as anger and envy, which are acknowledged by all to belong exclusively to the spirit, and to involve no relation whatever to matter or the bodily organism. Such *feelings* are not infrequently styled *sensations*, though improperly." PORTER *Human Intellect* § 112, p. 128. [s. 1890.] *Feeling* is a general term popularly denoting what is felt, whether through the body or by the mind alone, and includes both *sensation* and *emotion*. A *sense* is an organ or faculty of *sensation* or of *perception*.

SENSIBILITY

SYNONYMS:

feeling impressibility sensitiveness susceptibility

Sensibility in the philosophical sense, denotes the capacity of emotion or feeling, as distinguished from the intellect and the will. (Compare synonyms for SENSATION.) In popular use *sensibility* denotes sometimes capacity of feeling of any kind; as, *sensibility* to heat or cold; sometimes, a peculiar readiness to be the subject of feeling, especially of the higher feelings; as, the *sensibility* of the artist or the poet; a person of great or fine *sensibility*. *Sensitiveness* denotes an especial delicacy of *sensibility*, ready to be excited by the slightest cause, as displayed, for instance, in the "sensitive-plant." *Susceptibility* is rather a capacity to take up, receive, and, as it were, to contain feeling, so that a person of great *susceptibility* is capable of being not only readily but deeply moved; *sensitiveness* is more superficial, *susceptibility* more pervading. Thus, in physics, the *sensitiveness* of a magnetic needle is the ease with which it may be deflected, as by another magnet; its *susceptibility* is the degree to which it can be magnetized by a given magnetic force or the amount of magnetism it will hold. So a person of great *sensitiveness* is quickly and keenly affected by any external influence, as by music, pathos, or ridicule, while a person of great *susceptibility* is not only touched, but moved to his inmost soul.

ANTONYMS:

coldness
deadness

hardness
insensibility

numbness
unconsciousness

PREPOSITIONS:

The sensibility of the organism *to* atmospheric changes.

SEVERE**SYNONYMS:**

austere	inflexible	rigorous	unyielding
hard	morose	stern	uncompromising
harsh	relentless	stiff	unmitigated
inexorable	rigid	strict	unrelenting

That is *severe* which is devoid of all softness, mildness, tenderness, indulgence or levity, or (in literature and art) devoid of unnecessary ornament, amplification, or embellishment of any kind; as, a *severe* style; as said of anything painful, *severe* signifies such as heavily taxes endurance or resisting power; as, a *severe* pain, fever, or winter. *Rigid* signifies primarily *stiff*, resisting any effort to change its shape; a corpse is said to be *rigid* in death; hence, in metaphorical sense, a *rigid* person or character is one that resists all efforts to change the will or course of conduct; a *rigid* rule or statement is one that admits of no deviation. *Rigorous* is nearly akin to *rigid*, but is a stronger word, having reference to action or active qualities, as *rigid* does to state or character; a *rigid* rule may be *rigorously* enforced. *Strict* (from L. *stringo*, bind) signifies bound or stretched tight, tense, strenuously exact. *Stern* unites harshness and authority with strictness or severity; *stern*, as said even of inanimate objects, suggests something authoritative or forbidding. *Austere* signifies severely simple or temperate, *strict* in self-restraint or discipline, and similarly *unrelenting* toward others. We speak of *austere* morality, *rigid* rules, *rigorous* discipline, *stern* commands, *severe* punishment, *harsh* speech or a *harsh* voice, *hard* requirements, *strict* injunctions, and *strict* obedience. *Strict* discipline holds one exactly and unflinchingly to the rule; *rigorous* discipline punishes severely any infraction of it. The *austere* character is seldom lovely, but it is always strong and may be grand, commanding, and estimable.

ANTONYMS:

affable	easy	gentle	lenient	pliable	sweet	tractable
bland	genial	indulgent	mild	soft	tender	yielding

SHAKE

SYNONYMS:

agitate	jar	quake	shiver	totter
brandish	joggle	quaver	shudder	tremble
flap	jolt	quiver	sway	vibrate
fluctuate	lounce	reel	swing	wave
flutter	oscillate	rock	thrill	waver

A thing is *shaken* which is subjected to short and abruptly checked movements, as forward and backward, up and down, from side to side, etc. A tree is "*shaken* with a mighty wind"; a man slowly *shakes* his head. A thing *rocks* that is sustained from below; it *swings* if suspended from above, as a pendulum, or pivoted at the side, as a crane or a bridge-draw; to *oscillate* is to *swing* with a smooth and regular returning motion; a *vibrating* motion may be tremulous or *jarring*. The pendulum of a clock may be said to *swing*, *vibrate*, or *oscillate*; a steel bridge *vibrates* under the passage of a heavy train; the term *vibrate* is also applied to molecular movements. *Jolting* is a lifting from and letting down suddenly upon an unyielding surface; as, a carriage *jolts* over a rough road. A *jarring* motion is abruptly and very rapidly repeated through an exceedingly limited space; the *jolting* of the carriage *jars* the windows. *Rattling* refers directly to the sound produced by *shaking*. To *joggle* is to *shake* slightly; as, a passing touch *joggles* the desk on which one is writing. A thing *trembles* that *shakes* perceptibly and with an appearance of uncertainty and instability, as a person under the influence of fear; a thing *shivers* when all its particles are stirred with a slight but pervading tremulous motion, as a human body under the influence of cold; *shuddering* is a more pronounced movement of a similar kind, in human beings often the effect of emotional or moral recoil; hence, the word is applied by extension to such feelings even when they have no such outward manifestation; as, one says, "I *shudder* at the thought." To *quiver* is to have slight and often spasmodic contractile motions, as the flesh under the surgeon's knife. *Thrill* is applied to a pervasive movement felt rather than seen; as, the nerves *thrill* with delight; *quiver* is similarly used, but suggests somewhat more of outward manifestation. To *agitate* in its literal use is nearly the same as to *shake*, though we speak of the sea as *agitated* when we could not say it is *shaken*; the Latin *agitate* is preferred in scientific or technical use to the Saxon *shake*, and especially as applied

to the action of mechanical contrivances; in the metaphorical use *agitate* is more transitory and superficial, *shake* more fundamental and enduring; a person's feelings are *agitated* by distressing news; his courage, his faith, his credit, or his testimony is *shaken*. *Sway* applies to the movement of a body suspended from above or not firmly sustained from below, and the motion of which is less pronounced than *swinging*, smoother than *vibrating*, and not necessarily constant as *oscillating*; as, the *swaying* of a reed in the wind. *Sway* used transitively especially applies to motions of grace or dignity; *brandish* denotes a threatening or hostile motion; a monarch *sways* the scepter; the ruffian *brandishes* a club. To *reel* or *totter* always implies liability to fall; *reeling* is more violent than *swaying*, *tottering* more irregular; a drunken man *reels*; we speak of the *tottering* step of age or infancy. An extended mass which seems to lack solidity or cohesion is said to *quake*; as, a *quaking* bog. *Quaver* is applied almost exclusively to tremulous sounds of the human voice. *Flap*, *flutter*, and *fluctuate* refer to wave-like movements, *flap* generally to such as produce a sharp sound; a cock *flaps* his wings; *flutter* applies to a less pronounced and more irregular motion; a captive bird or a feeble pulse *flutters*. Compare FLUCTUATE.

SHELTER

SYNONYMS:

cover
defend

guard
harbor

protect
screen

shield
ward

Anything is *covered* over which something is completely extended; a vessel is *covered* with a lid; the head is *covered* with a hat. That which *covers* may also *defend* or *protect*; thus, troops interposed between some portion of their own army and the enemy are often called a *covering* party. To *shelter* is to *cover* so as to *protect* from injury or annoyance; as, the roof *shelters* from the storm; woods *shelter* from the heat. To *defend* (from L. *defendere*, to strike away) implies the actual, *protect* (from L. *protegere*, to cover before) implies the possible use of force or resisting power; *guard* implies sustained vigilance with readiness for conflict; we *defend* a person or thing against actual attack; we *guard* or *protect* against possible assault or injury. A powerful person may

protect one who is weak by simply declaring himself his friend; he *defends* him by some form of active championship. An inanimate object may *protect*, as a garment from cold; *defend* is used but rarely, and by somewhat violent metaphor, in such connection. *Protect* is more complete than *guard* or *defend*; an object may be faithfully *guarded* or bravely *defended*, in vain, but that which is *protected* is secure. To *shield* is to interpose something over or before that which is assailed, so as to save from harm, and has a comparatively passive sense; one may *guard* another by standing armed at his side, *defend* him by fighting for him, or *shield* him from a missile or a blow by interposing his own person. *Harbor* is generally used in an unfavorable sense; confederates or sympathizers *harbor* a criminal; a person *harbors* evil thoughts or designs. See CHERISH. Compare synonyms for HIDE; DEFENSE.

ANTONYMS:

betray cast out expel expose give up refuse reject surrender

PREPOSITIONS:

Shelter *under* a roof *from* the storm; *in* the fortress, *behind* or *within* the walls, *from* attack.

SIGN

SYNONYMS:

augury	mark	presage	symptom
emblem	note	prognostic	token
indication	omen	signal	type
manifestation	portent	symbol	

A *sign* (from L. *signum*) is any distinctive *mark* by which a thing may be recognized or its presence known, and may be intentional or accidental, natural or artificial, suggestive, descriptive, or wholly arbitrary; thus, a blush may be a *sign* of shame; the footprint of an animal is a *sign* that it has passed; the *sign* of a business house now usually declares what is done or kept within, but formerly might be an object having no connection with the business, as "the *sign* of the trout"; the letters of the alphabet are *signs* of certain sounds. While a *sign* may be involuntary, and even unconscious, a *signal* is always voluntary, and is usually concerted; a ship may show *signs* of distress to the casual observer, but *signals* of distress are a distinct appeal for aid. A *symptom* is a vital phenomenon resulting from a diseased condition; in medical language

a *sign* is an *indication* of any physical condition, whether morbid or healthy; thus, a hot skin and rapid pulse are *symptoms* of pneumonia; dulness of some portion of the lungs under percussion is one of the physical *signs*. Compare AUGUR; CHARACTERISTIC; EMBLEM.

SIN

SYNONYMS:

crime	ill-doing	unrighteousness
criminality	immorality	vice
delinquency	iniquity	viciousness
depravity	misdeed	wickedness
evil	offense	wrong
fault	transgression	wrong-doing
guilt	ungodliness	

Sin is any lack of holiness, any defect of moral purity and truth, whether in heart or life, whether of commission or omission. "All *unrighteousness* is *sin*," 1 John v, 17. *Transgression*, as its etymology indicates, is the stepping over a specific enactment, whether of God or man, ordinarily by overt act, but in the broadest sense, in volition or desire. *Sin* may be either act or state; *transgression* is always an act, mental or physical. *Crime* is often used for a flagrant violation of right, but in the technical sense denotes specific violation of human law. *Guilt* is desert of and exposure to punishment because of *sin*. *Depravity* denotes not any action, but a perverted moral condition from which any act of *sin* may proceed. *Sin* in the generic sense, as denoting a state of heart, is synonymous with *depravity*; in the specific sense, as in the expression a *sin*, the term may be synonymous with *transgression*, *crime*, *offense*, *misdeed*, etc., or may denote some moral activity that could not be characterized by terms so positive. *Immorality* denotes outward violation of the moral law. *Sin* is thus the broadest word, and *immorality* next in scope; all *crimes*, properly so called, and all *immoralities*, are *sins*; but there may be *sin*, as ingratitude, which is neither *crime*, *transgression*, nor *immorality*; and there may be *immorality* which is not *crime*, as falsehood. Compare CRIMINAL.

ANTONYMS:

blamelessness	goodness	integrity	rectitude	sinlessness
excellence	holiness	morality	right	uprightness
godliness	innocence	purity	righteousness	virtue

Compare synonyms for VIRTUE.

SING

SYNONYMS:

carol chant chirp chirrup hum warble

To *sing* is primarily and ordinarily to utter a succession of articulate musical sounds with the human voice. The word has come to include any succession of musical sounds; we say the bird or the rivulet *sings*; we speak of "the *singing* quality" of an instrument, and by still wider extension of meaning we say the teakettle or the cricket *sings*. To *chant* is to *sing* in solemn and somewhat uniform cadence; *chant* is ordinarily applied to non-metrical religious compositions. To *carol* is to *sing* joyously, and to *warble* (kindred with *whirl*) is to *sing* with trills or quavers, usually also with the idea of joy. *Carol* and *warble* are especially applied to the *singing* of birds. To *chirp* is to utter a brief musical sound, perhaps often repeated in the same key, as by certain small birds, insects, etc. To *chirrup* is to utter a somewhat similar sound; the word is often used of a brief, sharp sound uttered as a signal to animate or rouse a horse or other animal. To *hum* is to utter murmuring sounds with somewhat monotonous musical cadence, usually with closed lips; we speak also of the *hum* of machinery, etc.

SKETCH

SYNONYMS:

brief	draft	painting	portrayal
delineation	drawing	picture	representation
design	outline	plan	skeleton

A *sketch* is a rough, suggestive presentation of anything, whether graphic or literary, commonly intended to be preliminary to a more complete or extended treatment. An *outline* gives only the bounding or determining lines of a figure or a scene; a *sketch* may give not only lines, but shading and color, but is hasty and incomplete. The lines of a *sketch* are seldom so full and continuous as those of an *outline*, being, like the shading or color, little more than indications or suggestions according to which a finished *picture* may be made; the artist's first *representation* of a sunset, the hues of which change so rapidly, must of necessity be a *sketch*. *Draft* and *plan* apply especially to mechanical *drawing*, of which *outline*, *sketch*, and *drawing* are also used; a *plan* is strictly a view

from above, as of a building or machine, giving the lines of a horizontal section, originally at the level of the ground, now in a wider sense at any height; as, a *plan* of the cellar; a *plan* of the attic. A mechanical *drawing* is always understood to be in full detail; a *draft* is an incomplete or unfinished *drawing*; a *design* is such a preliminary *sketch* as indicates the object to be accomplished or the result to be attained, and is understood to be original. One may make a *drawing* of any well-known mechanism, or a *drawing* from another man's *design*; but if he says, "The *design* is mine," he claims it as his own invention or composition. In written composition, an *outline* gives simply the main divisions, and in the case of a sermon is often called a *skeleton*; a somewhat fuller suggestion of illustration, treatment, and style is given in a *sketch*. A lawyer's *brief* is a succinct statement of the main facts involved in a case, and of the main heads of his argument on points of law, with reference to authorities cited; the *brief* has none of the vagueness of a *sketch*, being sufficiently exact and complete to form, on occasion, the basis for the decision of the court without oral argument, when the case is said to be "submitted on *brief*." Compare DESIGN.

SKEPTIC

SYNONYMS:

agnostic
atheist

deist
disbeliever

doubter
freethinker

infidel
unbeliever

The *skeptic* doubts divine revelation; the *disbeliever* and the *unbeliever* reject it, the *disbeliever* with more of intellectual dissent, the *unbeliever* (in the common acceptation) with indifference or with opposition of heart as well as of intellect. *Infidel* is an opprobrious term that might once almost have been said to be geographical in its range. The Crusaders called all Mohammedans *infidels*, and were so called by them in return; the word is commonly applied to any decided opponent of an accepted religion. The *atheist* denies that there is a God; the *deist* admits the existence of God, but denies that the Christian Scriptures are a revelation from him; the *agnostic* denies either that we do know or that we can know whether there is a God.

ANTONYMS:

believer

Christian

SKILFUL

SYNONYMS:

accomplished	apt	dexterous	happy	proficient
adept	clever	expert	ingenious	skilled
adroit	deft	handy	practised	trained

Skilful signifies possessing and using readily practical knowledge and ability, having alert and well-trained faculties with reference to a given work. One is *adept* in that for which he has a natural gift improved by practise; he is *expert* in that of which training, experience, and study have given him a thorough mastery; he is *dexterous* in that which he can do effectively, with or without training, especially in work of the hand or bodily activities. In the case of the noun, "an expert" denotes one who is "experienced" in the fullest sense, a master of his branch of knowledge. A *skilled* workman is one who has thoroughly learned his trade, though he may be naturally quite dull; a *skilful* workman has some natural brightness, ability, and power of adaptation, in addition to his acquired knowledge and dexterity. Compare CLEVER; DEXTERITY; POWER.

ANTONYMS:

awkward	clumsy	inexpert	shiftless	unskilled	untrained
bungling	helpless	maladroit	unhandy	untaught	

PREPOSITIONS:

Skilful *at* or *in* a work, *with* a pen or tool of any kind.

SLANDER

SYNONYMS:

aspersion	defame	disparage	revile
backbite	depreciate	libel	traduce
calumniate	detract	malign	vilify
decry			

To *slander* a person is to utter a false and injurious report concerning him; to *defame* is specifically and directly to attack one's reputation; to *defame* by spoken words is to *slander*, by written words, to *libel*. To *aspersion* is, as it were, to bespatter with injurious charges; to *malign* is to circulate studied and malicious attacks upon character; to *traduce* is to exhibit one's real or assumed traits in an odious light; to *revile* or *vilify* is to attack with vile abuse. To *disparage* is to represent one's admitted good traits or acts as less praiseworthy than

they would naturally be thought to be, as for instance, by ascribing a man's benevolence to a desire for popularity or display. To *libel* or *slander* is to make an assault upon character and repute that comes within the scope of law; the *slander* is uttered, the *libel* written, printed, or pictured. To *backbite* is to speak something secretly to one's injury; to *calumniate* is to invent as well as utter the injurious charge. One may "abuse," "assail," or *vilify* another to his face; he *asperses*, *calumniates*, *slanders*, or *traduces* him behind his back. Compare DISPARAGE.

ANTONYMS:

defend eulogize extol laud praise vindicate

SLANG**SYNONYMS:**

cant colloquialism vulgarism vulgarity

A *colloquialism* is an expression not coarse or low, and perhaps not incorrect, but below the literary grade; educated persons are apt to allow themselves some *colloquialisms* in familiar conversation, which they would avoid in writing or public speaking. *Slang*, in the primary sense, denotes expressions that are either coarse and rude in themselves or chiefly current among the coarser and ruder part of the community; there are also many expressions current in special senses in certain communities that may be characterized as *slang*; as, college *slang*; club *slang*; racing *slang*. In the evolution of language many words originally *slang* are adopted by good writers and speakers, and ultimately take their place as accepted English. A *vulgarism* is an expression decidedly incorrect, and the use of which is a mark of ignorance or low breeding. *Cant*, as used in this connection, denotes the barbarous jargon used as a secret language by thieves, tramps, etc. Compare DICTION; LANGUAGE.

SLOW**SYNONYMS:**

dawdling	drowsy	inert	slack
delaying	dull	lingering	sluggish
deliberate	gradual	moderate	tardy
dilatory	inactive	procrastinating	

Slow signifies moving through a relatively short distance, or

with a relatively small number of motions in a given time; *slow* also applies to that which is a relatively long while in beginning or accomplishing something; a watch or a clock is said to be *slow* when its indications are behind those of the standard time. *Tardy* is applied to that which is behind the proper or desired time, especially in doing a work or arriving at a place. *Deliberate* and *dilatory* are used of persons, though the latter may be used also of things, as of a stream; a person is *deliberate* who takes a noticeably long time to consider and decide before acting or who acts or speaks as if he were deliberating at every point; a person is *dilatory* who lays aside, or puts off as long as possible, necessary or required action; both words may be applied either to undertaking or to doing. *Gradual* (from L. *gradus*, a step) signifies advancing by steps, and refers to *slow* but regular and sure progression. *Slack* refers to action that seems to indicate a lack of tension, as of muscle or of will, *sluggish* to action that seems as if reluctant to advance.

ANTONYMS:

See synonyms for NIMBLE.

SNEER**SYNONYMS:**

fling gibe jeer mock scoff taunt

A *sneer* may be simply a contemptuous facial contortion, or it may be some brief satirical utterance that throws a contemptuous side-light on what it attacks without attempting to prove or disprove; a depreciatory implication may be given in a *sneer* such as could only be answered by elaborate argument or proof, which would seem to give the attack undue importance:

Who can refute a *sneer*?

PALEY *Moral Philosophy* bk. v. ch. ix.

A *fling* is careless and commonly pettish; a *taunt* is intentionally insulting and provoking; the *sneer* is supercilious; the *taunt* is defiant. The *jeer* and *gibe* are uttered; the *gibe* is bitter, and often sly or covert; the *jeer* is rude and open. A *scoff* may be in act or word, and is commonly directed against that which claims honor, reverence, or worship. Compare BANTER.

PREPOSITION:

Only an essentially vicious mind is capable of a sneer *at* virtue.

SOCIALISM**SYNONYMS:****collectivism****communism****Fabianism**

Socialism, as defined by its advocates, is a theory of civil polity that aims to secure the reconstruction of society, increase of wealth, and a more equal distribution of the products of labor through the public collective ownership of land and capital (as distinguished from property), and the public collective management of all industries. Its aim is extended industrial cooperation; *socialism* is a purely economic term, applying to landownership and productive capital. Many socialists call themselves *collectivists*, and their system *collectivism*. *Communism* would divide all things, including the profits of individual labor, among members of the community; many of its advocates would abolish marriage and the family relation. *Anarchism* is properly an antonym of *socialism*, as it would destroy, by violence if necessary, all existing government and social order, leaving the future to determine what, if anything, should be raised upon their ruins.

SOUND**SYNONYMS:****noise****note****tone**

Sound is the sensation produced through the organs of hearing or the physical cause of this sensation. *Sound* is the most comprehensive word of this group, applying to anything that is audible. *Tone* is *sound* considered as having some musical quality or as expressive of some feeling; *noise* is *sound* considered without reference to musical quality or as distinctly unmusical or discordant. Thus, in the most general sense *noise* and *sound* scarcely differ, and we say almost indifferently, "I heard a *sound*," or "I heard a *noise*." We speak of a fine, musical, or pleasing *sound*, but never thus of a *noise*. In music, *tone* may denote either a musical *sound* or the interval between two such *sounds*, but in the most careful usage the latter is now distinguished as the "interval," leaving *tone* to

stand only for the *sound*. *Note* in music strictly denotes the character representing a *sound*, but in loose popular usage it denotes the *sound* also, and becomes practically equivalent to *tone*. Aside from its musical use, *tone* is chiefly applied to that quality of the human voice by which feeling is expressed; as, he spoke in a cheery *tone*; the word is similarly applied to the voices of birds and other animals, and sometimes to inanimate objects. As used of a musical instrument, *tone* denotes the general quality of its sounds collectively considered.

SPEAK

SYNONYMS:

announce	converse	discourse	say
articulate	declaim	enunciate	talk
chat	declare	express	tell
chatter	deliver	pronounce	utter

To *utter* is to give forth as an audible sound, articulate or not. To *talk* is to *utter* a succession of connected words, ordinarily with the expectation of being listened to. To *speak* is to give articulate utterance even to a single word; the officer *speaks* the word of command, but does not *talk* it. To *speak* is also to *utter* words with the ordinary intonation, as distinguished from singing. To *chat* is ordinarily to *utter* in a familiar, conversational way; to *chatter* is to *talk* in an empty, ceaseless way like a magpie.

PREPOSITIONS:

Speak *to* (address) a person; speak *with* a person (converse with him); speak *of* or *about* a thing (make it the subject of remark); speak *on* or *upon* a subject; in parliamentary language, speak *to* the question.

SPEECH

SYNONYMS:

address	dissertation	oration	speaking
discourse	harangue	oratory	talk
disquisition	language	sermon	utterance

Speech is the general word for *utterance* of thought in *language*. A *speech* may be the delivering of one's sentiments in the simplest way; an *oration* is an elaborate and prepared *speech*; a *harangue* is a vehement appeal to passion, or a *speech* that has something disputatious and combative in it.

A *discourse* is a set *speech* on a definite subject, intended to convey instruction. Compare CONVERSATION; DICTION; LANGUAGE.

ANTONYMS:

hush silence speechlessness stillness taciturnity

SPONTANEOUS**SYNONYMS:**

automatic impulsive involuntary voluntary
free instinctive unbidden willing

That is *spontaneous* which is freely done, with no external compulsion and, in human actions, without special premeditation or distinct determination of the will; that is *voluntary* which is freely done with distinct act of will; that is *involuntary* which is independent of the will, and perhaps in opposition to it; a *willing* act is not only in accordance with will, but with desire. Thus *voluntary* and *involuntary*, which are antonyms of each other, are both partial synonyms of *spontaneous*. We speak of *spontaneous* generation, *spontaneous* combustion, *spontaneous* sympathy, an *involuntary* start, an *unbidden* tear, *voluntary* agreement, *willing* submission. A babe's smile in answer to that of its mother is *spontaneous*; the smile of a pouting child wheedled into good humor is *involuntary*. In physiology the action of the heart and lungs is called *involuntary*; the growth of the hair and nails is *spontaneous*; the action of swallowing is *voluntary* up to a certain point, beyond which it becomes *involuntary* or *automatic*. In the fullest sense of that which is not only without the will but distinctly in opposition to it, or compulsory, *involuntary* becomes an antonym, not only of *voluntary* but of *spontaneous*; as, *involuntary* servitude. A *spontaneous* outburst of applause is of necessity an act of volition, but so completely dependent on sympathetic impulse that it would seem frigid to call it *voluntary*, while to call it *involuntary* would imply some previous purpose or inclination not to applaud.

SPY**SYNONYMS:**

detective emissary scout

The *scout* and the *spy* are both employed to obtain informa-

tion of the numbers, movements, etc., of an enemy. The *scout* lurks on the outskirts of the hostile army with such concealment as the case admits of, but without disguise; a *spy* enters in disguise within the enemy's lines. A *scout*, if captured, has the rights of a prisoner of war; a *spy* is held to have forfeited all rights, and is liable, in case of capture, to capital punishment. An *emissary* is rather political than military; sent rather to secretly influence opponents than to bring information concerning them; so far as he does the latter, he is not only an *emissary*, but a *spy*.

STAIN

SYNONYMS:

blot	discolor	dishonor	soil	sully	tinge
color	disgrace	dye	spot	tarnish	tint

To *color* is to impart a color desired or undesired, temporary or permanent, or, in the intransitive use, to assume a color in any way; as, he *colored* with shame and vexation. To *dye* is to impart a color intentionally and with a view to permanence, and especially so as to pervade the substance or fiber of that to which it is applied. To *stain* is primarily to *discolor*, to impart a color undesired and perhaps unintended, and which may or may not be permanent. Thus, a character "*dyed* in the wool" is one that has received some early, permanent, and pervading influence; a character *stained* with crime or guilt is debased and perverted. *Stain* is, however, used of giving an intended and perhaps pleasing color to wood, glass, etc., by an application of coloring-matter which enters the substance a little below the surface, in distinction from painting, in which coloring-matter is spread upon the surface; *dyeing* is generally said of wool, yarn, cloth, or similar materials which are dipped into the *coloring* liquid. Figuratively, a standard or a garment may be *dyed* with blood in honorable warfare; an assassin's weapon is *stained* with the blood of his victim. To *tinge* is to *color* slightly, and may also be used of giving a slight flavor, or a slight admixture of one ingredient or quality with another that is more pronounced.

STATE

SYNONYMS:

affirm	aver	declare	predicate	set forth
allege	avouch	depose	pronounce	specify
assert	avow	express	propound	swear
asseverate	certify	inform	protest	tell
assure	claim	maintain	say	testify

To *state* (from L. *sto*, stand) is to *set forth* explicitly, formally, or particularly in speech or writing. *Assert* (from L. *ad*, to, and *sero*, bind) is strongly personal, signifying to *state* boldly and positively what the one making the statement has not attempted and may not attempt to prove. *Affirm* has less of egotism than *assert* (as seen in the word *self-assertion*), coming nearer to *aver*. It has more solemnity than *declare*, and more composure and dignity than *asseverate*, which is to *assert* excitedly. In legal usage, *affirm* has a general agreement with *depose* and *testify*; it differs from *swear* in not invoking the name of God. To *assure* is to *state* with such authority and confidence as the speaker feels ought to make the hearer sure. *Certify* is more formal, and applies rather to written documents or legal processes. *Assure*, *certify*, *inform*, apply to the person; *affirm*, etc., to the thing. *Assert* is combative; *assure* is conciliatory. I *assert* my right to cross the river; I *assure* my friend it is perfectly safe. To *aver* is to *state* positively what is within one's own knowledge or matter of deep conviction. One may *assert* himself, or *assert* his right to what he is willing to contend for; or he may *assert* in discussion what he is ready to maintain by argument or evidence. To *assert* without proof is always to lay oneself open to the suspicion of having no proof to offer, and seems to arrogate too much to one's personal authority, and hence in such cases both the verb *assert* and its noun *assertion* have an unfavorable sense; we say a mere *assertion*, a bare *assertion*, 'his unsupported *assertion*'; he *asserted* his innocence, has less force than he *affirmed* or *maintained* his innocence. *Affirm*, *state*, and *tell* have not the controversial sense of *assert*, but are simply declarative. To *vindicate* is to defend successfully what is assailed. Almost every criminal will *assert* his innocence; the honest man will seldom lack means to *vindicate* his integrity.

ANTONYMS:

contradict	controvert	disprove	gainsay	refute	retract
contravene	deny	dispute	oppose	repudiate	waive

STEEP**SYNONYMS:**

abrupt	high	precipitous	sharp	sheer
---------------	-------------	--------------------	--------------	--------------

High is used of simple elevation; *steep* is said only of an incline where the vertical measurement is sufficiently great in proportion to the horizontal to make it difficult of ascent. *Steep* is relative; an ascent of 100 feet to the mile on a railway is a *steep* grade; a rise of 500 feet to the mile makes a *steep* wagon-road; a roof is *steep* when it makes with the horizontal line an angle of more than 45°. A *high* mountain may be climbed by a winding road nowhere *steep*, while a little hill may be accessible only by a *steep* path. A *sharp* ascent or descent is one that makes a sudden, decided angle with the plane from which it starts; a *sheer* ascent or descent is perpendicular, or nearly so; *precipitous* applies to that which is of the nature of a precipice, and is used especially of a descent; *abrupt* is as if broken sharply off, and applies to either acclivity or declivity. Compare **HIGH**.

ANTONYMS:

easy	flat	gentle	gradual	horizontal	level	low	slight
------	------	--------	---------	------------	-------	-----	--------

STORM**SYNONYMS:**

agitation	disturbance	tempest
------------------	--------------------	----------------

A *storm* is properly a *disturbance* of the atmosphere, with or without rain, snow, hail, or thunder and lightning. Thus we have rain-storm, snow-storm, etc., and by extension, magnetic storm. A *tempest* is a *storm* of extreme violence, always attended with some precipitation, as of rain, from the atmosphere. In the moral and figurative use, *storm* and *tempest* are not closely discriminated, except that *tempest* commonly implies greater intensity. We speak of *agitation* of feeling, *disturbance* of mind, a *storm* of passion, a *tempest* of rage.

ANTONYMS:

calm	fair weather	hush	peace	serenity	stillness	tranquillity
------	--------------	------	-------	----------	-----------	--------------

STORY

SYNONYMS:

account
anecdote
incident

legend
myth
narration

narrative
novel
recital

record
relation
tale

A *story* is the telling of some series of connected incidents or events, whether real or fictitious, in prose or verse, orally or in writing; or the series of incidents or events thus related may be termed a *story*. In children's talk, a *story* is a common euphemism for a falsehood. *Tale* is nearly synonymous with *story*, but is somewhat archaic; it is used for an imaginative, legendary, or fictitious *recital*, especially if of ancient date; as, a fairy *tale*; also, for an idle or malicious report; as, do not tell *tales*; "where there is no *tale*-bearer, the strife ceaseth." *Prov.* xxvi, 20. An *anecdote* tells briefly some *incident*, assumed to be fact. If it passes close limits of brevity, it ceases to be an *anecdote*, and becomes a *narrative* or *narration*. A traditional or mythical *story* of ancient times is a *legend*. A history is often somewhat poetically called a *story*; as, the *story* of the American civil war. Compare ALLEGORY; FICTION; HISTORY.

ANTONYMS:

annals

biography

chronicle

history

memoir

STUPIDITY

SYNONYMS:

apathy
dulness

insensibility
obtuseness

slowness
sluggishness

stupefaction
stupor

Stupidity is sometimes loosely used for temporary *dulness* or partial *stupor*, but chiefly for innate and chronic *dulness* and *sluggishness* of mental action, *obtuseness* of apprehension, etc. *Apathy* may be temporary, and be dispelled by appeal to the feelings or by the presentation of an adequate motive, but *stupidity* is inveterate and commonly incurable. Compare APATHY; IDIOCY; STUPOR.

ANTONYMS:

acuteness
alertness
animation

brilliance
cleverness
intelligence

keenness
quickness
readiness

sagacity
sense
sensibility

STUPOR

SYNONYMS:

apathy
asphyxia
coma
fainting

insensibility
lethargy
stupefaction
swoon

swooning
syncope
torpor
unconsciousness

Stupor is a condition of the body in which the action of the senses and faculties is suspended or greatly dulled—weakness or loss of sensibility. The *apathy* of disease is a mental affection, a state of morbid indifference; *lethargy* is a morbid tendency to heavy and continuous sleep, from which the patient may perhaps be momentarily aroused. *Coma* is a deep, abnormal sleep, from which the patient can not be aroused, or is aroused only with difficulty, a state of profound *insensibility*, perhaps with full pulse and deep stertorous breathing, and is due to brain-oppression. *Syncope* or *swooning* is a sudden loss of sensation and of power of motion, with suspension of pulse and of respiration, and is due to failure of heart-action, as from sudden nervous shock or intense mental emotion. *Insensibility* is a general term denoting loss of feeling from any cause, as from cold, intoxication, or injury. *Stupor* is especially profound and confirmed *insensibility*, properly comatose. *Asphyxia* is a special form of *syncope* resulting from partial or total suspension of respiration, as in strangulation, drowning, or inhalation of noxious gases.

SUBJECTIVE

SYNONYM:

objective

Subjective and *objective* are synonyms in but one point of view, being for the most part, strictly antonyms. *Subjective* signifies relating to the subject of mental states, that is, to the person who experiences them; *objective* signifies relating to the object of mental states, that is, to something outside the perceiving mind; in brief phrase it may be said that *subjective* relates to something within the mind, *objective* to something without. A mountain, as a mass of a certain size, contour, color, etc., is an *objective* fact; the impression our mind receives, the mental picture it forms of the mountain, is *subjective*. But this *subjective* impression may become itself the object of thought (called "subject-object"), as when we com-

pare our mental picture of the mountain with our idea of a plain or river. The direct experiences of the soul, as joy, grief, hope, fear, are purely *subjective*; the outward causes of these experiences, as prosperity, bereavement, disappointment, are *objective*. That which has independent existence or authority apart from our experience or thought is said to have *objective* existence or authority; thus we speak of the *objective* authority of the moral law. Different individuals may receive different *subjective* impressions from the same *objective* fact, that which to one is a cause of hope being to another a cause of fear, etc. The style of a writer is called *objective* when it derives its materials mainly from or reaches out toward external objects; it is called *subjective* when it derives its materials mainly from or constantly tends to revert to the personal experience of the author. Compare INHERENT.

SUBSIDY

SYNONYMS:

aid	bounty	indemnity	reward	support
allowance	gift	pension	subvention	tribute
bonus	grant	premium		

A *subsidy* is pecuniary aid directly granted by government to an individual or commercial enterprise, or money furnished by one nation to another to aid it in carrying on war against a common enemy. A nation grants a *subsidy* to an ally, pays a *tribute* to a conqueror. An *indemnity* is in the nature of things limited and temporary, while a *tribute* might be exacted indefinitely. A nation may also grant a *subsidy* to its own citizens as a means of promoting the public welfare; as, a *subsidy* to a steamship company. The somewhat rare term *subvention* is especially applied to a *grant* of governmental aid to a literary or artistic enterprise. Governmental aid to a commercial or industrial enterprise other than a transportation company is more frequently called a *bounty* than a *subsidy*; as, the sugar *bounty*. The word *bounty* may be applied to almost any regular or stipulated *allowance* by a government to a citizen or citizens; as, a *bounty* for enlisting in the army; a *bounty* for killing wolves. A *bounty* is offered for something to be done; a *pension* is granted for something that has been done.

SUBVERT

SYNONYMS:

destroy
extinguish

overthrow
overturn

ruin
supersede

supplant
suppress

To *subvert* is to overthrow from or as from the very foundation; utterly destroy; bring to ruin. The word is now generally figurative, as of moral or political ruin. To *supersede* implies the putting of something that is wisely or unwisely preferred in the place of that which is removed; to *subvert* does not imply substitution. To *supplant* is more often personal, signifying to take the place of another, usually by underhanded means; one is *superseded* by authority, *supplanted* by a rival. Compare ABOLISH.

ANTONYMS:

conserve keep perpetuate preserve sustain uphold

SUCCEED

SYNONYMS:

achieve **attain** **flourish** **prevail** **prosper** **thrive** **win**

A person *succeeds* when he accomplishes what he attempts, or *attains* a desired object or result; an enterprise or undertaking *succeeds* that has a prosperous result. To *win* implies that some one loses, but one may *succeed* where no one fails. A solitary swimmer *succeeds* in reaching the shore; if we say he *wins* the shore we contrast him with himself as a possible loser. Many students may *succeed* in study; a few *win* the special prizes for which all compete. Compare FOLLOW.

ANTONYMS:

be defeated come short fail fall short lose miss miscarry

SUGGESTION

SYNONYMS:

hint **implication** **innuendo** **insinuation** **intimation**

A *suggestion* (from L. *sub*, under, and *gero*, bring) brings something before the mind less directly than by formal or explicit statement, as by a partial statement, an incidental allusion, an illustration, a question, or the like. *Suggestion* is often used of an unobtrusive statement of one's views or wishes to another, leaving consideration and any consequent

action entirely to his judgment, and is hence, in many cases, the most respectful way in which one can convey his views to a superior or a stranger. A *suggestion* may be given unintentionally, and even unconsciously, as when we say an author has "a *suggestive* style." An *intimation* is a *suggestion* in brief utterance, or sometimes by significant act, gesture, or token, of one's meaning or wishes; in the latter case it is often the act of a superior; as, God in his providence gives us *intimations* of his will. A *hint* is still more limited in expression, and is always covert, but frequently with good intent; as, to give one a *hint* of danger or of opportunity. *Insinuation* and *innuendo* are used in the bad sense; an *insinuation* is a covert or partly veiled injurious utterance, sometimes to the very person attacked; an *innuendo* is commonly secret as well as sly, as if pointing one out by a significant nod (from L. *in*, in, to, and *nuo*, nod).

SUPERNATURAL

SYNONYMS:

miraculous

preternatural

superhuman

The *supernatural* (*super*, above) is above or superior to the recognized powers of nature; the *preternatural* (*preter*, beyond) is aside from or beyond the recognized results or operations of natural law, often in the sense of inauspicious; as, a *preternatural* gloom. *Miraculous* is more emphatic and specific than *supernatural*, as referring to the direct personal intervention of divine power. Some hold that a miracle, as the raising of the dead, is a direct suspension and even violation of natural laws by the fiat of the Creator, and hence is, in the strictest sense, *supernatural*; others hold that the miracle is simply the calling forth of a power residing in the laws of nature, but not within their ordinary operation, and dependent on a distinct act of God, so that the *miraculous* might be termed "extranatural," rather than *supernatural*. All that is beyond human power is *superhuman*; as, prophecy gives evidence of *superhuman* knowledge; the word is sometimes applied to remarkable manifestations of human power, surpassing all that is ordinary.

ANTONYMS:

common commonplace everyday natural ordinary usual

SUPPORT

SYNONYMS:

bear	cherish	keep	maintain	sustain
carry	hold up	keep up	prop	uphold

Support and *sustain* alike signify to *hold up* or *keep up*, to prevent from falling or sinking; but *sustain* has a special sense of continuous exertion or of great strength continuously exerted, as when we speak of *sustained* endeavor or a *sustained* note; a flower is *supported* by the stem or a temple-roof by arches; the foundations of a great building *sustain* an enormous pressure; to *sustain* life implies a greater exigency and need than to *support* life; to say one is *sustained* under affliction is to say more both of the severity of the trial and the completeness of the *upholding* than if we say he is *supported*. To *bear* is the most general word, denoting all *holding up* or *keeping up* of any object, whether in rest or motion; in the derived senses it refers to something that is a tax upon strength or endurance; as, to *bear* a strain; to *bear* pain or grief. To *maintain* is to *keep* in a state or condition, especially in an excellent and desirable condition; as, to *maintain* health or reputation; to *maintain* one's position; to *maintain* a cause or proposition is to hold it against opposition or difficulty. To *support* may be partial, to *maintain* is complete; *maintain* is a word of more dignity than *support*; a man *supports* his family; a state *maintains* an army or navy. To *prop* is always partial, signifying to add *support* to something that is insecure. Compare ABET; ENDURE; KEEP.

ANTONYMS:

abandon	break down	demolish	destroy	let go	throw down
betray	cast down	desert	drop	overthrow	wreck

PREPOSITIONS:

The roof is supported *by*, *on*, or *upon* pillars; the family was supported *on* or *upon* a pittance, or *by* charity.

SUPPOSE

SYNONYMS:

conjecture	deem	guess	imagine	surmise	think
------------	------	-------	---------	---------	-------

To *suppose* is temporarily to assume a thing as true, either with the expectation of finding it so or for the purpose of ascertaining what would follow if it were so. To *suppose* is also to

think a thing to be true while aware or conceding that the belief does not rest upon any sure ground, and may not accord with fact; or yet again, to *suppose* is to imply as true or involved as a necessary inference; as, design *supposes* the existence of a designer. To *conjecture* is to put together the nearest available materials for a provisional opinion, always with some expectation of finding the facts to be as *conjectured*. To *imagine* is to form a mental image of something as existing, though its actual existence may be unknown, or even impossible. To *think*, in this application, is to hold as the result of thought what is admitted not to be matter of exact or certain knowledge; as, I do not know, but I *think* this to be the fact; a more conclusive statement than would be made by the use of *conjecture* or *suppose*. Compare DOUBT; HYPOTHESIS.

ANTONYMS:

ascertain be sure conclude discover know prove

SURRENDER**SYNONYMS:**

abandon	cede	give over	relinquish
alienate	give	give up	sacrifice
capitulate	give oneself up	let go	yield

To *surrender* is to *give up* upon compulsion, as to an enemy in war, hence to *give up* to any person, passion, influence, or power. To *yield* is to give place or give way under pressure, and hence under compulsion. *Yield* implies more softness or concession than *surrender*; the most determined men may *surrender* to overwhelming force; when one *yields*, his spirit is at least somewhat subdued. A monarch or a state *cedes* territory, perhaps for a consideration; *surrenders* an army, a navy, or a fortified place to a conqueror; a military commander *abandons* an untenable position or unavailable stores. We *sacrifice* something precious through error, friendship, or duty, *yield* to convincing reasons, a stronger will, winsome persuasion, or superior force. Compare ABANDON.

SYNONYMOUS**SYNONYMS:**

alike	equivalent	like	similar
correspondent	identical	same	synonymic
corresponding	interchangeable		

Synonymous (from Gr. *syn*, together, and *onyma*, name)

strictly signifies being *interchangeable* names for the same thing, or being one of two or more *interchangeable* names for the same thing; to say that two words are *synonymous* is strictly to say they are *alike*, *equivalent*, *identical*, or the *same* in meaning; but the use of *synonymous* in this strict sense is somewhat rare, and rather with reference to statements than to words.

To say that we are morally developed is *synonymous* with saying that we have reaped what some one has suffered for us.

H. W. BEECHER *Royal Truths* p. 294. [T. & F. 1866.]

In the strictest sense, *synonymous* words scarcely exist; rarely, if ever, are any two words in any language *equivalent* or *identical* in meaning; where a difference in meaning can not easily be shown, a difference in usage commonly exists, so that the words are not *interchangeable*. By *synonymous* words (or *synonyms*) we usually understand words that coincide or nearly coincide in some part of their meaning, and may hence within certain limits be used interchangeably, while outside of those limits they may differ very greatly in meaning and use. It is the office of a work on synonyms to point out these correspondences and differences, that language may have the flexibility that comes from freedom of selection within the common limits, with the perspicuity and precision that result from exact choice of the fittest words to express each shade of meaning outside of the common limits. To consider *synonymous* words *identical* is fatal to accuracy; to forget that they are *similar*, to some extent *equivalent*, and sometimes *interchangeable*, is destructive of freedom and variety.

SYSTEM

SYNONYMS:

manner method mode order regularity rule

Order in this connection denotes the fact or result of proper arrangement according to the due relation or sequence of the matters arranged; as, these papers are in *order*; in alphabetical *order*. *Method* denotes a process, a general or established way of doing or proceeding in anything; *rule*, an authoritative requirement or an established course of things; *system*, not merely a law of action or procedure, but a comprehensive plan in which all the parts are related to each other and to the

whole; as, a *system* of theology; a railroad *system*; the digestive *system*; *manner* refers to the external qualities of actions, and to those often as settled and characteristic; we speak of a *system* of taxation, a *method* of collecting taxes, the *rules* by which assessments are made; or we say, as a *rule* the payments are heaviest at a certain time of year; a just tax may be made odious by the *manner* of its collection. *Regularity* applies to the even disposition of objects or uniform recurrence of acts in a series. There may be *regularity* without *order*, as in the recurrence of paroxysms of disease or insanity; there may be *order* without *regularity*, as in the arrangement of furniture in a room, where the objects are placed at varying distances. *Order* commonly implies the design of an intelligent agent or the appearance or suggestion of such design; *regularity* applies to an actual uniform disposition or recurrence with no suggestion of purpose, and as applied to human affairs is less intelligent and more mechanical than *order*. The most perfect *order* is often secured with least *regularity*, as in a fine essay or oration. The same may be said of *system*. There is a *regularity* of dividing a treatise into topics, paragraphs, and sentences that is destructive of true rhetorical *system*. Compare HABIT; HYPOTHESIS.

ANTONYMS:

chaos derangement disarrangement disorder irregularity
confusion

TACITURN**SYNONYMS:**

close	mute	reticent	speechless
dumb	reserved	silent	uncommunicative

Dumb, *mute*, *silent*, and *speechless* refer to fact or state; *taciturn* refers to habit and disposition. The talkative person may be stricken *dumb* with surprise or terror; the obstinate may remain *mute*; one may be *silent* through preoccupation of mind or of set purpose; but the *taciturn* person is averse to the utterance of thought or feeling and to communication with others, either from natural disposition or for the occasion. One who is *silent* does not speak at all; one who is *taciturn* speaks when compelled, but in a grudging way that repels further approach. *Reserved* suggests more of method and intention than *taciturn*, applying often to some special time or

topic; one who is communicative regarding all else may be *reserved* about his business. *Reserved* is thus closely equivalent to *uncommunicative*, but is a somewhat stronger word, often suggesting pride or haughtiness, as when we say one is *reserved* toward inferiors. Compare PRIDE.

ANTONYMS:

communicative free garrulous loquacious talkative unreserved

TASTEFUL**SYNONYMS:**

artistic	delicate	esthetic	fastidious	nice
chaste	delicious	esthetical	fine	tasty
dainty	elegant	exquisite		

Elegant (from L. *elegans*, select) refers to that assemblage of qualities which makes anything choice to persons of culture and refinement; it refers to the lighter, finer elements of beauty in form or motion, especially denoting that which exhibits faultless taste and perfection of finish. That which is *elegant* is made so not merely by nature, but by art and culture; a woodland dell may be beautiful or picturesque, but would not ordinarily be termed *elegant*. *Tasteful* refers to that in which the element of taste is more prominent, standing, as it were, more by itself, while in *elegant* it is blended as part of the whole. *Tasty* is an inferior word, used colloquially in a similar sense. *Chaste* (primarily *pure*), denotes in literature and art that which is true to the higher and finer feelings and free from all excess or meretricious ornament. *Dainty* and *delicate* refer to the lighter and finer elements of taste and beauty, *dainty* tending in personal use to an excessive scrupulousness which is more fully expressed by *fastidious*. *Nice* and *delicate* both refer to exact adaptation to some standard; the bar of a balance can be said to be nicely or delicately poised; as regards matters of taste and beauty, *delicate* is a higher and more discriminating word than *nice*, and is always used in a favorable sense; a *delicate* distinction is one worth observing; a *nice* distinction may be so, or may be overstrained and unduly subtle; *fine* in such use, is closely similar to *delicate* and *nice*, but (though capable of an unfavorable sense) has commonly a suggestion of positive excellence or admirableness; a *fine* touch does something; *fine* perceptions are to some purpose; *delicate* is capable of the single unfavorable sense of frail or

fragile; as, a *delicate* constitution. *Esthetic* or *esthetical* refers to beauty or the appreciation of the beautiful, especially from the philosophic point of view. *Exquisite* denotes the utmost perfection of the *elegant* in minute details; we speak of an *elegant* garment, an *exquisite* lace. *Exquisite* is also applied to intense keenness of any feeling; as, *exquisite* delight; *exquisite* pain. See BEAUTIFUL; DELICIOUS; FINE.

ANTONYMS:

clumsy	displeasing	grotesque	inartistic	rough
coarse	distasteful	harsh	inharmonious	rude
deformed	fulsome	hideous	meretricious	rugged
disgusting	gaudy	horrid	offensive	tawdry

TEACH**SYNONYMS:**

discipline	give instruction	inform	nurture
drill	give lessons	initiate	school
educate	inculcate	instil	train
enlighten	indoctrinate	instruct	tutor

To *teach* is simply to communicate knowledge; to *instruct* (originally, to build in or into, put in order) is to impart knowledge with special method and completeness; *instruct* has also an authoritative sense nearly equivalent to command. To *educate* is to draw out or develop harmoniously the mental powers, and, in the fullest sense, the moral powers as well. To *train* is to direct to a certain result powers already existing. *Train* is used in preference to *educate* when the reference is to the inferior animals or to the physical powers of man; as, to *train* a horse; to *train* the hand or eye. To *discipline* is to bring into habitual and complete subjection to authority; *discipline* is a severe word, and is often used as a euphemism for *punish*; to be thoroughly effective in war, soldiers must be *disciplined* as well as *trained*. To *nurture* is to furnish the care and sustenance necessary for physical, mental, and moral growth; *nurture* is a more tender and homelike word than *educate*. Compare EDUCATION.

TEMERITY**SYNONYMS:**

audacity	heedlessness	presumption
foolhardiness	over-confidence	rashness
hardihood	precipitancy	recklessness
hastiness	precipitation	venturesomeness

Rashness applies to the actual rushing into danger without

counting the cost; *temerity* denotes the needless exposure of oneself to peril which is or might be clearly seen to be such. *Rashness* is used chiefly of bodily acts, *temerity* often of mental or social matters; there may be a noble *rashness*, but *temerity* is always used in a bad sense. We say it is amazing that one should have had the *temerity* to make a statement which could be readily proved a falsehood, or to make an unworthy proposal to one sure to resent it; in such use *temerity* is often closely allied to *hardhood*, *audacity*, or *presumption*. *Venturesomeness* dallies on the edge of danger and experiments with it; *foolhardiness* rushes in for want of sense, *heedlessness* for want of attention, *rashness* for want of reflection, *recklessness* from disregard of consequences. *Audacity*, in the sense here considered, denotes a dashing and somewhat reckless courage, in defiance of conventionalities, or of other men's opinions, or of what would be deemed probable consequences; as, the *audacity* of a successful financier. Compare EFFRONTERY.

ANTONYMS:

care
caution

circumspection
cowardice

hesitation
timidity

wariness

TERM

SYNONYMS:

article
condition

denomination
expression

member
name

phrase
word

Term in its figurative uses always retains something of its literal sense of a boundary or limit. The *articles* of a contract or other instrument are simply the portions into which it is divided for convenience; the *terms* are the essential statements on which its validity depends—as it were, the landmarks of its meaning or power; a *condition* is a contingent *term* which may become fixed upon the happening of some contemplated event. In logic a *term* is one of the essential members of a proposition, the boundary of statement in some one direction. Thus, in general use, *term* is more restricted than *word*, *expression*, or *phrase*; a *term* is a *word* that limits meaning to a fixed point of statement or to a special class of subjects, as when we speak of the definition of *terms*, that is of the *key-words* in any discussion; or we say, that is a legal or scientific *term*. Compare BOUNDARY; DICTION.

TERSE

SYNONYMS:

brief	concise	neat	short
compact	condensed	pithy	succinct
compendious	laconic	sententious	

Anything *short* or *brief* is of relatively small extent. That which is *concise* (from L. *con-*, with, together, and *cædo*, cut) is trimmed down, and that which is *condensed* (from L. *con-*, with, together, and *densus*, thick) is, as it were, pressed together, so as to include as much as possible within a small space. That which is *compendious* (from L. *com-*, together, and *pendo*, weigh) gathers the substance of a matter into a few words, weighty and effective. The *succinct* (from L. *succinctus*, from *sub-*, under, and *cingo*, gird; girded from below) has an alert effectiveness as if girded for action. The *summary* is compacted to the utmost, often to the point of abruptness; as, we speak of a *summary* statement or a *summary* dismissal. That which is *terse* (from L. *tersus*, from *tergo*, rub off) has an elegant and finished completeness within the smallest possible compass, as if rubbed or polished down to the utmost. A *sententious* style is one abounding in sentences that are singly striking or memorable, apart from the context; the word may be used invidiously of that which is pretentiously oracular. A *pithy* utterance gives the gist of a matter effectively, whether in rude or elegant style.

ANTONYMS:

diffuse lengthy long prolix tedious verbose wordy

TESTIMONY

SYNONYMS:

affidavit	attestation	deposition	proof
affirmation	certification	evidence	witness

Testimony, in legal as well as in common use, signifies the statements of witnesses. *Deposition* and *affidavit* denote *testimony* reduced to writing; the *deposition* differs from the *affidavit* in that the latter is voluntary and without cross-examination, while the former is made under interrogatories and subject to cross-examination. *Evidence* is a broader term, including the *testimony* of witnesses and all facts of every kind that tend to prove a thing true; we have the *testimony* of a traveler that a fugitive passed this way; his footprints in the

sand are additional *evidence* of the fact. Compare DEMONSTRATION; OATH.

THEREFORE

SYNONYMS:

accordingly because	consequently hence	then thence	whence wherefore
-------------------------------	------------------------------	-----------------------	----------------------------

Therefore, signifying for that (or this) reason, is the most precise and formal word for expressing the direct conclusion of a chain of reasoning; *then* carries a similar but slighter sense of inference, which it gives incidentally rather than formally; as, "All men are mortal; Cæsar is a man; *therefore* Cæsar is mortal;" or, "The contract is awarded; *then* there is no more to be said." *Consequently* denotes a direct result, but more frequently of a practical than a theoretic kind; as, "Important matters demand my attention; *consequently* I shall not sail to-day." *Consequently* is rarely used in the formal conclusions of logic or mathematics, but marks rather the freer and looser style of rhetorical argument. *Accordingly* denotes correspondence, which may or may not be consequence; it is often used in narration; as, "The soldiers were eager and confident; *accordingly* they sprang forward at the word of command." *Thence* is a word of more sweeping inference than *therefore*, applying not merely to a single set of premises, but often to all that has gone before, including the reasonable inferences that have not been formally stated. *Wherefore* is the correlative of *therefore*, and *whence* of *hence* or *thence*, appending the inference or conclusion to the previous statement without a break. Compare synonyms for BECAUSE.

THRONG

SYNONYMS:

concourse crowd host jam mass multitude press

A *crowd* is a company of persons filling to excess the space they occupy and pressing inconveniently upon one another; the total number in a *crowd* may be great or small. *Throng* is a word of vastness and dignity, always implying that the persons are numerous as well as pressed or pressing closely together; there may be a dense *crowd* in a small room, but there can not be a *throng*. *Host* and *multitude* both imply

vast numbers, but a *multitude* may be diffused over a great space so as to be nowhere a *crowd*; *host* is a military term, and properly denotes an assembly too orderly for crowding. *Concourse* signifies a spontaneous gathering of many persons moved by a common impulse, and has a suggestion of stateliness not found in the word *crowd*, while suggesting less massing and pressure than is indicated by the word *throng*.

TIME

SYNONYMS:

age	eon	period	succession
date	epoch	season	term
duration	era	sequence	while

Sequence and *succession* apply to events viewed as following one another; *time* and *duration* denote something conceived of as enduring while events take place and acts are done. According to the necessary conditions of human thought, events are contained in *time* as objects are in space, *time* existing before the event, measuring it as it passes, and still existing when the event is past. *Duration* and *succession* are more general words than *time*; we can speak of infinite or eternal *duration* or *succession*, but *time* is commonly contrasted with eternity. *Time* is measured or measurable *duration*.

TIP

SYNONYMS:

cant	dip	incline	list	slope
careen	heel over	lean	slant	tilt

To *tilt* or *tip* is to throw out of a horizontal position by raising one side or end or lowering the other; the words are closely similar, but *tilt* suggests more of fluctuation or instability. *Slant* and *slope* are said of things somewhat fixed or permanent in a position out of the horizontal or perpendicular; the roof *slants*, the hill *slopes*. *Incline* is a more formal word for *tip*, and also for *slant* or *slope*. To *cant* is to set slantingly; in many cases *tip* and *cant* might be interchanged, but *tip* is more temporary, often momentary; one *tips* a pail so that the water flows over the edge; a mechanic *cants* a table by making or setting one side higher than the other. A vessel *careens* in the wind; *lists*, usually, from shifting of cargo, from

water in the hold, etc. *Careening* is always toward one side or the other; *listing* may be forward or astern as well. To *heel over* is the same as to *careen*, and must be distinguished from "keel over," which is to capsize.

TIRE

SYNONYMS:

exhaust fag fatigue harass jade wear out weary

To *tire* is to reduce strength in any degree by exertion; one may be *tired* just enough to make rest pleasant, or even unconsciously *tired*, becoming aware of the fact only when he ceases the exertion; or, on the other hand, he may be, according to the common phrase, "too *tired* to stir"; but for this extreme condition the stronger words are commonly used. One who is *fatigued* suffers from a conscious and painful lack of strength as the result of some overtaking; an invalid may be *fatigued* with very slight exertion; when one is *wearied*, the painful lack of strength is the result of long-continued demand or strain; one is *exhausted* when the strain has been so severe and continuous as utterly to consume the strength, so that further exertion is for the time impossible. One is *fagged* by drudgery; he is *jaded* by incessant repetition of the same act until it becomes increasingly difficult or well-nigh impossible; as, a horse is *jaded* by a long and unbroken journey.

ANTONYMS:

invigorate
recreate

refresh
relax

relieve
repose

rest
restore

TOOL

SYNONYMS:

**apparatus
appliance**

**implement
instrument**

**machine
mechanism**

**utensil
weapon**

A *tool* is something that is both contrived and used for extending the force of an intelligent agent to something that is to be operated upon. Those things by which pacific and industrial operations are performed are alone properly called *tools*, those designed for warlike purposes being designated *weapons*. An *instrument* is anything through which power is applied and a result produced; in general usage, the word is of considerably wider meaning than *tool*; as, a piano is a musical

instrument. *Instrument* is the word usually applied to *tools* used in scientific pursuits; as, we speak of a surgeon's or an optician's *instruments*. An *implement* is a mechanical agency considered with reference to some specific purpose to which it is adapted; as, an agricultural *implement*; *implements* of war. *Implement* is a less technical and artificial term than *tool*. The paw of a tiger might be termed a terrible *implement*, but not a *tool*. A *utensil* is that which may be used for some special purpose; the word is especially applied to articles used for domestic or agricultural purposes; as, kitchen *utensils*; farming *utensils*. An *appliance* is that which is or may be applied to the accomplishment of a result, either independently or as subordinate to something more extensive or important; every mechanical *tool* is an *appliance*, but not every *appliance* is a *tool*; the traces of a harness are *appliances* for traction, but they are not *tools*. *Mechanism* is a word of wide meaning, denoting any combination of mechanical devices for united action. A *machine* in the most general sense is any mechanical *instrument* for the conversion of motion; in this sense a lever is a *machine*; but in more commonly accepted usage a *machine* is distinguished from a *tool* by its complexity, and by the combination and coordination of powers and movements for the production of a result. A chisel by itself is a *tool*; when it is set so as to be operated by a crank and pitman, the entire *mechanism* is called a *machine*; as, a mortising-machine. An *apparatus* may be a *machine*, but the word is commonly used for a collection of distinct articles to be used in connection or combination for a certain purpose—a mechanical equipment; as, the *apparatus* of a gymnasium; especially, for a collection of *appliances* for some scientific purpose; as, a chemical or surgical *apparatus*; an *apparatus* may include many *tools*, *instruments*, or *implements*. *Implement* is for the most part and *utensil* is altogether restricted to the literal sense; *instrument*, *machine*, and *tool* have figurative use, *instrument* being used largely in a good, *tool* always in a bad sense; *machine* inclines to the unfavorable sense, as implying that human agents are made mechanically subservient to some controlling will; as, an *instrument* of Providence; the *tool* of a tyrant; a political *machine*.

TOPIC

SYNONYMS:

division head	issue matter	motion point	proposition question	subject theme
--------------------------	-------------------------	-------------------------	---------------------------------	--------------------------

A *topic* (from Gr. *topos*, place) is a *head* of discourse. Since a *topic* for discussion is often stated in the form of a *question*, *question* has come to be extensively used to denote a debatable *topic*, especially of a practical nature—an *issue*; as, the labor *question*; the temperance *question*. In deliberative assemblies a *proposition* presented or moved for acceptance is called a *motion*, and such a *motion* or other matter for consideration is known as the *question*, since it is or may be stated in interrogative form to be answered by each member with a vote of “aye” or “no”; a member is required to speak to the *question*; the chairman puts the *question*. In speaking or writing the general *subject* or *theme* may be termed the *topic*, though it is more usual to apply the latter term to the subordinate *divisions*, *points*, or *heads* of discourse; as, to enlarge on this *topic* would carry me too far from my *subject*; a pleasant drive will suggest many *topics* for conversation.

TRACE

SYNONYMS:

footmark footprint footstep	impression mark memorial	remains remnant sign	token track	trail vestige
--	---	-------------------------------------	------------------------	--------------------------

A *memorial* is that which is intended or fitted to bring to remembrance something that has passed away; it may be vast and stately. On the other hand, a slight *token* of regard may be a cherished *memorial* of a friend; either a concrete object or an observance may be a *memorial*. A *vestige* is always slight compared with that whose existence it recalls; as, scattered mounds containing implements, weapons, etc., are *vestiges* of a former civilization. A *vestige* is always a part of that which has passed away; a *trace* may be merely the *mark* made by something that has been present or passed by, and that is still existing, or some slight evidence of its presence or of the effect it has produced; as, *traces* of game were observed by the hunter. Compare CHARACTERISTIC.

TRANSACTION

SYNONYMS:

accomplish
actcarry on
conductdo
negotiateperform
treat

There are many acts that one may *do*, *accomplish*, or *perform* unaided; what he *transacts* is by means of or in association with others; one may *do* a duty, *perform* a vow, *accomplish* a task, but he *transacts* business, since that always involves the agency of others. To *negotiate* and to *treat* are likewise collective acts, but both these words lay stress upon deliberation, with adjustment of mutual claims and interests; *transact*, while it may depend upon previous deliberation, states execution only. Notes, bills of exchange, loans, and treaties are said to be *negotiated*, the word so used covering not merely the preliminary consideration, but the final settlement. *Negotiate* has more reference to execution than *treat*; nations may *treat* of peace without result, but when a treaty is *negotiated*, peace is secured; the citizens of the two nations are then free to *transact* business with one another. Compare *do*.

TRANSACTION

SYNONYMS:

act action affair business deed doing proceeding

One's *acts* or *deeds* may be exclusively his own; his *transactions* involve the agency or participation of others. A *transaction* is something completed; a *proceeding* is or is viewed as something in progress; but since *transaction* is often used to include the steps leading to the conclusion, while *proceedings* may result in *action*, the dividing line between the two words becomes sometimes quite faint, though *transaction* often emphasizes the fact of something done, or brought to a conclusion. Both *transactions* and *proceedings* are used of the records of a deliberative body, especially when published; strictly used, the two are distinguished; as, the *Philosophical Transactions* of the Royal Society of London give in full the papers read; the *Proceedings* of the American Philological Association give in full the *business* done, with mere abstracts of or extracts from the papers read. Compare *ACT*; *BUSINESS*.

TRANSCENDENTAL

SYNONYMS:

a priori intuitive original primordial transcendent

Intuitive truths are those which are in the mind independently of all experience, not being derived from experience nor limited by it, as that the whole is greater than a part, or that things which are equal to the same thing are equal to one another. All *intuitive* truths or beliefs are *transcendental*. But *transcendental* is a wider term than *intuitive*, including all within the limits of thought that is not derived from experience, as the ideas of space and time. "Being is *transcendental* As being can not be included under any genus, but transcends them all, so the properties or affections of being have also been called *transcendental*." K.-F. *Vocab. Philos.*, p. 530. "*Transcendent* he [Kant] employed to denote what is wholly beyond experience, being neither given as an a posteriori nor a *a priori* element of cognition—what therefore transcends every category of thought." K.-F. *Vocab. Philos.* p. 531. *Transcendental* has been applied in the language of the Emersonian school to the soul's supposed *intuitive* knowledge of things divine and human, so far as they are capable of being known to man. Compare MYSTERIOUS.

TRANSIENT

SYNONYMS:

brief	fleeting	fugitive	short
ephemeral	fitting	momentary	temporary
evanescent	flying	passing	transitory

Transient and *transitory* are both derived from the same original source (from L. *trans*, over, and *eo*, go), denoting that which quickly passes or is passing away, but there is between them a fine shade of difference. A thing is *transient* which in fact is not lasting; a thing is *transitory* which by its very nature must soon pass away; a thing is *temporary* (from L. *tempus*, time) which is intended to last or be made use of but a little while; as, a *transient* joy; this *transitory* life; a *temporary* chairman. *Ephemeral* (from Gr. *epi*, on, and *hemera*, day) literally lasting but for a day, often marks more strongly than *transient* exceeding brevity of duration; it agrees with *transitory* in denoting that its object is destined to pass

away, but is stronger, as denoting not only its certain but its speedy extinction; thus that which is *ephemeral* is looked upon as at once slight and perishable, and the word carries often a suggestion of contempt; man's life is *transitory*, a butterfly's existence is *ephemeral*; with no solid qualities or worthy achievements a pretender may sometimes gain an *ephemeral* popularity. That which is *fleeting* is viewed as in the act of passing swiftly by, and that which is *fugitive* (from L. *fugio*, flee) as eluding attempts to detain it; that which is *evanescent* (from L. *evanesco*, from *e*, out, and *vanus*, empty, vain) as in the act of vanishing even while we gaze, as the hues of the sunset.

ANTONYMS:

abiding	eternal	immortal	lasting	perpetual	undying
enduring	everlasting	imperishable	permanent	persistent	unfading

UNION**SYNONYMS:**

coalition	conjunction	juncture	unification
combination	cooperation	oneness	unity
concert	junction		

Unity is *oneness*, the state of being one, especially of that which never has been divided or of that which can not be conceived of as resolved into parts; as, the *unity* of God or the *unity* of the human soul. *Union* is a bringing together of things that have been distinct, so that they combine or coalesce to form a new whole, or the state or condition of things thus brought together; in a *union* the separate individuality of the things united is never lost sight of; we speak of the *union* of the parts of a fractured bone or of the *union* of hearts in marriage. But *unity* can be said of that which is manifestly or even conspicuously made up of parts, when a single purpose or ideal is so subserved by all that their possible separateness is lost sight of; as, we speak of the *unity* of the human body, or of the *unity* of the church. Compare ALLIANCE; ASSOCIATION; ATTACHMENT; HARMONY; MARRIAGE.

ANTONYMS:

analysis	disconnection	disunion	schism
contrariety	disjunction	division	separation
decomposition	dissociation	divorce	severance

USUAL

SYNONYMS:

accustomed	every-day	general	ordinary	public
common	familiar	habitual	prevailing	regular
customary	frequent	normal	prevalent	wonted

Usual (from L. *usus*, use, habit, wont) signifies such as regularly or often recurs in the ordinary course of events, or is habitually repeated in the life of the same person. *Ordinary* (from L. *ordo*, order) signifies according to an established order, hence of *every-day* occurrence. In strictness, *common* and *general* apply to the greater number of individuals in a class; but both words are in good use as applying to the greater number of instances in a series, so that it is possible to speak of one person's *common* practise or *general* custom, though *ordinary* or *usual* would in such case be preferable. Compare GENERAL; NORMAL.

ANTONYMS:

exceptional	infrequent	rare	strange	unparalleled
extraordinary	out-of-the-way	singular	uncommon	unusual

UTILITY

SYNONYMS:

advantage	expediency	serviceableness
avail	profit	use
benefit	service	usefulness

Utility (from L. *utilis*, useful) signifies primarily the quality of being useful, but is somewhat more abstract and philosophical than *usefulness* or *use*, and is often employed to denote adaptation to produce a valuable result, while *usefulness* denotes the actual production of such result. We contrast beauty and *utility*. We say of an invention, its *utility* is questionable, or, on the other hand, its *usefulness* has been proved by ample trial, or I have found it of *use*; still, *utility* and *usefulness* are frequently interchanged. *Expediency* (from L. *ex*, out, and *pes*, foot; literally, the getting the foot out) refers primarily to escape from or avoidance of some difficulty or trouble; either *expediency* or *utility* may be used to signify *profit* or *advantage* considered apart from right as the ground of moral obligation, or of actions that have a moral character, *expediency* denoting immediate *advantage* on a contracted view, and especially with reference to avoiding danger, difficulty, or loss,

while *utility* may be so broadened as to cover all existence through all time, as in the utilitarian theory of morals. *Policy* is often used in a kindred sense, more positive than *expediency* but narrower than *utility*, as in the proverb, "Honesty is the best *policy*." Compare PROFIT.

ANTONYMS:

disadvantage	impolicy	inutility	uselessness
folly	inadequacy	unprofitableness	worthlessness
futility	inexpediency		

VACANT**SYNONYMS:**

blank	leisure	unfilled	untenanted	void
empty	unemployed	unoccupied	vacuous	waste

That is *empty* which contains nothing; that is *vacant* which is without that which has filled or might be expected to fill it; *vacant* has extensive reference to rights or possibilities of occupancy. A *vacant* room may not be *empty*, and an *empty* house may not be *vacant*. *Vacant*, as derived from the Latin, is applied to things of some dignity; *empty*, from the Saxon, is preferred in speaking of slight, common, or homely matters, though it may be applied with special force to the highest; we speak of *empty* space, a *vacant* lot, an *empty* dish, an *empty* sleeve, a *vacant* mind, an *empty* heart, an *empty* boast, a *vacant* office, a *vacant* or *leisure* hour. *Void* and *devoid* are rarely used in the literal sense, but for the most part confined to abstract relations, *devoid* being followed by *of*, and having with that addition the effect of a prepositional phrase; as, the article is *devoid of* sense; the contract is *void* for want of consideration. *Waste*, in this connection, applies to that which is made so by devastation or ruin, or gives an impression of desolation, especially as combined with vastness, probably from association of the words *waste* and *vast*; *waste* is applied also to uncultivated or unproductive land, if of considerable extent; we speak of a *waste* track or region, but not of a *waste* city lot. *Vacuous* refers to the condition of being *empty* or *vacant*, regarded as continuous or characteristic.

ANTONYMS:

brimful	busy	filled	inhabited	overflowing
brimmed	crammed	full	jammed	packed
brimming	crowded	gorged	occupied	replete

VAIN

SYNONYMS:

abortive	futile	trifling	unserviceable
baseless	idle	trivial	unsubstantial
bootless	inconstant	unavailing	useless
deceitful	ineffectual	unimportant	valueless
delusive	nugatory	unprofitable	vapid
empty	null	unreal	visionary
frivolous	profitless	unsatisfying	worthless
fruitless	shadowy		

Vain (from L. *vanus*, empty) keeps the etymological idea through all changes of meaning; a *vain* endeavor is *empty* of result, or of adequate power to produce a result, a *vain* pretension is *empty* or destitute of support, a *vain* person has a conceit that is *empty* or destitute of adequate cause or reason. That which is *bootless*, *fruitless*, or *profitless* fails to accomplish any valuable result; that which is *abortive*, *ineffectual*, or *unavailing* fails to accomplish a result that it was, or was supposed to be, adapted to accomplish. That which is *useless*, *futile*, or *vain* is inherently incapable of accomplishing a specified result. *Useless*, in the widest sense, signifies not of use for any valuable purpose, and is thus closely similar to *valueless* and *worthless*. *Fruitless* is more final than *ineffectual*, as applying to the sum or harvest of endeavor. That which is *useless* lacks actual fitness for a purpose; that which is *vain* lacks imaginable fitness. Compare VACANT; OSTENTATION; PRIDE.

ANTONYMS:

adequate	effective	powerful	solid	useful
advantageous	efficient	profitable	sound	valid
beneficial	expedient	real	substantia	valuable
competent	potent	serviceable	sufficient	worthy

Compare synonyms for UTILITY.

VENAL

SYNONYMS:

hireling	mercenary	purchasable	salable
----------	-----------	-------------	---------

Venal (from L. *venalis*, from *venum*, sale) signifies ready to sell one's influence, vote, or efforts for money or other consideration; *mercenary* (from L. *mercenarius*, from *merces*, pay, reward) signifies influenced chiefly or only by desire for gain or reward; thus, etymologically, the *mercenary* can be hired, while the *venal* are openly or actually for sale; *hireling* (from

AS. *hyrling*, from *hyr*) signifies serving for hire or pay, or having the spirit or character of one who works or of that which is done directly for hire or pay. *Mercenary* has especial application to character or disposition; as, a *mercenary* spirit; *mercenary* motives—i. e., a spirit or motives to which money is the chief consideration or the moving principle. The *hireling*, the *mercenary*, and the *venal* are alike in making principle, conscience, and honor of less account than gold or sordid considerations; but the *mercenary* and *venal* may be simply open to the bargain and sale which the *hireling* has already consummated; a clergyman may be *mercenary* in making place and pay of undue importance while not *venal* enough to forsake his own communion for another for any reward that could be offered him. The *mercenary* may retain much show of independence; *hireling* service sacrifices self-respect as well as principle; a public officer who makes his office tributary to private speculation in which he is interested is *mercenary*; if he receives a stipulated recompense for administering his office at the behest of some leader, faction, corporation, or the like, he is both *hireling* and *venal*; if he gives essential advantages for pay, without subjecting himself to any direct domination, his course is *venal*, but not *hireling*. Compare PAY; VENIAL.

ANTONYMS:

disinterested	honest	incorruptible	public-spirited
generous	honorable	patriotic	unpurchasable

VENERATE**SYNONYMS:**

adore honor respect revere reverence

In the highest sense, to *revere* or *reverence* is to hold in mingled love and honor with something of sacred fear, as for that which while lovely is sublimely exalted and brings upon us by contrast a sense of our unworthiness or inferiority; to *revere* is a wholly spiritual act; to *reverence* is often, though not necessarily, to give outward expression to the reverential feeling; we *revere* or *reverence* the divine majesty. *Revere* is a stronger word than *reverence* or *venerate*. To *venerate* is to hold in exalted honor without fear, and is applied to objects less removed from ourselves than those we *revere*, being said especially of aged persons, of places or objects having sacred

associations, and of abstractions; we *venerate* an aged pastor, the dust of heroes or martyrs, lofty virtue or self-sacrifice, or some great cause, as that of civil or religious liberty; we do not *venerate* God, but *revere* or *reverence* him. We *adore* with a humble yet free outflowing of soul. Compare VENERATION.

ANTONYMS:

contemn despise	detest disdain	dishonor disregard	scoff at scorn	slight spurn
--------------------	-------------------	-----------------------	-------------------	-----------------

VENERATION

SYNONYMS:

adoration	awe	dread	reverence
------------------	------------	--------------	------------------

Awe is inspired by that in which there is sublimity or majesty so overwhelming as to awaken a feeling akin to fear; in *awe*, considered by itself, there is no element of esteem or affection, though the sense of vastness, power, or grandeur in the object is always present. *Dread* is a shrinking apprehension or expectation of possible harm awakened by any one of many objects or causes, from that which is overwhelmingly vast and mighty to that which is productive of momentary physical pain; in its higher uses *dread* approaches the meaning of *awe*, but with more of chilliness and cowering, and without that subjection of soul to the grandeur and worthiness of the object that is involved in *awe*. *Awe* is preoccupied with the object that inspires it; *dread* with apprehension of personal consequences. *Reverence* and *veneration* are less overwhelming than *awe* or *dread*, and suggest something of esteem, affection, and personal nearness. We may feel *awe* of that which we can not *reverence*, as a grandly terrible ocean storm; *awe* of the divine presence is more distant and less trustful than *reverence*. *Veneration* is commonly applied to things which are not subjects of *awe*. *Adoration*, in its full sense, is loftier than *veneration*, less restrained and awed than *reverence*, and with more of the spirit of direct, active, and joyful worship. Compare ESTEEM; VENERATE.

ANTONYMS:

contempt	disdain	dishonor	disregard	scorn
----------	---------	----------	-----------	-------

VENIAL

SYNONYMS:

excusable pardonable slight trivial

Venial (from L. *venia*, pardon) signifies capable of being pardoned, and, in common use, capable of being readily pardoned, easily overlooked. Aside from its technical ecclesiastical use, *venial* is always understood as marking some fault comparatively *slight* or *trivial*. A *venial* offense is one readily overlooked; a *pardonable* offense requires more serious consideration, but on deliberation is found to be susceptible of pardon. *Excusable* is scarcely applied to offenses, but to matters open to doubt or criticism rather than direct censure; so used, it often falls little short of justifiable; as, I think, under those circumstances, his action was *excusable*. Protestants do not recognize the distinction between *venial* and mortal sins. *Venial* must not be confounded with the very different word VENAL. Compare VENAL.

ANTONYMS:

inexcusable inexpiable mortal unpardonable unjustifiable

VERACITY

SYNONYMS:

candor honesty reality truthfulness
frankness ingenuousness truth verity

Truth is primarily and *verity* is always a quality of thought or speech, especially of speech, as in exact conformity to fact. *Veracity* is properly a quality of a person, the habit of speaking and the disposition to speak the *truth*; a habitual liar may on some occasions speak the *truth*, but that does not constitute him a man of *veracity*; on the other hand, a person of undoubted *veracity* may state (through ignorance or misinformation) what is not the *truth*. *Truthfulness* is a quality that may inhere either in a person or in his statements or beliefs. *Candor*, *frankness*, *honesty*, and *ingenuousness* are allied with *veracity*, and *verity* with *truth*, while *truthfulness* may accord with either. *Truth* in a secondary sense may be applied to intellectual action or moral character, in the former case becoming a close synonym of *veracity*; as, I know him to be a man of *truth*.

ANTONYMS:

deceit	duplicity	falsehood	fiction	lie
deception	error	falseness	guile	mendacity
delusion	fabrication	falsity	imposture	untruth

Compare synonyms for DECEPTION.

VERBAL

SYNONYMS:

literal

oral

vocal

Oral (from L. *os*, the mouth) signifies uttered through the mouth or (in common phrase) by word of mouth; *verbal* (from L. *verbum*, a word) signifies of, pertaining to, or connected with words, especially with words as distinguished from the ideas they convey; *vocal* (from L. *vox*, the voice) signifies of or pertaining to the voice, uttered or modulated by the voice, and especially uttered with or sounding with full, resonant voice; *literal* (from L. *littera*, a letter) signifies consisting of or expressed by letters, or according to the letter, in the broader sense of the exact meaning or requirement of the words used; what is called "the letter of the law" is its *literal* meaning without going behind what is expressed by the letters on the page. Thus *oral* applies to that which is given by spoken words in distinction from that which is written or printed; as, *oral* tradition; an *oral* examination. By this rule we should in strictness speak of an *oral* contract or an *oral* message, but *verbal* contract and *verbal* message, as indicating that which is by spoken rather than by written words, have become so fixed in the language that they can probably never be changed; this usage is also in line with other idioms of the language; as "I give you my *word*," "a true man's *word* is as good as his bond," "by *word* of mouth," etc. A *verbal* translation may be *oral* or written, so that it is word for word; a *literal* translation follows the construction and idiom of the original as well as the words; a *literal* translation is more than one that is merely *verbal*; both *verbal* and *literal* are opposed to *free*. In the same sense, of attending to words only, we speak of *verbal* criticism, a *verbal* change. *Vocal* has primary reference to the human voice; as, *vocal* sounds, *vocal* music; *vocal* may be applied within certain limits to inarticulate sounds given forth by other animals than man; as, the woods were *vocal* with the songs of birds; *oral* is never so applied, but is limited to articulate utterance regarded as having a definite meaning; as, an *oral* statement.

VICTORY

SYNONYMS:

achievement	ascendency	mastery	supremacy
advantage	conquest	success	triumph

Victory is the state resulting from the overcoming of an opponent or opponents in any contest, or from the overcoming of difficulties, obstacles, evils, etc., considered as opponents or enemies. In the latter sense any hard-won *achievement*, *advantage*, or *success* may be termed a *victory*. In *conquest* and *mastery* there is implied a permanence of state that is not implied in *victory*. *Triumph*, originally denoting the public rejoicing in honor of a *victory*, has come to signify also a peculiarly exultant, complete, and glorious *victory*. Compare CONQUER.

ANTONYMS:

defeat	disappointment	failure	miscarriage	retreat
destruction	disaster	frustration	overthrow	rout

VIGILANT

SYNONYMS:

alert	cautious	on the lookout	wary
awake	circumspect	sleepless	watchful
careful	on the alert	wakeful	wide-awake

Vigilant implies more sustained activity and more intelligent volition than *alert*; one may be habitually *alert* by reason of native quickness of perception and thought, or one may be momentarily *alert* under some excitement or expectancy; one who is *vigilant* is so with thoughtful purpose. One is *vigilant* against danger or harm; he may be *alert* or *watchful* for good as well as against evil; he is *wary* in view of suspected stratagem, trickery, or treachery. A person may be *wakeful* because of some merely physical excitement or excitability, as through insomnia; yet he may be utterly careless and negligent in his wakefulness, the reverse of *watchful*; a person who is truly *watchful* must keep himself *wakeful* while on watch, in which case *wakeful* has something of mental quality. *Watchful*, from the Saxon, and *vigilant*, from the Latin, are almost exact equivalents; but *vigilant* has somewhat more of sharp definiteness and somewhat more suggestion of volition; one may be habitually *watchful*; one is *vigilant* of set purpose and for direct cause, as in the presence of an enemy. Compare ALERT.

ANTONYMS:

careless
drowsy
dull

heedless
inattentive
incautious

inconsiderate
neglectful
negligent

oblivious
thoughtless
unwary

VIRTUE

SYNONYMS:

chastity
duty
excellence
faithfulness
goodness

honesty
honor
integrity
justice
morality

probity
purity
rectitude
righteousness
rightness

truth
uprightness
virtuousness
worth
worthiness

Virtue (from L. *virtus*, primarily manly strength or courage, from *vir*, a man, a hero) is, in its full sense, *goodness* that is victorious through trial, perhaps through temptation and conflict. *Goodness*, the being morally good, may be much less than *virtue*, as lacking the strength that comes from trial and conflict, or it may be very much more than *virtue*, as rising sublimely above the possibility of temptation and conflict—the infantile as contrasted with the divine *goodness*. *Virtue* is distinctively human; we do not predicate it of God. *Morality* is conformity to the moral law in action, whether in matters concerning ourselves or others, whether with or without right principle. *Honesty* and *probity* are used especially of one's relations to his fellow men, *probity* being to *honesty* much what *virtue* in some respects is to *goodness*; *probity* is *honesty* tried and proved, especially in those things that are beyond the reach of legal requirement; above the commercial sense, *honesty* may be applied to the highest truthfulness of the soul to and with itself and its Maker. *Integrity*, in the full sense, is moral wholeness without a flaw; when used, as it often is, of contracts and dealings, it has reference to inherent character and principle, and denotes much more than superficial or conventional *honesty*. *Honor* is a lofty *honesty* that scorns fraud or wrong as base and unworthy of itself. *Honor* rises far above thought of the motto that "*honesty* is the best policy." *Purity* is freedom from all admixture, especially of that which debases; it is *chastity* both of heart and life, but of the life because from the heart. *Duty*, the rendering of what is due to any person or in any relation, is, in this connection, the fulfilment of moral obligation. *Rectitude* and *righteousness* denote conformity to the standard of right, whether in heart or act;

righteousness is used especially in the religious sense. *Uprightness* refers especially to conduct. *Virtuousness* is a quality of the soul or of action; in the latter sense it is the essence of virtuous action. Compare INNOCENT; JUSTICE; RELIGION.

ANTONYMS:

evil	vice	viciousness	wickedness	wrong
------	------	-------------	------------	-------

Compare synonyms for SIN.

WANDER**SYNONYMS:**

deviate	err	range	stray
digress	go astray	roam	swerve
diverge	ramble	rove	veer

To *wander* (from A.S. *windan*, wind) is to move in an indefinite or indeterminate way which may or may not be a departure from a prescribed way; to *deviate* (from L. *de*, from, and *via*, a way) is to turn from a prescribed or right way, physically, mentally, or morally, usually in an unfavorable sense; to *diverge* (from L. *di*, apart, and *vergo*, incline, tend) is to turn from a course previously followed or that something else follows, and has no unfavorable implication; to *digress* (from L. *di*, apart, aside, and *gradior*, step) is used only with reference to speaking or writing; to *err* is used of intellectual or moral action, and of the moral with primary reference to the intellectual, an error being viewed as in some degree due to ignorance. *Range*, *roam*, and *rove* imply the traversing of considerable, often of vast, distances of land or sea; *range* commonly implies a purpose; as, cattle *range* for food; a hunting-dog *ranges* a field for game. *Roam* and *rove* are often purposeless, and always without definite aim. To *swerve* or *veer* is to turn suddenly from a prescribed or previous course, and often but momentarily; *veer* is more capricious and repetitious; the horse *swerves* at the flash of a sword; the wind *veers*; the ship *veers* with the wind. To *stray* is to go in a somewhat purposeless way aside from the regular path or usual limits or abode, usually with unfavorable implication; cattle *stray* from their pastures; an author *strays* from his subject; one *strays* from the path of virtue. *Stray* is in most uses a lighter word than *wander*. *Ramble*, in its literal use, is always a word of pleasant suggestion, but in its figurative use always somewhat contemptuous; as, *rambling* talk.

WAY

SYNONYMS:

alley	driveway	passage	roadway
avenue	highroad	passageway	route
bridle-path	highway	path	street
channel	lane	pathway	thoroughfare
course	pass	road	track

Wherever there is room for one object to pass another there is a *way*. A *road* (originally a *rideway*) is a prepared *way* for traveling with horses or vehicles, always the latter unless the contrary is expressly stated; a *way* suitable to be traversed only by foot-passengers or by animals is called a *path*, *bridle-path*, or *track*; as, the *roads* in that country are mere *bridle-paths*. A *road* may be private; a *highway* or *highroad* is public, *highway* being a specific name for a *road* legally set apart for the use of the public forever; a *highway* may be over water as well as over land. A *route* is a line of travel, and may be over many *roads*. A *street* is in some center of habitation, as a city, town, or village; when it passes between rows of dwellings the country *road* becomes the village *street*. An *avenue* is a long, broad, and imposing or principal *street*. *Track* is a word of wide signification; we speak of a *goat-track* on a mountain-side, a *railroad-track*, a *race-track*, the *track* of a comet; on a traveled *road* the line worn by regular passing of hoofs and wheels in either direction is called the *track*. A *passage* is between any two objects or lines of enclosure, a *pass* commonly between mountains. A *driveway* is within enclosed grounds, as of a private residence. A *channel* is a *waterway*. A *thoroughfare* is a *way* through; a *road* or *street* temporarily or permanently closed at any point ceases for such time to be a *thoroughfare*. Compare AIR; DIRECTION.

WEALTH

SYNONYMS:

abundance	fortune	means	possessions
affluence	goods	money	property
assets	lucre	opulence	prosperity
competence	luxuriance	pelf	riches
competency	luxury	plenty	substance

Abundance denotes a copious or overflowing supply or quantity of anything, beyond need, but short of excess.

There the richest was poor, and the poorest lived in *abundance*.

LONGFELLOW *Evangeline*, pt. 3, st. 1.

Affluence (from L. *ad*, to, and *fluo*, flow) denotes *abundance* as freely flowing in; *opulence* (from L. *opes*, riches) denotes *abundance* in simple existence or possession; *affluence* is thus a more vivid term than *opulence*; an abundant income, as from a life-estate, might enable one to live in *affluence*; only substantial possessions could fill the meaning of *opulence*. Both *affluence* and *opulence* have reference to condition, state, manifestation, or use, rather than to mere possession; both imply abundant resources accompanied by generous expenditure; we should not speak of a miser, however wealthy, as enjoying *affluence* or *opulence*, though we might refer to his hidden *wealth* or his useless *riches*. *Profusion* (from L. *pro*, forth, and *fundo*, pour) is *abundance* that pours forth or overflows, applying especially to extravagant or unchecked expenditure; *affluence* is a nobler word than *profusion*; *profusion* may characterize the mere spendthrift; *affluence*, the man of ample resources. *Luxury* denotes extravagant and hence enervating and enfeebling indulgence in the pleasures of *wealth*; one may live an active, vigorous, and helpful life in *affluence* or *opulence*, but not in *luxury*; *luxury* breaks down the stamina of a class or a nation. *Luxuriance* denotes abundant growth, as of vegetation, and is a synonym of *affluence*, *profusion*, *wealth*, etc., only in figurative use; it is not, in modern use, a synonym of *luxury*. *Wealth* (from AS. *wela*, well-being) denotes "a store or accumulation of those material things that men desire to possess, and that have exchangeable value;" *riches* (from F. *richesse*) was originally a singular noun, used as a near equivalent of *wealth*; but *riches* has more of the relative and comparative meaning of the adjective "rich;" the "rich" man of a western frontier town would commonly not be considered a man of *wealth* in New York or London; *wealth*, true to its derivation, is a broader, higher, and more substantial word than *riches*; we speak of the public *wealth*, the national *wealth*, rather than of the public or national *riches*; *riches* carries more of the idea of personal possession; *wealth* is distributive; a prosperous farming community may have great *wealth*, while few of its members possess *riches*, and none are in a condition of *affluence* or *opulence*. *Property* is something of value that is, or

may be, in personal possession of an owner; it may be of various kinds; as, personal *property* or real *property*; it may be of great or little value; as, a small or a large *property*, an unproductive *property*, etc.; but when used without qualification the word denotes *possessions* of considerable value; as, a man of *property*. *Substance* has similar use, but is less definite, vaguely denoting one's entire *possessions*, with the suggestion that these are considerable; as, a man of *substance*.

If a man would give all the *substance* of his house for love, it would utterly be condemned. Cant. viii, 7.

The word is less used in this sense now than formerly. *Money* in this connection, has more of the directly mercantile or mercenary suggestion than *riches* or *wealth*, and does not approach the meaning of *affluence* or *opulence*; the phrase, a man of *money*, carries less indication of membership in a substantial and respected class than the phrase, a man of *wealth*; *money* may be all that the former man has. Financially, the public *wealth* denotes all the *possessions* of a community of whatever kind, including the means of production; the public *money* is in the treasury or on deposit, and is a very small part of the public *wealth*. *Means* denotes *money* or *property* considered as a procuring medium—available resources; when used without limitation, the phrase a man of *means* signifies one of considerable *possessions*, but various adjectives may modify the meaning of the word *means*; we may speak of small or limited *means*, ample or unlimited *means*; the owner of vast *property* may be of limited *means*, if he can neither utilize nor realize on his *property*. A *fortune* is a considerable amount of *wealth* in the *possession* of a single owner, or of joint owners; as, to make or inherit a *fortune*; this, too, admits of degrees; as, a small, large, or ample *fortune*. A *competence* or *competency* is sufficient *property* for comfortable livelihood—and no more. *Plenty* denotes *abundance* of material supplies or resources, with especial reference to direct use or enjoyment; as, a land of *plenty*; *plenty* is more materialistic than *abundance*. (Compare *excess*; *plentiful*.) *Lucre* (from L. *lucrum*, gain) and *pelf* (from OF. *pêlfre*, spoil, plunder) are opprobrious terms, of inferior grade, *lucre* often denoting that the *money* or *wealth* is ill-gotten.

His [EH's] sons . . . turned aside after *lucre*, and took bribes.

1 Sam. viii, 3.

Teaching things which they ought not, for filthy *lucre's* sake.

Tit. i, 11.

The secondary or figurative uses of these words closely follow the primary or literal; we may speak of *affluence* of thought or language; *opulence* of learning; *luxuriance* of style; *profusion* of epithets or imagery; *wealth* may figuratively denote an *abundance* of almost anything that is viewed as a valuable and desirable *possession*.

O, precious hours! O, golden prime!

And *affluence* of love and time!

LONGFELLOW *Old Clock on the Stairs*, st. 6.

The loose golden *opulence* of her hair.

TAYLOR *Deukalion* iii, vi, 129.

He has that *opulence* which furnishes, at every turn, the precise weapon he needs.

EMERSON *Representative Men—Plato*.

Again the feast, the speech, the glee,

The shade of passing thought, the *wealth*

Of words and wit

TENNYSON *In Memoriam, Conclusion*.

ANTONYMS:

beggary	mendicancy	penury	squalor
destitution	misery	poverty	straitened circumstances
impecuniosity	need	privation	want
indigence	pauperism	scarcity	wretchedness
lack			

WISDOM

SYNONYMS:

attainment	insight	prudence
depth	judgment	reason
discernment	judiciousness	reasonableness
discretion	knowledge	sagacity
enlightenment	learning	sense
erudition	prescience	skill
foresight	profundity	understanding
information		

Enlightenment, erudition, information, knowledge, learning, and skill are acquired, as by study or practise. *Insight, judgment, profundity or depth, reason, sagacity, sense, and understanding* are native qualities of mind, though capable of increase by cultivation. The other qualities are on the borderline. *Wisdom* has been defined as "the right use of *knowledge*," or "the use of the most important means for attaining the best ends," *wisdom* thus presupposing *knowledge* for its very existence and exercise. *Wisdom* is mental power acting upon

the materials that fullest *knowledge* gives in the most effective way. There may be what is termed "practical *wisdom*" that looks only to material results; but, in its full sense, *wisdom* implies the highest and noblest exercise of all the faculties of the moral nature as well as of the intellect. *Prudence* is a lower and more negative form of the same virtue, respecting outward and practical matters, and largely with a view of avoiding loss and injury; *wisdom* transcends *prudence*, so that while the part of *prudence* is ordinarily also that of *wisdom*, cases arise, as in the exigencies of business or of war, when the highest *wisdom* is in the disregard of the maxims of *prudence*. *Judgment*, the power of forming decisions, especially correct decisions, is broader and more positive than *prudence*, leading one to do, as readily as to refrain from doing; but *judgment* is more limited in range and less exalted in character than *wisdom*; to say of one that he displayed good *judgment* is much less than to say that he manifested *wisdom*. *Skull* is far inferior to *wisdom*, consisting largely in the practical application of acquired *knowledge*, power, and habitual processes, or in the ingenious contrivance that makes such application possible. In the making of something perfectly useless there may be great *skull*, but no *wisdom*. Compare ACUMEN; ASTUTE; KNOWLEDGE; MIND; PRUDENCE; SAGACIOUS; SKILFUL.

ANTONYMS:

absurdity	folly	imbecility	miscalculation	senselessness
error	foolishness	imprudence	misjudgment	silliness
fatuity	idiocy	indiscretion	nonsense	stupidity

Compare synonyms for ABSURD; IDIOCY.

WIT

SYNONYMS:

banter	fun	joke	waggery
burlesque	humor	playfulness	waggishness
drollery	jest	pleasantry	witticism
facetiousness	jocularity	railery	

Wit is the quick perception of unusual or commonly unperceived analogies or relations between things apparently unrelated, and has been said to depend upon a union of surprise and pleasure; it depends certainly on the production of a diverting, entertaining, or merrymaking surprise. The analogies with which *wit* plays are often superficial or artificial; *humor*

deals with real analogies of an amusing or entertaining kind, or with traits of character that are seen to have a comical side as soon as brought to view. *Wit* is keen, sudden, brief, and sometimes severe; *humor* is deep, thoughtful, sustained, and always kindly. *Pleasantry* is lighter and less vivid than *wit*. *Fun* denotes the merry results produced by *wit* and *humor*, or by any fortuitous occasion of mirth, and is pronounced and often hilarious.

ANTONYMS:

dulness	seriousness	solemnity	stupidity
gravity	sobriety	stolidity	

WORK**SYNONYMS:**

achievement	doing	labor	product
action	drudgery	occupation	production
business	employment	performance	toil
deed	exertion		

Work is the generic term for any continuous application of energy toward an end; *work* may be hard or easy. *Labor* is hard and wearying *work*; *toil* is straining and exhausting *work*. *Work* is also used for any result of working, physical or mental, and has special senses, as in mechanics, which *labor* and *toil* do not share. *Drudgery* is plodding, irksome, and often menial *work*. Compare **ACT**; **BUSINESS**.

ANTONYMS:

ease idleness leisure recreation relaxation repose rest vacation

YET**SYNONYMS:**

besides further hitherto now still thus far

Yet and *still* have many closely related senses, and, with verbs of past time, are often interchangeable; we may say "while he was *yet* a child," or "while he was *still* a child." *Yet*, like *still*, often applies to past action or state extending to and including the present time, especially when joined with *as*; we can say "he is feeble *as yet*," or "he is *still* feeble." with scarcely appreciable difference of meaning, except that the former statement implies somewhat more of expectation than the latter. *Yet* with a negative applies to completed ac-

tion, often replacing a positive statement with *still*; "he is not gone *yet*" is nearly the same as "he is here *still*." *Yet* has a reference to the future which *still* does not share; "we may be successful *yet*" implies that success may begin at some future time; "we may be successful *still*" implies that we may continue to enjoy in the future such success as we are winning now.

YOUTHFUL

SYNONYMS:

adolescent	callow	childlike	immature	puerile
boyish	childish	girlish	juvenile	young

Boyish, *childish*, and *girlish* are used in a good sense of those to whom they properly belong, but in a bad sense of those from whom more maturity is to be expected; *childish* eagerness or glee is pleasing in a child, but unbecoming in a man; *puerile* in modern use is distinctly contemptuous. *Juvenile* and *youthful* are commonly used in a favorable and kindly sense in their application to those still *young*; *youthful* in the sense of having the characteristics of youth, hence fresh, vigorous, light-hearted, buoyant, may have a favorable import as applied to any age, as when we say the old man still retains his *youthful* ardor, vigor, or hopefulness; *juvenile* in such use would belittle the statement. *Young* is distinctively applied to those in the early stage of life or not arrived at maturity. Compare NEW.

ANTONYMS:

Compare synonyms for OLD.

PART II

PART II

QUESTIONS AND EXAMPLES

ABANDON (page 3)

QUESTIONS

1. To what objects or classes of objects does *abandon* apply? *abdicate? cede? quit? resign? surrender?* 2 Is *abandon* used in the favorable or unfavorable sense? *desert* favorable or unfavorable? *forsake?* 3. What does *abandon* commonly denote of previous relationship? *forsake?*

EXAMPLES

The soldiers ——— his standard in such numbers that the commander found it necessary to ——— the enterprise

France was compelled to ——— Alsace and Lorraine to Germany

In the height of his power Charles V. ——— the throne.

Finding resistance vain, the defenders agreed to ——— the fortress

To the surprise of his friends, Senator Conkling suddenly ——— his office.

At the stroke of the bell, the men instantly ——— work.

ABASE (page 4)

QUESTIONS

1. How does *abase* differ from *debase*? *humble* from *humiliate*? *degrade* from *disgrace*?

EXAMPLES

To provide funds, the king resolved to ——— the coinage.

He came from the scene of his disgrace, haughty and defiant, ——— but not ———.

The officer who had ——— himself by cowardice was ——— to the ranks.

Only the base in spirit will ——— themselves before wealth, rank, and power.

The messenger was so ——— that no heed was paid to his message.

SUGGESTIONS TO THE TEACHER

The following exercises have been prepared expressly and solely to accompany the preceding text in which the distinctions of synonyms have been carefully pointed out. It is not expected, intended, or desired that the questions should be answered or the blanks in the examples supplied off-hand. In such study nothing can be worse than guess-work. Hence, leading questions have been avoided, and the order of synonyms given in Part I. has frequently been departed from or reversed in Part II.

To secure the study of Part I. before coming into class, pupils should not be allowed to open it during recitation, unless on rare occasions to settle doubtful or disputed points. The very best method will be found to be to have the examples included in the lesson, with any others that may be added, copied on the blackboard before recitation, and no books brought into class.

The *teacher* should make a thorough study of the subject, not only mastering what is given in Part I. but going beyond the necessarily brief statements there given, and consulting the ultimate authorities—the best dictionaries and the works of the best speakers and writers. For the latter purpose a good cyclopedia of quotations, like the Hoyt, will be found very helpful. The teacher should so study out the subject as to be distinctly in advance of the class and able to speak authoritatively. Such independent study will be found intensely interesting, and can be made delightful and even fascinating to any intelligent class.

In answer to questions calling for definitive statement, the teacher should insist upon the very words of the text, unless the pupil can give in his own words what is manifestly as good. This will often be found not easy to do. Definition by synonym should be absolutely forbidden.

Reasonable questions should be encouraged, but the class should not be allowed to become a debating society. The meaning of English words is not a matter of conjecture, and all disputed points should be promptly referred to the dictionary—usually to be looked up after the recitation, and considered, if need be, at the next recitation. The majority of them will not need to be referred to again, as the difficulties will simply represent an inferior usage which the dictionary will brush aside. One great advantage of synonym study is to exterminate colloquialisms.

The class should be encouraged to bring quotations from first-class authors with blanks to be filled, such quotations being held authoritative, though not infallible; also quotations from the best newspapers, periodicals, speeches, etc., with words underlined for criticism, such quotations being held open to revision upon consultation of authorities. The change of usage, whereby that may be correct to-day which would not have been so at an earlier period, should be carefully noted, but always upon the authority of an approved dictionary.

The examples have been in great part selected from the best literature, and all others carefully prepared for this work. Hence, an appropriate word to fill each blank can always be found by careful study of the corresponding group of synonyms. In a few instances, either of two words would appropriately fill a blank and yield a good sense. In such case, either should be accepted as correct, but the resulting difference of meaning should be clearly pointed out.

ABASH (page 5)

QUESTIONS

1. What has the effect to make one *abashed*? 2. How does *confuse* differ from *abash*? 3. What do we mean when we say that a person is *mortified*? 4. Give an instance of the use of *mortified* where *abashed* could not be substituted. Why could not the words be interchanged? 5. Can one be *daunted* who is not *abashed*? 6. Is *embarrass* or *mortify* the stronger word? Give instances.

EXAMPLES

The peasant stood — in the royal presence.

The numerous questions — the witness

The speaker was — for a moment, but quickly recovered himself.

At the revelation of such depravity, I was utterly —.

When sensible of his error, the visitor was deeply —.

ABBREVIATION (page 6)

QUESTIONS

1. Is an *abbreviation* always a *contraction*? 2. Is a *contraction* always an *abbreviation*? Give instances 3 Can we have an *abbreviation* of a book, paragraph, or sentence? What can be *abbreviated*? and what *abridged*?

EXAMPLES

The treatise was already so brief that it did not admit of —.

The — Dr. is used both for Doctor and Debtor.

F. R. S. is an — of the title "Fellow of the Royal Society."

ABET (page 6)

QUESTIONS

1. *Abet*, *incite*, *instigate*; which of these words are used in a good and which in a bad sense? 2. How does *abet* differ from *incite* and *instigate* as to the time of the action? 3. Which of the three words apply to persons and which to actions? Give instances of the use of *abet*; *instigate*; *incite*.

EXAMPLES

To further his own schemes, he — the viceroy to rebel against the king.

To — a crime may be worse than to originate it, as arguing less excitement and more calculation and cowardice.

The prosecution was evidently malicious, — by envy and revenge.

And you that do — him in this kind

Cherish rebellion, and are rebels all.

ABHOR (page 8)

QUESTIONS

1. Which is the stronger word, *abhor* or *despise*? 2. What does *abhor* denote? 3. How does Archbishop Trench illustrate the difference between *abhor* and *shun*? 4. What does *detest* express? 5. What does *loathe* imply? Is it physical or moral in its application? 6. Give illustrations of the appropriate uses of the above words.

EXAMPLES

He had sunk to such degradation as to be utterly ——— by all good men.

Such weakness can only be ———.

Talebearers and backbiters are everywhere ———.

——— that which is evil, cleave to that which is good.

ABIDE (page 9)

QUESTIONS

1. What limit of time is expressed by *abide*? by *lodge*? by *live*, *dwell*, *reside*? 2. What is the meaning of *sojourn*? 3. Should we say one is *stopping* or *staying* at a hotel? and why? 4. Give examples of the extended, and of the limited use of *abide*.

EXAMPLES

One generation passeth away and another generation cometh, but the earth ——— forever.

And there were in the same country shepherds ——— in the field, keeping watch over their flock by night.

So great was the crowd of visitors that many were compelled to ——— in the neighboring villages.

He is ——— at the Albemarle.

He has ——— for forty years in the same house.

By faith he ——— in the land of promise, as in a strange country.

ABOLISH (page 11)

QUESTIONS

1. Is *abolish* used of persons or material objects? 2. Of what is it used? Give examples. 3. What does *annihilate* signify? Is it stronger or weaker than *abolish*? 4. What terms do we use for doing away with laws, and how do those terms differ among themselves? 5. What are the differences between *overthrow*, *suppress*, and *subvert*? especially between the last two of those words? 6. How does *prohibit* differ from *abolish*? 7. What word do we especially use of putting an end to a nuisance? 8. What other words of this class are especially referred to? 9. Give some antonyms of *abolish*.

EXAMPLES

The one great endeavor of Buddhism is to ——— sorrow.

Modern science seems to show conclusively that matter is never ———.

The law, which had long been ——— by the revolutionists, was at last ——— by the legislature.

The ancient statute was found to have been ——— by later enactments, though never formally ———.

The Supreme Court ——— the adverse decision of the inferior tribunal.

Even in a republic, sedition should be promptly ———, or it may result in the ——— of free institutions.

From the original settlement of Vineland, New Jersey, the sale of intoxicating liquor has been ———.

ABOMINATION (page 12)

QUESTIONS

1. To what was *abomination* originally applied? 2. Does it refer to a state of mind or to some act or other object of thought? 3. How does *abomination* differ from *aversion* or *disgust*? How does an *abomination* differ from an *offense*? from crime in general?

EXAMPLES

After the ship began to pitch and roll, we could not look upon food without ———.

It is time that such a ——— should be abated.

Capital punishment was formerly inflicted in England for trivial ———

In spite of their high attainments in learning and art, the foulest ——— were prevalent among the Greeks and Romans of classic antiquity.

ABRIDGMENT (page 13)

QUESTIONS

1. How does an *abridgment* differ from an *outline* or a *synopsis*? from an *abstract* or *digest*? 2. How does an *abstract* or *digest* differ from an *outline* or a *synopsis*? 3. Does an *analysis* of a treatise deal with what is expressed, or with what is implied? 4. What words may we use to express a condensed view of a subject, whether derived from a previous publication or not?

EXAMPLES

The New Testament may be regarded as an ——— of religion.

There are several excellent ——— of English literature.

An ——— of the decision of the court was published in all the leading papers.

The publishers determined to issue an ——— of their dictionary.

Such ——— as U. S. for United States should be rarely used, unless in hasty writing or technical works.

ABSOLUTE (page 15)

QUESTIONS

1. What does *absolute* in the strict sense denote? *supreme*? 2. To what are these words in such sense properly applied? 3. How are they

used in a modified sense? 4. Is *arbitrary* ever used in a good sense? What is the chief use? Give examples. 5. How does *autocratic* differ from *arbitrary*? both these words from *despotic*? *despotic* from *tyrannical*? 6. Is *irresponsible* good or bad in its implication? *arbitrary*? *imperative*? *imperious*? *peremptory*? *positive*? *authoritative*?

EXAMPLES

God alone is ——— and ———.

The Czar of Russia is an ——— ruler.

——— power tends always to be ——— in its exercise.

On all questions of law in the United States the decision of the ——— Court is ——— and final.

Learning of the attack on our seamen, the government sent an ——— demand for apology and indemnity.

Man's ——— will and ——— intellect have given him dominion over all other creatures on the earth, so that they are either subjugated or exterminated.

ABSOLVE (page 16)

QUESTIONS

1. What is the original sense of *absolve*? 2. To what does it apply? 3. What is its special sense when used with reference to sins? 4. How does it differ from *acquit*? *forgive*? *justify*? *pardon*? 5. What are the chief antonyms of *absolve*?

EXAMPLES

No power under heaven can ——— a man from his personal responsibility.

When the facts were known, he was ——— of all blame.

ABSORB (page 16)

QUESTIONS

1. When is a fluid said to be *absorbed*? 2. Is the substance of the *absorbing* body changed by that which it *absorbs*? Give instances. 3. How does *consume* differ from *absorb*? 4. Give instances of the distinctive uses of *engross*, *swallow*, *imbibe*, and *absorb* in the figurative sense. 5. What is the difference between *absorb* and *emit*? *absorb* and *radiate*?

EXAMPLES

Though the fuel was rapidly ——— within the furnace, very little heat was ——— from the outer surface.

In setting steel rails special provision must be made for their expansion under the influence of the heat that they ———.

Jip stood on the table and barked at Traddles so persistently that he may be said to have ——— the conversation

ABSTINENCE (page 17)

QUESTIONS

1. How does *abstinence* differ from *abstemiousness*? from *self denial*? 2 What is *temperance* regarding things lawful and worthy? regarding things vicious and injurious? 3. What is the more exact term for the proper course regarding evil indulgences?

EXAMPLES

He was so moderate in his desires that his ——— seemed to cost him no ———

Among the Anglo-Saxons the idea of universal and total ——— from all intoxicants is little more than a century old.

ABSTRACT, v.; ABSTRACTED (page 18)

QUESTIONS

1. What is the difference between *abstract* and *separate*? between *discriminate* and *distinguish*?* 2. How does *abstract*, when said of the mind, differ from *direit*? from *distract*? 3 How do *abstracted*, *absorbed*, and *preoccupied* differ from *absent minded*? 4. Can one who is preoccupied be said to be *listless* or *thoughtless*? one who is *absent-minded*?

* NOTE.—See these words under DISCERN as referred to at the end of the paragraph on ABSTRACT in Part I The pupil should be instructed, in all cases, to look up and read over the synonyms referred to by the words in small capitals at the end of the paragraph in Part I

EXAMPLES

He was so ——— with these perplexities as to be completely ——— of his surroundings.

The busy student may be excused if ———, in the merely ——— or ——— it is intolerable

The power to ——— one idea from all its associations and view it alone is the ——— mark of a philosophical mind

Numerous interruptions in the midst of ——— occupations had made him almost ———.

ABSURD (page 19)

QUESTIONS

1. What is the difference between *absurd* and *paradoxical*? 2 What are the distinctions between *irrational*, *joculish*, and *silly*? 3 What is the especial implication in *unreasonable*? 4 How do *monstrous* and *preposterous* compare with *absurd*? 5 What is the especial element common to the *ludicrous*, the *ridiculous*, and the *nonsensical*? 6. What are some chief antonyms of *absurd*?

EXAMPLES

A statement may be disproved by deducing logically from it a conclusion that is ———.

Carlyle delighted in ——— utterances.

The ——— hatred of the Jews in the Middle Ages led the populace to believe the most ——— slanders concerning them.

I attempted to dissuade him from the ——— plan, but found him altogether ———. many of his arguments were so ——— as to be positively ———.

ABUSE (page 20)

QUESTIONS

1. To what does *abuse* apply?
2. How does *abuse* differ from *damage* (as in the case of rented property, *e. g.*)?
3. How does *abuse* differ from *harm*?
4. What words of this group are used in a bad sense?
5. Is *reproach* good or bad?
6. How do *persecute* and *oppress* differ?
7. Do *misemploy*, *misuse*, and *pervert* apply to persons or things? To which does *abuse* apply?

EXAMPLES

The tenant shall not ——— the property beyond reasonable wear.

——— intellectual gifts make the dangerous villain.

In his rage he began to ——— and ——— all who had formerly been his friends

To be ——— for doing right can never really ——— a true man.

In no way has man ——— his fellow man more cruelly than by ——— him for his religious belief.

ACCESSORY, *n.* (page 23)

QUESTIONS

1. Which words of this group are used in a good, and which in a bad sense?
2. Which are indifferently either good or bad?
3. To what does *ally* generally apply? *colleague*?
4. How does an *associate* compare in rank with a principal?
5. Is *assistant* or *attendant* the higher word? How do both these words compare with *associate*?
6. In what sense are *follower*, *henchman*, and *retainer* used? *partner*?
7. What is the legal distinction between *abettor* and *accessory*?
8. To what is *accomplice* nearly equivalent? Which is the preferred legal term?

EXAMPLES

The Senator differed with his ——— in this matter.

The baron rode into town with a great array of armed ———.

France and Russia seem to have become firm ———.

The ——— called to the ——— for a fresh bandage

All persons, but especially the young, should take the greatest care in the choice of their ———.

As he was not present at the actual commission of the crime, he was held to be only an ——— and not an ———

ACCIDENT (page 24)

QUESTIONS

1. What is the difference between *accident* and *chance*?
2. How does *incident* differ from both?
3. What is the special significance of *fortune*?
4. How does it differ in usage from *chance*?
5. How are *accident*, *misadventure*, and *mishap* distinguished?

EXAMPLES

Gambling clings almost inseparably to games of ———.

Bruises and contusions are regarded as ordinary ——— of the cavalry service.

The prudent man is careful not to tempt ——— too far.

The misplacement of the switch caused a terrible ———.

Great thoughts and high purposes keep one from being greatly disturbed by the little ——— of daily life.

ACQUAINTANCE (page 25)

QUESTIONS

1. What does *acquaintance* between persons imply?
2. How does *acquaintance* differ from *companionship*? *acquaintance* from *friendship*? from *intimacy*?
3. How does *fellowship* differ from *friendship*?

EXAMPLES

A public speaker becomes known to many persons whom he does not know, but who are ready promptly to claim ——— with him.

The ——— of life must bring us into ——— with many who can not be admitted within the inner circle of ———.

The ——— of school and college life often develop into the most beautiful and enduring ———.

Between those most widely separated by distance of place and time, by language, station, occupation, and creed, there may yet be true ——— of soul.

ACRIMONY (page 26)

QUESTIONS

1. How does *acerbity* differ from *asperity*? *asperity* from *acrimony*?
2. How is *acrimony* distinguished from *malignity*? *malignity* from *virulence*?
3. What is implied in the use of the word *severity*?

EXAMPLES

A certain ——— of speech had become habitual with him.

To this ill-timed request, he answered with sudden ———.

A constant sense of injustice may deepen into a settled ———.

This smooth and pleasing address veiled a deep ———.

Great ——— will be patiently borne if the sufferer is convinced of its essential justice.

ACT (page 27)

QUESTIONS

1. How is *act* distinguished from *action*? from *deed*? 2. Which of the words in this group necessarily imply an external effect? Which may be wholly mental?

EXAMPLES

He who does the truth will need no instruction as to individual _____.
_____ is the truth of thought.
The _____ is done.

ACTIVE (page 28)

QUESTIONS

1. With what two sets of words is *active* allied? 2. How does *active* differ from *busy*? from *industrious*? 3. How do *active* and *restless* compare? 4. To what sort of activity does *officious* refer? 5. What are some chief antonyms of *active*?

EXAMPLES

Being of an _____ disposition and without settled purpose or definite occupation, she became _____ as a hornet.

He had his _____ days and hours, but could never be properly said to be _____.

An _____ attendant instantly seized upon my baggage.

The true student is _____ from the mere love of learning, independently of its rewards.

ACUMEN (page 28)

QUESTIONS

1. How do *sharpness*, *acuteness*, *penetration*, and *insight* compare with *acumen*? 2. What is the special characteristic of *acumen*? To what order of mind does it belong? 3. What is *sagacity*? Is it attributed to men or brutes? 4. What is *perspicacity*? 5. What is *shrewdness*? Is it ordinarily good or evil? 6. Give illustrations of the uses of the above words as regards the possessors of the corresponding qualities.

EXAMPLES

The treatise displays great critical _____.

The Indians had developed a practical _____ that enabled them to follow a trail by scarcely perceptible signs almost as unerringly as the hound by scent.

ADD (page 32)

QUESTIONS

1. How is *add* related to *increase*? How does it differ from *multiply*?
2. What does *augment* signify? Of what is it ordinarily used? 3. To

what does *amplify* apply? 4 In what ways may a discourse or treatise be amplified?

EXAMPLES

Care to our coffin ——— a nail no doubt;
And every grin, so merry, draws one out.
—— up at night, what thou hast done by day;
And in the morning what thou has to do

ADDRESS, v. (page 33)

QUESTIONS

1. What does *accost* always signify? *greet*? *haul*? 2. How does *salute* differ from *accost* or *greet*? *address*? 3. What is it to *apostrophize*?

EXAMPLES

The pale snowdrop is springing
To ——— the glowing sun.
—— to the Chief who in triumph advances.
His faithful dog ——— the smiling guest.
—— ye heroes! heaven-born band!
Who fought and died in freedom's cause.

ADDRESS, n. (page 34)

QUESTIONS

1. What is *address* in the sense here considered? 2. What is *tact*? 3. What qualities are included in *address*?

EXAMPLES

And the tear that is wiped with a little ———
May be follow'd perhaps by a smile.
The ——— of doing doth expresse
No other but the doer's willingness.
I have very poor and unhappy brains for drinking; I could wish ———
would invent some other custom of entertainment

ADEQUATE (page 34)

QUESTIONS

1. What do *adequate*, *commensurate*, and *sufficient* alike signify? How does *commensurate* specifically differ from the other two words? Give examples. 2. To what do *adapted*, *fit*, *suitable*, and *qualified* refer? 3. Is *satisfactory* a very high recommendation of any work? Why? 4. Is *able* or *capable* the higher word? Illustrate.

EXAMPLES

We know not of what we are ——— till the trial comes.
Indeed, left nothing ——— for your purpose untouched, slightly
handled, in discourse

ADHERENT (page 35)

QUESTIONS

1. What is an *adherent*? 2. How does an *adherent* differ from a *supporter*? from a *disciple*? 3. How do both the above words differ from *ally*? 4. Has *partisan* a good or a bad sense, and why? 5. Is it well to speak of a *supporter* as a *backer*?

EXAMPLES

Also of your own selves shall men arise speaking perverse things to draw away ———s after them.

Woman is woman's natural ———

Self-defense compelled the European nations to be ———s against Napoleon

The deposed monarch was found to have a strong body of ———s.

ADJACENT (page 36)

QUESTIONS

1. What is the difference between *adjacent* and *adjoining*? *contiguous*? *conterminous*? 2. What distance is implied in *near*? *neighboring*? 3. What does *next* always imply? 4. Give antonyms of *adjacent*; *near*.

EXAMPLES

Stronger by weakness, wiser men become,
As they draw ——— to their eternal home.

ADMIRE (page 37)

QUESTIONS

1. In what sense was *admire* formerly used? What does it now express? 2. How does *admire* compare with *revere*? *venerate*? *adore*? Give instances of the use of these words

EXAMPLES

The beautiful are sure to be ———.

Henceforth the majesty of God ———;
Fear him, and you have nothing else to fear.
I value Science—none can prize it more,
It gives ten thousand motives to ———:
Be it religious, as it ought to be,
The heart it humbles, and it bows the knee.

ADORN (page 38)

QUESTIONS

1. How does *adorn* differ from *ornament*? from *garnish*? from *deck* or *bedeck*? from *decorate*?

EXAMPLES

At church, with meek and unaffected grace,
His looks ——— the venerable place.

The redbreast oft, at evening hours,
Shall kindly lend his little aid,
With hoary moss, and gathered flowers,
To ——— the ground where thou art laid.

AFFRONT (page 39)

QUESTIONS

1. What is it to *affront*? 2. How does *affront* compare with *insult*? with *tease*? *annoy*?

EXAMPLES

It is safer to ——— some people than to oblige them, for the better a man deserves, the worse they will speak of him.

Oh, rather give me commentators plain,
Who with no deep researches ——— the brain

The petty desire to ——— is simply a perversion of the human love of power.

They rushed to meet the ——— foe.

AGENT (page 41)

QUESTIONS

1. How does *agent* in the philosophical sense compare with *mover* or *doer*? 2. What different sense has it in business usage?

EXAMPLES

That morality may mean anything, man must be held to be a free ———.

The ——— declined to take the responsibility in the absence of the owner.

AGREE (page 42)

QUESTIONS

1. How do *concur* and *coincide* differ in range of meaning? How with reference to expression in action? 2. How does *accede* compare with *consent*? 3. Which is the most general word of this group?

EXAMPLES

A woman's lot is made for her by the love she ———.
My poverty, but not my will, ———.

AGRICULTURE (page 43)

QUESTIONS

1. What does *agriculture* include? How does it differ from *farming*? 2. What is *gardening*? *floriculture*? *horticulture*?

EXAMPLES

Loan oft loses both itself and friend;
And borrowing dulls the edge of _____.
A field becomes exhausted by constant _____.

AIM (page 44)

QUESTIONS

1. What is an *aim*? How does it differ from *mark*? from *goal*? 2. How do *end* and *object* compare? 3. To what does *aspiration* apply? How does it differ in general from *design*, *endeavor*, or *purpose*? 4. How does *purpose* compare with *intention*? 5. What is *design*?

EXAMPLES

In deeds of daring rectitude, in scorn
For miserable _____ that end with self.
O yet we trust that somehow good
Will be the final _____ of ill
How quickly nature falls into revolt,
When gold becomes her _____.
It is not _____, but ambition that is the mother of misery in man.

AIR (page 44)

QUESTIONS

1. What is *air* in the sense here considered? 2. How does *air* differ from *appearance*? 3. What is the difference between *expression* and *look*? 4. What is the sense of *bearing*? *carriage*? 5. How does *mien* differ from *air*? 6. What does *demeanor* include?

EXAMPLES

I never, with important _____,
In conversation overbear.
Vice is a monster of so frightful _____,
As, to be hated, needs but to be seen.
Grief fills the room up of my absent child,
Lies in his bed, walks up and down with me,
Puts on his pretty _____, repeats his words.

AIRY (page 45)

QUESTIONS

1. How does *airy* agree with and differ from *aerial*? Give instances of the uses of the two words. 2. What does *ethereal* signify? *sprightly*? 3. Are *lively* and *animated* used in the favorable or unfavorable sense?

EXAMPLES

_____ tongues that syllable men's names, on sands and shores and desert wildernesses.

The ——— mold

Incapable of stain, would soon expel
Her mischief, and purge off the baser fire,
Victorious
Society became my glittering bride,
And ——— hopes my children
Soft o'er the shrouds ——— whispers breathe,
That seemed but zephyrs to the train beneath.

ALARM (page 47)

QUESTIONS

1. What is the derivation and distinctive meaning of *alarm*? 2. What do *affright* and *fright* express? Give an illustration of the contrasted terms. 3. How are *apprehension*, *disquietude*, *dread*, and *misgiving* related to the danger that excites them? 4. What are *consternation*, *dismay*, and *terror*, and how are they related to the danger? 5. What is *timidity*?

EXAMPLES

The people took the ———, and moved promptly
While thronged the citizens with ——— dumb
I have a faint, cold ——— thrills through my veins.

ALERT (page 47)

QUESTIONS

1. To what do *alert*, *wide-awake*, and *ready* refer? 2. How does *ready* differ from *alert*? from *prepared*? 3. What does *prompt* signify? 4. What is the secondary meaning of *alert*?

EXAMPLES

To be ——— for war is one of the most effectual ways of preserving peace

He who is not ——— to-day will be less so to-morrow.
Thus ending loudly, as he would o'erleap
His destiny, ——— he stood.

ALIEN, *v.* & *n.* (page 48)

QUESTIONS

1. How does *alien* differ from *foreign*? 2. Is a *foreigner* by birth necessarily an *alien*? 3. Are the people of one country while residing in their own land *foreigners* or *aliens* to the people of other lands? 4. How can one residing in a *foreign* country cease to be an *alien* in that country? 5. How do *foreign* and *alien* differ in their figurative use?

EXAMPLES

By —— hands thy dying eyes were closed

* * *

By —— hands thy humble grave adorned

By strangers honored and by strangers mourned

What is religion? Not a —— inhabitant, nor something —— to our nature, which comes and takes up its abode in the soul
—— from the commonwealth of Israel and —— from the covenants of promise.

ALIKE (page 49)

QUESTIONS

1. How does *alike* compare with *similar*? with *identical*?
2. What is the distinction often made between *equal* and *equivalent*?
3. What is the sense of *analogous*? (Compare synonyms for ANALOGY.)
4. In what sense is *homogeneous* used?

EXAMPLES

Sometimes gentle, sometimes capricious, sometimes awful, never the —— for two months together

Fashioned for himself, a bride;

An ——, taken from his side.

ALLAY (page 50)

QUESTIONS

1. What is the distinction between *allay* and *alleviate*? Which word implies a partial removal of the cause of suffering, or an actual *lightening* of the burden?
2. With which of the above words are we to class *appease*, *pacify*, *soothe*, and the like?
3. With what words is *alleviate* especially to be grouped? (See synonyms for ALLEVIATE.)

EXAMPLES

Such songs have power to ——

The restless pulse of care,

And come like the benediction

That follows after prayer.

Many a word, at random spoken

May —— or wound a heart that's broken!

ALLEGE (page 51)

QUESTIONS

1. Which is the primary and which the secondary word, *allege* or *adduce*? Why?
2. How much of certainty is implied in *allege*?
3. How much does one admit when he speaks of an *alleged* fact, document, signature, or the like?

EXAMPLES

In many — cases of haunted houses, the spirits have not ventured to face an armed man who has passed the night there

I can not — one thing and mean another. If I can't pray I will not make believe!

ALLEGORY (page 52)

QUESTIONS

1. How does *allegory* compare with *simile*? *Simile* with *metaphor*? 2. What are the distinctions between *allegory*, *fable*, and *parable*? 3. Under what general term are all these included? 4. To what is *fiction* now most commonly applied?

EXAMPLES

In argument

— are like songs in love.

They much describe; they nothing prove

And He spake many things unto them in —, saying, Behold a sower went forth to sow.

ALLEVIATE (page 53)

QUESTIONS

1. How does *alleviate* differ from *relieve*? from *remove*? 2. Is *alleviate* used of persons? 3. What are the special significations of *abate*? *assuage*? *mitigate*? *moderate*? 4. How does *alleviate* compare with *allay*? (Compare synonyms for ALLAY.)

EXAMPLES

To pity distress is but human; to — it is Godlike.

But, O! what mighty magician can —

A woman's envy!

ALLIANCE (page 53)

QUESTIONS

1. What is an *alliance*? how does it differ from *partnership*? from *coalition*? from *league*? 2. How does a *confederacy* or *federation* differ from a *union*?

EXAMPLES

The two nations formed an offensive and defensive — against the common enemy.

Till the war-drum throbbed no longer, and the battle-flags were furled,
In the Parliament of man, the — of the world.

Business — are the warrant for the existence of trade —.

ALLOT (page 54)

QUESTIONS

1. Does *allot* refer to time, place, or person? 2. To what does *appoint* refer? *assign*? 3. How does *destine* differ from *appoint*? 4. How does *award* differ from *allot*, *appoint*, and *assign*?

EXAMPLES

Man hath his daily work of body or mind ———.

He ———eth the moon for seasons, the sun knoweth his going down.

The king is but as the hind . . .

Who may not wander from the ——— field

Before his work be done.

ALLOW (page 55)

QUESTIONS

1. What is the difference between *allow* and *permit*? between a *permit* and *permission*? 2. What instances can you give of the use of these words, also of *tolerate* and *submit*? 3. What does *yield* imply?

EXAMPLES

Frederick ——— the Austrians to cross the mountains that he might attack them on a field of his own choosing.

The cruelty and envy of the people

——— by our dastard nobles, who

Have all forsook me, hath devoured the rest.

State churches have ever been unwilling to ——— dissent.

ALLUDE (page 56)

QUESTIONS

1. What is the distinctive sense of *allude*? of *advert*? of *refer*? 2. How do the above words compare with *mention* as to explicitness? 3. How do *hint* and *insinuate* differ?

EXAMPLES

Late in the eighteenth century Cowper did not venture to do more than ——— to the great allegorist [Bunyan], saying:

"I name thee not, lest so despised a name

Should move a sneer at thy deserved fame."

ALLURE (page 57)

QUESTIONS

1. What is it to *allure*? 2. How does *allure* differ from *attract*? from *sure*? 3. What does *coax* express? 4. What is it to *cajole*? to *decoy*? to *inveigle*? 5. How does *seduce* differ from *tempt*? 6. Is *win* used in the favorable or unfavorable sense?

EXAMPLES

The ruddy square of comfortable light
 ——— him, as the beacon blaze ———

The bird of passage.

But Satan now is wiser than of yore,

And ——— by making rich, not making poor.

He had a strange gift of ——— friends, and of ——— the love of women.

ALSO (page 57)

QUESTIONS

1. Into what two groups are the synonyms for *also* naturally divided? 2. Which words simply add a fact or thought? 3. Which distinctly imply that what is added is like that to which it is added?

EXAMPLES

Thine to work ——— to pray,
 Clearing thorny wrongs away;
 Plucking up the weeds of sin,
 Letting heaven's warm sunshine in.

ALTERNATIVE (page 60)

QUESTIONS

1. What is the difference between *choice* and *alternative* in the strict use of language? 2. Is *alternative* always so severely restricted by leading writers? 3. What do *choice*, *pick*, *election*, and *preference* imply regarding one's wishes? *alternative*? *resources*?

EXAMPLES

Homer delights to call Ulysses "the man of many ———."

AMASS (page 60)

QUESTIONS

1. What is it to *amass*? 2. How is *amass* distinguished from *accumulate*? 3. Is interest *amassed* or *accumulated*? 4. How does *hoard* differ from *store*?

EXAMPLES

By daring and successful speculation, he ——— a prodigious fortune.
 The sum was the ——— savings of an industrious and frugal life.

O, to what purpose dost thou ——— thy words,
 That thou return'st no greeting to thy friends?

AMATEUR (page 61)

QUESTIONS

1. What is the difference between *amateur* and *connoisseur*? between *con-*

noisseur and *critic*? 2. Which word carries a natural implication of superficialness? 3. How does *novice* and *tyro* differ from *amateur*?

EXAMPLES

He was in Logic a great ——
 Profoundly skill'd in Analytic;
 He could distinguish, and divide
 A hair 'twixt south and south-west side.

The greatest works in poetry, painting, and sculpture have not been done by ——.

The mere —— who produces nothing, and whose business is only to judge and enjoy.

AMAZEMENT (page 61)

QUESTIONS

1. What do *amazement* and *astonishment* agree in expressing? 2. How do the two words differ? 3. What is the meaning of *awe*? of *admiration*? 4. How does *surprise* differ from *astonishment* and *amazement*? 5. What are the characteristics of *wonder*?

EXAMPLES

'Twas while he toiled him to be freed,
 And with the rein to raise the steed,
 That, from ——'s iron trance,
 All Wyckliffe's soldiers waked at once.

Can such things be,
 And overcome us like a summer's cloud,
 Without our special —— ?
 The fool of nature stood with stupid eyes
 And gaping mouth that testified ——.

AMBITION (page 62)

QUESTIONS

1. What two senses has *ambition*? 2. How does *ambition* differ from *aspiration*? Which is the higher word? 3. What is the distinctive sense of *emulation*? 4. Has *emulation* a good side? How does it compare with *aspiration*?

EXAMPLES

Cromwell, I charge thee, fling away ——
 By that sin fell the angels.
 Envy, to which th' ignoble mind's a slave,
 Is —— in the learn'd or brave.

I have no spur
 To prick the sides of my intent, but only
 Vaulting ——.

AMEND (page 63)

QUESTIONS

1. What is it to *amend*? 2. How do *advance*, *better*, and *improve* differ from *amend*? 3. Are these words applied to matters decidedly bad, foul, or evil? 4. What is the difference between *amend* and *emend*?

EXAMPLES

Return ye now every man from his evil way, and ——— your doings.
The construction here is difficult, and the text at this point has been variously ———.

Human characters and conditions never reach such perfection that they can not be ———.

AMIALE (page 64)

QUESTIONS

1. To what does *lovely* often apply? 2. To what does *amiable* always apply? 3. How do *agreeable*, *attractive*, and *charming* differ from *amiable*? Give examples. 4. Is a *good-natured* person necessarily *agreeable*? an *amiable* person?

EXAMPLES

His life was ———; and the elements
So mixed in him, that Nature might stand up
And say to all the world, This was a man!
The east is blossoming! Yea a rose,
Vast as the heavens, soft as a kiss,
——— as the presence of woman is.

ANALOGY (page 66)

QUESTIONS

1. What is the specific meaning of *analogy*? 2. What is *affinity*? *coincidence*? 3. Does *coincidence* necessarily involve *resemblance* or *likeness*? 4. What is *parity of reasoning*? 5. What is a *similitude*? 6. How do *resemblance* and *similarity* differ from *analogy*?

EXAMPLES

The two boys bore a close ——— to each other.

It is not difficult to trace the ——— of the home to the state.

ANGER (page 67)

QUESTIONS

1. What are the especial characteristics of *anger*? How does it differ from *indignation*? *exasperation*? *rage*? *wrath*? *ire*?

EXAMPLES

My enemy has long borne me a feeling of ———.

Christ was filled with ——— at the hypocrisy of the Jews.

I was overcome by a sudden feeling of ———.

ANIMAL (page 68)

QUESTIONS

1. What is an *animal*? a *brute*? a *beast*? 2. Is man an *animal*? 3. What is implied if we speak of any particular man as an *animal*? a *brute*? a *beast*? 4. What forms of existence does the word *creature* include? 5. What are the animals of a country or region collectively called?

EXAMPLES

It is only within the last half century that societies have been organized for the prevention of cruelty to ———.

O that men should put an enemy in their mouths to steal away their brains! that we should with joy, pleasure, revel, and applause, transform ourselves into ———!

Take a ——— out of his instinct, and you find him wholly deprived of understanding.

Spurning manhood and its joys to loot,
To be a lawless, lazy, sensual ———.

ANNOUNCE (page 69)

QUESTIONS

1. What is it to *announce*? 2. Does it apply chiefly to the past or the future? 3. To what is *advertise* chiefly applied? *propound*? *promulgate*? *publish*?

EXAMPLES

The Sphinx ——— its riddles with life and death depending on the answer.

Through the rare felicity of the times you are permitted to think what you please and to ——— what you please.

The songs of birds and the wild flowers in the woodlands ——— the coming of spring.

ANSWER (page 70)

QUESTIONS

1. What is a verbal *answer*? 2. In what wider sense is *answer* used? 3. What is a *reply*? a *rejoinder*? 4. How does an *answer* to a charge, an argument, or the like, differ from a *reply* or *rejoinder*? 5. What is the special quality of a *response*? 6. What is a *retort*? How does it differ from *repartee*?

EXAMPLES

I can no other ——— make, but thanks

Theirs not to make ———
Theirs not to reason why,
Theirs but to do and die.

Upon thy princely warrant I descend,
To give thee ——— of thy just demand.

He could not be content without finding a ——— in Nature to every mood of his mind; and he does find it.

A man renowned for ———
Will seldom scruple to make free
With friendship's honest feeling.

Nothing is so easy and inviting as the ——— of abuse and sarcasm; but it is a paltry and unprofitable contest.

ANTICIPATE, ANTICIPATION (page 71)

QUESTIONS

1. What are the two contrasted senses of *anticipate*? 2. Which is now the more common? 3. How does *anticipate* differ from *expect*? from *hope*? from *apprehend*? 4. How does *anticipation* differ from *presentiment*? from *apprehension*? from *foreboding*? 5. What special element is involved in *foretaste*? How do *foresight* and *forethought* go beyond the meaning of *anticipation*?

EXAMPLES

Then some leaped overboard with fearful yell,
As eager to ——— their grave.

England ——— every man to do his duty.

These are portents; but yet I ———, I hope,
They do not point on me.

If I know your sect, I ——— your argument

The happy ——— of a renewed existence in company with the spirits of the just.

ANTIPATHY (page 72)

QUESTIONS

1. How is *antipathy* to be distinguished from *dislike*? from *antagonism*? from *aversion*? 2. What is *uncongeniality*? How does it differ from *antipathy*? Which is positive? and which negative?

EXAMPLES

Christianity is the solvent of all race ———.

From my soul I loathe
All affectation, 'tis my perfect scorn, object of my implacable ———.

ANTIQUE (page 72)

QUESTIONS

1. To what does *antique* refer? *antiquated*? 2. Is the difference between them a matter of time? Give examples. 3. Can a modern building be *antiquated*? Can it be *antique*? 4. What is the significance of *quaint*?

EXAMPLES

My copper lamps, at any rate,
 For being true ———, I bought.
 I do love these ——— ruins,
 We never tread upon them but we set
 Our foot upon some reverend history.

ANXIETY (page 73)

QUESTIONS

1. What is *anxiety* in the primary sense? Is it mental or physical? 2. How does *anxiety* differ from *anguish*? 3. What kind of possibility does *anxiety* always suggest? 4. How does it differ from *apprehension*, *fear*, *dread*, etc., in this regard? 5. What is *worry*? *fretfulness*? 6. Does *perplexity* involve *anxiety*?

EXAMPLES

Yield not to ——— for the future, weep not for the past.
 Superstition invested the slightest incidents of life with needless ———.
 ——— is harder than work, and far less profitable.

APATHY (page 74)

QUESTIONS

1. What is *apathy*? How does it differ from the Saxon word *unfeelingness*? from *indifference*? from *insensibility*? from *unconcern*? 3. How does *stojicism* differ from *apathy*?

EXAMPLES

In lazy ——— 't stoics boast
 Their virtue fixed: 'tis fixed as in a frost.
 At length the morn and cold ——— came.
 He sank into a ——— from which it was impossible to arouse him.

APOLOGY (page 75)

QUESTIONS

1. What change of meaning has *apology* undergone? 2. What does an *apology* now always imply? 3. How does an *apology* differ from an *excuse*? 4. Which of these words may refer to the future? 5. How does *confession* differ from *apology*?

EXAMPLES

——— only account for that which they do not alter.
 Beauty is its own ——— for being.
 There is no refuge from ——— but suicide; and suicide is ———.

APPARENT (page 76)

QUESTIONS

1. What two contrasted senses arise from the root meaning of *apparent*?
2. What is implied when we speak of *apparent* kindness or *apparent* neglect?
3. How do *presumable* and *probable* differ?
4. What implication is conveyed in *seeming*? What do we suggest when we speak of "*seeming* innocence"?

EXAMPLES

It is not ——— that the students will attempt to break the rules again.
 It is not yet ——— what his motive could have been in committing such an offense.
 It is ——— that something has been omitted which was essential to complete the construction.

APPETITE (page 80)

QUESTIONS

1. Of what kind of demands or impulses is *appetite* ordinarily used?
2. What demands or tendencies are included in *passion*?
3. What is implied by *passions* and *appetites* when used as contrasted terms?

EXAMPLES

Govern well thy ———, lest sin
 Surprise thee, and her black attendant Death.
 Take heed lest ——— sway
 Thy judgment to do aught which else free will
 Would not admit.

APPORTION (page 82)

QUESTIONS

1. What is the special significance of *apportion* by which it is distinguished from *allot*, *assign*, *distribute*, or *divide*?
2. What is the significance of *dispend* in the transitive use?
3. What is it to *appropriate*?

EXAMPLES

Representatives are ——— among the several states according to the population.
 The treasure was ——— and their shares duly ——— among the captors.

APPROXIMATION (page 83)

QUESTIONS

1. What is an *approximation* in the mathematical sense?
2. How close an approach to exactness and certainty does *approximation* imply?
3. How does *approximation* differ from *resemblance* and *similarity*? from *approach*?
4. How does *approximation* as regards the class of ob-

jects to which it is applied, differ from *nearness*, *neighborhood*, or *propinquity*?

EXAMPLES

We have to be content with ——— to a solution.

Without faith, there is no real ——— to God.

Wit consists in knowing the ——— of things which differ, and the difference of things which are alike.

ARMS (page 83)

QUESTIONS

1. What is the difference between *arms* and *armor*?
2. In what connection is *armor* used in modern warfare?

EXAMPLES

——— on ——— clashing brayed

Horrible discord.

There is constant rivalry between irresistible projectiles and impenetrable ———.

ARMY (page 84)

QUESTIONS

1. What are the essentials of an *army*?
2. Is an *army* large or small?
3. What term would be applied to a *multitude* of armed men without order or organization?
4. In what sense is *host* used? *legion*?

EXAMPLES

For the ——— is a school in which the miser becomes generous, and the generous, prodigal; miserly soldiers are like monsters, but very rarely seen.

The still-discordant wavering ———.

ARRAIGN (page 84)

QUESTIONS

1. To what kind of proceedings do *indict* and *arraign* apply?
2. How is one *indicted*? How *arraigned*?
3. How do these words differ from *charge*? *accuse*? *censure*?

EXAMPLES

The criminal was ——— for trial for his offenses.

Religion does not ——— or exclude unnumbered pleasures, harmlessly pursued.

ARTIFICE (page 88)

QUESTIONS

1. What is an *artifice*? a *device*? *finesse*?
2. In what sense are *cheat*, *maneuver*, and *imposture* always used?
3. In what sense is *trick*?

commonly used? 4. What is a *fraud*? 5. Is *wile* used in a good or a bad sense? 6. Does the good or the bad sense commonly attach to the words *artifice*, *contrivance*, *ruse*, *blind*, *device*, and *finesse*?

EXAMPLES

Those who can not gain their ends by force naturally resort to _____.
The enemy were decoyed from their defenses by a skilful _____.

Quips and cranks and wanton _____.

Nods and becks and wreathed smiles.

Whoever has even once become notorious by base _____, even if he speaks the truth, gains no belief.

ARTIST (page 89)

QUESTIONS

1. What is an *artist*? an *artisan*? 2. What is an *artificer*? How related to *artist* and *artisan*?

EXAMPLES

The power depends on the depth of the _____'s insight of that object he contemplates.

Infuse into the purpose with which you follow the various employments and professions of life the sense of beauty, and you are transformed at once from an _____ into an _____.

If too many _____ turn shopkeepers, the whole natural quantity of that business divided among them all may afford too small a share for each.

ASK (page 90)

QUESTIONS

1. For what class of objects does one *ask*? For what does he *beg*? 2. How do *entreat* and *beseech* compare with *ask*? 3. What is the special sense of *implore*? of *supplicate*? 4. How are *crave* and *request* distinguished? *pray* and *petition*? 5. What kind of *asking* is implied in *demand*? in *require*? How do these two words differ from one another?

EXAMPLES

We, ignorant of ourselves,
_____ often our own harms, which the wise powers
Deny us for our good: so we find profit,
By losing of our prayers.

The harvest truly is great, but the labourers are few: _____ ye therefore the Lord of the harvest that he would send forth labourers into his harvest.

Speak with me, pity me, open the door,
A beggar _____ that never begg'd before.
Be not afraid to _____; to _____ is right.
_____, if thou canst, with hope; but ever _____,
Though hope be weak or sick with long delay;
_____ in the darkness, if there be no light,

ASSOCIATE, *n.* (page 91)

QUESTIONS

1. What does *associate* imply, as used officially? What when used in popular language? 2. Do we speak of associates in crime or wrong? What words are preferred in such connection? (See synonyms for ACCESSORY.) 3. Is *companion* used in a good or bad sense? 4. How does it differ in use from *associate*? 5. What is the significance of *peer*? *comrade*? *consort*?

EXAMPLES

His best ——— innocence and health,
And his best riches ignorance of wealth.
The ——— accepted Napoleon's abdication.
The leader in the plot was betrayed by his ———.

ASSUME (page 93)

QUESTIONS

1. Does *assume* apply to that which is rightfully or wrongfully taken? 2. In what use does *assume* correspond with *arrogate* and *usurp*? 3. How do *arrogate* and *usurp* differ from each other? How does *assume* differ from *postulate* as regards debate or reasoning of any kind?

EXAMPLES

Wherefore do I ———
These royalties, and not refuse to reign.
——— a virtue if you have it not.
For well we know no hand of blood and bone
Can gripe the sacred handle of our scepter,
Unless he do profane, steal, and ———.

ASSURANCE (page 93)

QUESTIONS

1. What is *assurance* in the good sense? 2. What is *assurance* in the bad sense? 3. How does *assurance* compare with *impudence*? with *effrontery*?

EXAMPLES

Let us draw near with a true heart in full ——— of faith.
Some wicked wits have libel'd all the fair.
With matchless ——— they style a wife
The dear-bought curse, and lawful plague of life.
With brazen ——— he denied the most indisputable facts.

ASTUTE (page 94)

QUESTIONS

1. From what language is *acute* derived? What is its distinctive sense? 2. From what language is *keen* derived? What does it distinctively de-

note? 3. From what language is *astute* derived, and what was its original meaning? 4. In present use what does *astute* add to the meaning of *acute* or *keen*? 5. What does *astute* imply regarding the ulterior purpose or object of the person who is credited with it?

EXAMPLES

You statesmen are so ——— in forming schemes!

He taketh the wise in their own ———ness.

The most ——— reasoner may be deluded, when he practises sophistry upon himself.

ATTACHMENT (page 97)

QUESTIONS

What is *attachment*? How does it differ from *adherence* or *adhesion*? from *affection*? from *inclination*? from *regard*?

EXAMPLES

Talk not of wasted ———, ——— never was wasted.

You do not weaken your ——— for your family by cultivating ——— beyond its pale, but deepen and intensify it.

ATTACK, v. & n. (pages 98, 99)

QUESTIONS

1. What special element is involved in the meaning of *attack*? 2. How do *assail* and *assault* differ? 3. What is it to *encounter*? how does this word compare with *attack*? How does *attack* differ from *aggression*?

EXAMPLES

We see thine's furrows on another's brow,
And death intrench'd, preparing his ———;
How few themselves in that just mirror see!

Who ever knew Truth put to the worse in a free and open ———?

Roger Williams ——— the spirit of intolerance, the doctrine of persecution, and never his persecutors.

ATTAIN (page 99)

QUESTIONS

1. What kind of a word is *attain*, and to what does it point? 2. How does *attain* differ from *obtain*? from *achieve*? 3. How does *obtain* differ from *procure*?

EXAMPLES

The heights by great men ——— and kept
Were not ——— by sudden flight,
But they, while their companions slept,
Were toiling upward in the night.

Our doubts are traitors,
And make us lose the good we oft might ———
By fearing to attempt.

ATTITUDE (page 100)

QUESTIONS

1. How does *position* as regards the human body differ from *attitude*, *posture*, or *pose*? 2. Do the three latter words apply to the living or the dead? 3. What is the distinctive sense of *attitude*? Is it conscious or unconscious? 4. How does *posture* differ from *attitude*? 5. What is the distinctive sense of *pose*? How does it differ from, and how does it agree with *attitude* and *posture*?

EXAMPLES

The ——— assumed indicated great indignation because of the insult implied.

The ——— was graceful and pleasing.

ATTRIBUTE, v. (page 100)

QUESTIONS

1. What suggestion is often involved in *attribute*? 2. How does *attribute* differ from *refer* and *ascribe*? 3. Is *charge* (in this connection) used in the favorable or unfavorable sense?

EXAMPLES

——— ye greatness unto our God.

He ——— unworthy motives which proved a groundless charge.

ATTRIBUTE, n. (page 101)

QUESTIONS

1. What is the derivation and the inherent meaning of *quality*? 2. What is an *attribute*? 3. Which of the above words expresses what necessarily belongs to the subject of which it is said to be an *attribute* or *quality*? 4. What is the derivation and distinctive sense of *property*? 5. How does *property* ordinarily differ from *quality*? 6. In what usage do *property* and *quality* become exact synonyms, and how are *properties* then distinguished?

EXAMPLES

His scepter shows the force of temporal power,

The ——— to awe and majesty,

Wherewith doth sit the dread and fear of kings.

Nothing endures but personal ———.

AVARICIOUS (page 104)

QUESTIONS

1. How do *avaricious* and *covetous* differ from *miserly*, *niggardly*, *parsimonious*, and *penurious*? 2. Of what matters are *greedy* and *stingy* used? How do they differ from each other?

EXAMPLES

I am not ——— for gold;

Nor care I who doth feed upon my cost;

It yearns me not if men my garments wear.

It is better to be content with such things as ye have than to become

——— and ——— in accumulating.

AVENGE, (page 104)

QUESTIONS

1. What is it to *avenge*? 2. How does *avenge* differ from *revenge*? 3. Which word would be used of an act of God? 4. Is *retahate* used in the sense of *avenge* or of *revenge*?

EXAMPLES

O, that the vain remorse, which must chastise

Crimes done, had but as loud a voice to warn

As its keen sting is mortal to ———.

I lost mine eye laying the prize aboard,

And therefore to ——— it, shalt thou die.

AVOW (page 105)

QUESTIONS

1. Which words of this group refer exclusively to one's own knowledge or action? 2. What is the distinctive sense of *aver*? of *avouch*? of *avow*? 3. How do *avouch* and *avow* differ from *aver* in construction? 4. Is *avow* used in a good or a bad sense? What does it imply of others' probable feeling or action? 5. How does *avow* compare with *confess*?

EXAMPLES

And, but herself, ——— no parallel.

The child ——— his fault and was pardoned by his parent.

AWFUL (page 106)

QUESTIONS

- 1 To what matters should *awful* properly be restricted? 2. Is *awful* always interchangeable with *alarming* or *terrible*? with *disagreeable* or *annoying*?

EXAMPLES

'Then must it be an ——— thing to die.

The silent falling of the snow is to me one of the most ——— things in nature.

AWKWARD (page 106)

QUESTIONS

1. What is the derivation and original meaning of *awkward*? of *clumsy*?
2. To what, therefore, does *awkward* primarily refer? and to what *clumsy*?
3. Is a draft-horse distinctively *awkward* or *clumsy*?
4. Give some metaphorical uses of *awkward*.

EXAMPLES

Though he was ———, he was kindly.

The apprentice was not only ———, but ———, and had to be taught over and over again the same methods.

The young girl stood in a ——— way, looking in at the showy shop-windows.

AXIOM (page 107)

QUESTIONS

1. In what do *axiom* and *truism* agree?
2. In what do they differ?
3. How do they compare in interest and utility?

EXAMPLES

It is almost an ——— that those who do most for the heathen abroad are most liberal for the heathen at home.

Trifling ———s clothed in great, swelling words of vanity.

BABBLE (page 107)

QUESTIONS

1. To what class do most of the words in this group belong? Why are they so called?
2. What is the special significance of *blab* and *blurt*? How do they differ from each other in use?
3. What is *chat*?
4. How does *prattling* differ from *chatting*?
5. In what sense is *jabber* used? How does it compare with *chatter*?

EXAMPLES

"The crane," I said, "may ——— of the crane,

The dove may ——— of the dove."

Two women sat contentedly ———ing, one of them amusing a ———ing babe.

BANISH (page 110)

QUESTIONS

1. From what land may one be *banished*? From what *expatriated* or *exiled*?
2. By whom may one be said to be *banished*? by whom *expatriated* or *exiled*?
3. Which of these words is of widest import? Give examples of its metaphorical use.

BANK (page 111)

QUESTIONS

1. What is a *beach*? a *coast*?
2. How does each of the above words differ from *bank*?
3. What is the distinctive sense of *strand*? In what style of writing is it most commonly used? What are the distinctive senses of *edge* and *brink*?

BANTER (page 112)

QUESTIONS

1. What is *banter*?
2. How is *badinage* distinguished from *banter*? *railery* from both?
3. What is the distinctive sense of *irony*?
4. Is *irony* kindly or the reverse? *badinage*? *banter*?
5. What words of this group are distinctly hostile?
6. Is *ridicule* or *derision* the stronger word? What is the distinction between the two? between *satire* and *sarcasm*? between *chaff*, *jeering*, and *mockery*?

BARBAROUS (page 113)

QUESTIONS

1. What is the meaning of *barbarian*?
2. What is the added significance of *barbaric*?
3. How does *barbarous* in general use differ from both the above words?
4. What special element is commonly implied in *savage*?
5. In what less opprobrious sense may *barbarous* and *savage* be used? Give instances.

EXAMPLES

A multitude like which the populous North
Poured never from her frozen loins, to pass
Rhene or the Danaw, when her ——— sons
Came like a deluge on the South.

Or when the gorgeous East, with richest hand,
Showers on her kings ——— pearl and gold.

It is most true, that a natural and secret hatred and aversion toward society, in any man, hath somewhat of the ——— beast.

Thou art bought and sold among those of any wit like a ——— slave.

BARRIER (page 113)

QUESTIONS

1. What is a *bar*? and what is its purpose?
2. What is a *barrier*?
3. Which word is ordinarily applied to objects of great extent?
4. Would a mountain range be termed a *bar* or a *barrier*?
5. What distinctive name is given to a mass of sand across the mouth of a river or harbor?

BATTLE (page 114)

QUESTIONS

1. What is the general meaning of *conflict*? 2. What is a *battle*? 3. How long may a *battle* last? 4. On how many fields may one *battle* be fought? 5. How does *engagement* differ from *battle*? How does *combat* differ? *action*? *skirmish*? *fight*?

BEAUTIFUL (page 115)

QUESTIONS

1. What is necessary to constitute an object or a person *beautiful*? 2. Can *beautiful* be said of that which is harsh and rugged, however grand? 3. How is *beautiful* related to our powers of appreciation? 4. How does *pretty* compare with *beautiful*? *handsome*? 5. What does *fair* denote? *comely*? *picturesque*?

EXAMPLES

I pray thee, O God, that I may be ——— within.

A happy youth, and their old age is ——— and free.

'Twas sung, how they were ——— in their lives

And in their death had not divided been.

How ——— has the day been, how bright was the sun,

How lovely and joyful the course that he run.

Though he rose in a mist when his race he began

And there followed some droppings of rain!

BECOMING (page 117)

QUESTIONS

1. What is the meaning of *becoming*? of *decent*? of *suitable*? 2. Can that which is worthy or beautiful in itself ever be otherwise than *becoming* or *suitable*? Give instances. 3. What is the meaning of *fit*? How does it differ from *fitting* or *befitting*?

EXAMPLES

A merrier man,

Within the limit of ——— mirth,

I never spent an hour's talk withal.

Still govern thou my song,

Urania, and ——— audience find, though few.

Indeed, left nothing ——— for your purpose

Untouch'd, slightly handled, in discourse.

In such a time as this, it is not ———

That every nice offense should bear his comment.

How could money be better spent than in erecting a ——— building
for the greatest library in the country?

BEGINNING (page 118)

QUESTIONS

1. From what language is *beginning* derived? *commencement*? How do the two words differ in application and use? Give instances.
2. What is an *origin*? a *source*? a *rise*?
3. How are *fount*, *fountain*, and *spring* used in the figurative sense?

EXAMPLES

For learning is the ——— pure
Out from which all glory springs.
Truth is the ——— of every good to gods and men.
Courage, the mighty attribute of powers above,
By which those great in war are great in love;
The ——— of all brave acts is seated here.

It can not be that Desdemona should long continue her love to the Moor, nor he his to her; it was a violent ———, and thou shalt see an answerable sequestration.

In the ——— God created the heaven and the earth.

BEHAVIOR (page 119)

QUESTIONS

1. How do *behavior* and *conduct* differ?
2. What is the special sense of *carriage*? of *bearing*? *demeanor*?
3. What is *manner*? *manners*?

EXAMPLES

Our thoughts and our ——— are our own.
Good ——— are made up of petty sacrifices.

BENEVOLENCE (page 120)

QUESTIONS

1. What is the original distinction between *benevolence* and *beneficence*?
2. In what sense is *benevolence* now most commonly used?
3. What words are commonly used for *benevolence* in the original sense?
4. What was the original sense of *charity*? the present popular sense?
5. What of *humanity*? *generosity*? *liberality*? *philanthropy*?

EXAMPLES

——— is a virtue of the heart, and not of the hands.
The secrets of life are not shown except to ——— and likeness.

BIND (page 121)

QUESTIONS

1. What is the distinctive sense of *bind*?
2. What is the special meaning of *tie*?
3. In how general a sense is *fasten* used?
4. Which of the above three words is used in a figurative sense?

EXAMPLES

Shut, shut the door, good John! fatigu'd, I said;
 ——— up the knocker, say I'm sick, I'm dead.
 Adjust our lives to loss, make friends with pain,
 ——— all our shattered hopes and bid them bloom again.

BITTER (page 122)

QUESTIONS

1. How may *acid*, *bitter*, and *acid* be distinguished? *pungent*? *caustic*? 2. In metaphorical use, how are *harsh* and *bitter* distinguished? 3. What is the special significance of *caustic*? 4. Give examples of these words in their various uses.

BLEACH (page 122)

QUESTIONS

1. How do *bleach* and *blanch* differ from *whiten*? from each other?

EXAMPLES

You can behold such sights,
 And keep the natural ruby of your cheeks,
 When mine is ——— with fear.
 We let the years go: wash them clean with tears,
 Leave them to ——— out in the open day.

BLEMISH (page 124)

QUESTIONS

1. What is a *blemish*? 2. How does it differ from a *flaw* or *taint*? 3. What is a *defect*? a *fault*? 4. Which words of this group are naturally applied to reputation, and which to character?

EXAMPLES

Every page enclosing in the midst
 A square of text that looks a little ———.
 The noble Brutus
 Hath told you Cæsar was ambitious:
 If it were so, it was a grievous ———.

BLUFF (page 125)

QUESTIONS

1. In what sense are *bluff*, *frank*, and *open* used? 2. In what sense are *blunt*, *brusk*, *rough*, and *rude* employed?

EXAMPLES

There are to whom my satire seems too ———.
Stout once a month they march, a ——— band
And ever but in times of need, at hand.

BOUNDARY (page 126)

QUESTIONS

1. What is the original sense of *boundary*?
2. How does it differ in usage from *bound* or *bounds*?
3. In what style and sense is *bound* used?
4. What is the distinctive meaning of *edge*?

EXAMPLES

So these lives . . .
Parted by ———s strong, but drawing nearer and nearer,
Rushed together at last, and one was lost in the other.
In worst extremes, and on the perilous ———
Of battle.

BRAVE (page 127)

QUESTIONS

1. How does *brave* differ from *courageous*?
2. What is the special sense of *adventurous*? of *bold*? of *chivalrous*?
3. How do these words differ from *venturesome*?
4. What is especially denoted by *fearless* and *intrepid*?
5. What does *valiant* tell of results?
6. What ideas are combined in *heroic*?

EXAMPLES

A ——— man is also full of faith.
Fir'd at first sight with what the Muse imparts,
In ——— youth we tempt the heights of Arts.
Thy danger chiefly lies in acting well;
No crime's so great as ——— to excel.

BUSINESS (page 133)

QUESTIONS

1. What is the distinctive meaning of *barter*?
2. What does *business* add to the meaning of *barter*?
3. What is *occupation*? Is it broader than *business*?
4. What is a *vocation*?
5. What (in the strict sense) is an *avocation*?
6. What is implied in *profession*? *pursuit*?
7. What is a *transaction*?
8. How does *trade* differ from *commerce*?
9. What is *work*?
10. What is an *art* in the industrial sense? a *craft*?

EXAMPLES

A man must serve his time to every ———.
We turn to dust, and all our mightiest ———s die too.

CALCULATE (page 136)

QUESTIONS

1. How do you distinguish between *count* and *calculate*? *compute*, *reckon*, and *estimate*? 2. Which is used mostly with regard to future probabilities? 3. Do we use *compute* or *estimate* of numbers exactly known? 4. Of *compute*, *calculate*, and *estimate*, which is used with especial reference to the future?

EXAMPLES

There were 4,046 men in the district, by actual ———.

The time of the eclipse was ——— to a second.

We ask them to ——— approximately the cost of the building.

CALL (page 136)

QUESTIONS

1. What is the distinctive meaning of *call*? 2. Do we ever apply *bellow* and *roar* to human sounds? 3. Can you give more than one sense of *cry*? Are *shout* and *scream* more or less expressive than *call*? 5. Which of the words in this group are necessarily and which ordinarily applied to articulate utterance? Which rarely, if ever, so used?

EXAMPLES

——— for the robin redbreast and the wren.

The pioneers could hear the savages ——— outside.

I ——— my servant and he came.

The captain ——— in a voice of thunder to the helmsman, "Put your helm hard aport!"

CALM (page 137)

QUESTIONS

1. To what classes of objects or states of mind do we apply *calm*? *collected*? *quiet*? *placid*? *serene*? *still*? *tranquil*? 2. Do the antonyms *boisterous*, *excited*, *ruffled*, *turbulent*, and *wild*, also apply to the same? 3. Can you contrast *calm* and *quiet*? 4. How many of the preceding adjectives can be applied to water? 5. How does *composed* differ from *calm*?

EXAMPLES

The possession of a ——— conscience is an estimable blessing.

The water is said to be always ——— in the ocean depths.

——— on the listening ear of night

Fall heaven's melodious strains.

CANCEL (page 138)

QUESTIONS

1. What is the difference in method involved in the verbs *cancel*, *efface*, *erase*, *expunge*, and *obliterate*? 2. Which suggest the most complete

removal of all trace of a writing? 3. How do the figurative uses of these words compare with the literal? 4. Is it possible to *obliterate* or *efface* that which has been previously *canceled* or *erased*?

EXAMPLES

It is practically impossible to clean a postage-stamp that has been properly ——— so that it can be used again.

With the aid of a sharp penknife the blot was quickly ———.

By lapse of time and elemental action, the inscription had become completely ———.

CANDID (page 139)

QUESTIONS

1. To what class of things do we apply *aboveboard*? *candid*? *fair*? *frank*? *honest*? *sincere*? *transparent*? 2. Can you state the similarity between *artless*, *guileless*, *naïve*, *simple*, and *unsophisticated*? How do they differ as a class from the words above referred to? 3. How does it happen that "To be frank," or "To be candid" often precedes the utterance of something disagreeable?

EXAMPLES

The sophistry was so ——— as to disgust the assembly.

A. T. Stewart relied on ——— dealing as the secret of mercantile success

An ——— man will not steal or defraud.

——— she seems with artful care

Affecting to be unaffected.

CARE (page 141)

QUESTIONS

1. What is the special difference between *care* and *anxiety*? 2. Wherein does *care* differ from *caution*? *solicitude* from *anxiety*? *watchfulness* from *wariness*? 3. Can you give some of the senses of *care*? 4. Is *concern* as strong a term as *anxiety*? 5. What is *circumspection*? *precaution*? *heed*?

EXAMPLES

Take her up tenderly, lift her with ———.

A military commander should have as much ——— as bravery.

The invaders fancied themselves so secure against attack that they had not taken the ——— to station sentinels.

CARICATURE (page 143)

QUESTIONS

1. What is the distinctive meaning of *caricature*? 2. What is the special difference between *parody* and *travesty*? between both and *burlesque*?

3. To what is *caricature* mostly confined? 4. How do *mimicry* and *imitation* differ? 5. Is an *extravaganza* an *exaggeration*?

EXAMPLES

The eagle nose of the general was magnified in every artist's ———.
His laughable reproduction of the great actor's vagaries was a clever
bit of ———.

If it be not lying to say that a fox's tail is four feet long, it is certainly
a huge ———.

CARRY (page 144)

QUESTIONS

1. To what sort of objects do we apply *bear*? *carry*? *move*? *take*? 2.
What kinds of force or power do we indicate by *convey*, *lift*, *transmit*,
and *transport*? 3. What is the distinction between *bring* and *carry*?
between *carry* and *bear*? 4. What does *lift* mean? 5. Can you give
some figurative uses of *carry*?

EXAMPLES

The strong man can ——— 1,000 pounds with apparent ease.
Napoleon always endeavored to ——— the war into the enemy's terri-
tory.

It was found necessary to ——— the coal overland for a distance of
500 miles.

My punishment is greater than I can ———.

CATASTROPHE (page 145)

QUESTIONS

1. What is a *catastrophe* or *cataclysm*? 2. Is a *catastrophe* also necessarily
a *calamity* or a *disaster*? 3. Which word has the broader meaning,
disaster or *calamity*? 4. Does *misfortune* suggest as serious a condi-
tion as any of the foregoing? 5. How does a *misadventure* compare with a
catastrophe, a *calamity*, or a *disaster*? 6. Give some chief antonyms
of the above

EXAMPLES

War and pestilence are properly ———, while the loss of a battle may
be a ———, but not a ———.

Fortune is not satisfied with inflicting one ———.

Well had the boding tremblers learned to trace

The day's ——— in his morning face.

The failure of the crops of two successive years proved an irreparable
——— to the emigrants.

CAUSE (page 146)

QUESTIONS

1. What is the central distinction between *antecedent* and *cause*? 2. How
are the words *cause*, *condition*, and *occasion* illustrated by the fall of

an avalanche? 3. And the antonyms *consequence? effect? outgrowth? result?* 4. What are *causality* and *causation?* 5. How are *origin* and *source* related to *cause?*

EXAMPLES

Where there is an effect there must be also a ———.

It is necessary to know something of the ——— of a man before we can safely trust him.

The ——— of the river was found to be a small lake among the hills.

What was given as the ——— of the quarrel was really but the ———.

CHAGRIN (page 151)

QUESTIONS

1. What feelings are combined in *chagrin*? 2. How do you distinguish between *chagrin*, *disappointment*, *humiliation*, *mortification*, and *shame*? 3. Which involves a sense of having done wrong?

EXAMPLES

The king's ——— at the limitations imposed upon him was painfully manifest.

He is not wholly lost who yet can blush from ———.

Hope tells a flattering tale,

Delusive, vain and hollow,

Ah! let not hope prevail,

Lest ——— follow.

CHANGE (page 152)

QUESTIONS

1. What is the distinction between *change* and *exchange*? Are they ever used as equivalent, and how? 2. Can you distinguish between *modify* and *qualify*?

EXAMPLES

The tailor offered to ——— the armholes of the coat.

We requested the pianist to ——— his music by introducing a few popular tunes.

We often fail to recognize the actor who ——— his costume between the acts.

CHARACTER (page 153)

QUESTIONS

1. How do you distinguish between *character* and *reputation? constitution* and *disposition?* 2. Is *nature* a broader word than any of the preceding? 3. If so, why?

EXAMPLES

The philanthropist's ——— for charity is often a great source of annoyance to him.

Let dogs delight to bark and bite, for 'tis their ——— to

Misfortune may cause the loss of friends and reputation, yet if the man has not yielded to wrong, his ——— is superior to loss or change.

CHOOSE (page 157)

QUESTIONS

1. What are the shades of difference between *choose*, *cull*, *elect*, *pick*, *prefer*, and *select*? 2. Also between the antonyms *cast away*, *decline*, *dismiss*, *refuse*, *repudiate*? 3. Does *select* imply more care or judgment than *choose*?

EXAMPLES

The prettiest flowers had all been ———.

Jacob was ——— to Esau, though he was the younger.

When a man deliberately ——— to do wrong, there is little hope for him.

CIRCUMSTANCE (page 158)

QUESTIONS

1. To what classes of things do we apply *accompaniment*? *concomitant*? *circumstance*? *event*? *fact*? *incident*? *occurrence*? *situation*? 2. Can you give some instances of the use of *circumstance*? 3. Is it a word of broader meaning than *incident*?

EXAMPLES

The ——— that there had been a fire was proved by the smoke-blackened walls.

Extreme provocation may be a mitigating ——— in a case of homicide.

CLASS (page 159)

QUESTIONS

1. How does a *class* differ from a *caste*? 2. In what connection is *rank* used? *order*? 3. What is a *coterie*? How does it differ from a *clique*?

EXAMPLES

An ——— was formed for the relief of the poor and needy of the city.

A select ——— met at the residence of one of the leading men of the city.

There is a struggle of the masses against the ———.

CLEAR (page 161)

QUESTIONS

1. What does *clear* originally signify? 2. How does *clear* differ from *transparent* as regards a substance that may be a medium of vision? 3. With what meaning is *clear* used of an object apprehended by the senses, as an object of sight or hearing? 4. What does *distinct* sig-

nify? 5. What is *plain*? 6. What special sense does this word always retain? How does *transparent* differ from *translucent*? 7. What do *lucid* and *pellucid* signify? 8. What is the special force of *limpid*?

CLEVER (page 162)

QUESTIONS

1. What is the meaning of *clever* as used in England? 2. What was the early New England usage? 3. What is to be said of the use of *smart* and *sharp*? 4. What other words of this group are preferable to *clever* in many of its uses?

EXAMPLES

His brief experience in the department had made him very —— in the work now assigned him.

She was especially —— in song.

Be good, sweet maid, and let who will be ——;

Do noble things, not dream them, all day long;

And so make life, death, and the vast forever

One grand, sweet song.

COMPANY (page 164)

QUESTIONS

1. From what is *company* derived? What is its primary meaning? 2. For what are those associated who constitute a *company*? Is their association temporary or permanent? 3. What is the difference between *assemblage* and *assembly*? 4. What is a *conclave*? a *convocation*? a *convention*? 5. What are the characteristics of a *group*? 6. To what use is *congregation* restricted? How does *meeting* agree with and differ from it?

EXAMPLES

Far from the madding ——'s ignoble strife,

Their sober wishes never learned to stray.

The room contained a large —— of miscellaneous objects.

A fellow that makes no figure in ——.

A great —— had met, but without organization or officers.

If ye inquire anything concerning other matters, it shall be determined in a lawful ——.

COMPEL (page 165)

QUESTIONS

1. What is it to *compel*? 2. What does *force* imply? 3. What is the especial significance of *coerce*? 4. What does *constrain* imply? In what favorable sense is it used?

EXAMPLES

Even if we were not willing, they possessed the power of —— us to do justice.

Employers may —— their employees into voting as they demand, but for the secret ballot.

These considerations —— us to aid them to the utmost of our power.

COMPLAIN (page 165)

QUESTIONS

1. By what is *complaining* prompted? *murmuring*? *repining*? 2. Which finds outward expression, and which is limited to the mental act? 3. To whom does one *complain*, in the formal sense of the word? 4. With whom does one *remonstrate*?

EXAMPLES

It is not pleasant to live with one who is constantly ——ing.

The dog gave a low —— which frightened the tramp away.

COMPLEX (page 166)

QUESTIONS

1. How does *complex* differ from *compound*? from *composite*? 2. What is *heterogeneous*? *conglomerate*? 3. How does *complicated* differ from *intricate*? from *involved*?

CONSCIOUS (page 173)

QUESTIONS

1. Of what things is one *aware*? of what is he *conscious*? 2. How does *sensible* compare with the above-mentioned words? 3. What does *sensible* indicate regarding the emotions that would not be expressed by *conscious*?

EXAMPLES

To be —— that you are ignorant is a great step to knowledge.

They are now —— it would have been better to resist the first temptation.

He was —— of a stealthy step and a bulk dimly visible through the darkness.

CONSEQUENCE (page 173)

QUESTIONS

1. How does *consequence* differ from *effect*? both from *result*? 2. How do *recall* and *issue* compare? 3. In what sense is *consequence* used?

CONTAGION (page 174)

QUESTIONS

1. To what is *contagion* now limited by the best medical usage? 2. To what is the term *infection* applied?

EXAMPLES

During the plague in London persons walked in the middle of the streets for fear of the ——— from the houses.

The mob thinks by ——— for the most part, catching an opinion like a cold.

No pestilence is so much to be dreaded as the ——— of bad example.

CONTINUAL (page 175)

QUESTIONS

1. How does *continuous* differ from *continual*? *incessant* from *ceaseless*? Give examples.

CONTRAST (page 175)

QUESTIONS

1. How is *contrast* related to *compare*? 2. What are the special senses of *differentiate*, *discriminate* and *distinguish*?

CONVERSATION (page 176)

QUESTIONS

1. What is the essential meaning of *conversation*? 2. How does *conversation* differ from *talk*? 3. How is *discourse* related to *conversation*? 4. What are the special senses of *dialogue* and *colloquy*?

EXAMPLES

There can be no ——— with a great genius, who does all the ———ing.

Nor wanted sweet ———, the banquet of the mind.

CONVEY (page 177)

QUESTIONS

1. In what do *convey*, *transmit*, and *transport* agree? What is the distinctive sense of *convey*? 2. To what class of objects does *transport* refer? 3. To what class of objects do *transfer*, *transmit*, and *convey* apply? 4. Which is the predominant sense of the latter words?

CRIMINAL (page 178)

QUESTIONS

1. What is the distinctive meaning of *criminal*? How does it differ from *illegal* or *unlawful*? 2. What is *felonious*? *flagitious*? 3. What is the primary meaning of *iniquitous*? 4. Is an *iniquitous* act necessarily *criminal*?

DANGER (page 180)

QUESTIONS

1. What is the distinctive meaning of *danger*? 2. Does *danger* or *peril* suggest the more immediate evil? 3. How are *jeopardy* and *risk* distinguished from *danger* and *peril*?

EXAMPLES

Delay always breeds ———.
The careful rider avoids running ———s.
Stir, at your ———!

DECAY (page 181)

QUESTIONS

1. What sort of things *decay*? *putrefy*? *rot*? 2. What is the essential difference between *decay* and *decompose*?

EXAMPLES

The flowers wither, the tree's trunk ———.
The water was ——— by the electric current.

DECEPTION (page 181)

QUESTIONS

1. How is *deceit* distinguished from *deception*? from *guile*? *fraud*? *lying*? *hypocrisy*? 2. Do all of these apply to conduct as well as to speech? 3. Is *deception* ever innocent? 4. Have *craft* and *cunning* always a moral element? 5. How is *dissimulation* distinguished from *duplicity*?

EXAMPLES

The ——— of his conduct was patent to all.
It was a matter of self———.
The judge decided it to be a case of ———.

DEFINITION (page 184)

QUESTIONS

1. Which is the more exact, a *definition* or a *description*? 2. What must a *definition* include, and what must it exclude? 3. What must a *description* include? 4. In what respect has *interpretation* a wider meaning than *translation*? 5. How does an *explanation* compare with an *exposition*?

EXAMPLES

A prompt ——— of the difficulty prevented a quarrel.
The ——— of scenery was admirable.
The seer gave an ——— of the dream.
Many a controversy may be instantly ended by a clear ——— of terms.

DELIBERATE (page 185)

QUESTIONS

1. What are the chief distinctions between *deliberate*? *consult*? *consider*? *meditate*? *reflect*? 2. Do large gatherings of people *consult*, or *meditate*, or *deliberate*? 3. Do we *reflect* on things past or things to come? 4. How many persons are necessarily implied in *consult*, *confer*, and *debate* as commonly used? in *deliberate*, *consider*, *ponder*, *reflect*? in *meditate*? 5. What idea of time is implied in *deliberate*?

EXAMPLES

The matter was carefully ——— in all its bearings.
The legislature ——— for several days.

DELUSION (page 187)

QUESTIONS

1. What is the essential difference between *illusion* and *delusion*? How does *hallucination* differ from both? 2. Which word is used especially of objects of sight?

EXAMPLES

The ——— of the sick are sometimes pitiful.
In the soft light the ——— was complete.

DEMONSTRATION (page 188)

QUESTIONS

1. To what kind of reasoning does *demonstration* in the strict sense apply? 2. What is *evidence*? *proof*? 3. Which is the stronger term? 4. Which is the more comprehensive?

EXAMPLES

The ——— of the witness was so complete that no further ——— was required.
A mathematical ——— must be final and conclusive.

DESIGN (page 190)

QUESTIONS

1. What is the distinctive meaning of *design*? 2. What element is prominent in *intention*? *purpose*? *plan*? 3. Does *purpose* suggest more power to execute than *design*? 4. How does *intent* specifically differ from *purpose*? Which term do we use with reference to the Divine Being?

EXAMPLES

The architect's ——— involved much detail.
Hell is paved with good ———.

It is the ——— of the voter that decides how his ballot shall be counted.
 The ——— of the Almighty can not be thwarted.
 The adaption of means to ends in nature clearly indicates a ——— ,
 and so proves a ———-er.

DESPAIR (page 191)

QUESTIONS

1. In what order might *despair*, *desperation*, *discouragement*, and *hopelessness* follow, each as the result of the previous condition? 2. How does *despondency* especially differ from *despair*?

EXAMPLES

The utter ——— of their condition was apparent.
 In weak ——— he abandoned all endeavor.

DEXTERITY (page 192)

QUESTIONS

1. From what is *adroitness* derived? From what *dexterity*? How might each be rendered? 2. How does *adroitness* differ in use from *dexterity*? 3. From what is *aptitude* derived, and what does it signify? 4. How does *skill* differ from *dexterity*? Which can and which can not be communicated?

EXAMPLES

He had a natural ——— for scientific investigation, and by long practise gained an inimitable ——— of manipulation.

His ——— in debate enabled him to evade or parry arguments or attacks which he could not answer.

The ——— of the best trained workman can not equal the precision of a machine.

DICTION (page 193)

QUESTIONS

1. Which is the more comprehensive word, *diction*, *language*, or *phraseology*? 2. What is the true meaning of *verbiage*? Should it ever be used as the equivalent of *language* or *diction*? 3. What is *style*? How does it compare with *diction* or *language*?

EXAMPLES

The ——— of the discourse was plain and emphatic.

The ——— of a written contract should be such as to prevent misunderstandings.

The poetic ——— of Milton is so exquisitely perfect that another word can scarcely ever be substituted for the one he has chosen without marring the line.

DIFFERENCE (page 194)

QUESTIONS

1. Which pertain mostly to realities, and which are matters of judgment—*difference*, *disparity*, *distinction*, or *inconsistency*? 2. What do we mean by “a *distinction* without a *difference*”?

EXAMPLES

The proper ——— should be carefully observed in the use of “shall” and “will.”

The ——— between black and white is self-evident.

The ——— of our representatives’ conduct with their promise is unpardonable.

DISCERN (page 196)

QUESTIONS

1. To what sort of objects do we apply *behold*, *discern*, *distinguish*, *observe*, and *see*? 2. What do *behold* and *distinguish* suggest in addition to *seeing*?

EXAMPLES

With the aid of a great telescope we may ——— what stars are double.
——— the upright man.

Let us minutely ——— the color of the goods.

DISCOVER (page 196)

QUESTIONS

1. What is the distinctive meaning of *detect*? *discover*? *invent*? 2. How do *discover* and *invent* differ? 3. Is *detect* often used in a favorable sense?

EXAMPLES

An experienced policeman acquires wonderful skill in ———ing criminals.

Newton ——— the law of gravitation.

To ——— a machine, one must first understand the laws of mechanics.

DISEASE (page 197)

QUESTIONS

1. What was the early and general meaning of *sick* and *sickness* in English? 2. How long did that usage prevail? 3. What is the present restriction upon the use of these words in England? What words are there commonly substituted? 4. What is the prevalent usage in the United States?

EXAMPLES

——— spread in the camp and proved deadlier than the sword.

The ——— was found to be contagious.

He is just recovering from a slight ———.
It is not good manners to talk of one's ———s.

DO (page 198)

QUESTIONS

1. What is the most comprehensive word of this group? 2. In what sense are *finish* and *complete* used, and how are they discriminated from each other? 3. How do we discriminate between *fulfil*, *realize*, *effect*, and *execute*? *perform* and *accomplish*? *accomplish* and *complete*?

EXAMPLES

A duty has been ———, a work of gratitude and affection has been ———.

It is wonderful how much can be ——— by steady, plodding industry without brilliant talents.

The work is not only grand in design but it is ——— with the most exquisite delicacy in every detail.

It is the duty of the legislators to make laws, of the magistrates to ——— them.

Every one should labor to ——— his duties faithfully, and ——— the just expectations of those who have committed to him any trust.

DOCTRINE (page 200)

QUESTIONS

1. To what matters do we apply the word *creed*? *doctrine*? *dogma*? *principle*? 2. Which is the more inclusive word? 3. Is *dogma* used favorably or unfavorably?

EXAMPLES

The ——— rests either upon the authority of the Scriptures, or upon a decision of the Church

A man may have upright ———s even while he disregards commonly received ———s.

DOUBT, v. (page 201)

QUESTIONS

1. Do we apply *doubt*, *distrust*, *surmise*, and *suspect* mostly to persons and things, or to motives and intentions? 2. Is *mistrust* used of persons or of things? 3. Is it used in a favorable or an unfavorable sense?

EXAMPLES

We do not ——— that the earth moves around the sun.

Nearly every law of nature was by man first ———, then proved to be true.

I ——— my own heart.

I ——— that man from the outset.

DOUBT, *n.* (page 202)

QUESTIONS

1. To what class of objects do we apply *disbelief*? *doubt*? *hesitation*? *misgiving*? 2. Which of these words most commonly implies an unfavorable meaning? 3. What meaning has *skepticism* as applied to religious matters?

EXAMPLES

We feel no ——— in giving our approval.

The jury had ———s of his guilt.

We did all we could to further the enterprise, but still had our ———s as to the outcome.

DUPLICATE (page 206)

QUESTIONS

1. Can you give the distinction between a *copy* and a *duplicate*? a *facsimile*, and an *imitation*? 2. What sort of a *copy* is a *transcript*?

EXAMPLES

The ——— of an organ by the violinist was perfect.

This key is a ———, and will open the lock.

The signature was merely a printed ———.

DUTY (page 207)

QUESTIONS

1. Do we use *duty* and *right* of civil things? or *business* and *obligation* of moral things? 2. Does *responsibility* imply connection with any other person or thing?

EXAMPLES

I go because it is my ———.

We recognize a ——— for the good conduct of our own children, but do we not also rest under some ——— to society to exercise a good influence over the children of others?

EAGER (page 207)

QUESTIONS

1. What is the distinction between *eager* and *earnest* in the nature of the feeling implied? in the objects toward which it is directed? 2. How does *anxious* in this acceptation differ from both *eager* and *earnest*?

EXAMPLES

Hark! the shrill trumpet sounds to horse! away!

My soul's in arms, and ——— for the fray.

I am in ———. I will not equivocate; I will not excuse; I will not retreat a single inch, and I will be heard!

I am ——— to hear of your welfare, and of the prospects of the enterprise

EASE (page 208)

QUESTIONS

1. What does *ease* denote, in the sense here considered? Does it apply to action or condition? 2. Is *facility* active or passive? *readiness*? 3. What does *ease* imply, and to what may it be limited? 4. What does *facility* imply? *readiness*? 5. To what is *expertness* limited?

EXAMPLES

He plays the violin with great ———, and delights an audience.

Whatever he did was done with so much ———,

In him alone 'twas natural to please.

It is often said with equal truth that we ought to take advantage of the ——— which children possess of learning.

EDUCATION (page 209)

QUESTIONS

1. What is the distinctive meaning of *education*? *instruction*? *teaching*? 2. How is *instruction* or *teaching* related to *education*? 3. How does *training* differ from *teaching*? 4. What is *discipline*? *tutition*? 5. What are *breeding* and *nurture*, and how do they differ from each other? 6. How are *knowledge* and *learning* related to *education*?

EXAMPLES

The true purpose of ——— is to cherish and unfold the seed of immortality already sown within us.

By ———, we do learn ourselves to know

And what to man, and what to God we owe.

——— maketh a full man, conference a ready man, and writing an exact man.

For natural abilities are like natural plants that need pruning by ———; and ———s themselves do give forth directions too much at large, except they be bounded in by experience.

A branch of ——— is often put to an improper use, for fear of its being idle.

EFFRONTERY (page 210)

QUESTIONS

1. What is *audacity*? *hardihood*? 2. What special element does *effrontery* add to the meaning of *audacity* and *hardihood*? 3. What is *impudence*? *shamelessness*? 4. How does *effrontery* compare with these words? 5. What is *boldness*? Is it used in a favorable or an unfavorable sense?

EXAMPLES

When they saw the ——— of Peter and John, and perceived that they were unlearned and ignorant men they marvelled.

I ne'er heard yet

That any of these bolder vices wanted
Less ——— to gainsay what they did,
Than to perform it first.

I am not a little surprised at the easy ——— with which political gentlemen in and out of Congress take it upon them to say that there are not a thousand men in the North who sympathize with John Brown.

EGOTISM (page 210)

QUESTIONS

1. What is *egoism* and how does it differ from *egotism*? 2. What is *self-assertion*? *self-conceit*? 3. Does *conceit* differ from *self-conceit*, and how? 4. What is *self-confidence*? Is it worthy or unworthy? 5. Is *self-assertion* ever a duty? *self-conceit*? 6. What is *vanity*? How does it differ from *self-confidence*? from *pride*? 7. What is *self-esteem*? How does it differ from *self-conceit*? from *self-confidence*?

EXAMPLES

——— may puff a man up, but never prop him up.
——— is as ill at ease under indifference, as tenderness is under the love which it can not return.

EMBLEM (page 211)

QUESTIONS

1. From what language is *emblem* derived? What did it originally signify? 2. What is the derivation and primary meaning of *symbol*? 3. How do the two words compare as now used? 4. How does a *sign* suggest something other than itself? 5. Can the same thing be both an *emblem* and a *symbol*? a *sign* and a *symbol*? 6. What is a *token*? a *figure*? an *image*? a *type*?

EXAMPLES

Rose of the desert, thou art to me
An ——— of stainless purity, ———
Of those who, keeping their garments white,
Walk on through life with steps aright.
All things are ———s: the external shows
Of nature have their ——— in the mind
As flowers and fruits and falling of the leaves.
Moses, as Israel's deliverer, was a ——— of Christ.

EMIGRATE (page 212)

QUESTIONS

1. What is the distinctive meaning of *migrate*? What is its application? 2. What do *emigrate* and *immigrate* signify? To what do they apply? Can the two words be used of the same person and the same act? How?

EXAMPLES

The ship was crowded with ———, mostly from Germany.

——— are pouring into the United States often at the rate of half a million a year.

EMPLOY (page 213)

QUESTIONS

1. What are the distinctive senses of *employ* and *use*? Give instances. 2. What does *use* often imply as to materials *used*? 3. How does *hire* compare with *employ*?

EXAMPLES

The young man had been ——— by the firm for several months and had proved faithful in every respect

The church was then ready to ——— a pastor

What one has, one ought to ———: and whatever he does he should do with all his might

END, v. (page 213)

QUESTIONS

1. What is it to *end*, and what reference does *end* have to intention or expectation? 2. What do *close*, *complete*, *conclude*, and *finish* signify as to expectation or appropriateness? Give instances. 3. What specially distinctive sense has *finish*? 4. Does *terminate* refer to reaching an arbitrary or an appropriate *end*? 5. What does *stop* signify?

EXAMPLES

The life was suddenly ———.

The train ——— long enough for the passengers to get off, then whirled on.

END, n. (page 214)

QUESTIONS

1. What is the *end*? 2. What is the distinctive meaning of *extremity*? 3. How does *extremity* compare with *end*? 4. What reference is implied in *extremity*? 5. What is the meaning of *tip*? *point*? How does *extremity* differ in use from the two latter words? 6. What is a *terminus*? What specific meaning has the word in modern travel? 7. What is the meaning of *termination*, and of what is it chiefly used? *expiration*? *limit*?

EXAMPLES

Seeing that death, a necessary ———, will come when it will come.

All rejoice at the successful ——— of the vast undertaking.

He that endureth to the ——— shall be saved.

Do not turn back when you are just at the ———.

ENDEAVOR, v. (page 215)

QUESTIONS

1. What is it to *attempt*? to *endeavor*? To what sort of exertion does *en-*

deavor especially apply? 2. How does *essay* differ from *attempt* and *endeavor* in its view of the results of the action? 3. What is implied in *undertake*? Give an instance. 4. What does *strive* suggest? 5. How does *try* compare with the other words of the group?

EXAMPLES

—— first thyself, and after call on God,
For to the worker God himself lends aid.
—— the end, and never stand to doubt;
Nothing's so hard but search will find it out.
—— to enter in at the strait gate.

ENDEAVOR, *n.* (page 216)

QUESTIONS

1. What is an *effort*? an *exertion*? Which includes the other? 2. How does *attempt* differ from *effort*? 3. What is a *struggle*? 4. What is an *essay*, and for what purpose is it made? 5. What is an *endeavor*, and how is it distinguished from *effort*? from *attempt*?

EXAMPLES

Youth is a blunder; manhood a ——; old age a regret.
So vast an —— required more capital than he could command at that time. Others combining with him enabled him to succeed with it.
After a few spasmodic ——s, he abandoned all —— at improvement.

ENDURE (page 216)

QUESTIONS

1. What is the meaning of *bear* as applied to care, pain, grief, and the like? 2. What does *endure* add to the meaning of *bear*? 3. How do *allow* and *permit* compare with the words just mentioned? 4. How do *put up with* and *tolerate* compare with *allow* and *permit*? 5. What is the special sense of *afford*? How does it come into connection with the words of this group? 6. What is the sense of *brook*? 7. Of what words does *abide* combine the meanings?

EXAMPLES

Charity —— long and is kind; charity —— all things.
I follow thee, safe guide, the path
Thou lead'st me, and to the hand of heav'n ——.
For there was never yet philosopher
That could —— the toothache patiently.

ENEMY (page 217)

QUESTIONS

1. What is an *enemy*? an *adversary*? 2. What distinction is there between the two words as to the purpose implied? 3. What is an *antagonist*?

an opponent? a competitor? a rival? 4. How does *foe* compare with *enemy*?

EXAMPLES

He makes no friend who never made a ———.
 This friendship that possesses the whole soul,
 can admit of no ———.
 Mountains interposed
 Make ——— of nations who had else,
 Like kindred drops been molded into one

He that wrestles with us strengthens our nerves and sharpens our skill.
 Our ——— is our helper.

ENMITY (page 218)

QUESTIONS

1. What is *enmity*? 2. How does *animosity* differ from *enmity*? 3. What is *hostility*? What is meant by *hostilities* between nations? 4. What is *bitterness*? *acrimony*? 5. How does *antagonism* compare with the words above mentioned?

EXAMPLES

Let all ———, and wrath, and anger, and clamor, and evil speaking, be put away from you, with all malice.

But their ———, though smothered for a while, burnt with redoubled violence.

The carnal mind is ——— against God, for it is not subject to the law of God, neither indeed can be

ENTERTAIN (page 218)

QUESTIONS

1. What is it to *entertain* mentally? to *amuse*? 2. What is the distinctive sense of *divert*? 3. Can one be *amused* or *entertained* who is not *diverted*? 4. What is it to *recreate*? to *beguile*?

EXAMPLES

Books can not always ———; however good;
 Minds are not ever craving for their food
 Who God doth late and early pray
 More of his grace than gifts to lend,
 And ——— the harmless day
 With a religious book or friend.

ENTERTAINMENT (page 219)

QUESTIONS

1. What do *entertainment* and *recreation* imply? How, accordingly, do they rank among the lighter matters of life? 2. How do *amusement* and

pastime differ? 3. On what plane are *sports*? How do they compare with *entertainment* and *recreation*? 4. How do *amusement* and *enjoyment* compare?

EXAMPLES

At Christmas play, and make good ———,
For Christmas comes but once a year.

It is as ——— to fools to do mischief.

No true heart can find ——— in another's pain or grief.

The Puritans hated bear-baiting, not because it gave pain to the bear, but because it gave ——— to the spectators.

As Tammie glowered, amazed and curious,

The mirth and ——— grew fast and furious.

And so, if I might be judge, God never did make a more calm, quiet, innocent ——— than angling

ENTHUSIASM (page 220)

QUESTIONS

1. In what sense was *enthusiasm* formerly used?
2. What is now its prevalent and controlling meaning?
3. How does *zeal* differ from *enthusiasm*?

EXAMPLES

An ardent ——— leads to great results in exposing certain evils.

His ——— was contagious and they rushed into battle.

The precept had its use; it could make men feel it right to be humane, and desire to be so, but it could never inspire them with an ——— of humanity.

ENTRANCE (page 220)

QUESTIONS

1. To what does *entrance* refer?
2. What do *admittance* and *admission* add to the meaning of *entrance*?
3. To what does *admittance* refer? To what additional matters does *admission* refer? Illustrate.
4. What is the figurative use of *entrance*?

EXAMPLES

——— was obtained by a side-door, and a good position secured in the crowded hall.

No ——— except on business.

He was never so engrossed with cares of state that the needy could not have ——— to him

However carefully church-membership may be guarded, unworthy members will sometimes gain ———.

ENVOUS (page 221)

QUESTIONS

1. What do we mean when we say that a person is *envious*?
2. What is the difference between *envious* and *jealous*?
3. Is an *envious* spirit

ever good? 4. Is *jealous* capable of being used in a good sense? 5. In what sense is *suspicious* used?

EXAMPLES

Neither be thou ——— against the workers of iniquity.
——— in honor, sudden and quick in quarrel.

EQUIVOCAL (page 222)

QUESTIONS

1. What is the derivation and the original signification of *equivocal*? of *ambiguous*? How do the two words compare in present use? 2. What is the meaning of *enigmatical*? 3. How do *doubtful* and *dubious* compare? 4. In what sense is *questionable* used? *suspicious*?

EXAMPLES

These sentences, to sugar or to gall,
Being strong on both sides, are ———.

An ——— statement may result from the thoughtless use of a single word that is capable of more than one meaning.

ESTEEM, *n.* (page 223)

QUESTIONS

1. What is the difference between *esteem* and *estimate*? 2. Is *esteem* now used of concrete valuation? 3. What is its chief present use? 4. What is its meaning in popular use as said of persons?

EXAMPLES

They please, are pleas'd; they give to get ———,
Till seeming blest, they grow to what they seem.

The loss of conscience or honor is one that can not be ———.

ETERNAL (page 224)

QUESTIONS

1. What is the meaning of *eternal* in the fullest sense? 2. To what being, in that sense, may it be applied? 3. In what does *everlasting* fall short of the meaning of *eternal*? 4. How does *endless* agree with and differ from *everlasting*? 5. In what inferior senses are *everlasting* and *interminable* used? 6. Is *eternal*, in good speech or writing, ever brought down to such inferior use?

EXAMPLES

Truth crushed to earth shall rise again,
The ——— years of God are hers.

Whatever may befall thee, it was preordained for thee from ———.

It were better to be eaten to death with a rust than to be scoured to nothing with ——— motion.

Here comes the lady! Oh, so light a foot
Will ne'er wear out the ——— flint.

EVENT (page 225)

QUESTIONS

1. How do *event* and *incident* differ etymologically? 2. Which is the greater and more important? Give examples. 3. How does *circumstance* compare with *incident*? 4. What is the primary meaning of *occurrence*? 5. What is an *episode*? 6. How does *event* differ from *end*? 7. What meaning does *event* often have when applied to the future?

EXAMPLES

Fate shall yield
 To fickle ———, and Chaos judge the strife.
 Men are the sport of ——— when
 The ——— seem the sport of men.
 Coming ——— cast their shadows before.
 Where an equal poise of hope and fear
 Does arbitrate the ———, my nature is
 That I incline to hope rather than fear,
 And gladly banish squint suspicion.

EVERY (page 225)

QUESTIONS

1. In what are *all* and *both* alike? *any*, *each*, and *every*? 2. How does *any* differ from *each* and *every*? 3. How do *each* and *every* differ from *all*? 4. How does *each* compare with *every*? with *both*? 5. What does *either* properly denote? In what other sense is it often used? What is the objection to the latter use?

EXAMPLES

——— person in the room arose to his feet.
 A free pardon was offered to ——— who should instantly lay down their arms.
 As the garrison marched out, the victorious troops stood in arms on ——— side of the way.
 In order to keep his secret inviolate, he revealed it privately to ——— of his most intimate friends.
 ——— person giving such information shall be duly rewarded.

EVIDENT (page 226)

QUESTIONS

1. How do *apparent* and *evident* compare? 2. What is the special sense of *manifest*? How does it compare in strength with *evident*? 3. What is the sense of *obvious*? 4. How wide is the range of *visible*? 5. How does *discernible* compare with *visible*? What does it imply as to the observer's action? 6. What is the sense of *palpable* and *tangible*? *conspicuous*?

EXAMPLES

A paradox is a real truth in the guise of an ——— absurdity or contradiction.

The prime minister was ——— by his absence

The statement is a ——— absurdity.

On a comparison of the two works the plagiarism was ———.

Yet from those flames

No light; but only darkness ———.

These hes are like the father that begets them, gross as a mountain, open, ———.

EXAMPLE (page 227)

QUESTIONS

1. What is the etymological meaning of *example*?
2. What two contradictory meanings does *example* derive from this primary sense?
3. How does *example* differ from *sample*?
4. How does it compare with *model*? with *pattern*?
5. How does *exemplar* agree with, and differ from *example*?
6. What is an *exemplification*? an *ensample*?

EXAMPLES

I bid him look into the lives of men as though himself a mirror, and from others to take an ——— for himself

We sleep, but the loom of life never stops and the ——— which was weaving when the sun went down is weaving when it comes up to-morrow.

History is an ——— of philosophy.

The commander was resolved to make an ——— to deter others from the like offense.

EXCESS (page 228)

QUESTIONS

1. What is *excess*? Is it used in the favorable or unfavorable sense?
2. What is *extravagance*?
3. What is *exorbitance*?
4. What kind of *excess* do *overplus* and *superabundance* denote? *lavishness* and *profusion*?
5. Is *surplus* used in the favorable or unfavorable sense?
6. To what do *redundance* and *redundancy* chiefly refer?
7. What words are used as synonyms of *excess* in the moral sense?

EXAMPLES

Saving requires self-denial, and ——— is the death of self-denial

Where there is great ——— there usually follows corresponding ——— of wealth is cause of covetousness.

Haste brings ———, and ——— brings want.

The ——— of the demand caused unfeigned surprise.

More of the present woes of the world are due to ——— than to any other single cause.

——— of language often weakens the impression of what would be impressive in sober statement.

EXECUTE (page 228)

QUESTIONS

1. What is the meaning of *execute*? of *administer*? of *enforce*? 2. How are the words applied in special cases? Give instances. 3. What secondary meaning has *administer*?

EXAMPLES

It is the place of the civil magistrate to ——— the laws.

The pasha gave a signal and three attendants seized the culprit, and promptly ——— the bastinado

I can not illustrate a moral duty without at the same time ———ing a precept of our religion.

EXERCISE (page 229)

QUESTIONS

1. What is the meaning of *exercise* apart from all qualifying words? 2. How does *exercise* in that sense differ from *exertion*? 3. How may *exercise* be brought up to the full meaning of *exertion*? 4. What is *practise*? How does it differ from *exercise*? 5. How is *practise* discriminated from such theory or profession? 6. What is *drill*?

EXAMPLES

Regular ——— tends to keep body and mind in the best working order. ——— in time becomes second nature.

By constant ——— the most difficult feats may be done with no apparent ———.

EXPENSE (page 229)

QUESTIONS

1. What is *cost*? *expense*? 2. How are these words now commonly differentiated? 3. What is the meaning of *outlay*? of *outgo*?

EXAMPLES

Which of you, intending to build a tower, sitteth not down first, and counteth the ———, whether he have sufficient to finish it.

The entire receipts have not equaled the ———.

When the ——— is more than the income, if the income can not be increased, it becomes an absolute necessity to reduce the ———.

EXPLICIT (page 230)

QUESTIONS

1. To what are *explicit* and *express* alike opposed? 2. How do the two words differ from each other?

EXAMPLES

I came here at this critical juncture by the ——— order of Sir John 4t. Clare.

The language of the proposition was too ——— to admit of doubt
Now the Spirit speaketh ———ly that in the latter times some shall
depart from the faith.

EXTEMPORANEOUS (page 230)

QUESTIONS

1. What did *extemporaneous* originally mean?
2. What has it now come to signify in common use?
3. What is the original meaning of *impromptu*?
4. How does the *impromptu* remark often differ from the *extemporaneous*?
5. How does *unpremeditated* compare with the words above mentioned?

EXAMPLES

In ——— prayer, what men most admire, God least regardeth
As a speaker, he excelled in ——— address, while his opponent was at
a loss to answer him because not gifted in the same way.
No more on prancing palfrey borne.
He carolled light as lark at morn,
And poured to lord and lady gay
The ——— lay.

EXTERMINATE (page 231)

QUESTIONS

1. What is the derivation, and what the original meaning of *exterminate*?
2. To what are these words severally applied?

EXAMPLES

Since the building of the Pacific railroads in the United States, the
buffalo has been quite ———.
The evil of intemperance is one exceedingly difficult to ———
No inveterate improver should ever tempt me to ——— the dandelions
from the green carpet of my lawn.

FAINT (page 231)

QUESTIONS

1. What are the chief meanings of *faint*?
2. How is *faint* a synonym of *feeble* or *purposeless*? of *irresolute* or *timid*? of *dim*, *faded*, or *indistinct*?

EXAMPLES

Great is the strength of ——— arms combined,
And we can combat even with the brave
In his right hand a tipped staffe he held,
With which his ——— steps he stayed still,
For he was ——— with cold, and weak with eld;
That scarce his loosed limbs he hable was to weld.

FAITH (page 232)

QUESTIONS

1. What is *belief*?
2. How does *credence* compare with *belief*?
3. What is *conviction*?
4. What is an *opinion*?
5. How does a *persuasion* compare with an *opinion*?
6. What is a *doctrine*?
7. What are *confidence* and *reliance*?
8. What is *trust*?
9. What elements are combined in *faith*?
10. How is *belief* often used in popular language as a precise equivalent of *faith*?
11. How is *belief* discriminated from *faith* in the strict religious sense?

EXAMPLES

—— is the substance of things hoped for, the evidence of things not seen.

Put not your —— in princes, nor in the son of man, in whom there is no help.

—— is largely involuntary, a mathematical demonstration can not be doubted by a sane mind capable of understanding the terms and following the steps.

Every one of us, whatever our speculative ——, knows better than he practises, and recognizes a better law than he obeys.

There are few greater dangers for an army in the face of an enemy than undue ——.

FAITHFUL (page 233)

QUESTIONS

1. In what sense may a person be called *faithful*?
2. In what sense may one be called *trusty*?
3. Is *faithful* commonly said of things as well as persons?
4. What is the special difference of meaning between the two words? Give examples.

EXAMPLES

Be thou —— unto death, and I will give thee a crown of life.

Thy purpose —— is equal to the deed:

Who does the best his circumstance allows

Does well, acts nobly; angels could no more.

FAME (page 235)

QUESTIONS

1. What is *fame*? Is it commonly used in the favorable or unfavorable sense?
2. What are *reputation* and *repute*, and in which sense commonly used?
3. What is *notoriety*?
4. From what do *eminence* and *distinction* result?
5. How does *celebrity* compare with *fame*?
6. How does *renown* compare with *fame*?
7. What is the import of *honor*? of *glory*?

EXAMPLES

Saying, Amen: Blessing and ——, and wisdom, and thanksgiving, and ——, and power and might, be unto our God for ever and ever.

That fellow seems to me to possess but one ———, and that is a wrong one

If she were to take a ——— to anybody in the house, she would soon settle, but not till then.

FAREWELL (page 238)

QUESTIONS

1. To what language do *farewell* and *good-by* belong etymologically? How do they differ? 2. From what language have *adieu* and *congé* been adopted into English? 3. What is the special significance of *congé*? 4. What are *valediction* and *valedictory*?

EXAMPLES

——— my paper's out so nearly
I've only room for yours sincerely.
The train from out the castle drew,
But Marmion stopped to bid ———.
———! a word that must be, and hath been—
A sound which makes us linger; —yet— ———.

FEAR (page 238)

QUESTIONS

1. What is the generic term of this group? 2. What is *fear*? Is it sudden or lingering? In view of what class of dangers? 3. What is the etymological meaning of *horror*? What does the word signify in accepted usage? 4. What are the characteristics of *affright*, *fright*, and *terror*? 5. How is *fear* contrasted with *fright* and *terror* in actual or possible effects? 6. What is *panic*? What of the numbers affected by it? 7. What is *dismay*? How does it compare with *fright* and *terror*?

EXAMPLES

Even the bravest men may be swept along in a sudden ———.

With much more ———

I view the fight than thou that mak'st the fray.

Look in, and see Christ's chosen saint

In triumph wear his Christ-like chain;

No ——— lest he should swerve or faint.

The ghastly spectacle filled every beholder with ———.

A lingering ——— crept upon him as he waited in the darkness.

FEMININE (page 240)

QUESTIONS

1. How are *female* and *feminine* discriminated? 2. What is the difference between a *female* voice and a *feminine* voice? 3. How are *womanly* and *womanish* discriminated in use?

EXAMPLES

Notice, too, how precious are these ——— qualities in the sick room.
The demand for closet-room is no mere ——— fancy, but the good sense
of the sex

FETTER (page 240)

QUESTIONS

1. What are *fetters* in the primary sense? 2. What are *manacles* and *hand-cuffs* designed to fasten or hold? *gyves*? 3. What are *shackles* and what are they intended to fasten or hold? 4. Of what material are all these restraining devices commonly composed? By what general name are they popularly known? 5. What are *bonds* and of what material composed? 6. Which of these words are used in the metaphorical sense?

EXAMPLES

But first set my poor heart free,
Bound in these icy ——— by thee.
Slaves can not breathe in England
.....
They touch our country, and their ——— fall.

FEUD (page 241)

QUESTIONS

1. What is a *feud*? Of what is it used? 2. Is a *quarrel* in word or act? *contention*? *strife*? *contest*? 3. How does *quarrel* compare in importance with the other words cited? 4. What does an *affray* always involve? To what may a *brawl* or *broil* be confined? 5. How do these words compare in dignity with *contention*, *contest*, *controversy*, and *dissension*?

EXAMPLES

Could we forbear ——— and practise love
We should agree as angels do above.
"Between my house and yours," he answered,
"There is a ——— of five hundred years."
Beware of entrance to a ———.

FICTION (page 243)

QUESTIONS

1. What is a *fiction* in the most common modern meaning of the word? 2. How does a *fiction* differ from a *novel*? from a *fable*? from a *myth*? 3. How does a *myth* differ from a *legend*? 4. How do *falsehood* and *fabrication* differ from the words above mentioned? 5. Is *fabrication* or *falsehood* the more odious term? Which term is really the stronger? 6. What is a *story*? Is it good or bad, true or false? With what words of the group does it agree?

EXAMPLES

O scenes surpassing ———, and yet true,

Scenes of accomplished bliss

A ——— strange is told of thee.

I believe the whole account from beginning to end to be a pure ———.

A thing sustained by such substantial evidence could not be a mere
——— of the imagination.

FIERCE (page 244)

QUESTIONS

1. What does *fierce* signify? 2. To what does *ferocious* refer? How do the two words differ? 3. What does *savage* signify?

EXAMPLES

——— was the day; the wintry sea

Moaned sadly on New England's strand,

When first the thoughtful and the free,

Our fathers, trod the desert land.

Contentions ———,

Ardent, and dire, spring from no petty cause.

The ——— savages massacred the survivors to the last man.

FINANCIAL (page 245)

QUESTIONS

1. To what does *monetary* directly refer? 2. How does *pecuniary* agree with and differ from *monetary*? 3. To what does *financial* especially apply? 4. In what connection is *fiscal* most commonly used?

EXAMPLES

The ——— year closes with the society out of debt.

He was rejoiced to receive the ——— aid at a time when it was most needed.

In a ——— panic, many a sound business house goes down for want of power to realize instantly on valuable securities.

FINE (page 245)

QUESTIONS

1. From what is *fine* derived, and what is its original meaning? 2. How, from this primary meaning does *fine* become a synonym of *excellent* and *beautiful*? 3. How does it come into connection with *clarified*, *clear*, *pure*, *refined*? 4. How is it connected with *dainty*, *delicate*, and *exquisite*? 5. How does *fine* come to be a synonym for *minute*, *comminuted*? How for *filmy*, *tenuous*? for *keen*, *sharp*? Give instances of the use of *fine* in its various senses.

EXAMPLES

Some people are more ——— than wise.

——— feathers do not always make ——— birds

The ———est balances must be kept under glass, because so ———ly adjusted as to be ——— to a film of dust or a breath of air.

FIRE (page 246)

QUESTIONS

1. What is the essential fact underlying the visible phenomena we call *fire*?
2. What is *combustion*?
3. How wide is its range of meaning?
4. What is a *conflagration*?

EXAMPLES

He's gone, and who knows how he may report

Thy words by adding fuel to the ———?

Lo! as he comes, in Heaven's array.

And scattering wide the ——— day.

FLOCK (page 249)

QUESTIONS

1. What is the most general word of this group?
2. What is a *group*, and of what class of objects may it be composed?
3. To what class of animals does *brood* apply? to what class does *litter* apply?
4. Of what is *bevy* used? *flock*?
5. To what is *herd* limited?
6. Of what is *pack* used?
7. What is a *drove*?

EXAMPLES

What is not good for the ——— is not good for the bee

He heard the bleating of the ———s and the twitter of birds among the trees.

The lowing ——— winds slowly o'er the sea.

Excited ———s gathered at the corners discussing the affair.

A ——— of brightly clad women and children were enjoying a picnic under the trees.

" FLUCTUATE (page 249)

QUESTIONS

1. What is the meaning of *fluctuate*?
2. In what one characteristic do *swerve* and *veer* differ from *oscillate*, *fluctuate*, *undulate*, and *waver*?
3. What is the difference in mental action between *hesitate* and *waver*? between *vacillate* and *waver*?
4. Which of the above-mentioned words apply to persons? which to feelings?

EXAMPLES

Thou almost mak'st me ——— in my faith.

The surface of the prairies rolls and ——— to the eye.

It is almost universally true that the human mind ——— at the moment of committing a crime.

The vessel suddenly ———s from her course.

FLUID (page 250)

QUESTIONS

1. What is a *fluid*? 2. Into what two sections are *fluids* divided? 3. What is a *liquid*? a *gas*? 4. Are all *liquids fluids*? 5. Are *gases fluids*? 6. Are *gases ever liquids*? 7. What substance is at once a *liquid* and a *fluid* at the ordinary temperature and pressure?

EXAMPLES

Now nature paints her colors, how the bee
Sits on the bloom, extracting ——— sweet.
This earth was once a ——— haze of light.

FOLLOW (page 250)

QUESTIONS

1. What is it to *follow*? 2. How does *follow* compare with *chase* and *pursue*? 3. As regards succession in time, what is the difference between *follow* and *ensue*? *result*?

EXAMPLES

Say, shall my little bark attendant sail,
—— the triumph and partake the gale?
When Youth and Pleasure meet
To —— the glowing Hours with flying feet,
"Then —— me, the Prince."
I answered, "each be hero in his turn;
Seven and yet one, like shadows in a dream."

FORMIDABLE (page 252)

QUESTIONS

1. What is the meaning of *formidable*? 2. How does *formidable* differ from *dangerous*? *terrible*? *tremendous*? Give examples.

EXAMPLES

All delays are —— in war.
—— as an army with banners.
The great fleet moved slowly toward the forts, a —— array.

FORTIFICATION (page 252)

QUESTIONS

1. How does a *fortress* specifically differ from a *fortification*? 2. What is the distinctive meaning of *citadel*? 3. What is a *fort*? 4. What is a *fastness* or *stronghold*?

EXAMPLES

For a man's house is his ——.
A mighty —— is our God,
A bulwark never failing;
Our helper He amid the flood
Of mortal ills prevailing
Alva built a —— in the heart of Antwerp to overawe the city.

FORTITUDE (page 253)

QUESTIONS

1. What is *fortitude*? 2. How does it compare with *courage*? 3. How do *resolute* and *endurance* compare?

EXAMPLES

Unbounded ——— and compassion join'd,
Tempering each other in the victor's mind.

Tell thy story;

If thine, consider'd, prove the thousandth part
Of my ———, thou art a man, and I
Have suffer'd like a girl.

Thou didst smile,

Infused with a ——— from heaven,

When I had decked the sea with drops full salt.

FORTUNATE (page 253)

QUESTIONS

1. How does *fortunate* compare with *successful*? 2. How are *lucky* and *fortunate* discriminated? 3. In what special sense, and with what reference are *avored* and *prospered* used?

EXAMPLES

It is not a ——— word this same "impossible"; no good comes of those that have it so often in their mouth.

Ah, ——— years! once more who would not be a boy?

I have a mind presages me such thrift

That I should questionless be ———.

FRAUD (page 256)

QUESTIONS

1. What is a *fraud*? How does it differ from *deceit* or *deception*? 2. What is the design of an *imposture*? 3. What is *dishonesty*? a *cheat*? a *swindle*? How do all these fall short of the meaning of *fraud*? 4. Of what relations is *treachery* used? *treason*?

EXAMPLES

——— doth never prosper: what's the reason?

Why, if it prosper none dare call it ———.

Whoever has once become notorious by base ———, even if he speaks truth gains no belief.

The first and the worst of all ——— is to cheat oneself.

FRIENDLY (page 256)

QUESTIONS

1. What does *friendly* signify as applied to persons, or as applied to acts? 2. How does the adjective *friendly* compare in strength with the noun

friend? 3. What is the special meaning of *accessible?* of *companionable* and *sociable?* of *cordial* and *genial?*

EXAMPLES

He that hath friends must show himself ———.

A fellow feeling makes one wondrous ———.

FRIENDSHIP (page 257)

QUESTIONS

1. What is *friendship?* 2. In what one quality does it differ from *affection*, *attachment*, *devotion*, and *friendliness?* 3. What is the meaning of *comity* and *amity?* 4. How does *friendship* differ from *love?*

EXAMPLES

Talk not of wasted ———, ——— never was wasted,
If it enrich not the heart of another, its waters returning
Back to their springs, like the rain, shall fill them full of refreshment.
———, peculiar boon of heaven,
The noble mind's delight and pride,
To men and angels only given,
To all the lower world denied.

FRIGHTEN (page 258)

QUESTIONS

1. By what is one *frightened?* by what *intimidated?* 2. What is it to *browbeat* or *cow?* 3. What is it to *scare* or *terrify?*

EXAMPLES

The child was ——— by the stories the nurse told.
The loud, loud winds, that o'er the billows sweep—
Shake the firm nerve, ——— the bravest soul!

FRUGALITY (page 259)

QUESTIONS

1. What is *economy?* 2. What is *frugality?* 3. What is *parsimony?* How does it compare with *frugality?* What is the motive of *parsimony?* 4. What is *miserliness?* 5. What is the special characteristic of *prudence* and *providence?* of *thrift?* 6. What is the motive of *economy?*

EXAMPLES

There are but two ways of paying debts: increase of industry in raising, increase of ——— in laying out.

By close ——— the little home was at last paid for and there was a great thanksgiving time.

GARRULOUS (page 259)

QUESTIONS

1. What does *garrulous* signify? *chattering*? 2. How do *talkative* and *loquacious* differ from *garrulous*, and from each other? 3. What is the special application of *verbose*?

EXAMPLES

To tame a shrew, and charm her ——— tongue.

Guard against a feeble fluency, a ——— prosiness, a facility of saying nothing.

GENDER (page 260)

QUESTIONS

1. What is *sex*? 2. To what beings only does *sex* apply? 3. What is *gender*? To what does it apply? Do the distinctions of *gender* correspond to the distinctions of *sex*? Give examples of languages containing three *genders*, and of the classification in languages containing but two.

EXAMPLES

The material relation naturally and necessarily divides the work of the ———s, giving to women the indoor life, and to man the work of the outer world.

While in French every word is either of the masculine or feminine ———, the language sometimes fails for that very reason to indicate the ——— of some person referred to.

GENERAL (page 260)

QUESTIONS

1. What does *general* signify? 2. How does *general* compare with *universal* with *common*? 3. What illustrations of the differences are given in the text?

EXAMPLES

——— friendships will admit of division, one may love the beauty of this, the good humor of that person, . . . and so on.

A ——— feeling of unrest prevailed.

Death comes to all by ——— law.

GENEROUS (page 261)

QUESTIONS

1. What is the primary meaning of *generous*? the common meaning? 2. How does *generous* differ from *liberal*? 3. What is the distinctive sense of *munificent*? 4. What does *munificent* tell of the motive or spirit of the giver? What does *generous* tell? 5. How does *disinterested* compare with *generous*? 6. What is the distinctive meaning of *magnanimous*? How does it differ from *generous* as regards dealing with insults or injuries?

EXAMPLES

To cunning men
I will be very kind; and ——
To mine own children, in good bringing up.
A —— friendship no cold medium knows,
Burns with one love, with one resentment glows.
The conqueror proved as —— in victory as he was terrible in battle.

GENIUS (page 262)

QUESTIONS

1. What is *genius*? 2. What is *talent*? 3. Which is the higher quality?
4. Which is the more dependent upon training?

EXAMPLES

The eternal Master found
His single —— well employ'd.
No great —— was ever without some mixture of madness.

GET (page 262)

QUESTIONS

1. What is a person said to *get*? 2. How is *get* related to expectation or desire? How is *gain* related to those words? 3. By what processes does one *acquire*? Is the thing *acquired* sought or desired, or not?
4. What does one *earn*? 5. Does a person always *get* what he *earns* or always *earn* what he *gets*? 6. What does *obtain* imply? Is the thing one *obtains* an object of *desire*? How does *obtain* differ from *get*? 7. What does *win* imply? How is one said to *win* a suit at law? What is the correct term in legal phrase? Why? 8. By what special element does *procure* differ from *obtain*? 9. What is especially implied in *secure*?

EXAMPLES

He —— a living as umbrella-mender, but a poor living it is.
—— wisdom and with all thy getting, —— understanding.
In the strange city he found that all his learning would not —— him a dinner.

GIFT (page 263)

QUESTIONS

1. What is a *gift*? Is *gift* used in the good or the bad sense? Does the legal agree with the popular sense? 2. What synonymous word is always used in the evil sense? 3. What is a *benefaction*? a *donation*? What difference of usage is recognized between the two words?
4. What is a *gratuity*, and to whom given? 5. What is the sense and use of *largess*? 6. What is a *present*, and to whom given? 7. What is the special sense of *boon*? 8. What is a *grant*, and by whom made?

EXAMPLES

He gave us only over beast, fish, fowl,
Dominion absolute; that right we hold

By his ———.

True love's the ——— which God has given
To man alone beneath the heaven.

"———, ——, noble knights," cried the heralds.

The courts of justice had fallen so low that it was practically impossible
to win a cause without a ———.

GIVE (page 264)

QUESTIONS

1. What is the primary meaning of *give*? the secondary meaning?
2. Can we *give* what is undesired?
3. Can we *give* what we are paid for?
4. How is *give* always understood when there is no limitation in the context?
5. Is it correct to say "He *gave* it to me for nothing"?
6. What is to *grant*?
7. What is implied when we speak of *granting* a favor?
8. What is to *confer*?
9. What is especially implied in *impart*? in *bestow*?

EXAMPLES

My God shall ——— all your need according to his riches in glory by
Christ Jesus.

——— to every man that asketh of thee, and from him that would
borrow of thee, turn not thou away.

The court promptly ——— the injunction

The king ——— upon him the honor of knighthood.

One of the pleasantest things in life is to ——— instruction to those
who really desire to learn.

GOVERN (page 265)

QUESTIONS

1. What does the word *govern* imply? How does it differ from *control*?
2. How do *command* and *control* differ?
3. How do *rule* and *govern* differ?
4. What is the special significance of *sway*? of *mold*?
5. What is it to *manage*?
6. What is the present meaning of *reign*?
How does it compare with *rule*?

EXAMPLES

He that ——— his spirit is greater than he that taketh a city.

For some must follow, and some ———

Though all are made of clay.

Daniel Webster well described the character of "Old Hickory" in the
sentence, "I do not say that General Jackson did not mean to ——— his
country well, but I do say that General Jackson meant to ——— his
country."

GRACEFUL (page 266)

QUESTIONS

What does *graceful* denote? How is it especially distinguished from
beautiful?

EXAMPLES

How — upon the mountains are the feet of him that bringeth good tidings, that publisheth peace.

A — myrtle rear'd its head.

GRIEF (page 266)

QUESTIONS

1. What is *grief*? 2. How does *grief* compare with *sorrow*? with *sadness*? with *melancholy*? 3. What two chief senses has *affliction*? 4. What is implied in *mourning*, in its most common acceptation?

EXAMPLES

We glory in — also.

For our light — which is but for a moment, worketh for us a far more exceeding and eternal weight of glory.

What private — they have, alas! I know not, that made them do it.

HABIT (page 267)

QUESTIONS

1. What is *custom*? *routine*? Which is the more mechanical? 2. What element does *habit* add to *custom* and *routine*? 3. Should we preferably use *custom* or *habit* of a society? of an individual? 4. What is *fashion*? *rule*? *system*? 5. What are *use* and *usage*, and how do they differ from each other? 6. What is *practise*? 7. What is the distinctive meaning of *wont*?

EXAMPLES

Every — is preserved and increased by correspondent actions, as the — of walking by walking, of running by running.

Montaigne is wrong in declaring that — ought to be followed simply because it is —, and not because it is reasonable or just.

Lord Brougham says "The longer I live the more careful I am to entrust everything that I really care to do to the beneficent power of —," — makes perfect.

Without — little that is valuable is ever learned or done.

HAPPEN (page 267)

QUESTIONS

1. What does *happen* signify? 2. How does it differ from *chance*? 3. What is the distinctive meaning of *betide*? 4. How do both *befall* and *betide* differ from *happen* in grammatical construction? 5. What is the meaning of *supervene*? 6. Is *transpire* correctly used in the sense of *happen*? When may an event be properly said to *transpire*?

EXAMPLES

Whatever — at all — as it should.

Thou sowest not that body that shall be, but bear grain, it may — of wheat, or of some other grain.

Ill ——— the graceless renegade!

It ——— that a secret treaty had been previously concluded between the powers.

If mischief ——— him, thou shalt bring down my gray hairs with sorrow to the grave.

HAPPINESS (page 268)

QUESTIONS

1. What is *gratification*? *satisfaction*? 2. What is *happiness*? 3. How does *happiness* differ from *comfort*? 4. How does *comfort* differ from *enjoyment*? 5. How does *pleasure* compare with *comfort* and *enjoyment*? with *happiness*? 6. What do *gratification* and *satisfaction* express? How do they compare with each other? 7. How does *happiness* compare with *gratification*, *satisfaction*, *comfort*, and *pleasure*? with *delight* and *joy*? 8. What is *delight*? *ecstasy*? *rapture*? 9. What is *triumph*? *blessedness*? *bliss*?

EXAMPLES

Sweet is ——— after pain.

Virtue alone is ——— below.

Hope elevates and ——— brightens his crest.

The storm raged without, but within the house all was brightness and

There is no ——— so sweet and abiding as that of doing good.

This is the very ——— of love.

HAPPY (page 270)

QUESTIONS

1. What is the original meaning of *happy*? With what words is it allied in this sense? 2. In what way is *happy* a synonym of *blessed*? 3. What is the meaning of *happy* in its most frequent present use?

EXAMPLES

——— are they that mourn, for they shall be comforted.

To what ——— accident is it that we owe so unexpected a visit.

A ——— heart maketh a ——— countenance.

I would not spend another such a night,

Though 'twere to buy a world of ——— days.

HARMONY (page 271)

QUESTIONS

1. What is *harmony*? 2. How does *harmony* compare with *agreement*? 3. How do *concord* and *accord* compare with *harmony* and with each other? 4. What is *conformity*? *congruity*? 5. What is *consistency*? 6. What is *unanimity*? 7. How do *consent* and *concurrence* compare?

EXAMPLES

We have made a covenant with death and with hell are we at ———.

Tyrants have made desperate efforts to secure outward ——— in religious observances without ——— of religious belief.

That action and counteraction which, in the natural and in the political world, from the reciprocal struggle of discordant powers draws out the ——— of the universe

The speaker was, by general ———, allowed to proceed.

HARVEST (page 272)

QUESTIONS

1. What is the original meaning of *harvest*? its later meaning?
2. How does *harvest* compare with *crop*?
3. What is *produce*? How does it differ from *product*?
4. What is the meaning of *proceeds*? *yield*? *return*?
5. Is *harvest* capable of figurative use, and in what sense?
6. What is the special meaning of *harvest-home*? *harvest tide*? *harvest-time*?

EXAMPLES

Just tickle the earth with a hoe, and she laughs with an abundant ———.

And the ripe ——— of the new-mown hay gives it a sweet and wholesome odor.

It soweth here with toil and care
But the ——— of love is there.
Of no distemper, of no blast he died,
But fell like autumn ——— that mellowed long.

HATRED (page 273)

QUESTIONS

1. What is *repugnance*? *aversion*?
2. How does *hatred* compare with *aversion* as applied to persons? as applied to things?
3. What is *malice*? *malignity*?
4. What is *spite*?
5. What are *grudge*, *resentment*, and *revenge*, and how do they compare with one another?

EXAMPLES

Heaven has no ——— like love to ——— turned.
The slight put upon him filled him with deep ———.
He ne'er bore ——— for stalwart blow
Ta'en in fair fight from gallant foe.

In all cases of wilful injury to person or property, the law presumes ———.

I felt from our first meeting an instinctive ——— for the man, which acquaintance deepened into a settled ———.

HAVE (page 274)

QUESTIONS

1. To what is *have* applied? How widely inclusive a word is it?
2. What does *possess* signify?
3. What is to *hold*? to *occupy*?
4. How does

be in possession compare with *possess*? 5. How does *own* compare with *possess* or with *be in possession*? 6. What is the difference between the statement that a man *has* reason, and the statement that he *is in possession* of his reason?

EXAMPLES

Son, thou art ever with me, and all that I ——— is thine.

I earnestly entreat you, for your own sakes, to ——— yourselves of solid reasons

He occupies the house, but does not ——— it.

HAZARD (page 275)

QUESTIONS

1. What is the meaning of *hazard*? 2. How does *hazard* compare with *danger*? 3. How do *risk* and *venture* compare with *chance* and *hazard*, and with each other? 4. How do *accident* and *casualty* differ? 5. What is a *contingency*?

EXAMPLES

We must take the current when it serves or lose our ———.

I have set my life upon a cast, and I will stand the ——— of the die. There is no ——— in doing known duty.

Do you think it necessary to provide for every ——— before taking the first step?

HEALTHY (page 275)

QUESTIONS

1. What is the meaning of *healthy* or *healthful*? Are the words properly interchangeable? 2. What are the chief synonyms of *healthy* or *healthful*? 3. In what sense is *salubrious* used, and to what is it applied? 4. To what realm does *salutary* belong?

EXAMPLES

In books, or work, or ——— play let my first years be passed.

Blessed is the ——— nature; it is the coherent, sweetly cooperative, not the self-distracting one.

HELP (page 276)

QUESTIONS

1. Is *help* or *aid* the stronger term? 2. Which is used in excitement or emergency? 3. Does *help* include *aid* or does *aid* include *help*? 4. Which implies the seconding of another's exertions? Do we *aid* or *help* the helpless? 5. How do *cooperate* and *assist* differ? 6. To what do *encourage* and *uphold* refer? *succor* and *support*?

EXAMPLES

He does not prevent a crime when he can ——— it.

Know then whatever cheerful and serene ——— the mind ——— the body too.

HERETIC (page 276)

QUESTIONS

1. What is a *heretic*? a *schismatic*? 2. In what does a *heretic* differ from his church or religious body? a *schismatic*? 3. How do a *heretic* and a *schismatic* often differ in action? 4. How are the terms *dis-senter* and *non-conformist* usually applied?

EXAMPLES

A man that is an ———, after the first and second admonition, reject.
Churchmen and ——— alike resisted the tyranny of James II.

HETEROGENEOUS (page 277)

QUESTIONS

1. When are substances *heterogeneous* as regards each other? 2. When is a mixture, as cement, said to be *heterogeneous*? when *homogeneous*? 3. What is the special significance of *non-homogeneous*? 4. How does *miscellaneous* differ from *heterogeneous*?

EXAMPLES

My second son received a sort of ——— education at home.
Courtier and patriot can not mix
Their ——— politics
Without an effervescence.

HIDE (page 278)

QUESTIONS

1. Which is the most general term of this group, and what does it signify? 2. Is an object *hidden* by intention, or in what other way or ways, if any? 3. Does *conceal* evince intention? 4. How does *secrete* compare with *conceal*? How is it chiefly used? 5. What is it to *cover*? to *screen*?

EXAMPLES

Men use thought only as authority for their injustice, and employ speech only to ——— their thoughts.
Ye little stars! ——— your diminished rays.

HIGH (page 279)

QUESTIONS

1. What kind of a term is *high*? What does it signify? Give instances of the relative use of the word. 2. How does *high* compare with *deep*? To what objects may these words be severally applied? 3. What is the special significance of *tall*? 4. What element does *lofty* add to the meaning of *high* or *tall*? 5. How do *elevated* and *eminent* compare in the literal sense? in the figurative? 6. How do the words above mentioned compare with *exalted*? 7. What contrasted uses has *high* in the figurative sense? 8. What is *towering* in the literal, and in the figurative sense?

EXAMPLES

A pillar'd shade, ——— overarched, and echoing walks between.
A daughter of the gods, divinely ——— and most divinely fair.

What is that which the breeze on the ——— steep,
As it fitfully blows, half conceals, half discloses?

He knew

Himself to sing, and build the ——— rime.

HINDER (page 280)

QUESTIONS

1. What is it to *hinder*? 2. How does *hinder* differ from *delay*? 3. How does *hinder* compare with *prevent*? 4. What is the meaning of *retard*? 5. What is it to *obstruct*? to *resist*? How do these two words compare with each other?

EXAMPLES

——— the Devil, and he will flee from you.

My tears must stop, for every drop

———my needle and thread.

It is the study of mankind to ——— that advance of age or death which can not be ———.

HISTORY (page 281)

QUESTIONS

1. What is the meaning of *history*? How does it relate events? To what class of events does it apply? 2. How does *history* differ from *annals* or *chronicles*?

EXAMPLES

Happy the people whose ——— are dulled.

——— is little else than a picture of human crimes and misfortunes.

——— is philosophy teaching by example.

HOLY (page 282)

QUESTIONS

1. What is the meaning of *sacred*? 2. How does it compare with *holy*? 3. Which term do we apply directly to God? 4. In what sense is *divine* loosely used? What is its more appropriate sense?

EXAMPLES

The ——— time is quiet as a nun breathless with adoration.

A ——— burden is this life ye bear.

All sects and churches of Christendom hold to some form of the doctrine of the ——— inspiration of the Christian Scriptures.

HOME (page 282)

QUESTIONS

1. What is the general sense of *abode*, *dwelling*, and *habitation*? What

difference is there in the use of these words? 2. From what language is *home* derived? What is its distinctive meaning?

EXAMPLES

An ——— giddy and unsure

Hath he that buildeth on the vulgar heart.

The attempt to abolish the ideal woman and keep the ideal ——— is a predestinated failure.

A house without love may be a castle or a palace, but it is not a ———.

Love is the life of a true ———.

HONEST (page 283)

QUESTIONS

1. What is the meaning of *honest* in ordinary use? 2. What is the meaning of *honorable*? 3. How will the merely *honest* and the truly *honorable* man differ in action? 4. What is *honest* in the highest and fullest sense? How, in this sense, does it differ from *honorable*?

EXAMPLES

——— labor bears a lovely face.

An ——— man's the noblest work of God.

No form of pure, undisguised murder will be any longer allowed to confront itself with the necessities of ——— warfare.

HORIZONTAL (page 283)

QUESTIONS

1. What does *horizontal* signify? How does it compare with *level*? 2. From what language is *flat* derived? 3. What is its original meaning? its most common present sense? In what derived sense is it often used? 4. What are the senses of *plain* and *plane*?

EXAMPLES

Sun and moon were in the ——— sea sunk.

Ample spaces o'er the smooth and ——— pavement.

The prominent lines in Greek architecture were ———, and not vertical.

HUNT (page 285)

QUESTIONS

1. What is a *hunt*? 2. For what is a *chase* or *pursuit* conducted? a *search*? 3. What does *hunt* ordinarily include? 4. Is it correct to use *hunt* when *search* only is contemplated? 5. How are these words used in the figurative senses?

EXAMPLES

Among the inalienable rights of man are life, liberty and the ——— of happiness.

All things have an end, and so did our ——— for lodgings.

The ——— formed the principal amusement of our Norman kings, who for that purpose retained in their possession forests in every part of the kingdom.

The ——— is up, but they shall know
The stag at bay's a dangerous foe.

HYPOCRISY (page 285)

QUESTIONS

1. From what language is *pretense* derived, and what does it signify? 2. What is *hypocrisy*? 3. What is *cant*? *sanctimoniousness*? 4. What is *pietism*? *formalism*? *sham*? 5. How does *affectation* compare with *hypocrisy*?

EXAMPLES

Let not the Trojans, with a feigned ——— of proffered peace, delude the Latin prince.

——— is a fawning and flexible art, which accommodates itself to human feelings, and flatters the weakness of men in order that it may gain its own ends.

HYPOCRITE (page 286)

QUESTIONS

1. From what language is *hypocrite* derived? What is its primary meaning? 2. What common term includes the other words of the group. 3. How are *hypocrite* and *dissembler* contrasted with each other? 4. What element is common to the *cheat* and the *impostor*? How do the two compare with each other?

EXAMPLES

It is the weakest sort of politicians that are the greatest ———.

I dare swear he is no ——— but prays from his heart.

In the reign of Henry VII., an ———, named Perkin Warbeck, laid claim to the English crown.

HYPOTHESIS (page 286)

QUESTIONS

1. What is a *hypothesis*? What is its use in scientific investigation and study? 2. What is a *guess*? a *conjecture*? a *supposition*? a *surmise*? 3. What implication does *surmise* ordinarily convey? What is a *theory*? a *scheme*? a *speculation*? How do they differ?

EXAMPLES

———, fancies, built on nothing firm.

There are no other limits to ——— than those of the human mind.

The development ———, though widely accepted by men of science, fails of proof at many important points.

IDEA (page 287)

QUESTIONS

1. From what language is *idea* derived, and what did it originally mean?
2. What did *idea* signify in early philosophical use?
3. What is its present popular use, and with what words is it now synonymous?

EXAMPLES

All rests with those who read. A work or ——

Is what each makes it to himself

He who comes up to his own —— of greatness must always have had a very low standard of it in his mind.

IDEAL (page 288)

QUESTIONS

1. What is an *ideal*?
2. What is an *archetype*? a *prototype*?
3. Can a *prototype* be equivalent to an *archetype*?
4. Is an *ideal* primal, or the result of development?
5. What is an *original*?
6. What is the *standard*? How does it compare with the *ideal*?
7. How are *idea* and *ideal* contrasted?

EXAMPLES

Be a —— to others and then all will go well.

The mind's the —— of the man.

Every man has at times in his mind the —— of what he should be, but is not.

IDIOCY (page 289)

QUESTIONS

1. What is *idiocy*?
2. What is *imbecility*? How does it compare with *idiocy*?
3. How does *insanity* differ from *idiocy* or *imbecility*?
4. How do *folly* and *foolishness* compare with *idiocy*?
5. What is *fatuity*? *stupidity*?

EXAMPLES

Where ignorance is bliss, 'tis —— to be wise.

To expect an effect without a cause, or attainment without application, is little less than ——.

IDLE (page 289)

QUESTIONS

1. From what language is *idle* derived, and what is its original meaning?
2. What does *idle* in present use properly denote? Does it necessarily denote the absence of all action?
3. What does *lazy* signify? How does it differ from *idle*?
4. What does *inert* signify? *sluggish*?
5. In what realm does *slothful* belong, and what does it denote?
6. How does *indolent* compare with *slothful*?

EXAMPLES

The —— stream was covered with a green scum.

Never —— a moment, but thrifty and thoughtful of others.

As the door turneth upon his hinges, so doth the ——— turn upon his bed.

IGNORANT (page 290)

QUESTIONS

1. What does *ignorant* signify? How wide is its range? 2. What is the meaning of *illiterate*? 3. How does *unlettered* compare with *illiterate*?

EXAMPLES

So foolish was I and ———; I was as a beast before thee.
A boy is better unborn than ———.

IMAGINATION (page 290)

QUESTIONS

1. Into what two parts was *imagination* divided in the old psychology? 2. What name is now preferably given to the so-called *reproductive imagination* by President Porter and others? 3. What is *fantasy* or *phantasy*? In what mental actions is it manifested? 4. What is *fantasy* in ordinary usage? 5. How is *imagination* defined? *fancy*? 6. To what faculty of the mind do both of these activities or powers belong? 7. In what other respects do *imagination* and *fancy* agree? What is the one great distinction between them? How do they respectively treat the material objects or images with which they deal? Which power finds use in philosophy, science, and mechanical invention, and how?

EXAMPLES

While ———, like the finger of a clock,
Runs the great circuit, and is still at home.
And as ——— bodie forth
The forms of things unknown, the poet's pen
Turns them to shapes, and gives to airy nothing
A local habitation and a name.

IMMEDIATELY (page 293)

QUESTIONS

1. What is the primary meaning of *immediately*? Its meaning as an adverb of time? 2. What did *by and by* formerly signify? What is its present meaning? 3. What did *directly* formerly signify, and what does it now commonly mean? 4. What change has *presently* undergone? 5. Is *immediately* losing anything of its force? What words now seem more emphatic?

EXAMPLES

Nothing is there to come, and nothing past,
But an eternal ——— does always last.
Let us go up ———, and possess it; for we are well able to overcome it.
Obey me ———!

IMMERSE (page 294)

QUESTIONS

1. From what language is *dip* derived? from what *immerse*? 2. How do the two words differ in dignity? How as to the completeness of the action? How as to the continuance of the object in or under the liquid? 3. Which word is preferably used as to the rite of baptism? 4. What does *submerge* imply? 5. What are *douse* and *duck*? 6. What special sense has *dip* which the other words do not share?

EXAMPLES

Trust no Future, howe'er pleasant!

Let the dead Past ——— its dead.

The ships of war, Congress and Cumberland, were ——— by the Merri-mac.

When food can not be swallowed, life may be prolonged by ——— the body in nutritive fluids.

IMMINENT (page 294)

QUESTIONS

1. From what language is *imminent* derived and with what primary sense? *impending*? 2. How do *imminent* and *impending* differ in present use? 3. How does *threatening* differ from the two words above given?

EXAMPLES

And nodding Ilium waits the ——— fall.

And these she does apply for warnings, portents,

And evils ———.

IMPEDIMENT (page 295)

QUESTIONS

1. What does *impediment* primarily signify? *obstacle*? *obstruction*? 2. How does *obstacle* differ from *obstruction*? 3. What is a *hindrance*? 4. Is an *impediment* what one finds or what he carries? Is it momentary or constant? What did the Latin *impedimenta* signify? 5. What is an *encumbrance*? How does it differ from an *obstacle* or *obstruction*? 6. Is a *difficulty* within one or without?

EXAMPLES

Something between a ——— and a help.

Thus far into the bowels of the land

Have we march'd without ———.

Demosthenes became the foremost orator of the world in spite of an ——— in his speech.

—————s overcome are the stepping-stones by which great men rise.

IMPUDENCE (page 296)

QUESTIONS

1. What does *impertinence* primarily denote? What is its common acceptation?
2. What is *impudence*? *insolence*?
3. What is *officiousness*?
4. What does *rudeness* suggest?

EXAMPLES

With matchless ——— they style a wife

The dear-bought curse, and lawful plague of life.

It is better not to turn friendship into a system of lawful and unpunishable ———.

A certain class of ill-natured people mistake ——— for frankness.

INCONGRUOUS (page 297)

QUESTIONS

1. When are things said to be *incongruous*?
2. To what is *discordant* applied? *inharmonious*?
3. What does *incompatible* signify? Whom are things said to be *incompatible*?
4. To what does *inconsistent* apply?
5. What illustrations of the uses of these words are given in the text?
6. What is the meaning of *incommensurable*?

EXAMPLES

No solitude is so solitary as that of ——— companionship.

I hear a strain ——— as a merry dirge, or sacramental bacchanal might be.

INDUCTION (page 298)

QUESTIONS

1. What is *deduction*? *induction*?
2. What is the proof of an *induction*?
3. What process is ordinarily followed in what is known as scientific *induction*?
4. How do *deduction* and *induction* compare as to the certainty of the conclusion?
5. How does an *induction* compare with an *inference*?

EXAMPLES

The longer one studies a vast subject the more cautious in ——— he becomes.

Perhaps the widest and best known ——— of Biology is that organisms grow.

INDUSTRIOUS (page 299)

QUESTIONS

1. How does *busy* differ from *industrious*?
2. What is the implication if we say one is *industrious* just now?
3. What does *diligent* add to the meaning of *industrious*?

EXAMPLES

Look cheerfully upon me,

Here, love; thou see'st how ——— I am.

The ——— have no time for tears.

INDUSTRY (page 299)

QUESTIONS

1. What is *industry*? 2. What does *assiduity* signify as indicated by its etymology? *diligence*? 3. How does *application* compare with *assiduity*? 4. What is *constancy*? *patience*? *perseverance*? 5. What is *perseverance*? What implication does it frequently convey? 6. How does *industry* compare with *diligence*? 7. To what do *labor* and *pains* especially refer?

EXAMPLES

Honors come by ———, riches spring from economy.

'Tis ——— supports us all.

There is no success in study without close, continuous, and intense

———.

His ——— in wickedness would have won him enduring honor if it had taken the form of ——— in a better cause

INFINITE (page 300)

QUESTIONS

1. From what language is *infinite* derived, and with what meaning? To what may it be applied? 2. How do *countless*, *innumerable*, and *numberless* compare with *infinite*? 3. What is the use of *boundless*, *limitless*, *limitless*, *measureless*, and *unlimited*? 4. What are the dimensions of *infinite* space? What is the duration of *infinite* time?

EXAMPLES

My bounty is as ——— as the sea, my love as deep, the more I give to thee, the more I have, for both are ———.

Man's inhumanity to man makes ——— thousands mourn.

INFLUENCE (page 300)

QUESTIONS

1. What is it to *influence*? is one *influenced* by external or internal forces? 2. To what kind of power does *actuate* refer? Does one person *actuate* or *influence* another? 3. What do *prompt* and *stir* imply? 4. What is it to *excite*? 5. What do *incite* and *instigate* signify? How do these two words differ? 6. What do *urge* and *impel* imply? How do they differ in the source of the power exerted? 7. What do *drive* and *compel* imply, and how do these two words compare with each other?

EXAMPLES

He was ——— by his own violent passions to desperate crime.

And well she can ———.

Fine thoughts are wealth, for the right use of which

Men are and ought to be accountable,

If not to Thee, to those they ———.

INHERENT (page 301)

QUESTIONS

1. What does *inherent* signify?
2. To what realm of thought does *immanent* belong? What does it signify? How does it differ from *inherent*? Which is applied to the Divine Being?
3. To what do *congenital*, *innate*, and *inborn* apply as distinguished from *inherent* and *intrinsic*?
4. With what special reference does *congenital* occur in medical and legal use?
5. What is the difference in use between *innate* and *inborn*?
6. What does *inbred* add to the sense of *innate* or *inborn*?
7. What is *ingrained*?

EXAMPLES

An ——— power in the life of the world.

All men have an ——— right to life, liberty, and protection.

He evinced an ——— stupidity that seemed almost tantamount to ——— idioecy.

Many philosophers hold that God is ——— in nature.

Any stable currency must be founded at last upon something, as gold or silver, that has ——— value.

The wrongs and abuses which are ——— in the very structure and constitution of society as it now exists throughout Christendom.

INJURY (page 302)

QUESTIONS

1. From what language is *injury* derived? What is its primary meaning? Its derived meaning?
2. How inclusive a word is *injury*?
3. From what is *damage* derived, and with what original sense? *detriment*? How do these words compare in actual use?
4. How does *damage* compare with *loss*? How can a *loss* be said to be partial?
5. What is *evil*, and with what frequent suggestion?
6. What is *harm*? *hurt*? How do these words compare with *injury*?
7. What is *mischiefs*? How caused, and with what intent?

EXAMPLES

Nothing can work me ———, except myself; the ——— that I sustain I carry about with me, and never am a real sufferer but by my own fault.

Hippolyta, I woo'd thee with my sword,

And won thy love, doing thee ———.

INJUSTICE (page 303)

QUESTIONS

1. What is *injustices*?
2. How does *wrong* differ from *injustice* in legal use? How in popular use?
3. What is *iniquity* in the legal sense? in the common sense?

EXAMPLES

War in men's eyes shall be a monster of ———.

No man can mortgage his ——— as a pawn for his fidelity.

Such an act is an ——— upon humanity.

INNOCENT (page 304)

QUESTIONS

1. What does *innocent* in the full sense signify? 2. Is *innocent* positive or negative? How does it compare with *righteous*, *upright*, or *virtuous*? 3. In what two applications may *immaculate*, *pure* and *sinless* be used? 4. With what limited sense is *innocent* used of moral beings? 5. In what sense is *innocent* applied to inanimate substances?

EXAMPLES

They are as ——— as grace itself.

For blessings ever wait on ——— deeds,

And though a late, a sure reward succeeds.

The wicked flee where no man pursueth, but the ——— are beld as a lion.

A daughter, and a goodly babe;
the queen receives

Much comfort in't: says, *My poor prisoner,*
I am ——— as you.

INQUISITIVE (page 304)

QUESTIONS

1. What are the characteristics of an *inquisitive* person? 2. Is *inquisitive* ever used in a good sense? What, in that sense, is ordinarily preferred? 3. What does *curious* signify, and how does it differ from *inquisitive*?

EXAMPLES

His was an anxiously ——— mind, a scrupulously conscientious heart.

Adrian was the most ——— man that ever lived, and the most universal inquirer.

I am ——— to know the cause of this sudden change of purpose.

INSANITY (page 305)

QUESTIONS

1. What is *insanity* in the widest sense? in its restricted use? Which use is the more frequent? 2. From what is *lunacy* derived? What did it originally imply? In what sense is it now used? 3. What is *madness*? 4. What is *derangement*? *delirium*? 5. What is the specific meaning of *dementia*? 6. What is *oberration*? 7. What is the distinctive meaning of *hallucination*? 8. What is *monomania*? 9. What are *frenzy* and *mania*?

EXAMPLES

Go—you may call it ———, folly—you shall not chase my gloom away.
All power of fancy over reason is a degree of ———.

INTERPOSE (page 306)

QUESTIONS

1. What is it to *interpose*? 2. How does *intercede* differ from *interpose*?
3. What is it to *intermeddle*? How does it differ from *meddle*? from *interfere*?
4. What do *arbitrate* and *mediate* involve?

EXAMPLES

Dion, his brother, ——— for him and his life was saved.

Nature has ——— a natural barrier between England and the continent.

INVOLVE (page 307)

QUESTIONS

1. From what language is *involve* derived, and with what primary meaning?
2. How does *involve* compare with *implicate*?
3. Are these words used in the favorable or the unfavorable sense?
4. As regards results what is the difference between *include*, *imply*, and *involve*?

EXAMPLES

Rocks may be squeezed into new forms, bent, contorted, and ———.

An oyster-shell sometimes ——— a pearl.

——— in other men's affairs, he went down to their ruin.

JOURNEY (page 307)

QUESTIONS

1. From what language is *journey* derived? What is its primary meaning? Its present meaning?
2. What is *travel*? How does it differ from *journey*?
3. What was the former meaning of *voyage*? Its present meaning?
4. What is a *trip*? a *tour*?
5. What is the meaning and common use of *passage*? of *transit*?
6. What is the original meaning of *pilgrimage*? How is it now used?

EXAMPLES

——— makes all men countrymen.

All the ——— of their life is bound in shallows and in miseries.

It were a ——— like the path to heaven,

to help you find them.

JUDGE (page 308)

QUESTIONS

1. What is a *judge* in the legal sense?
2. What other senses has the word *judge* in common use?
3. What is a *referee*, and how appointed? an *arbitrator*?
4. What is the popular sense of *umpire*? the legal sense?
5. What is the present use of *arbitrator*?
6. What are the *judges* of the United States Supreme Court officially called?

EXAMPLES

The end crowns all,
And that old common ———, Time,
Will one day end it
A man who is no ——— of law may be a good ——— of poetry.
The ——— is only the mouth of law, and the magistrate who punishes
is only the hand.

JUSTICE (page 309)

QUESTIONS

1. What is *justice* in governmental relations? in social and personal relations? in matters of reasoning or literary treatment? 2. To what do *integrity*, *rectitude*, *right*, *righteousness*, and *virtue* apply? What do all these include? 3. What two contrasted senses has *lawfulness*? 4. To what does *justness* refer, and in what sense is it used?

EXAMPLES

——— exalteth a nation.
——— of life is fame's best friend.
He shall have merely ———, and his bond.

KEEP (page 310)

QUESTIONS

1. What is the general meaning of *keep*? 2. How does *keep* compare with *preserve*? *fulfil*? *maintain*? 3. What does *keep* imply when used as a synonym of *guard* or *defend*?

EXAMPLES

These make and ——— the balance of the mind.
The good old rule
Sufficeth them,—the simple plan,
That they should take who have the power
And they should ——— who can.
——— thy shop, and thy shop will ——— thee.

KILL (page 310)

QUESTIONS

1. What is it to *kill*? 2. To what are *assassinate*, *execute*, and *murder* restricted? 3. What is the specific meaning of *murder*? *execute*? *assassinate*? To what class of persons is the latter word ordinarily applied? 4. What is it to *slay*? 5. To what is *massacre* limited? With what special meaning is it used? 6. To what do *butcher* and *slaughter* primarily apply? What is the sense of each when so used? 7. What is it to *despatch*?

EXAMPLES

To look into her eyes was to ——— doubt.
Three presidents of the United States have been ———.

Hamilton was ——— in a duel by Aaron Burr.

The place was carried by storm, and the inhabitants ——— without distinction of age or sex.

KIN (page 311)

QUESTIONS

1. How does *kind* compare with *kin*? 2. What do *kin* and *kindred* denote? 3. What is *affinity*? How does it differ from *consanguinity*?

EXAMPLES

A little more than ———, and less than ———.

He held his seat,—a friend to the human ———.

The patient bride, a little sad,

Leaving of home and ———.

KNOWLEDGE (page 311)

QUESTIONS

1. What is *knowledge*? How does it differ from *information*? 2. What is *perception*? *apprehension*? *cognizance*? 3. What is *intuition*? 4. What is *experience*, and how does it differ from *intuition*? 5. What is *learning*? *erudition*?

EXAMPLES

——— comes, but wisdom lingers.

The child is continually seeking ———; hence his endless questions.

'Tis the sunset of life gives me mystical ———,

And coming events cast their shadows before.

———s lie at the very foundation of all reasoning.

LANGUAGE (page 312)

QUESTIONS

1. What is the derivation of *language*? What was its original signification? How wide is its present meaning? 2. As regards the use of words, what does *language* denote in the general and in the restricted sense? 3. What does *speech* always involve? 4. Can we speak of the *speech* of animals? of their *language*? 5. What is a *dialect*? a *barbarism*? an *idiom*? 6. What is a *patois*? How does it differ from a *dialect*? 7. What is a *vernacular*?

EXAMPLES

We must be free or die, who speak the ———

That Shakespeare spake: the faith and morals hold

Which Milton held.

——— is great; but silence is greater.

An infant crying in the night,

An infant crying for the light,

And with no ——— but a cry.

Thought leapt out to wed with Thought,

Ere Thought could wed itself with ———.

A Babylonish ———

Which learned pedants much affect.
O! good, my lord, no Latin,
I'm not such a truant since my coming
As not to know the ——— I have lived in.

LARGE (page 313)

QUESTIONS

1. To how many dimensions does *large* apply? How does it differ from *long*?
2. How does *large* compare with *great*? with *big*?

EXAMPLES

Courage, the mighty attribute of powers above,
By which those ——— in war, are ——— in love.
Everything is twice as ——— measured on a three-year-old's three-foot
scale as on a thirty-year-old's six-foot scale.
And his ——— manly voice,
Turning again toward childish treble,
Pipes and whistles in its sound.

LAW (page 315)

QUESTIONS

1. What is the definition of *law* in its ideal? What does it signify in common use? 2. What are the characteristics of *command* and *commandment*? of an *edict*? 3. What is a *mandate*? a *statute*? an *enactment*? 4. In what special connection is *formula* commonly used? *ordnance*? *order*? 5. What is the meaning of *law* in such an expression as "the *laws* of nature?" What in more strictly scientific use? 6. What is a *code*? *jurisprudence*? *legislation*? What is an *economy*? Is *law* ever a synonym for these words, and in what way?

EXAMPLES

Order is Heaven's first ———; and this contest,
Some are, and must be, greater than the rest.
Those he commands move only in ———,
Nothing in love.
His fair large front and eye sublime declared
Absolute ———
We have strict ———, and most biting ———.
Napoleon gave France the best ——— of ——— she has ever possessed.
—— is physical, established sequence; intellectual, a condition of intellectual action in order that truth may be reached; and moral, an imperative which determines the right guidance of our higher life.

LIBERTY (page 316)

QUESTIONS

1. What is *freedom*? 2. What is *liberty* in the primary sense? in the widest sense? 3. How do *freedom* and *liberty* compare? 4. How is *independence* used in distinction from *freedom* and *liberty*? 5. Is *free*.

dom or *liberty* more freely used in a figurative sense? 6. What is *license*? How does it compare with *liberty* and *freedom*?

EXAMPLES

In Rousseau's philosophy ——— is conceived of as lawlessness.

When ——— from her mountain-height

Unfurled her standard to the air,

She tore the azure robe of night,

And set the stars of glory there.

The ——— to go higher than we are is given only when we have fulfilled amply the duty of our present sphere

——— they mean when they cry ———!

For who loves that must first be wise and good.

LIGHT (page 317)

QUESTIONS

1. What is *light*?
2. What are the characteristics of a *flame*? a *blaze*?
3. What is a *flare*? a *flash*?
4. What is the sense of *glare* and *glow*? How do they differ, and to what are they applied?
5. To what do *shine* and *sheen* refer?
6. What do *glimmer*, *glitter*, and *shimmer* denote?
7. What is *gleam*? a *glitter*? a *sparkle*? *glistening*?
8. What is *scintillation*? in what two senses used?
9. To what are *twinkle* and *twinkling* applied?
10. What is *illumination*? *incandescence*?

EXAMPLES

From a little spark may burst a mighty ———.

A ——— as of another life, my kindling soul received.

It is ———, that enables us to see the differences between things; and it is Christ that gives us ———.

White with the whiteness of the snow,

Pink with faintest rosy ———,

They blossom on their sprays,

Ghastly in the ——— of day.

——— in golden coats like images,

So ——— a good deed in a naughty world.

There's but the ——— of a star

Between a man of peace and war.

LISTEN (page 318)

QUESTIONS

1. What does *hear* signify? What does *listen* add to the meaning of *hear*?
2. What does *attend* add to the meaning of *listen*?
3. What does *heed* further imply?
4. What is the difference between *listen for* and *listen to*?

EXAMPLES

And ———! how blithe the thrush sings;

He, too, is no mean preacher;

Till I ——— and ———

If a step draweth near.

Ohill airs and wintry winds! my ear
Has grown familiar with your song;
I ——— it in the opening year,
I ——— and it cheers me long.
———, every one

That ——— may, unto a tale
That's merrier than the nightingale.

The men lay silent in the tall grass ——— for the signal gun that
should bid them rise and charge.

LITERATURE (page 319)

QUESTIONS

1. What is *literature* in the most general sense? In more limited sense?
2. What does *literature*, used absolutely, denote? 3. How may *literature* include *science*? How is it ordinarily contrasted with *science*?

EXAMPLES

Wherever ——— consoles sorrow or assuages pain; wherever it brings
gladness to eyes which fail with wakefulness and tears—there is exhibited
in its noblest form the immortal influence of Athens.

——— are life-long friends.

——— are embalmed minds.

In our own language we have a ——— nowhere surpassed, in whose
lock no foreign key will ever rust.

LOAD (page 319)

QUESTIONS

1. From what language is *burden* derived, and with what primary meaning? *load*?
2. What does *weight* signify? How does it compare with *load* and *burden*?
3. What are *cargo*, *freight*, and *lading*?
4. What is the distinctive sense of *pack*?

EXAMPLES

Bear ye one another's ———.

Wearing all that ———

Of learning lightly like a flower.

The ass will carry his ———, but not a double ———.

LOOK (page 320)

QUESTIONS

1. What is the distinction between *look* and *see*? between these words and *behold*?
2. What is it to *gaze*? to *glance*? to *stare*?
3. What do *scan*, *inspect*, and *survey* respectively express, and how are they distinguished from one another?
4. What element or elements does *watch* add to the meaning of *look*?

EXAMPLES

It is always well to ——— at people when addressing them.

Having eyes they ——— not, and having ears hear not.

Then gently ——— your brother man,

Still gentler sister woman;

Tho' they may gang a kennin wrang,

To step aside is human.

My soul waiteth for the Lord more than they that ——— for the morning.

How peacefully the broad and golden moon

Comes up to ——— upon the reaper's toil!

I am monarch of all I ———,

My right there is none to dispute;

From the center all round to the sea,

I am lord of the fowl and the brute.

But, ———, the morn in russet mantle clad,

Walks o'er the dew of yon high eastern hill.

LOVE (page 321)

QUESTIONS

1. What is *affection*?
2. What may be given as a brief definition of *love*?
3. Does *affection* apply to persons or things? To what does *love* apply?
4. What term is preferable to *love* as applying to articles of food and the like?
5. How does *love* differ from *affection*? from *friendship*?

EXAMPLES

Peace, commerce, and honest ——— with all nations help to form the bright constellation which has gone before us.

And you must love him ere to you he will seem worthy of your ———.

Yet pity for a horse o'erdriven

And ——— in which my hound has part

Can hang no weight upon my heart,

In its assumptions up to heaven.

Such ——— and unbroken faith

As temper life's worst bitterness.

MAKE (page 322)

QUESTIONS

1. What is the essential idea of *make*?
2. How is *make* allied with *create*?
3. How is *make* allied with *compose* or *constitute*?
4. What are some chief antonyms for *make*?
5. What are the prepositions chiefly used with *make*, and how employed?

EXAMPLES

In the beginning God ——— the heaven and the earth.

The mason ———, the architect ———.

I assert confidently that it is in the power of one American mother to

—— as many gentlemen as she has sons.

Newton discovered, but did not ——— the law of gravitation.

The river flows over a bed of pebbles like those that ——— the beach and the surrounding plains.

A hermit and a wolf or two

My whole acquaintance ———.

If we were not willing, they possessed the power of ——— us to do them justice.

The lessons of adversity sometimes soften and ———, but as often they indurate and pervert.

MARRIAGE (page 323)

QUESTIONS

1. What does *matrimony* specifically denote? 2. What two senses has *marriage*? 3. From what language is *wedlock* derived? what is its distinctive use? 4. What is the meaning of *wedding*? *nuptials*?

EXAMPLES

Let me not to the ——— of true minds admit impediments.

The lover was killed in a duel on the night before the intended ———.

I'll join my eldest daughter, and my joy,

To him forthwith in holy ——— bonds.

MASCULINE (page 323)

QUESTIONS

1. To what is *male* applied? To what *masculine*? 2. To what does *manly* refer? *manful*? In what connection can *manly* be used where *manful* could not be substituted? 3. What is the sense of *mannish*? *virile*?

EXAMPLES

Every virtue in the higher phases of ——— character begins in truth and pity or truth and reverence to all womanhood.

One brave and ——— struggle

And he gained the solid land

And the cover of the mountains

And the carbines of his band.

So God created man in his own image, in the image of God created he him; ——— and female created he them.

MASSACRE (page 324)

QUESTIONS

1. What is *massacre*? *butchery*? *havo*? 2. To what does *carriage* especially refer? *slaughter*? 3. Which of these words can be used of the destruction of life in open and honorable warfare?

EXAMPLES

Mark! where his ——— and his conquests cease!

He makes a solitude and calls it peace!

Forbade to wade through ——— to a throne,
And shut the gates of mercy on mankind.
The capture of Port Arthur was followed by a terrible ———.

MEDDLESOME (page 324)

QUESTIONS

1. What is the conduct specially characteristic of a *meddlesome* person? of an *intrusive* person? of one who is *obtrusive*? *officious*? 2. To what is *obtrusive* chiefly applied? *intrusive*? *officious*? *meddlesome*?

EXAMPLES

Where sorrow's hold ——— and turned out,
There wisdom will not enter nor true power,
Nor aught that dignifies humanity.
A ——— monkey had been among the papers.

MELODY (page 326)

QUESTIONS

1. What is *harmony*? *melody*? In what special feature does the one differ from the other? 2. How many parts are required for *harmony*? how many for *melody*? 3. What is *unison*? 4. What does *music* include?

EXAMPLES

Sweetest ———
Are those that are by distance made more sweet.
———, when soft voices die,
Vibrates in the memory.
Ring out ye crystal spheres
And with your ninefold ———
Make up full consort to the angelic ———.

MEMORY (page 327)

QUESTIONS

1. What is *memory* in the special and in the general sense? 2. What is *remembrance*, and how distinguished from *memory*? 3. Is *remembrance* voluntary or involuntary? 4. What is *recollection*, and what does it involve? 5. What is *reminiscence*? *retrospection*? How do these two words differ?

EXAMPLES

——— like a purse, if it be over-full that it can not shut, all will drop out of it; take heed of a gluttonous curiosity to feed on many things, lest the greediness of the appetite of thy ——— spoil the digestion thereof.

——— wakes with all her busy train,

Swells at my breast, and turns the past to pain.

It is a favorite device of eminent men to devote their old age to writing their ———s, thus quietly living over again a busy or tumultuous life.

MERCY (page 327)

QUESTIONS

1. What is *mercy* in the strictest sense?
2. To what class is *grace* shown?
3. To what class are *mercy*, *forgiveness*, and *pardon* extended?
4. In what wider significations is *mercy* used?
5. What is *clemency*? *leniency* or *lenity*? How do these words compare with *mercy*?

EXAMPLES

How would you be,
If He, which is the top of judgment, should
But judge you as you are? O, think on that;
And ——— then will breathe within your lips,
Like man new made.

The only protection which the conquered could find was in the moderation, the ———, and the enlarged policy of the conquerors.

To favor sin is to discourage virtue; undue ——— to the bad is unkindness to the good.

METER (page 328)

QUESTIONS

1. What is *euphony*? How does it differ from *meter*, *measure*, and *rhythm*?
2. How are *rhythm* and *meter* produced?
3. How does *meter* differ from *rhythm*?
4. What is a *verse* in the strict sense? In what wider sense is the word often used?

EXAMPLES

——— is a very vague and unscientific term. Each nation considers its own language, each tribe its own dialect, euphonic.

——— may be defined to be a succession of poetical feet arranged in regular order according to certain types recognized as standards, in verses of a determinate length.

We have three principal domains in which ——— manifests its nature and power—dancing, music, poetry.

MIND (page 329)

QUESTIONS

1. What is *mind*? How does it differ from *intellect*?
2. What does *consciousness* include? Is it attended with distinct thinking and willing?
3. What is the *soul*?
4. From what is *spirit* used in special contradiction? How does it differ from *soul*?
5. What is Paley's definition of *instinct*?
6. In what contrasted meanings is the word *sense* employed?
7. What is *thought*?

EXAMPLES

A great ——— will be strong to live, as well as to think.

God is a ———; and they that worship him must worship him in ——— and in truth,

MINUTE (page 330)

QUESTIONS

1. What is the meaning of *minute*? 2. When is a thing said to be *comminuted*? 3. How does *fine* differ from *comminuted*? 4. What terms are applied to an account extended to *minute* particulars? to an examination similarly extended?

EXAMPLES

No ——— room so warm and bright,
Wherein to read, wherein to write.

Life hangs on, held by a ——— thread.

An organism so ——— as to be visible only under the microscope, yet possessed of life, motion, and seeming intelligence is a source of ceaseless wonder.

MISFORTUNE (page 331)

QUESTIONS

1. What is *misfortune*? Is the sufferer considered blameworthy for it? 2. What is *calamity*? *disaster*? 3. In what special sense are the words *affliction*, *chastening*, *trial*, and *tribulation* used? How are these four words discriminated the one from another?

EXAMPLES

He's not valiant that dares die,
But he that boldly bears ———.

I never knew a man in life who could not bear another's ——— perfectly like a Christian.

MODEL (page 334)

QUESTIONS

1. What is a *model*? a *pattern*? How are they distinguished from one another? 2. Which admits of freedom or idealization?

EXAMPLES

Things done without ———, in their issue
Are to be fear'd.

Be a ——— to others, and then all will go well.

Washington and his compeers had no ——— of a federal republic with constitutional bonds and limitations.

Moses was admonished, See that thou make all things according to the ——— shewed to thee in the mount.

MODESTY (page 334)

QUESTIONS

1. What is *modesty* in the general sense? In what specific sense is the word also used? 2. What is *bashfulness*? *diffidence*? *coyness*? *reserve*?

EXAMPLES

For silence and chaste ——— is woman's genuine praise, and to remain quiet within the house.

If a young lady has that discretion and ———, without which all knowledge is little worth, she will never make an ostentatious parade of it.

His shrinking ——— was often mistaken for a proud ———.

MONEY (page 335)

QUESTIONS

1. What is *money*? *specie*? *cash*? 2. How does *property* differ from *money*?
3. What is *bullion*? *capital*?

EXAMPLES

I am not covetous for ———;

Nor care I who doth feed upon my cost.

For the love of ——— is the root of all evil.

He converted all his ——— into ready ———.

One who undertakes to do business without ——— is likely to be speedily straitened for ———.

——— in reversion may be of far less value than ——— in hand.

MOROSE (page 335)

QUESTIONS

1. By what characteristics are the *morose* distinguished? the *sullen* and *sulky*? 2. How does *sullen* differ from *sulky*? 3. What is the meaning of *sulry*? 4. Which of these words denote transient moods and which denote enduring states or disposition?

EXAMPLES

My master is of ——— disposition,

And little reckes to find the way to heaven

By doing deeds of hospitality.

A poet who fails in writing, becomes often a ——— critic.

He answered with a ——— growl.

Achilles remained in his tent in ——— inaction.

MOTION (page 336)

QUESTIONS

1. What is *motion*? 2. How does *motion* differ from *movement*? Give examples. 3. In what sense is *move* employed? 4. What is the special sense of *motion* in a deliberative assembly? 5. Is *action* or *motion* the more comprehensive word? Which is commonly used in reference to the mind?

EXAMPLES

That ——— is best which procures the greatest happiness for the greatest numbers.

There is no death! What seems so is ———;
 This life of mortal breath
 Is but a suburb of the life elysian,
 Whose portal we call Death.
 The Copernican theory first clearly explained the ——— of the planets.

MUTUAL (page 337)

QUESTIONS

1. What is the meaning of *common*? *mutual*? *reciprocal*? 2. Is it correct to speak of a *mutual* friend?

EXAMPLES

——— friendships will admit of division, one may love the beauty of this, the good humor of that person.

In all true family life there is a ——— dependence which binds hearts together.

——— action is the rule in the human body, where every part is alternately means and end, and every action both cause and effect.

NAME (page 338)

QUESTIONS

1. What is a *name* in the most general sense? 2. In the more limited sense, how does a *name* differ from an *appellation*? a *title*? Give instances of the use of these three words. 3. From what language is *epithet* derived? What is its primary meaning? 4. What does *epithet* signify in literary use? 5. What part of speech is an *epithet*? Is it favorable or unfavorable in signification? 6. What is a *cognomen*? How does it differ from a *surname*? 7. What is *style* considered as a synonym of *name*?

EXAMPLES

Those he commands, move only in command

Nothing in love: now does he feel the ———

Hang loose about him, like a giant's robe

Upon a dwarfish thief.

O magnify the Lord with me, and let us exalt his ——— together.

NATIVE (page 339)

QUESTIONS

1. What does *native* denote? *natal*? *natural*? 2. What examples are given in the text of the correct use of these words?

EXAMPLES

I would advise no child's being taught music who has not a ——— aptitude for it.

It was the 4th of July, the ——— day of American freedom.

NAUTICAL (page 339)

QUESTIONS

1. From what is *marine* derived? *maritime*? What do these two words respectively signify? 2. From what is *naval* derived? *nautical*? How do these words differ in meaning? 3. How does *ocean*, used adjectively, differ from *oceanic*?

EXAMPLES

That sea-beast,
Leviathan, which God of all his works
Created hugest that swim the ——— stream.

NEAT (page 340)

QUESTIONS

1. What does *clean* signify? 2. Does *orderly* apply to persons or things, and in what sense? 3. What does *tidy* denote? 4. What is the meaning of *neat*? 5. How does *nice* compare with *neat*? 6. What is the significance of *spruce*? *trim*? *dapper*?

EXAMPLES

If he (Jefferson) condescended to turn ——— sentences for delicate ears—still, he was essentially an earnest man.

Still to be ———, still to be dressed,
As you were going to a feast,
Still to be powder'd, still perfum'd.

NECESSARY (page 341)

QUESTIONS

1. When is a thing properly said to be *necessary*? 2. What is the meaning of *essential*? How does it differ from *indispensable*? 3. With reference to what is a thing said to be *requisite*? How does *requisite* compare with *essential* and *indispensable*? 4. How do *inevitable* and *unavoidable* compare? To what kind of things are both these words applied? 5. How do *needed* and *needful* compare with *necessary*?

EXAMPLES

As you grow ready for it, somewhere or other you will find what is ——— for you in a book.

The ideas of space and time are called in philosophy ——— ideas.

NECESSITY (page 341)

QUESTIONS

1. What is *necessity*? 2. What do *need* and *want* imply? How does *need* compare with *want*? 3. How does *necessity* compare with *need*? 4. What is an *essential*?

EXAMPLES

Courage is, on all hands, considered as an ——— of high character.
 No living man can send me to the shades
 Before my time, no man of woman born.
 Coward or brave, can shun his ———.

NEGLECT (page 342)

QUESTIONS

1. What is *neglect*? *negligence*? How do the two words compare? 2. What senses has *negligence* that *neglect* has not? 3. Which of the two words may be used in a passive sense? 4. What is the legal phrase for a punishable omission of duty?

EXAMPLES

Ah, why

Should we, in the world's riper years, ———
 God's ancient sanctuaries, and adore
 Only among the crowd.

But, alas, to make

A fixed figure, for the hand of ———
 To point his slow unmoving finger at.

NEW (page 343)

QUESTIONS

1. What is the meaning of *new*? of *modern*? of *recent*? 2. How does *recent* compare with *new*? 3. What is the meaning of *novel*? of *fresh*? 4. To what do *young* and *youthful* distinctively apply?

NIMBLE (page 344)

QUESTIONS

1. To what does *nimble* properly refer? 2. To what does *swift* apply? 3. How does *alert* compare with *nimble*? For what is *alert* more properly a synonym?

EXAMPLES

Win her with gifts, if she respects not words;
 Dumb jewels often, in their silent kind,
 More ——— than words, do move a woman's mind.
 Profound thinkers are often helpless in society, while shallow men have
 ——— and ready minds.

NORMAL (page 344)

QUESTIONS

1. What does *natural* signify? *normal*? Give instances of the distinctive use of the two words. 2. What does *typical* signify? *regular*? *common*?

EXAMPLES

He does it with a better grace, but I do it more ——.

The —— round of work may grow monotonous, but it is evidently necessary.

NOTWITHSTANDING (page 345)

QUESTIONS

1. What is the signification of *however* as a conjunction? of *nevertheless*?
2. Which is the most emphatic word of the group and what does it signify?
3. How do *yet* and *still* compare with *notwithstanding*?
- with *but*?
4. What is the force of *though* and *although*?
5. How does *notwithstanding* as a preposition differ from *despite* or *in spite of*?

EXAMPLES

—— do thy worst, old Time; despite thy wrong,

My love shall in my verse ever live young.

—— till all graces be in one woman, one woman shall not come in my grace.

There was an immense crowd —— the inclement weather.

OATH (page 346)

QUESTIONS

1. What is an *oath*? an *affidavit*? How does the *affidavit* differ from the *oath*?
2. What is an *adjuration*?
3. What is a *vow*? How does it differ from an *oath*?
4. Of what words is *oath* a popular synonym?
5. In what do *anathema*, *curse*, *execration*, and *imprecation* agree?
6. What is an *anathema*?
7. Is a *curse* just or unjust?
8. What does *execration* express?

EXAMPLES

Better is it that thou shouldest not ——, than that thou shouldest —— and not pay.

Then how can any man be said

To break an —— he never made!

OBSCURE (page 347)

QUESTIONS

1. What is *obscure*?
2. How does *obscure* compare with *complicated*? with *complex*? with *abstruse*? with *profound*?

OBSOLETE (page 348)

QUESTIONS

1. When is a word *obsolete*? When is a word *archaic*?
2. Is an *old* or *ancient* word necessarily *obsolete*?
3. What is meant by saying that a word is *rare*?
4. Is a *rare* word necessarily *obsolete* or an *obsolete* word necessarily *rare*?

EXAMPLES

When the labors of modern philologists began, Sanscrit was the most
—— of all the Aryan languages known to them.

Atlas, we read in —— song
Was so exceedingly tall and strong,
He bore the skies upon his back,
Just as the pedler does his pack.

It is wonderful that so few —— words are found in Shakespeare
after the lapse of three centuries.

OBSTINATE (page 348)

QUESTIONS

1. How does *headstrong* differ from *obstinate* and *stubborn*? 2. How do *obstinate* and *stubborn* differ from each other? Which is commonly applied to the inferior animals and to inanimate things? 3. What is the meaning of *refractory*? How does it differ from *stubborn*? Which word is applied to metals, and in what sense? 4. What is the meaning of *obdurate*? *contumacious*? *pertinacious*? 5. What words do we apply to the *unyielding* character or conduct that we approve?

EXAMPLES

Is it in heav'n a crime to love too well?
To bear too tender, or too —— a heart,
To act a Lover's or a Roman's part?

"I shall talk of what I like," she said wilfully, clasping her hands
round her knees with the gesture of an —— child.

OBSTRUCT (page 349)

QUESTIONS

1. What is the literal meaning of *obstruct*? How does it compare with *hinder*? 2. How does *obstruct* compare with *impede*? 3. What does *arrest* signify in the sense here considered?

EXAMPLES

There is a certain wisdom of humanity which is common to the greatest
men with the lowest, and which our ordinary education often labors to
silence and ——.

No, no ——ing the vast wheel of time,
That round and round still turns with onward might.

OLD (page 350)

QUESTIONS

1. What does *old* signify? 2. How do *old* and *ancient* compare? 3. What contrasted senses has *old*? 4. What is the special force of *olden*? 5. In what sense are *gray*, *hoary*, and *olden* used of material objects? 6. To what is *aged* chiefly applied? 7. To what do *decrepit*, *gray*, and *hoary* apply, as said of human beings? 8. To what does *senile*

apply? 9. In what sense is *elderly* used? 10. What are the primary and derived meanings of *remote*? 11. What does *venerable* express?

EXAMPLES

'The hills,
Rock-ribbed and ——— as the sun,—the vales
Stretching in pensive quietness between;
The ——— woods, . . .
. . . and, poured round all,
——— ocean's gray and melancholy waste,—
Are but the solemn decorations all
Of the great tomb of man.
Through the sequestered vale of rural life,
The ——— patriarch guileless held
The tenor of his way.
O good ——— head which all men knew!
Shall we, shall ——— men, like ——— trees.
Strike deeper their vile root, and closer cling,
Still more enamored of their wretched soil?

OPERATION (page 351)

QUESTIONS

1. What does *operation* denote? and by what kind of agent is it effected?
2. What do *performance* and *execution* denote? and by what kind of agents are they effected?
3. How does *performance* differ from *execution*?

EXAMPLES

The tools of working out salvation
By mere mechanic ———.
His promises were, as he then was, mighty;
But his ———, as he is now, nothing.

ORDER (page 351)

QUESTIONS

1. What does *instruction* imply? *direction*?
2. How does *order* compare with *direction*?
3. To what *classes* of persons are *orders* especially given? How does an *order* in the commercial sense become authoritative?
4. How does *command* compare with *order*?
5. In what sense is *requirement* used? By what authority is a *requirement* made?
6. In what sense is *prohibition* used? *injunction*?

EXAMPLES

General Sherman writes in his Memoirs, "I have never in my life questioned or disobeyed an ———."

"Ye shall become like God"—transcendent fate!

That God's ——— forgot, she plucked and ate.

OSTENTATION (page 352)

QUESTIONS

1. What is *ostentation*? How does it compare with *boasting*? *display*? *show*? 2. What is *pomp*? *pageant* or *pageantry*? What do the two latter words suggest, and how do they compare with *pomp*? 3. From what is *parade* derived? What is its primary meaning? With what implication is it always used in the metaphorical sense? How does *parade* compare with *ostentation*?

EXAMPLES

The boast of heraldry, the ——— of power,
And all that beauty, all that wealth e'er gave,
Await alike the inevitable hour;
The paths of glory lead but to the grave.

The President's salary does not permit ———, nor, indeed, is ——— expected of him.

With all his wealth, talent, and learning, he was singularly free from ———.

OUGHT (page 353)

QUESTIONS

1. What does *ought* properly signify? 2. How does *ought* compare with *should*? 3. In what secondary sense is *ought* sometimes used?

EXAMPLES

He has not a right to do what he likes, but only what he ——— with his own, which after all is his own only in a qualified sense.

Age ——— have reverence, and ——— be worthy to have it.

OVERSIGHT (page 353)

QUESTIONS

1. In what two contrasted senses is *oversight* used? 2. How does *superintendence* compare with *oversight*? 3. With what special reference is *control* used? 4. What kind of a term is *surveillance* and what does it imply?

EXAMPLES

Those able to conduct great enterprises must be allowed wages of ———.

O Friendship, equal poised ———!

Feed the flock of God which is among you, taking the ——— thereof not by constraint, but willingly.

PAIN (page 354)

QUESTIONS

1. What is *pain*? *suffering*? 2. How does *distress* rank as compared with *pain* and *suffering*? 3. What is an *ache*? a *throe*? a *paroxysm*? 4. What is *agony*? *anguish*?

EXAMPLES

To each his ———s; all are men,
Condemned alike to groan;
The tender for another's ———,
The unfeeling for his own.
The weariest and most loathed worldly life
That age, ———, penury, and imprisonment
Can lay on nature.

PALLIATE (page 354)

QUESTIONS

1. How do *cloak* and *palliate* agree in original meaning? How do they differ in the derived senses? 2. What is it to *extenuate*, and how does that word compare with *palliate*?

EXAMPLES

Speak of me as I am; nothing ———
Nor aught set down in malice.
We would not dissemble nor ——— [our transgressions] before the face of Almighty God, our heavenly Father.
I shall never attempt to ——— my own foibles by exposing the error of another.

PARDON, v. (page 355)

QUESTIONS

1. What is it to *pardon*? 2. To what does *forgive* refer? 3. How do *pardon* and *forgive* differ in use in accordance with the difference in meaning? 4. What is it to *remit*? to *condone*? to *excuse*?

EXAMPLES

How many will say ———,
And find a kind of license in the wound
To hate a little longer!
I ——— him, as heaven shall ——— me.
To err is human, to ———, divine.

PARDON, n. (page 356)

QUESTIONS

1. What is *acquittal*? How does it differ from *pardon* as regards the person acquitted or pardoned? 2. Is an innocent person ever pardoned? 3. What is *oblivion*? *amnesty*? *absolution*?

EXAMPLES

For 'tis sweet to stammer one letter
Of the Eternal's language;—on earth it is called ———,
———, not wrath, is God's best attribute.
——— to the injured does belong,
But they ne'er ——— who have done the wrong.

PART, n. (page 357)

QUESTIONS

1. What is a *part*?
2. What is a *fragment*? a *piece*?
3. What do *division* and *fraction* signify?
4. What is a *portion*?
5. What is a *share*? an *instalment*? a *particle*?
6. What do *component*, *constituent*, *ingredient*, and *element* signify? How do they differ from one another?
7. What is a *subdivision*?

EXAMPLES

The best ——— of a good man's life,
His little, nameless, unremembered acts
Of kindness and of love.

Spirits that live throughout.

Vital in every ——— . . .

Can not but by annihilating die.

Many cheap houses were built to be sold by ———s.

PARTICLE (page 358)

QUESTIONS

1. What is a *particle*?
2. What does *atom* etymologically signify? What is its meaning in present scientific use?
3. What is a *molecule*, and of what is it regarded as composed?
4. What is an *element* in chemistry?

EXAMPLES

Lucretius held that the universe originated from a fortuitous concourse of ———s.

But thou shalt flourish in immortal youth,

Unhurt amidst the war of ———s,

The wreck of matter and the crush of worlds.

Many aquatic animals, whose food consists of small ——— diffused through the water, have an apparatus for creating currents so as to bring such ——— within their reach.

PATIENCE (page 358)

QUESTIONS

1. What is *patience*?
2. What is *endurance*?
3. How does *patience* compare with *submission* and *endurance*?
4. To what are *submission* and *resignation* ordinarily applied?
5. What is *forbearance*? How does it compare with *patience*?

EXAMPLES

With ——— bear the lot to thee assigned,

Nor think it chance, nor murmur at the load,

For know what man calls Fortune is from God.

There is, however, a limit at which ——— ceases to be a virtue.

PAY (page 359)

QUESTIONS

1. What is *pay*? *compensation*? *remuneration*? *recompense*?
2. What is an *allowance*?
3. What are *wages*? *earnings*?
4. What is *hire*? what does it imply?
5. For what is *salary* paid? How does it differ from *wages*?
6. What is a *fee*, and for what given?

EXAMPLES

I am not aware that ———, or even favors, however gracious, bind any man's soul.

Our praises are our ———.

Carey, in early life, was a country minister with a small ———.

Laborers are remunerated by ———, and officials by ———.

PEOPLE (page 360)

QUESTIONS

1. What is a *community*? a *commonwealth*?
2. What is a *people*? a *race*?
3. What is a *state*? a *nation*?
4. What does *population* signify? *tribe*?

EXAMPLES

A ——— may let a king fall, and still remain a ———, but if a king let his ——— slip from him, he is no longer a king.

Questions of ——— have played a great part in the politics and wars of the latter half of the nineteenth century, the Germanic ———, the Slavonic ———, the Italian, and the Greek ——— struggling to assert their unity.

PERCEIVE (page 361)

QUESTIONS

1. What class of things do we *perceive*?
2. How does *apprehend* differ in scope from *perceive*?
3. What does *conceive* signify?
4. How does *comprehend* compare with *apprehend*? with *conceive*?

EXAMPLES

We may ——— the tokens of the divine agency without being able to ——— or ——— the divine Being.

. . . Admitted once to his embrace,

Thou shalt ——— that thou wast blind before.

O horror! horror! horror! Tongue nor heart

Can not ——— nor name thee!

PERFECT (page 362)

QUESTIONS

1. What is *perfect* in the fullest and highest sense?
2. What is *absolute* in the fullest sense?
3. What is *perfect* in the limited sense, and in popular language?

EXAMPLES

We have the idea of a Being infinitely ———, and from this Descartes reasoned that such a being really exists.

'Shall remain'!

Hear you this Triton of the minnows? mark you

His ——— 'shall'!

PERMANENT (page 362)

QUESTIONS

1. From what is *durable* derived? to what class of substances is it applied?
2. What is *permanent*, and in what connections used?
3. How does *enduring* compare with *durable*? with *permanent*?

EXAMPLES

My heart is wax, molded as she pleases, but ——— as marble to retain.

A violet in the youth of primy nature,

Forward, not ———, sweet, not ———,

The perfume and suppliance of a minute.

For her merchandise shall be for them that dwell before the Lord, to eat sufficiently, and for ——— clothing.

PERMISSION (page 363)

QUESTIONS

1. What is *authority*?
2. What is *permission*?
3. How does *permission* compare with *allowance*?
4. What is a *permit*?
5. What is *license*?
- How does it compare with *authority*? with *permission*?
6. What does *consent* involve?

EXAMPLES

God is more there than thou; for thou art there

Only by his ———.

Thieves for their robbery have ———,

When judges steal themselves.

Very few of the Egyptians avail themselves of the ——— which their religion allows them, of having four wives.

PERNICIOUS (page 364)

QUESTIONS

1. From what is *pernicious* derived, and what does it signify?
2. How does *pernicious* compare with *injurious*?
3. What does *noisome* denote?
4. What is the distinctive sense of *noxious*?
5. How does *noxious* compare with *noisome*?

EXAMPLES

Inflaming wine, ——— to mankind.

So bees with smoke, and doves with ——— stench,

Are from their hives, and houses, driven away.

The strong smell of sulfur, and a choking sensation of the lungs indicated the presence of ——— gases.

PERPLEXITY (page 364)

QUESTIONS

1. What is *perplexity*? *confusion*? How do the two words compare? 2. How do *bewilderment* and *confusion* compare? 3. From what does *amazement* result?

EXAMPLES

CAIUS.—Vere is mine host *de Jarterre*?

HOST.—Here, master doctor, in ——— and doubtful dilemma.

There is such ——— in my powers

As, after some oration fairly spoke

By a beloved prince, there doth appear

Among the buzzing, pleased multitude.

PERSUADE (page 365)

QUESTIONS

1. What does *convince* denote? How does it differ from the other words of the group? 2. What is it to *persuade*? 3. How is *convincing* related to *persuasion*? 4. How does *coax* compare with *persuade*?

EXAMPLES

A long train of these practises has at length unwillingly ——— me that there is something hid behind the throne greater than the king himself.

He had a head to contrive, a tongue to ———, and a hand to execute any mischief.

PERVERSE (page 366)

QUESTIONS

1. What is the etymological meaning of *perverse*? What does it signify in common use? 2. What does *petulant* signify? *wayward*?

EXAMPLES

And you, my lords—methinks you do not well,

To bear with their ——— objections.

Whining, purblind, ——— boy!

Good Lord! what madness rules in brainsick men

When, for so slight and frivolous a cause,

Such ——— emulations shall arise.

PHYSICAL (page 366)

QUESTIONS

1. What does *material* signify? 2. What idea does *physical* add to that contained in *material*? 3. To what do *bodily*, *corporeal*, and *corporeal* apply? 4. How do *bodily* and *corporeal* differ from *corporeal*? 5. To what is *corporeal* now for the most part limited?

EXAMPLES

----- punishment is practically abandoned in the greater number of American schools.

Man has two parts, the one ----- and earthly, the other immaterial and spiritual.

These races are all clearly differentiated by other ----- traits than the color of the skin.

We can not think of substance save in terms that imply ----- properties.

PITIFUL (page 367)

QUESTIONS

1. What was the original meaning of *piti/ul*? What does it now signify?
2. How does *piti/ul* differ in use from *piti/able*?
3. What was the early and what is the present sense of *piteous*?

EXAMPLES

There is something pleading and ----- in the simplicity of perfect ignorance.

The most ----- sight one ever sees is a young man doing nothing; the Furies early drag him to his doom.

O, the most ----- cry of the poor souls!

PITY (page 368)

QUESTIONS

1. What is *pity*? *sympathy*?
2. How does *sympathy* in its exercise differ from *pity*?
3. How does *pity* differ from *mercy*?
4. How does *compassion* compare with *mercy* and *pity*?
5. How does *commiseration* differ from *compassion*?

EXAMPLES

Nothing but the Infinite ----- is sufficient for the infinite pathos of human life.

He hallows every heart he once has swayed,
And when his presence we no longer share,
Still leaves ----- as a relic there.

PLEAD (page 369)

QUESTIONS

1. What is it to *plead* in the ordinary sense? in the legal sense?
2. How do *argue* and *advocate* differ?
3. What do *besssch*, *entreat*, and *implore* imply?
4. How does *solicit* compare with the above words?

EXAMPLES

Speak to me low, my Savior, low and sweet,
* * *

Lest I should fear and fall, and miss thee so,
Who art not missed by any that -----.

Speaking of the honor paid to good men, is it not time to ----- for a reform in the writing of biographies?

PLEASANT (page 370)

QUESTIONS

1. What does *pleasant* add to the sense of *pleasing*? 2. How does *pleasant* compare with *kind*? 3. What does *good-natured* signify? How does it compare with *pleasant*?

EXAMPLES

Like one that wraps the drapery of his couch
About him, and lies down to ——— dreams.

When fiction rises ——— to the eye,
Men will believe because they love the lie.
. . . If we must part forever,
Give me but one ——— word to think upon.

PLENTIFUL (page 371)

QUESTIONS

1. What kind of a term is *enough*, and what does it mean? 2. How does *sufficient* compare with *enough*? 3. What is *ample*? 4. To what do *abundant*, *ample*, *liberal*, and *plentiful* apply? 5. How is *copious* used? *affluent*? *plentiful*? 6. What does *complete* express? 7. In what sense are *lavish* and *profuse* employed? 8. To what is *luxuriant* applied?

EXAMPLES

My ——— joys,
Wanton in fulness, seek to hide themselves
In drops of sorrow.

Can anybody remember when the right sort of men and the right sort
of women were ———?

Share the advice betwixt you; if both gain all,
The gift doth stretch itself as 'tis received,
And is ——— for both.

He hasted, and opposed the rocky orb
Of tenfold adamant, his ——— shield.

POETRY (page 372)

QUESTIONS

1. What is *poetry*? 2. Does *poetry* involve *rime*? Does it require *meter*? 3. What is imperatively required beyond *verse*, *rime*, or *meter* to constitute *poetry*?

EXAMPLES

——— is rhythmical, imaginative language, expressing the invention,
taste, thought, passion, and insight of a human soul.

He knew
Himself to sing, and build the lofty ———,
And ever against eating cares,
Lap me in soft Lydian airs,
Married to immortal ———.

POLITE (page 372)

QUESTIONS

1. What are the characteristics of a *civil* person? What more is *found* in one who is *polite*?
2. How does *courteous* compare with *civil*?
3. What does *courtly* signify? *genteel*? *urbane*?
4. In what sense is *polished* used? *complaisant*?

EXAMPLES

She is not ——— for the sake of seeming ———, but ——— for the sake of being kind.

He was so generally ——— that nobody thanked him for it.

Her air, her manners, all who saw admired; ——— though coy, and gentle though retired.

POVERTY (page 374)

QUESTIONS

1. What does *poverty* strictly denote? What does it signify in ordinary use?
2. What does *privation* signify? How does it compare with *distress*?
3. What is *indigence*? *destitution*? *penury*?
4. What does *pauperism* properly signify? How does it differ from *beggary* and *mendicancy*?

POWER (page 375)

QUESTIONS

1. What is *power*?
2. Is *power* limited to intelligent agents, or how widely applied?
3. How does *ability* compare with *power*?
4. What is *capacity*, and how related to *power* and to *ability*?
5. What is *competency*? *faculty*? *talent*?
6. What are *dexterity* and *skill*? How are they related to *talent*?
7. What is *efficacy*? *efficiency*?

EXAMPLES

Bismarck was the one great figure of all Europe, with more ——— for good or evil than any other human being possessed at that time.

The soul, in its highest sense, is a vast ——— for God.

I reckon it is an oversight in a great body of metaphysicians that they have been afraid to ascribe our apprehensions of ——— to intuition. In consequence of this neglect, some never get the idea of ———, but merely of succession, within the bare limits of experience.

PRAISE (page 376)

QUESTIONS

1. What is *praise*? By how many is it given, and how is it expressed?
2. What is *applause*? by how many given? and how expressed?
3. What is *acclamation*? How does it differ from *applause*?
4. How does *approbation* differ from *praise*?
5. What does *approval* add to the meaning of *praise*?
6. How does *compliment* compare with *praise*?
7. What is *flattery*?

EXAMPLES

The ——— of listening senates to command,
The threats of pain and ruin to despise,
To scatter plenty o'er a smiling land,
And read their history in a nation's eyes.
——— no man e'er deserved who sought no more.
Gladly then he mixed
Among those friendly powers, who him received
With joy and ———s loud.

PRAY (page 377)

QUESTIONS

1. What is it to *pray* in the religious sense? 2. In what lighter and more familiar sense may *pray* be used? Is this latter use now common?

EXAMPLES

Hesiod exhorted the husbandman to ——— for a harvest, but to do so with his hand upon the plow.
I kneel, and then ——— her blessing.

PRECARIOUS (page 377)

QUESTIONS

1. To what is the term *uncertain* applied? 2. What did *precarious* originally signify? How is it now used, and how does it differ from *uncertain*?

EXAMPLES

. . . Thou know'st, great son,
The end of war's ———.
Life seems to be ——— in proportion to its value.

PRECEDENT (page 378)

QUESTIONS

1. What is a *precedent*? 2. How does *case* fall short of the meaning of *precedent*? 3. What is an *obiter dictum*? How does it differ from a *precedent*?

EXAMPLES

Where freedom broadens slowly down
From ——— to ———.
Let us consider the reason of the ———, for nothing is law that is not reason.

PREDESTINATION (page 378)

QUESTIONS

1. What is *predestination*? 2. How does *fate* differ from *predestination*? 3. What does *necessity* signify in the philosophical sense? 4. What is *foreknowledge*? Does it involve *foreordination* or *predestination*?

EXAMPLES

For ——— has wove the thread of life with pain

All high truth is the union of two contradictories Thus ——— and free-will are opposites; and the truth does not lie between these two, but in a higher reconciling truth which leaves both true.

PREJUDICE (page 380)

QUESTIONS

1. What is a *presumption*? On what is it founded?
2. On what are *prejudice* and *prepossession* based? How do these two words differ from each other?

EXAMPLES

When the judgment's weak, the ——— is strong.

The ——— is always in favor of what exists.

His fine features, manly form, and perfect manners awakened an instant ——— in his favor.

PRETENSE (page 380)

QUESTIONS

1. What is a *pretense*? How does it differ from a *pretext*?
2. What is a *ruse*?

EXAMPLES

The claim of a stronger nation to protect a weaker has commonly been but a ——— for conquest.

It is not poverty so much as ——— that harasses a ruined man—the struggle between a proud mind and an empty purse.

The independent English nobility conspired to make an insurrection, and to support the prince's ———s.

PREVENT (page 381)

QUESTIONS

1. What is the original meaning of *prevent*?
2. What word is now commonly used in that sense?
3. What is the meaning of *obviate*?
4. How is *prevent* at present used?

EXAMPLES

The contrary supposition is obviously ———.

When the Siberian Pacific Railway is finished, what is there to ——— Russia from annexing nearly the whole of China?

There appears to be no way to ——— the difficulty.

PREVIOUS (page 382)

QUESTIONS

1. What does *antecedent* denote?
2. How does *preceding* differ from *antecedent* and *previous*?
3. How is *anterior* commonly used?
4. Of what is *former* used? What does *former* always imply?

EXAMPLES

These matters have been fully explained in ——— chapters of this work.

The reader will be helped to an understanding of this process by a careful study of the diagram on the ——— page.

In ——— times many things were attributed to witchcraft that now have a scientific explanation.

PRICE (page 383)

QUESTIONS

1. What is the *cost* of an article? the *price*? 2. How do *cost* and *price* ordinarily differ? 3. In what exceptional case may *cost* and *price* agree? 4. What does *price* always imply? 5. What is the meaning of *value*? How does market *value* differ from intrinsic *value*? 6. How does *value* differ from *worth*? 7. To what are *charge* and *expense* ordinarily applied?

EXAMPLES

——— is the life-giving power of anything; ———, the quantity of labor required to produce it; ———, the quantity of labor which its possessor will take in exchange for it.

No man can permanently do business by making the ——— of his goods the same as their ——— to him, however such a method may help him momentarily in an emergency.

PRIDE (page 384)

QUESTIONS

1. What is *pride*? *haughtiness*? *arrogance*? *disdain*? How do these qualities compare with *pride*? 2. What does *superciliousness* imply according to its etymology? 3. How do *pride* and *vanity* differ? 4. What difference is noted between *self-conceit* and *conceit*? 5. How do *self-respect* and *self-esteem* compare with each other and with the other words of the group?

EXAMPLES

——— may puff a man up, but never prop him up.

There is nothing ——— can so little bear with as ——— itself.

——— is as ill at ease under indifference as tenderness is under the love which it can not return.

PRIMEVAL (page 385)

QUESTIONS

1. What is the derivation and signification of *aboriginal*? *autochthonic*? *primeval*? 2. What do *prime* and *primary* denote? What special sense has *primary* as in reference to a school? 3. How is *primordial* used? 4. What does *primitive* suggest, as in the expressions, the *primitive* church, *primitive* simplicity? 5. What is *pristine*? 6. How do *native* and *indigenous* compare?

EXAMPLES

Thou from ——— nothingness didst call
First chaos, then existence, Lord.

The ——— inhabitants of America are long since extinct, for even the races whom the white men conquered had themselves supplanted an earlier race.

All the later ages have wondered at and admired the whole-souled consecration of the ——— church.

PROFIT (page 387)

QUESTIONS

1. What are *returns* or *receipts*?
2. What is *profit* in the commercial sense? What in the intellectual and moral sense?
3. What is *utility*?
4. What does *advantage* originally signify? Does it now necessarily imply having or gaining superiority to another person, or securing anything at another's expense?
5. What is *gain*? *benefit*? *emolument*?
6. To what does *expediency* especially refer?

EXAMPLES

Silence has many ———s.

No man can read with ——— that which he can not learn to read with pleasure.

Godliness with contentment is great ———.

PROGRESS (page 388)

QUESTIONS

1. What is *progress*?
2. What do *attainment*, *proficiency*, and *development* imply?
3. What is *advance*? How does it differ from *progress*?

EXAMPLES

What is thy ——— compared with an Alexander's, a Mahomet's, a Napoleon's?

And dreams in their ——— have breath,
And tears, and tortures, and the touch of joy.

Human ——— consists in a continual increase in the number of those who, ceasing to live by the animal life alone and to feel the pleasures of sense only, come to participate in the intellectual life also.

PROHIBIT (page 389)

QUESTIONS

1. What is it to *prohibit*?
2. How does *forbid* compare with *prohibit*?
3. How does *prohibit* compare with *prevent*?

EXAMPLES

Though much I want which most would have,
Yet still my mind ——— to crave.

The laws of England, from the early Plantagenets, sternly ——— the

conversion of malt into alcohol, excepting a small portion for medicinal purposes.

Human law must ——— many things that human administration of law can not absolutely ———; is not this true also of the divine government?

PROMOTE (page 390)

QUESTIONS

1. What is it to *promote*? 2. To what does *promote* apply? To persons or things, and in what way?

EXAMPLES

The outlawed pirate of one year was ——— the next to be a governor and his country's representative.

The imperial ensign, which full high ———ed,
Shone like a meteor streaming in the wind.

PROPTIATION (page 390)

QUESTIONS

1. What did *atonement* originally denote? What is its present theological and popular sense? 2. What does *expiation* signify? *propitiation*? *satisfaction*?

EXAMPLES

——— has respect to the bearing which satisfaction has upon sin or the sinner. ——— has respect to the effect of satisfaction in removing the judicial displeasure of God.

When a man has been guilty of any sin or folly, I think the best ——— he can make is to warn others not to fall into the like.

Redemption implies the complete deliverance from the penalty, power, and all the consequences of sin; ——— is used in the sense of the sacrificial work, whereby the redemption from the condemning power of the law was insured.

PROPOSAL (page 391)

QUESTIONS

1. What does an *offer* or *proposal* do? 2. What does a *proposition* set forth? 3. For what is the *proposition* designed? the *proposal*? 4. In what way does *proposition* come to have nearly the sense of *proposal* in certain uses? 5. What is a *bid*? 6. What does an *overture* accomplish? In what special application is the word commonly used?

EXAMPLES

Garrison emphatically declared, "I can not listen to any ——— for a gradual abolition of wickedness."

The theme in confirmation must always admit of being expressed in a logical ———, with subject, predicate, and copula.

PROPOSE (page 392)

QUESTIONS

1. How does *propose* in its most frequent use differ from *purpose*? 2. How is *propose* used so as to be nearly equivalent to *purpose*? What important difference appears in this latter use?

EXAMPLES

I know, indeed, the evil of that I ———, but my inclination gets the better of my judgment.

Man ———s, but God disposes.

PROTRACT (page 392)

QUESTIONS

1. What is it to *protract*? 2. What is the significance of *defer* and *delay*, and how do these words differ in usage from *protract*? 3. How does *elongate* differ from *protract*? 4. Is *protract* ordinarily favorable or unfavorable in sense? 5. Is *continue* favorable or unfavorable?

EXAMPLES

Unseen hands ———

The coming of what oft seems close in ken.

Burton, a hypochondriac, wrote the "Anatomy of Melancholy," that marvel of learning, and ——— his life to the age of sixty-four.

PROVERB (page 393)

QUESTIONS

1. In what do the *proverb* and the *adage* agree? In what respects do they differ? 2. What is an *apothem*? an *aphorism*? How do these two words differ? 3. What is a *dictum*? a *saying*? 4. What is a *precept*? How does it differ from a *motto* or *maxim*? 5. How do *motto* and *maxim* differ from each other?

EXAMPLES

The ——— must be verified.

That beggars mounted, run their horse to death.

Books, like ———s, receive their chief value from the stamp and esteem of ages through which they have passed.

PRUDENCE (page 394)

QUESTIONS

1. What is the definition of *prudence*? 2. How does *providence* differ from *prudence*? 3. How does *care* compare with *prudence* and *providence*? 4. How is *frugality* related to *prudence*? 5. How do *foresight* and *forethought* compare with each other, and both with *providence*?

EXAMPLES

When desp'rate ills demand a speedy cure,
Distrust is cowardice, and ——— folly.

With a ——— unknown in other parts of Scotland, the peasantry have
in most places planted orchards around their cottages.

PURCHASE (page 395)

QUESTIONS

1. From what language is *purchase* derived? 2. From what is *buy* derived?
3. How do *buy* and *purchase* agree in meaning? What single definition would answer for either? 4. How do *buy* and *purchase* differ in use? Give instances.

EXAMPLES

I'll give thee England's treasure,
Enough to ——— such another island,
So thou wilt make me live.
'Tis gold which ———s admittance.
—— the truth, and sell it not.

PURE (page 395)

QUESTIONS

1. What does *pure* signify? 2. In what sense are material substances said to be *pure*? 3. What does *pure* denote in moral and religious use?
4. How does *pure* compare with *innocent*? with *virtuous*?

EXAMPLES

Water from melted snow is ———r than rain-water, as it descends
through the air in a solid form, incapable of absorbing atmospheric gases.

Stone walls do not a prison make,

Nor iron bars a cage;

Minds ——— and quiet take

That for a hermitage.

In every place incense shall be offered unto my name and a ———
offering, saith the Lord of hosts.

QUEER (page 397)

QUESTIONS

1. What is the meaning of *odd*? *singular*? Are *odd* and *singular* precise equivalents? 2. When is a thing called *strange*? 3. What is the primary meaning of *peculiar*? With what implication is it now commonly used? 4. What is the meaning of *eccentric*? How does it differ in use from *odd* or *queer*? 5. How does *erratic* compare with *eccentric*? 6. What is the primary meaning of *queer*? its common meaning? 7. What is the significance of *quaint*? *grotesque*?

EXAMPLES

A ———, shy man was this pastor—a sort of living mummy, dried up and bleached by Icelandic snows.

In setting a hen, says Grose, the good women hold it an indispensable rule to put an ——— number of eggs

Only a man of undoubted genius can afford to be ———.

The ——— architecture of these medieval towns has a strange fascination.

QUICKEN (page 398)

QUESTIONS

1. What is it to *accelerate*? to *despatch*? 2. What does the verb *speed* signify? *hasten*? *hurry*? What does *hurry* suggest in addition to the meaning of *hasten*?

EXAMPLES

The motion of a falling body is continually ———ed,

The muster-place is Lanrick mead!

——— forth the signal! Norman, ———!

The pulsations of the heart are ———ed by exertion.

QUOTE (page 398)

QUESTIONS

1. How does *cite* differ from *quote*? 2. What is it to *paraphrase*? to *plagiarise*?

EXAMPLES

A great man ——— bravely, and will not draw on his invention when his memory serves him with a word as good.

The Devil can ——— Scripture for his purpose.

To appropriate others' thoughts or words mechanically and without credit is to ———.

RACY (page 399)

QUESTIONS

1. To what does *racy* in the first instance refer? *pungent*? 2. How does *piquant* differ from *pungent*? 3. How are these words and the word *epicy* used in reference to literary products?

EXAMPLES

Pure mother English, ——— and fresh with idiomatic graces.

The atmosphere was strangely impregnated with the ——— odor of burning peat.

The spruce, the cedar, and the juniper, with their balsamic breath, filled the air with a ——— fragrance.

RADICAL (page 400)

QUESTIONS

1. What is the primary meaning of *radical*? 2. What contrasted senses are derived from this primary meaning?

EXAMPLES

Timidity is a ——— defect in a reformer.

Social and political leaders look to vested interests, and hence are inclined to regard all ——— measures as ———.

RARE (page 400)

QUESTIONS

1. What is the meaning of *unique*? Can any one of a number of things of the same kind be *unique*? 2. What is the primary meaning of *rare*? What added sense is often blended with this primary meaning? 3. Is *extraordinary* favorable or unfavorable in meaning?

EXAMPLES

Nothing is so ——— as time.

That which gives to the Jews their ——— position among the nations is what we are accustomed to regard as their sacred history.

- And what is so ——— as a day in June?
Then, if ever, come perfect days.

REACH (page 401)

QUESTIONS

1. What is it to *reach* in the sense here considered? 2. What is it to *arrive*? 3. What does *attain* add to the meaning of *arrive*? What does *gain* add?

EXAMPLES

And grasping down the boughs
I ———ed the shore.

He gathered the ripe nuts in the fall,
And berries that grew by fence and wall
So high she could not ——— them at all.
The heights by great men ———ed and kept
Were not ———ed by sudden flight,
But they, while their companions slept,
Were toiling upward in the night.

It is only in this way that we can hope to ——— at truth.

REAL (page 402)

QUESTIONS

1. From what is *real* derived? What does it mean? 2. From what is the *real* distinguished? 3. To what is *actual* opposed? 4. What shades of difference may be pointed out between the four words *actual*, *real*, *developed*, and *positive*?

EXAMPLES

In ——— life we do not die when all that makes life bright dies to us.
If there was any trouble, ——— or impending, affecting those she had served, her place was with them.

This was regarded as proof ——— of conspiracy.

REASON, v. (page 402)

QUESTIONS

1. What is it to *reason* about a matter? 2. From what is *argue* derived, and what does it mean? 3. What is it to *demonstrate*? to *prove*? How do these two words agree and differ?

EXAMPLES

There are two ways of reaching truth: by ———ing it out and by feeling it out.

In ———ing, too, the person owned his skill,

For e'en though vanquished, he could ——— still.

A matter of fact may be ———ed by adequate evidence; only a mathematical proposition can be ———ed.

REASON, n. (page 403)

QUESTIONS

1. How does *cause* differ from *reason* in the strict sense of each of the two words? 2. How is *reason* often used so as to be a partial equivalent of *cause*?

EXAMPLES

No one is at liberty to speak ill of another without a justifiable ———, even though he knows he is speaking truth.

I am not only witty myself, but the ——— that wit is in other men.

Necessity is the ——— of tyrants; it is the creed of slaves.

Alas! how light a ——— may move

Dissension between hearts that love!

REASONING (page 404)

QUESTIONS

1. What do *argumentation* and *debate* ordinarily imply? 2. How does *reasoning* differ from both the above words in this respect? 3. To what kind of *reasoning* were *argument* and *argumentation* formerly restricted? How widely are the words now applied? 4. How do *argument* and *argumentation* compare with *reasoning* as regards logical form?

EXAMPLES

All ———, Inductive or Deductive, is a reaching of the unknown through the known; and where nothing unknown is reached there is no ———.

Early at Bus'ness, and at Hazard late,

Mad at a fox-chase, wise at a ———.

If thou continuest to take delight in idle ———, thou mayest be qualified to combat with the sophists, but never know how to live with men.

REFINEMENT (page 406)

QUESTIONS

1. To what does *civilization* apply, and what does it denote?
2. What is *refinement*?
3. What is the primary meaning of *cultivation*? the derived meaning?
4. By what word is *cultivation* now largely superseded?
5. What does *culture* denote?

EXAMPLES

What is ———? It is the humanization of man in society, the satisfaction for him in society of the true law of human nature.

Giving up wrong pleasure is not self-sacrifice, but self———.

This refined taste is the consequence of education and habit; we are born only with a capacity of entertaining this ——.

RELIABLE (page 407)

QUESTIONS

1. What is to be said of the controversy regarding the formation and use of the word *reliable*?
2. What do *trusty* and *trustworthy* denote?
3. How does *reliable* compare with these words?
4. What meaning may *reliable* convey that *trusty* and *trustworthy* would not?

EXAMPLES

Good lack! quoth he, yet bring it me
My leathern belt likewise,
In which I bear my —— sword,
When I do exercise.

The first voyage to America, of which we have any perfectly —— account, was performed by the Norsemen.

RELIGION (page 408)

QUESTIONS

1. What is the original sense of *piety*? the derived sense?
2. What is *religion*? What does it include?
3. What is *worship*? *devotion*?
4. What is *morality*? *godliness*? *holiness*?
5. How is *theology* related to *religion*?

EXAMPLES

—— is man's belief in a being or beings, mightier than himself and inaccessible to his senses, but not indifferent to his sentiments and actions, with the feelings and practises which flow from such belief.

——, whose soul sincere

Fears God, and knows no other fear.

To deny the freedom of the will is to make —— impossible.

Systematic —— may be defined as the substance of the Christian

REND (page 410)

QUESTIONS

1. To what are *rend* and *tear* usually applied? Which is the stronger word?
2. In what connection is *rive* used, and in what sense?
3. What does *lacerate* signify?
4. How does *mangle* compare with *lacerate*?
5. What do *burst* and *rupture* signify? Which is the stronger word? When is a steam-boiler said to be *ruptured*?
6. What does *rip* signify?

EXAMPLES

Storms do not ——— the sail that is furled.

Oh, it offends me to the soul to hear a robustious, periwig-pated fellow ——— a passion to tatters, to very rags, to split the ears of the groundlings.

And now a bubble ———s, and now a world.

The first blood shed in the revolutionary struggle; a mere drop in amount, but a deluge in its effects, ———ing the colonies forever from the mother country.

RENOUCE (page 411)

QUESTIONS

1. From what is *renounce* derived, and in what sense used? *recant*? *retract*?
2. What is it to *discard*?
3. How does *revoke* compare with *recall* in original meaning and in present use?
4. What is the derivation and the distinctive meaning of *abjure*?
5. In what sense is *repudiate* used?

EXAMPLES

On his knees, with his hand on the Bible, Galileo was compelled to ——— and curse the doctrine of the movement of the earth.

He adds his soul to every other loss, and by the act of suicide, ——— earth to forfeit heaven.

He had no spiritual adviser, no human comforter, and was entirely in the hands of those who were determined that he should ——— or die.

REPENTANCE (page 412)

QUESTIONS

1. What is *regret*?
2. What does *penitence* add to *regret*?
3. How does *repentance* surpass the meaning of *penitence*, *regret*, *sorrow*, etc.?
4. What is *compunction*? *contrition*?
5. What is *remorse*, and how does it compare with *repentance*?

EXAMPLES

What then? what rests?

Try what ——— can: what can it not?

Forgive me, Valentine, if hearty ———

Be a sufficient ransom for offense,

I tender't here.

So writhes the mind ——— has riven,
Unmeet for earth, undoomed to heaven.
Darkness above, despair beneath,
Around it flame, within it death.

REPROOF (page 413)

QUESTIONS

1. Are *blame*, *censure*, and *disapproval* spoken or silent? 2. Are *comment*, *criticism*, *rebuke*, *reflection*, *reprehension*, and *reproof* expressed or not? 3. How of *admonition* and *animadversion*? 4. Are *comment* and *criticism* favorable or unfavorable? Do they imply superiority on the part of commentator or critic? 5. Do *reflection* and *reprehension* imply such superiority? How are these two words discriminated? 6. What does *rebuke* literally signify? To what kind of person is a *rebuke* administered? 7. To what kind of person is *reproof* administered? 8. What do *rebuke* and *reproof* imply on the part of him who administers them? 9. What is *animadversion*? *admonition*?

EXAMPLES

A ——— is intolerable when it is administered out of pride or hatred.
The best preservative to keep the mind in health is the faithful ———
of a friend.

Open ——— is better than secret love.

REPROVE (page 414)

QUESTIONS

1. What is it to *censure*? to *reprove*? to *reprimand*? 2. How does *admonish* compare with the other words in the group? Is its reference to the past or to the future? 3. What is it to *reproach*? Does this word imply authority or superiority? 4. What is the force of *expostulate* and *remonstrate*?

EXAMPLES

He that oppresseth the poor ———eth his Maker.

Her answer ———ed me, for she said, "I never ask their crimes, for we have all come short."

Moses was ———ed of God when he was about to make the tabernacle: for, see, saith he, that thou make all things according to the pattern shewed to thee in the mount.

This witness is true. Therefore ——— them sharply, that they may be sound in the faith.

REST (page 416)

QUESTIONS

1. What is *ease*? *quiet*? *rest*? 2. What is *recreation*, and how is it related to *rest*? 3. What is *repose* in the primary, and what in the derived, sense? 4. How does *repose* compare with *rest*? 5. What is a *pause*? 6. How does *sleep* compare with *repose* and *rest*?

EXAMPLES

Seek out, less often sought than found,
 A soldier's grave—for thee the best;
 Then look around, and choose thy ground,
 And take thy ———.
 Her manners had not that ———
 That stamps the cast of Vere de Vere.
 Shall I not take mine ——— in mine inn?

RESTRAIN (page 418)

QUESTIONS

1. What is it to *restrain*? 2. How does *constrain* differ from *restrain*? 3. How does *restrain* differ from *restrict*? 4. How does *repress* compare with *restrain*? *suppress*?

EXAMPLES

The English Puritans, ———ed at home, fled for freedom to America.
 In no political system is it so necessary to ——— the powers of the government as in a democratic state.

REVENGE (page 419)

QUESTIONS

1. What is *revenge*? 2. How does *retaliation* compare with *revenge*? 3. What did *vengeance* formerly mean, and what does it now imply? 4. What is a *requital*? 5. How do *avenging* and *retribution* differ from *retaliation*, *revenge*, and *vengeance*? 6. What difference may be noted between *avenging* and *retribution*?

EXAMPLES

According to the wish of Sulla himself, . . . his monument was erected in the Campus Martius, bearing an inscription composed by himself: "No friend ever did me a kindness, no enemy a wrong, without receiving full ———."

By the spirit of ———, as we sometimes express it, we generally understand a disposition, not merely to return suffering for suffering, but to inflict a degree of pain on the person who is supposed to have injured us, beyond what strict justice requires.

In all great religions we find one God, and in all, personal immortality with ———.

REVOLUTION (page 420)

QUESTIONS

1. What is the essential idea of *revolution*? 2. Does a *revolution* necessarily involve war? 3. What is *anarchy*? *insubordination*? *sedition*? *revolt*? *rebellion*? 4. How does *rebellion* differ from *revolution*? 5. By what class of persons is *insurrection* made? *mutiny*?

EXAMPLES

———s are not made; they come.
——— to tyrants is obedience to God.
Since government is of God, —— must be contrary to his will.

REVOLVE (page 421)

QUESTIONS

1. When is a body said to *roll*? to *rotate*? to *revolve*? 2. In what sense may the earth be said to *revolve*? and in what sense to *rotate*? 3. What are some of the extended uses of *roll*? 4. What kind of a word is *turn*, and what is its meaning?

EXAMPLES

Any bright star close by the pole is seen to —— in a very small circle whose center is the pole itself.

The sun —— on an axis in the same direction in which the planets —— in their orbits.

Human nature can never rest; once in motion it —— like the stone of Sisyphus every instant when the resisting force is suspended.

RIGHT (page 424)

QUESTIONS

1. What is a *right*? Is it general or special? 2. What is a *privilege*? an *exemption*? an *immunity*? 3. What is a *franchise*? a *prerogative*?

EXAMPLES

Friendship gives no —— to make ourselves disagreeable.

All men are created equal, and endowed with certain inalienable ——s.

RUSTIC (page 426)

QUESTIONS

1. From what are *rural* and *rustic* alike derived? How do the two words agree in general signification? How are they discriminated in use? 2. What is the meaning of *pastoral*? of *bucolic*?

EXAMPLES

How still the morning of the hallowed day!
Mute is the voice of —— labor, hush'd
The plowboy's whistle and the milkmaid's song.
The —— arbor which the summit crowned
Was woven of shining smilax, trumpet-vine,
Clematis, and the wild white eglantine.

When hunting tribes begin to domesticate animals, they enter usually upon the —— stage.

SACRAMENT (page 427)**QUESTIONS**

1. What is a religious *service* in the extended sense? 2. What is a *sacrament*? 3. What is an *observance*? an *ordinance*? 4. How do *sacrament* and *ordinance* differ? 5. What is a *r  te*?

EXAMPLES

Religion will glide by degrees out of the mind unless it be invigorated and reimpresed by external ———s.

Nothing tends more to unite men's hearts than joining together in the same prayers and ———s.

SALE (page 428)**QUESTIONS**

1. What is *change* or *exchange*? 2. What is *barter*? *sale*? 3. What is a *bargain* in the strict sense? 4. What is *trade* in the broad and in the limited sense?

EXAMPLES

Honor sits smiling at the ——— of truth.

I'll give thrice as much land to any well-deserving friend,

But in the way of ———, mark ye me,

I'll cavil on the ninth part of a hair.

Stamps God's own name upon a lie just made

To coin a penny in the way of ———.

SAMPLE (page 429)**QUESTIONS**

1. What is a *sample*? a *specimen*? 2. How do *sample* and *specimen* compare as indications of the quality of that which they respectively represent?

EXAMPLES

There is, therefore, in this country, an implied warranty that the goods correspond to the ———.

Cursola is a perfect ——— of a Venetian town.

SCHOLAR (page 430)**QUESTIONS**

1. What is the primary sense of *scholar*? the derived sense? 2. What does *pupil* signify? How is it technically used in educational work? 3. In what sense is *student* employed?

EXAMPLES

The accent or turn of expression of a single sentence will at once mark a ———.

The State of New York supplies all needed text-books free of charge to the ———s in the public schools.

The _____s in American colleges have taken up athletics with intense enthusiasm.

SCIENCE (page 430)

QUESTIONS

1. How does *science* compare with *knowledge*? 2. How does *art* compare with *science*? 3. What two senses of *art* must be discriminated from each other? 4. In which sense is *art* a system of rules? 5. In which sense does *art* transcend rule?

EXAMPLES

Beethoven took his _____ as seriously as a saint and martyr takes his religion.

Modern _____ may be regarded as one vast miracle, whether we view it in relation to the Almighty Being, by whom its objects and its laws were formed, or to the feeble intellect of man, by which its depths have been sounded, and its mysteries explored.

Printing has been aptly termed the _____ preservative of all other _____s.

SECURITY (page 431)

QUESTIONS

1. Of what kind of value or property must an *earnest* consist? 2. How do *pledge* and *security* differ from *earnest*? 3. How does *security* differ from *pledge*? 4. What is *bail*? *gage*?

EXAMPLES

The _____ for a national or state debt is the honesty of its people.

The surest _____ of a deathless name

Is the silent homage of thoughts unspoken.

And for an _____ of a greater honor,

He bade me, from him, call thee Thane of Cawdor.

SENSATION (page 433)

QUESTIONS

1. What is a *sensation*? a *perception*? 2. How does an *emotion* differ from a *sensation*? 3. How does the popular term *feeling* compare with *sensation* and *emotion*? 4. What is a *sense*?

EXAMPLES

But _____, in the technical and limited sense of the term, is appropriated to the knowledge of material objects, and of the external world. This knowledge is gained or acquired by means of the _____s, and hence, to be more exact, we call it sensible _____, or, more briefly, *sense* _____.

_____s sweet,
Felt in the blood, and felt along the heart.

SENSIBILITY (page 434)

QUESTIONS

1. What is *sensibility* in the philosophical sense? in popular use? 2. What does *sensitiveness* denote? 3. What is *susceptibility*? How does it compare with *sensitiveness*? 4. How are *susceptibility* and *sensitiveness* discriminated in physics?

EXAMPLES

The _____ of the external surface of the body is a special endowment adapted to the elements around and calculated to protect the interior parts from injury.

_____ to pleasure is of necessity also _____ to pain.

Every mind is in a peculiar state of _____ to certain impressions.

SEVERE (page 435)

QUESTIONS

1. What is *severe*? *rigid*? *strict*? 2. How does *rigorous* compare with *rigid*? 3. What does *austere* signify? What element is always found in an *austere* character?

EXAMPLES

In mathematics we arrive at certitude by _____ demonstration.

He who the sword of heaven will bear

Should be as holy as _____.

_____ law is often _____ injustice.

By _____ adherence to truth in official dealing with the natives, the English have come to be always believed in India.

SHELTER, v. (page 437)

QUESTIONS

1. When is anything said to be *correct*? 2. How does *shelter* compare with *cover*? 3. What does *defend* signify? 4. What does *guard* imply? 5. How does *protect* surpass *guard* and *defend*? 6. What does *shield* signify? How does it compare with *guard* or *defend*? 7. In what sense is the verb *harbor* commonly used?

EXAMPLES

He that _____eth his sins shall not prosper, but he that forsaketh them shall find mercy.

Thou who trod'st the billowy sea,

_____ us in our jeopardy!

In youth it _____ed me,

And I'll protect it now.

SIN (page 439)

QUESTIONS

1. What is *sin*? 2. How is *transgression* discriminated from *sin* in the general sense? 3. What is *crime*? *guilt*? *depravity*?

EXAMPLES

Commit

The oldest ———s the newest kind of ways.
——— is not punished as an offense against God, but as prejudicial to society.

How ——— once harbored in the conscious breast,
Intimidates the brave, degrades the great.

SKETCH (page 440)

QUESTIONS

1. What is a *sketch*? How does it compare with *outline*? 2. In what special connection are *draft* and *plan* used? 3. How does a mechanical *drawing* differ from a *draft*? 4. What is a *design*? How does it exceed the meaning of *drawing*? 5. What is an *outline* in written composition? How does a *sketch* in this sense compare with an *outline*? 6. What is an *outline* of a sermon technically called? 7. What is a lawyer's *brief*? How does it compare with an *outline* or *sketch*?

EXAMPLES

A ——— that is without vigor, and in which the anatomy has not been defined, is a bad foundation for a good picture.

A little model the master wrought,
Which should be to the larger ———
What the child is to the man.

SKILFUL (page 442)

QUESTIONS

1. What does *skilful* signify? 2. How does *dexterous* compare with *skilful*? 3. How does a *skilled* compare with a *skilful* workman?

EXAMPLES

So ——— seamen ken the land from far,
Which shows like mists to the dull passenger.

Thousands of ——— workmen are thrown into enforced idleness by the strikes and lockouts of every year.

Much that has been received as the work of disembodied spirits has been but the ——— sleight of hand of spirits embodied.

SLANDER (page 442)

QUESTIONS

1. What is it to *slander*? to *defame*? to *libel*? 2. When is *defame* equivalent to *slander*? When is it equivalent to *libel*? 3. What is it to *aspere*? to *malign*? to *traduce*? to *disparage*? 4. How do *slander* and *libel* differ in legal signification from the other words? 5. Which words of the group apply to open attack in one's presence, and which to attack in his absence?

EXAMPLES

———ed to death by villains

That dare as well answer a man, indeed,

As I dare take a serpent by the tongue.

If the Scriptures seem to —— knowledge, it is the knowledge that despises virtue.

Challenging each recreant doubter

Who ——ed her spotless name.

SLANG (page 443)

QUESTIONS

1. What is a *colloquialism*?
2. What is *slang* in the primary and ordinary sense? in special senses?
3. What is a *vulgarism*?
4. What is *cant* in the sense here considered?

EXAMPLES

There is a —— bred of vileness that is never redeemed? there is also a —— that is the vigorous utterance of uncultured wit, that fills a gap in the language and mounts ultimately to the highest places.

A —— is worse than ——, because it bears the ineffaceable stamp of ignorance.

SOCIALISM (page 445)

QUESTIONS

1. What is *socialism*? What term do many of its advocates prefer? 2. What is *communism*? *anarchism*?

EXAMPLES

——— in its full sense means the abolition of inheritance, the abolition of the family, the abolition of nationalities, the abolition of religion, the abolition of property.

———, in some modified form, is steadily making its way among thinking men under the guise of cooperation.

——— is the offspring of sore hearts and shallow brains. It is the wisdom of the man who burned down his house because his chimney smoked.

SPONTANEOUS (page 447)

QUESTIONS

1. When is anything properly said to be *spontaneous*? *voluntary*? *involuntary*?
2. How do *voluntary* and *involuntary* compare with each other? both with *spontaneous*?

EXAMPLES

——— is opposed to reflective. Those operations of mind which are continually going on without any effort or intention on our part are *spontaneous*.

No action that is not —— has any merit.

SPY (page 447)

QUESTIONS

1. In what are the *spy* and the *scout* alike? 2. In what do they differ? 3. What are their respective rights in case of capture? 4. What is an *emissary*?

EXAMPLES

A daring —— of General Stuart made his way to my quarters, and informed me that General Imboden had planned an attack upon the town.

I had grown uneasy in regard to the disjointed situation of our army and, to inform myself of what was going on, determined to send a —— into the enemy's lines.

STATE, v. (page 449)

QUESTIONS

1. From what is *state* derived? What does it mean? 2. What is the significance of *assert*? What element is prominent in this word? 3. What is the relative force of *affirm* and *assert*? *assacrate*? *aver*? *assure*? 4. What does *affirm* signify in legal use, and how does it differ from *swear*? 5. What is it to *certify*? 6. What does *vindicate* signify?

EXAMPLES

The first condition of intelligent debate is that the question be clearly ——ed.

We —— that the sciences dispose themselves round two great axes of thought, parallel and not unrelated, yet distinct—the natural sciences held together by the one, the moral by the other.

It is impossible for the mind to —— anything of that of which it knows nothing

STORM (page 450)

QUESTIONS

1. What is the essential meaning of *storm*? 2. What is a *tempest*?

EXAMPLES

The —— is hard at hand will sweep away

Thrones, churches, ranks, traditions, customs, marriage.

Were any considerable mass of air to be suddenly transferred from beyond the tropics to the equator, the difference of the rotatory velocity proper to the two situations would be so great as to produce not merely a wind, but a —— of the most destructive violence.

STORY (page 451)

QUESTIONS

1. What is a *story*? Is it true or false? 2. What is an *anecdote*? a *narrative* or *narration*?

EXAMPLES

There are ———, common to the different branches of the Aryan stock. . . . They are ancient Aryan ———, . . . older than the Odyssey, older than the dispersion of the Aryan race.

———s are relations of detached, interesting particulars.

Fairy ———s have for children an inexhaustible charm.

SUBJECTIVE (page 452)

QUESTIONS

1. What is the meaning of *subjective*? of *objective*? 2. How are these words illustrated in the case of a mountain? 3. What matters are purely *subjective*? 4. What matters are purely *objective*? 5. What is meant by saying that an author has a *subjective* or an *objective* style?

EXAMPLES

Subject, therefore, denotes the mind itself; and ———, that which belongs to, or proceeds from, the thinking subject. Object is a term for that about which the knowing subject is conversant, . . . while ——— means that which belongs to, or proceeds from, the object known, and not from the subject knowing; and thus denotes what is real, in opposition to what is ideal,—what exists in nature, in contrast to what exists merely in the thought of the individual.

SUGGESTION (page 454)

QUESTIONS

1. In what way does *suggestion* bring a matter before the mind? 2. What is an *intimation*? a *hint*? 3. What are the special characteristics of *insinuation* and *innuendo*?

EXAMPLES

Behold in the bloom of apples,
And the violets in the sward,
A ——— of the old, lost beauty
Of the garden of the Lord!

Time is truly the comforter, at once lessening the tendency to ——— of images of sorrow, and softening that very sorrow when the images arise.

An ——— is cowardly because it can seldom be directly answered, and the one who makes it can always retreat behind an assumed misconception of his words; but the ——— is the stab in the back, sneaking as it is malicious.

SUPERNATURAL (page 455)

QUESTIONS

1. What is the original meaning of *supernatural*? of *preternatural*? 2. What is commonly implied in the use of *preternatural*? 3. In what sense do some hold a miracle to be *supernatural*? What descriptive term would others prefer? 4. What is the meaning of *superhuman*? In what secondary sense is it often used?

EXAMPLES

It was something altogether ———, as when God said, "Let there be light," and there was light.

With an imagination of intense vividness and ——— activity, Choate was as practical as the most sordid capitalist that ever became an "incarnation of fat dividends."

SUPPORT (page 456)

QUESTIONS

1. What do *support* and *sustain* alike signify? 2. How does *sustain* surpass *support* in meaning and force? 3. What is the force and use of *bear* in this connection? 4. What is it to *maintain*? 5. How does *maintain* compare with *support* as to fulness and as to dignity? 6. What is it to *prop*? What is the limit upon the meaning of this word?

EXAMPLES

And Cain said, My punishment is greater than I can ———.

You take my house when you do take the prop
That doth ——— my house.

Can a soul like mine,
Unus'd to power, and form'd for humbler scenes,
—— the splendid miseries of greatness?
While less expert, though stronger far,
The Gael ———ed unequal war.

SUPPOSE (page 456)

QUESTIONS

1. What is it to *suppose*? 2. How does *conjecture* differ from *suppose*? 3. What does *think* signify in the sense here considered? How does it compare with *conjecture* or *suppose*?

EXAMPLES

Newton ———ed that if the earth were to be so composed as to be absolutely without pores, its dimensions might not exceed a cubic inch.

Let it not be ———ed that principles and opinions always go together.

SYNONYMOUS (page 457)

QUESTIONS

1. Are there any *synonymous* words in the strict sense of the term? 2. What is meant by *synonymous* words? 3. What are the two common faults with reference to *synonymous* words or *synonyms*?

EXAMPLES

The great source of a loose style is the injudicious use of those words termed ———.

To raise, with fitting observances, over the ruins of the historic fortress [Sumter] the ——— flag which had waved over it during its first bombardment.

SYSTEM (page 458)

QUESTIONS

1. What is *order*, in the sense here considered?
2. What does *method* denote?
3. What is a *system*?
4. To what does *manner* refer?
5. To what does *regularity* apply?
6. Can there be *order* without *regularity* or *regularity* without *order*, and how?

EXAMPLES

If this be madness, there is ——— in it.

A ——— is . . . an organized body of truth, or truths arranged under one and the same idea, which idea is as the life or soul which assimilates all those truths.

TEACH (page 461)

QUESTIONS

1. What is it to *teach*?
2. How does *instruct* surpass *teach* in signification?
3. What secondary sense has *instruct*?
4. What is the full meaning of *educate*?
5. What is it to *train*?
6. To what is *train* commonly applied where *educate* could not well be used?
7. What is it to *discipline*?
8. What does *nurture* signify, and how does it compare with *educate*?

EXAMPLES

Plato returned to Athens and began to ———; like his master, he ——— without money and without price.

For the most effective mechanical work both mind and hand must be ———ed in childhood.

The Highlanders flocking to him from all quarters, though ill-armed, and worse ———ed, made him undervalue any enemy who, he thought, was yet to encounter him.

TERM (page 462)

QUESTIONS

1. What is the literal meaning of *term*?
2. Is this meaning retained in the figurative uses of the word?
3. What are the *articles* of a contract?
4. What are the *terms* of a contract?
5. What is a *condition*?
6. What is a *term* in the logical sense?
6. How does *term* in ordinary use compare with *word*, *expression*, or *phrase*?

EXAMPLES

For beauty's come hath a ——— as brief

As the wave's poise before it break in pearl.

But what are these moral sermons [of Seneca]? ———s, nothing but ———s.

The very ——— miser is a confession of the misery which attends avarice.

TERSE (page 463)

QUESTIONS

1. What is the meaning of *short* or *brief*?
2. What is the derivation and meaning of *concise*? of *condensed*? of *compendious*?
3. What is the derivation and meaning of *succinct*? of *terse*?
4. What is the force of *summary*?
5. What is a *sententious* style? a *pillhy* utterance?

EXAMPLES

With all his lucidity of statement, Hamilton was not always ———.

In most cases it will be found that the Victorian idiom is clearer, but less ——— than the corresponding Elizabethan idiom which it has supplanted?

TESTIMONY (page 463)

QUESTIONS

1. What is *testimony*?
2. How does it compare with *evidence*?
3. How does a *deposition* differ from an *affidavit*?

EXAMPLES

The word ———, in legal acceptance, includes all the means by which any alleged matter of fact, the truth of which is submitted to us for investigation, is established or disproved.

As to the fruits of Sodom, fair without, full of ashes within, I saw nothing of them, though from the ——— we have, something of this kind has been produced.

TIME (page 465)

QUESTIONS

1. To what do *sequence* and *succession* apply?
2. What does *time* denote? How is it conceived of with reference to events?
3. How do *duration* and *succession* compare with *time*?

EXAMPLES

Every event remembered is remembered as having happened in ——— past. This gives us the idea in the concrete, . . . We can now, by a process of abstraction, separate the ——— from the event, and we have the abstract idea of *time*.

The ——— of each earthquake is measured generally only by seconds, or even parts of a second.

It has been conjectured that our idea of ——— is founded upon the conscious ——— of sensations and ideas in our own minds.

TOOL (page 466)

QUESTIONS

1. What is a *tool*?
2. How does *instrument* compare in meaning with *tool*?
3. What special *tools* are ordinarily called *instruments*?
4. What is an *implement*?
5. What is a *utensil*? In what special relations is the

word used? 6. What is an *appliance*? How does *appliance* compare with *tool*? 7. What is a *mechanism*? 8. What is a *machine* in the most general sense? in the technical and common use? 9. What is an *apparatus*? 10. Which of these words have figurative use? 11. How are *instrument* and *tool* contrasted in figurative use?

EXAMPLES

The time is coming when the ———s of husbandry shall supplant the weapons of war.

Mix salt and sand, and it shall puzzle the wisest of men, with his mere natural ———s, to separate all the grains of sand from all the grains of salt.

The pick, stone-saw, wedge, chisel, and other ———s were already in use when the pyramids were built.

TOPIC (page 468)

QUESTIONS

1. From what is *topic* derived, and with what meaning? 2. How is *question* used in a similar sense, and why? 3. Is the general *subject* or *theme* properly known as the *topic*? To what is that name more appropriately given?

EXAMPLES

My father . . . always took care to start some ingenious or useful ——— of discourse, which might tend to improve the minds of his children.

One of the most important rules in a deliberative assembly is, that every speaker shall speak to the ———.

The ——— of the Iliad is not the war of Troy, but the wrath of Achilles exhibited during and in connection with the war of Troy.

TRANSACT, TRANSACTION (page 469)

1. How does *transact* differ from *do*? 2. How does *transact* differ from *treat* and *negotiate*? 3. How does *negotiate* compare with *treat*? 4. How do *transactions* differ from *proceedings*?

EXAMPLES

In the first Parliament of James the House of Commons refused for the first time to ——— business on a Sunday.

The treaty of peace that closed the war of 1812 had been already ——— before the battle of New Orleans was fought.

Any direction of Christ or any direction or act of his apostles respecting the ——— of business in the church, is binding upon us, unless such direction or act was grounded upon peculiar circumstances then existing.

TRANSIENT (page 470)

QUESTIONS

1. What is the derivation of *transient* and *transitory*? 2. How does *transient* differ in signification from *transitory*? 3. What is the dis-

tinctive meaning of *temporary*? 4. From what is *ephemeral* derived, and with what sense? 5. How does *ephemeral* differ from *transient* or *transitory*? 6. What does *ephemeral* suggest besides brevity of time? 7. What is the derivation and meaning of *fugitive*? 8. What is the distinctive meaning of *evanescent*?

EXAMPLES

Mirth is short and ———, cheerfulness fixed and permanent.

Neither gratitude nor revenge had any share in determining his [Charles II.'s] course; for never was there a mind on which both services and injuries left such faint and ——— impressions.

A ——— chairman is commonly appointed at the opening of a meeting to conduct proceedings till a permanent presiding officer shall be elected.

UNION (page 471)

QUESTIONS

1. What is *unity*? 2. What is *union*? 3. How are *unity* and *union* contrasted? 4. When may *unity* be predicated of that which is made up of parts?

EXAMPLES

Behold how good and how pleasant it is for brethren to dwell together in ———.

Out of the ——— of Roman and Teutonic elements arose the modern world of Europe.

UTILITY (page 472)

QUESTIONS

1. From what is *utility* derived, and what is its primary meaning? 2. How is *utility* discriminated from *use* and *usefulness*? 3. What is the derivation and primary meaning of *expediency*? 4. How are *expediency* and *utility* used as regards moral action? Which is the inferior word in such use? 5. How does *policy* in such use compare with *expediency* and *utility*?

EXAMPLES

Principle is ever my motto, not ———.

Two words form the key of the Baconian doctrine, ——— and progress. The ancient philosophy disdained to be useful, and was content to be stationary.

Justice itself is the great standing ——— of civil society, and any departure from it, under any circumstances, rests under the suspicion of being no ——— at all.

The fundamental objection to the doctrine of ———, in all its modifications is that taken by Dr. Reid, viz., "that agreeableness and ——— are not moral conceptions, nor have they any connection with morality. What a man does merely because it is agreeable is not virtue."

VACANT (page 473)

QUESTIONS

1. What is the meaning of *empty*? of *vacant*? 2. To what does *vacant* especially refer? 3. What is the difference between an *empty* house and a *vacant* house? 4. What is the difference in dignity between the two words? 5. What is the significance of *void* and *devoid*? 6. What does *waste* imply? 7. In what sense is *vacuous* used?

EXAMPLES

——— heads console with ——— sound.
The watch-dog's voice that bay'd the whispering wind
And the loud laugh that spoke the ——— mind.

VENAL (page 474)

QUESTIONS

1. From what is *venal* derived, and with what meaning? *mercenary*? *hireling*? 2. How are *mercenary* and *venal* discriminated from *hireling*?

EXAMPLES

The closing quarter of the nineteenth century may be termed the ——— era of American politics. Never before has legislation been so universally, so unscrupulously, and unblushingly for sale.

The body of Greeks, immortalized under the name of the Ten Thousand, . . . though embarking on a foreign ——— service, were by no means outcasts, or even men of extreme poverty.

It is not the hire, but the working only for the hire that makes the ———.

VENERATION (page 476)

QUESTIONS

1. By what qualities is *awe* inspired? 2. What elements are present and what lacking in *awe*? 3. What is *dread* and by what aroused? 4. How do *reverence* and *veneration* differ from *awe* or *dread*? 5. How does *adoration* compare with *veneration*?

EXAMPLES

Man craves an object of ———; and if not supplied with that which God has appointed, will take what offers.

The Italian climate robs age of its ———, and makes it look newer than it is.

VENIAL (page 477)

QUESTIONS

1. From what is *venial* derived, and what does it signify? 2. How does *venial* compare with *pardonable*? 3. How does *excusable* differ from the above words? 4. What very different word is sometimes confounded with *venial*?

EXAMPLES

Theft on the part of a starving man is one of the most _____ of offenses.

Under all the circumstances, the error was _____.

VERACITY (page 477)

QUESTIONS

1. Do *truth* and *verity* apply to thought and speech or to persons? 2. To what does *veracity* apply? *truthfulness*? 3. Into what two classes may the words in this group of synonyms be divided, and what words will be found in each class?

EXAMPLES

On a certain confidence in the _____ of mankind is founded so much of the knowledge on which we constantly depend, that, without it, the whole system of human things would go into confusion.

If all the world and love were young,
And _____ in every shepherd's tongue,
These pretty pleasures might us move
To live with thee and be thy love.

VIRTUE (page 480)

QUESTIONS

1. What is the prominent idea in *virtue*? 2. How does *goodness* differ from *virtue*? 3. Of what relations are *honesty* and *probity* used? 4. How is *honesty* used in a sense higher than the commercial? 5. What, in the full sense, is *integrity*? 6. What is *honor*? 7. What is *purity*? *duty*? 8. What do *rectitude* and *righteousness* denote? 9. To what does *uprightness* especially refer? 10. What is *virtuousness*?

EXAMPLES

_____ is the fruit of exertion; it supposes conquest of temptation.

In seeing that a thing is right, we see at the same time that it is our _____ to do it.

It is true that _____ is the best policy; but if this be the motive of honest dealing, there is no real _____.

Where is that chastity of _____ that felt a stain like a wound?

INDEX OF SYNONYMS

(For explanation of how to use this index, see Special Note on page xv.)

	PAGE		PAGE
<i>abandon</i>	3	<i>abrogate, abolish</i>	11
<i>renounce</i>	411	<i>cancel</i>	138
<i>surrender</i>	457	<i>abrupt, bluff</i>	125
<i>abandoned, addicted</i>	32	<i>steep</i>	450
<i>abase</i>	4	<i>abscond</i>	14
<i>abash</i>	5	<i>absent, abstracted</i>	18
<i>abate</i>	6	<i>absolute</i>	15
<i>abolish</i>	11	<i>infinite</i>	300
<i>alleviate</i>	53	<i>perfect</i>	362
<i>abberation, insanity</i>	305	<i>pure</i>	395
<i>abbreviation</i>	6	<i>absolution, pardon, n.</i>	356
<i>abridgment</i>	13	<i>absolve</i>	16
<i>abdicate, abandon</i>	3	<i>pardon, v.</i>	355
<i>abet</i>	6	<i>absorb</i>	16
<i>help</i>	276	<i>absorbed, abstracted</i>	18
<i>abetter, accessory</i>	23	<i>abstain, cease</i>	149
<i>abettor, accessory</i>	23	<i>abstaining, abstinence</i>	17
<i>obeyance</i>	7	<i>abstemiousness, abstinence</i>	17
<i>abhor</i>	8	<i>abstention, abstinence</i>	17
<i>abhorrence, abomination</i>	12	<i>abstinences</i>	17
<i>antipathy</i>	72	<i>abnegation</i>	11
<i>hatred</i>	273	<i>abstract, v.</i>	18
<i>abide</i>	9	<i>abstract, n., abridgment</i>	13
<i>endure</i>	216	<i>abstracted</i>	13
<i>abiding, permanent</i>	362	<i>abstruse, complex</i>	166
<i>ability, power</i>	375	<i>mysterious</i>	337
<i>abject, pitiful</i>	367	<i>obscure</i>	347
<i>abjuration, abnegation</i>	11	<i>absurd</i>	19
<i>abjure, abandon</i>	3	<i>incongruous</i>	297
<i>renounce</i>	411	<i>abundance, wealth</i>	482
<i>able, adequate</i>	34	<i>abundant, large</i>	313
<i>clever</i>	162	<i>plentiful</i>	371
<i>sagacious</i>	427	<i>abuse</i>	20
<i>ablution</i>	9	<i>abomination</i>	12
<i>abnegation</i>	11	<i>abutting, adjacent</i>	36
<i>abode, home</i>	282	<i>abyss, abyss</i>	20
<i>abolish</i>	11	<i>academic, academical</i>	22
<i>cancel</i>	138	<i>accede, agree</i>	42
<i>abominable, criminal</i>	178	<i>accelerate, quicken</i>	398
<i>abominate, abhor</i>	8	<i>accept, agree</i>	42
<i>abomination</i>	12	<i>assume</i>	98
<i>aboriginal, primal</i>	385	<i>confess</i>	170
<i>abortive, vain</i>	474	<i>acceptable, delightful</i>	136
<i>abound</i>	13	<i>accepted, authentic</i>	108
<i>abounding, plentiful</i>	371	<i>access, entrance</i>	220
<i>aboveboard, candid</i>	130	<i>accessible, friendly</i>	256
<i>above-mentioned, previous</i>	382	<i>accession, entrance</i>	220
<i>above-named, previous</i>	382	<i>accessory, a., auxiliary</i>	108
<i>abridge, restrain</i>	418	<i>accessory, n.</i>	23
<i>abridgment</i>	13	<i>appendage</i>	79
<i>abbreviation</i>	6		

	PAGE
<i>accident</i>	24
<i>hazard</i>	275
acclaim, <i>praise</i>	376
acclamation, <i>praise</i>	376
accommodate, <i>adapt</i>	29
accommodation, <i>compromise</i> ..	167
accompaniment, <i>appendage</i> ..	79
<i>circumstance</i>	158
accompany, <i>follow</i>	250
accomplice, <i>accessory</i>	28
<i>associate, n.</i>	91
accomplish, <i>attain</i>	99
<i>do</i>	198
<i>transact</i>	469
accomplished, <i>polite</i>	372
<i>skilful</i>	442
accomplishment, <i>act</i>	27
<i>end, n.</i>	214
accord, <i>v., agree</i>	42
<i>accord, n., harmony</i>	271
accordance, <i>harmony</i>	271
accordingly, <i>therefore</i>	464
accost, <i>address, v.</i>	33
account, <i>v., calculate</i>	136
<i>history</i>	281
<i>reason, n.</i>	408
<i>record</i>	405
<i>report</i>	412
<i>story</i>	451
accountability, <i>duty</i>	207
accountable, <i>responsible</i>	415
accounterments, <i>arms</i>	88
<i>caparison</i>	140
accredited, <i>authentic</i>	103
accumulate, <i>amass</i>	60
accurate, <i>perfect</i>	362
accuse, <i>arraign</i>	84
accustomed, <i>addicted</i>	82
<i>usual</i>	472
acerb, <i>bitter</i>	122
acerbity, <i>acrimony</i>	26
acetous, <i>bitter</i>	122
ache, <i>pain</i>	354
achieve, <i>attain</i>	99
<i>do</i>	198
<i>get</i>	262
<i>succeed</i>	454
achievement, <i>act</i>	27
<i>end, n.</i>	214
<i>victory</i>	479
<i>work</i>	487
acid, <i>bitter</i>	122
acidulated, <i>bitter</i>	122
acidulous, <i>bitter</i>	122
acknowledge, <i>avow</i>	105
<i>confess</i>	170
acknowledgment, <i>apology</i> ...	75

	PAGE
<i>acquaintance</i>	25
<i>knowledge</i>	311
acquiesce, <i>agree</i>	42
acquire, <i>attain</i>	99
<i>get</i>	262
<i>purchase</i>	395
acquit, <i>absolve</i>	16
<i>pardon, v.</i>	355
acquittal, <i>pardon, n.</i>	356
acrid, <i>bitter</i>	122
acrimonious, <i>bitter</i>	122
<i>morose</i>	355
acrimony	26
<i>enmity</i>	218
act, <i>v., transact</i>	469
act, <i>n.</i>	27
<i>exercise</i>	229
<i>motion</i>	836
<i>transaction</i>	467
action, <i>act</i>	27
<i>battle</i>	114
<i>behavior</i>	119
<i>exercise</i>	229
<i>morose</i>	355
<i>operation</i>	351
<i>transaction</i>	469
<i>work</i>	487
active	28
<i>alert</i>	47
<i>aline</i>	49
<i>industrious</i>	299
<i>nimble</i>	344
activity, <i>alacrity</i>	46
<i>exercise</i>	229
actor, <i>agent</i>	41
<i>cause</i>	148
actual, <i>real</i>	462
actualize, <i>do</i>	198
actuate, <i>influence</i>	300
acumen	28
acute, <i>acute</i>	94
<i>sagacious</i>	427
autenens, <i>acumen</i>	28
adage, <i>proverb</i>	393
adapt	29
adapted, <i>adequate</i>	34
<i>fit</i>	246
add	32
<i>append</i>	78
<i>attach</i>	95
addendum, <i>appendage</i>	79
addicted	82
addition, <i>appendage</i>	79
address, <i>v.</i>	38
<i>appeal</i>	77
address, <i>n.</i>	34
<i>speech</i>	446

	PAGE		PAGE
adduce, <i>allege</i>	51	advantage, <i>profit</i>	387
adept, <i>skilful</i>	442	<i>utility</i>	472
adequate	84	<i>victory</i>	479
<i>condign</i>	169	adventure, <i>accident</i>	24
<i>fit</i>	246	adventurous, <i>brave</i>	127
<i>plentiful</i>	371	adversary, <i>enemy</i>	217
adherence, <i>attachment</i>	97	<i>adverse</i>	39
adherent	35	adversity, <i>misfortune</i>	381
adhesion, <i>attachment</i>	97	advert, <i>allude</i>	56
adhesive	86	advertise, <i>announce</i>	69
adieu, <i>farewell</i>	238	advised, <i>conscious</i>	173
adit, <i>entrance</i>	220	advocate, <i>abet</i>	6
adjacent	36	<i>plead</i>	369
adjoin, <i>add</i>	32	aerial, <i>airy</i>	45
<i>attach</i>	95	affable, <i>friendly</i>	256
<i>conjoin</i>	171	affair, <i>battle</i>	114
adjoining, <i>adjacent</i>	86	<i>business</i>	133
adjourn, <i>defer</i>	182	<i>transaction</i>	469
adjournment, <i>abeyance</i>	7	affect, <i>assume</i>	93
adjunct, <i>appendage</i>	79	affection, <i>hypocrisy</i>	285
adjuration, <i>oath</i>	346	<i>pretense</i>	380
adjust, <i>adapt</i>	29	affection, <i>attachment</i>	97
<i>arrange</i>	85	<i>disease</i>	197
adjustment, <i>compromise</i>	167	<i>friendship</i>	257
administer, <i>execute</i>	228	<i>love</i>	321
admirable, <i>fine</i>	245	affectionate, <i>friendly</i>	256
admiration, <i>amazement</i>	61	affidavit, <i>oath</i>	346
admire	37	<i>testimony</i>	463
admissible	87	affiliate, <i>associate, v.</i>	90
admission, <i>entrance</i>	220	affinity, <i>analogy</i>	66
admit, <i>agree</i>	42	<i>attachment</i>	97
<i>allow</i>	55	<i>kin</i>	311
<i>avow</i>	105	affirm, <i>allege</i>	51
<i>confess</i>	170	<i>state</i>	449
admittance, <i>entrance</i>	220	affirmation, <i>testimony</i>	463
admixture, <i>alloy</i>	56	affix, <i>add</i>	32
admonish, <i>reprove</i>	414	<i>append</i>	78
admonition, <i>reproof</i>	413	<i>attach</i>	95
adolescent, <i>youthful</i>	458	<i>conjoin</i>	171
adoration, <i>veneration</i>	476	afflict, <i>chasten</i>	155
adore, <i>admire</i>	37	affliction, <i>grief</i>	266
<i>venerate</i>	475	<i>misfortune</i>	381
adorn	88	affluence, <i>wealth</i>	482
adroit, <i>clever</i>	162	affluent, <i>plentiful</i>	371
<i>skilful</i>	442	afford, <i>endure</i>	216
adroitness, <i>address, n.</i>	34	affray, <i>feud</i>	241
<i>dexterity</i>	192	affright, <i>v., frighten</i>	258
adulation, <i>praise</i>	376	affright, <i>n., alarm</i>	47
adulteration, <i>alloy</i>	56	<i>fear</i>	238
advance, <i>v., aggrandize</i>	41	affront	39
<i>allege</i>	51	aforsaid, <i>previous</i>	382
<i>amend</i>	68	afraid	40
<i>progress</i>	388	age, <i>time</i>	465
<i>promote</i>	390	aged, <i>old</i>	350
<i>quicken</i>	398	agency, <i>operation</i>	351
advancement, <i>progress</i>	388	agent	41
		<i>cause</i>	146

	PAGE		PAGE
<i>aggrandize</i>	41	<i>all, every</i>	225
<i>aggravate, affront</i>	39	<i>allay</i>	50
<i>amass</i>	60	<i>allege</i>	51
<i>aggression, attack, n.</i>	99	<i>state</i>	449
<i>aggrieve, abuse</i>	20	<i>allegiance</i>	51
<i>agile, active</i>	28	<i>allegory</i>	52
<i>nimble</i>	344	<i>fiction</i>	243
<i>agility, alacrity</i>	46	<i>alleviate</i>	53
<i>agitate, shake</i>	436	<i>allay</i>	50
<i>agitation, storm</i>	450	<i>alley, way</i>	482
<i>agnomen, name</i>	338	<i>alliance</i>	53
<i>agnostic, skeptic</i>	441	<i>association</i>	92
<i>agony, pain</i>	354	<i>kin</i>	311
<i>agree</i>	42	<i>allot</i>	54
<i>agreeable, amiable</i>	64	<i>apply</i>	80
<i>comfortable</i>	163	<i>apportion</i>	82
<i>delightful</i>	186	<i>devote</i>	191
<i>pleasant</i>	370	<i>allow</i>	55
<i>agreement, compromise</i>	167	<i>confess</i>	170
<i>contract</i>	175	<i>endure</i>	216
<i>harmony</i>	271	<i>allowable, admissible</i>	87
<i>agriculture</i>	43	<i>allowance, pay, n.</i>	359
<i>agricultural, rustic</i>	426	<i>permission</i>	308
<i>aid, v., abet</i>	6	<i>subsidy</i>	453
<i>promote</i>	390	<i>alloy</i>	56
<i>aid, n., adherent</i>	85	<i>allude</i>	58
<i>auxiliary</i>	108	<i>allure</i>	57
<i>help</i>	276	<i>draw</i>	303
<i>subsidy</i>	458	<i>ally, v., associate, v.</i>	90
<i>aid, adherent</i>	85	<i>ally, n., accessory</i>	23
<i>ailment, disease</i>	197	<i>adherent</i>	35
<i>aim</i>	44	<i>associate, n.</i>	91
<i>account, n.</i>	408	<i>auxiliary</i>	108
<i>design</i>	190	<i>almsgiving, benevolence</i>	120
<i>direction</i>	196	<i>also</i>	87
<i>air</i>	44	<i>alter, change, n.</i>	151
<i>pretense</i>	380	<i>alteration, change, n.</i>	152
<i>airy</i>	45	<i>altercation</i>	58
<i>akin, alike</i>	49	<i>alternative</i>	60
<i>alacrity</i>	46	<i>although, notwithstanding, conj.</i>	345
<i>alarm</i>	47	<i>amalgamate, mix</i>	831
<i>frighten</i>	258	<i>amass</i>	60
<i>alarmed, afraid</i>	40	<i>amateur</i>	61
<i>alarming, awful</i>	108	<i>amusement</i>	61
<i>alert</i>	47	<i>perplexity</i>	364
<i>active</i>	28	<i>ambiguous, clear</i>	181
<i>alive</i>	49	<i>equivocal</i>	222
<i>nimble</i>	344	<i>obscure</i>	347
<i>vigilant</i>	479	<i>ambition</i>	62
<i>alertness, alacrity</i>	46	<i>ameliorate, amend</i>	63
<i>alien, a. & n.</i>	48	<i>amenable, docile</i>	200
<i>alienate, surrender</i>	457	<i>responsive</i>	415
<i>alienation, insanity</i>	305	<i>amend</i>	68
<i>alike</i>	49	<i>amend, reward</i>	422
<i>synonymous</i>	457	<i>amiable</i>	64
<i>aliment, food</i>	251	<i>amiable, friendly</i>	284
<i>alive</i>	49	<i>amid</i>	63

	PAGE		PAGE
amidst, <i>amid</i>	65	antagonism, <i>antipathy</i>	72
amity, <i>friendship</i>	260	<i>enmity</i>	218
<i>harmony</i>	271	antagonist, <i>enemy</i>	217
amnesty, <i>pardon, n.</i>	356	antagonistic, <i>adverse</i>	89
among, <i>amid</i>	65	antecedent, <i>n, cause</i>	146
amongst, <i>amid</i>	65	<i>precedent</i>	878
ample, <i>large</i>	313	<i>previous</i>	882
<i>plentiful</i>	871	antepast, <i>anticipation</i>	71
amplify	65	anterior, <i>previous</i>	882
add	82	anticipate	71
amuse, <i>entertain</i>	218	<i>abide</i>	9
amusement, <i>entertainment</i> ..	219	<i>prevent</i>	881
analogous, <i>alike</i>	49	anticipation	71
analogy	66	antipathy	72
analysis, <i>abridgment</i>	18	<i>hatred</i>	278
anarchy, <i>revolution</i>	420	antiquated, <i>antique</i>	72
anathema, <i>oath</i>	846	<i>obsolete</i>	848
ancient, <i>antique</i>	72	<i>old</i>	850
<i>obsolete</i>	848	antique	72
<i>old</i>	850	<i>old</i>	850
<i>primeval</i>	885	anxiety	78
and, <i>but</i>	184	<i>care</i>	141
anger	67	anxious, <i>afraid</i>	40
<i>hatred</i>	278	<i>eager</i>	207
anguish, <i>anxiety</i>	78	any, <i>every</i>	225
<i>pain</i>	854	apathy	74
anecdote, <i>story</i>	451	<i>stupidity</i>	451
animadversion, <i>reproof</i>	418	<i>stupor</i>	452
animal, <i>a., brutish</i>	131	aperture, <i>cavity</i>	147
animal, <i>n.</i>	68	apiece	75
animate, <i>alive</i>	49	aphorism, <i>proverb</i>	898
animated, <i>airy</i>	45	apocalypse, <i>revelation</i>	419
<i>alive</i>	49	apologize for, <i>palliate</i>	354
<i>eager</i>	207	apologue, <i>fiction</i>	248
animation, <i>alacrity</i>	46	apology	75
animosity, <i>anger</i>	67	<i>defense</i>	182
<i>enmity</i>	218	apostate, <i>heretic</i>	276
<i>feud</i>	241	apostrophize, <i>address, v.</i>	88
<i>hatred</i>	278	apothegm, <i>proverb</i>	898
annals, <i>history</i>	281	appal, <i>frighten</i>	258
annex, <i>add</i>	32	appalling, <i>awful</i>	106
<i>append</i>	78	apparatus, <i>tool</i>	466
<i>attach</i>	95	apparel, <i>dress</i>	204
annihilate, <i>abolish</i>	11	apparent	76
<i>exterminate</i>	281	<i>clear</i>	181
annotation, <i>remark</i>	409	<i>evident</i>	226
announce	69	appeal	77
<i>speak</i>	446	<i>ask</i>	90
annoy, <i>affront</i>	89	appual to, <i>address, v.</i>	88
annoyance, <i>abomination</i>	12	appar	78
annul, <i>abolish</i>	11	appearance or semblance of,	
<i>cancel</i>	188	<i>have, appear</i>	78
anomalous, <i>aburd</i>	19	appearance, <i>air</i>	44
<i>quser</i>	397	appease, <i>allay</i>	50
answer	70	appellation, <i>name</i>	898
answerable, <i>responsible</i>	415		

	PAGE		PAGE
append	78	appurtenance, appendage	79
add	32	a priori, transcendental	470
attach	100	apt, clever	162
appendage	79	fit	246
appendix, appendage	79	likely	318
appetence, appetite	80	sagacious	427
desire	190	skilful	442
appetite	80	aptitude, dexterity	192
desire	190	power	375
applaud, admire	37	arbiter, judge	308
applause, praise	376	arbitrary, absolute	15
appliance, tool	466	arbitrate, interpose	308
application, exercise	229	arbitration, compromise	167
industry	299	arbitrator, judge	308
apply	80	archaic, obsolete	348
adapt	29	archetype, example	227
allot	54	idea	247
appeal	77	ideal	244
attach	95	model	234
devote	191	archive, record	405
fix	247	archives, history	281
apply for, ask	90	ardent, eager	207
apply to, address, v.	33	ardor, enthusiasm	230
ask	90	arduous, difficult	196
appoint, allot	54	argue, plead	369
apportion	82	reason, v.	402
apportion	82	argument, altercation	58
allot	54	reason, n.	403
devote	191	reasoning	404
opposite, fit	246	argumentation, reasoning	404
appreciate, esteem, v.	223	arise, rise	424
apprehend, anticipate	71	arising, beginning	118
arrest	88	armament, army	84
catch	146	armor, arms	83
perceive	861	arms	83
apprehension, alarm	47	army	84
anticipation	71	array	87
anxiety	73	arraign	84
fear	288	arrange	85
idea	287	adapt	29
knowledge	311	arrangement, array	87
apprehensive, afraid	40	compromise	167
apprised, conscious	173	contract	175
approach, address, v.	38	array	87
approach, n., approximation	83	army	84
entrance	220	arrange	85
approbation, praise	376	dress	204
appropriate, abstract	18	arrest	88
apply	80	obstruct	349
apportion	82	arrive, reach	401
assume	98	arrive at, attain	99
devote	191	arrogance, pride	844
fit	246	arrogant, absolute	15
approval, praise	376	dogmatic	200
approve, admire	37	arrogate, assume	92
agree	42		
approximation	83		

	PAGE		PAGE
art, artifice	88	assist, abet	6
<i>business</i>	133	<i>help</i>	276
<i>science</i>	430	<i>promote</i>	391
artful, astute	94	assistant, accessory ..	23
article, term	462	<i>auxiliary</i>	102
article of belief, doctrine ..	200	associate, v.	90
article of faith, doctrine ..	200	<i>accessory</i>	23
articulate, speak ..	446	<i>apply</i>	80
artifice	88	<i>attach</i>	95
<i>fraud</i>	256	<i>attribute</i> , v.	100
artificer, artist	89	<i>conjoin</i>	171
artisan, artist	89	<i>mix</i>	331
artist	89	associate, n.	91
artistic, tasteful	460	association	92
artless, candid	139	<i>acquaintance</i>	25
<i>rustic</i>	426	<i>class</i>	159
as, because	116	assort, arrange	85
ascend, rise	424	assuage, alleviate	98
ascendency, victory	479	assumption, assurance ..	98
ascertain, discover	196	<i>pretense</i>	380
ascribe, attribute, v.	100	<i>pride</i>	384
ashes, body	125	assurance	98
ask	90	<i>effrontery</i>	210
<i>plead</i>	369	<i>faith</i>	232
<i>pray</i>	377	<i>impudence</i>	296
asperity, acrimony	26	assure, confirm	170
aspersion, slander	442	<i>state</i>	449
asphyxia, stupor	452	assured, conscious	173
aspiration, aim	44	astonishment, amazement ..	61
<i>ambition</i>	62	<i>perplexity</i>	364
<i>desire</i>	190	astute	94
assail, attack, v.	98	as well, also	57
assassinate, kill	310	as well as, also	57
assault, v., attack, v.	98	at ease, comfortable	168
assault, n., attack, n.	99	atheist, skeptic	441
assimilation, company	164	atom, part, n.	357
assemble, convoke	178	<i>particle</i>	358
assembly, company	164	at once, immediately	298
assent, v., agree	42	atonement, propitiation	390
assent, n., faith	232	at rest, comfortable	168
assert, allege	51	atrocious, barbarous	113
<i>state</i>	449	attach	95
assertion, assurance	98	<i>add</i>	32
aseth, wealth	482	<i>append</i>	78
asperate, allege	51	<i>apply</i>	80
<i>state</i>	449	<i>associate</i> , v.	90
assiduity, industry	299	<i>conjoin</i>	171
assiduous, industrious	299	<i>fix</i>	247
assign, allege	51	attached, addicted	32
<i>allot</i>	54	<i>adjacent</i>	30
<i>apply</i>	80	attachment	97
<i>apportion</i>	82	<i>appendage</i>	79
<i>attribute</i> , v.	100	<i>friendship</i>	257
<i>commit</i>	164	<i>love</i>	321
<i>devote</i>	191	attack, v.	98
		attack, n.	99

	PAGE
attain	99
<i>get</i>	262
<i>reach</i>	401
<i>succeed</i>	451
attainment, <i>progress</i>	388
<i>wisdom</i>	485
attempt, <i>v.</i> , <i>endeavor, v.</i>	215
attempt, <i>n.</i> , <i>endeavor, n.</i>	216
attend, <i>follow</i>	250
<i>listen</i>	318
attendant, <i>accessory</i>	23
attention, <i>care</i>	141
<i>industry</i>	299
attestation, <i>testimony</i>	408
attire, <i>dress</i>	204
attitude	100
attract, <i>allure</i>	57
<i>draw</i>	202
attraction, <i>love</i>	321
attractive, <i>amiable</i>	64
<i>beautiful</i>	115
<i>pleasant</i>	370
attribute, <i>v.</i>	100
tribute, <i>n</i>	101
<i>characteristic</i>	154
<i>emblem</i>	211
audacity, <i>effrontery</i>	210
<i>temerity</i>	461
augment, <i>add</i>	32
<i>aggrandize</i>	41
<i>amplify</i>	65
augur	102
augury, <i>sign</i>	488
august, <i>awful</i>	106
<i>royal</i>	425
auspicious, <i>propitious</i>	391
austere, <i>severe</i>	435
authentic	108
<i>real</i>	402
author, <i>cause</i>	140
authoritative, <i>absolute</i>	15
<i>authentic</i>	108
<i>dogmatic</i>	200
authority, <i>permission</i>	368
<i>power</i>	375
<i>precedent</i>	378
authorization, <i>permission</i>	368
authorized, <i>authentic</i>	108
autobiography, <i>history</i>	281
autochthonic, <i>primeval</i>	385
automatic, <i>absolute</i>	15
automatic, <i>spontaneous</i>	447
auxiliary	108
<i>appendage</i>	79
avail, <i>profit</i>	387
<i>utility</i>	472
avaricious	104

	PAGE
avenge	104
<i>requite</i>	415
avenging, <i>revenge</i>	419
avenue, <i>way</i>	483
aver, <i>allege</i>	51
avow	105
<i>state</i>	449
averse, <i>reluctant</i>	409
aversion, <i>abomination</i>	12
<i>antipathy</i>	72
<i>hatred</i>	273
avocation, <i>business</i>	133
avouch, <i>avow</i>	105
<i>state</i>	449
avow	105
<i>confess</i>	170
<i>state</i>	449
await, <i>abide</i>	9
awake, <i>vigilant</i>	479
award, <i>allot</i>	54
aware, <i>conscious</i>	173
awe, <i>amazement</i>	61
<i>fear</i>	238
<i>veneration</i>	470
awful	106
awkward	106
<i>rustic</i>	426
axiom	107
<i>proverb</i>	393
babble	107
backbite, <i>slander</i>	442
backer, <i>adherent</i>	35
backward, <i>reluctant</i>	409
backwardness, <i>modesty</i>	384
bad, <i>pernicious</i>	364
badinage, <i>banter</i>	112
baffle	108
<i>hinder</i>	280
<i>hail, security</i>	431
<i>halk, baffle</i>	108
<i>hinder</i>	280
balmy, <i>restful</i>	417
balmy, <i>calm</i>	137
ban, <i>v.</i> , <i>banish</i>	110
<i>oath</i>	348
band, <i>company</i>	164
bandit, <i>robber</i>	428
baneful, <i>pernicious</i>	364
banish	110
<i>exterminate</i>	231
bank	111
bankrupt, <i>break</i>	124
bankruptcy	124
banquet, <i>feast</i>	239
banter	112
<i>wit</i>	486

	PAGE		PAGE
bar, barrier	113	beautify, adorn	88
hinder	280	because	116
impediment	295	therefore	464
lock	320	chance, happen	267
obstruct	349	become, make	322
barbarian, barbarous	113	becoming	117
barbaric, barbarous	113	fit	246
barbarism, language	312	be cured or healed, recover	406
barbarous	113	bedeck, adorn	88
bare, bleak	123	befall, happen	267
barely, but	184	befitting, becoming	117
bargain, contract	175	fit	246
sale	428	befoul, defile	184
bargain for, purchase	395	befriend, help	276
barricade, v., obstruct	349	beg, ask	90
barricade, n., barrier	113	plead	369
barrier	113	pray	377
boundary	126	beggary, poverty	374
impediment	295	beginning	118
barter, business	183	beguile, entertain	218
sale	428	behavior	119
barter for, purchase	395	air	44
base, brutish	181	behold, discern	196
foundation	254	look	320
pitiful	367	be in possession of, have	274
baseless, vain	474	belabor, beat	115
bashfulness, modesty	384	beleaguer, attack, v	98
basic, radical	400	belief, doctrine	200
basis, foundation	254	fath	232
bastinado, beat	115	fancy	237
bath, ablution	9	idea	287
bathing, ablution	9	belittle, disparage	198
bathos, abyss	20	belles-lettres, literature	319
batter, beat	115	bellow, call	136
battle	114	bemoan, mourn	336
battle array, array	87	bend	119
hawk, call	136	benefaction, gift	263
beach, bank	111	beneficence, benevolence	120
beam, light	317	benefit, profit	337
beaming, bright	129	utility	472
bear, abide	9	benevolence	120
carry	144	mercy	327
endure	216	benevolent, humane	284
support	456	benign, propitious	391
bearing, air	44	benignant, amiable	64
behavior	119	humane	284
direction	196	propitious	391
bear up under, endure	216	benignity, benevolence	120
bear with, endure	216	mercy	327
beast, animal	62	be possessed of, have	274
beastly, brutish	181	bequest, gift	263
beat	115	bereavement, misfortune	331
conquer	172	be restored, recover	406
beautiful, beautiful	115	beseech, ask	90
beautiful	115	plead	369
fine	245	pray	377
graceful	266	beseeching, becoming	117

	PAGE		PAGE
beset, attack, v	98	bleach	122
beside, adjacent	36	bleak	123
besides, also	57	blemish	124
but	134	injury	302
yet	487	blend, mix	331
besiege, attack, v.	98	blessed, happy	270
bestial, brutish	131	holy	282
bestow, give	264	blessedness, happiness	268
betide, happen	267	blessing, mercy	327
betoken, augur	102	blind, artifice	88
better, amend	63	bliss, happiness	262
between, amid	65	blissful, happy	270
betwixt, amid	65	blithe, happy	270
bevy, flock	249	blithesome, happy	270
bewail, mourn	336	block, barrier	113
bewilderment, amazement	61	hinder	280
perplexity	364	obstruct	349
bewitching, beautiful	115	blood, kin	311
charming	154	bloodshed, massacre	324
bias, bend	119	blooming, beautiful	115
prejudice	380	blot, blemish	124
bid, pray	877	stain	448
proposal	301	blot out, cancel	138
bide, abide	9	blow	124
big, large	313	misfortune	331
bigotry, fanaticism	236	bluff	125
bills, money	335	blunt, bluff	125
bind	121	blur, blemish	124
fix	247	blurt, babble	107
bind up, bind	121	blurt out, babble	107
biography, history	281	blustering, bluff	125
birth, kin	311	boast, ostentation	352
bit, particle	353	boasting, ostentation	352
biting, bitter	122	bode, augur	102
bitter	122	bodily, physical	366
bitterness, acrimony	26	body	125
enmity	218	bold, bluff	125
feud	241	brave	127
bizarre, queer	397	boldness, assurance	93
blab, babble	107	effrontery	210
black, dark	180	impudence	296
blame, v., condemn	108	perineess	365
reprove	414	bolt, abscond	14
blame, n., reproof	415	lock	320
blameless, innocent	304	bondage, fetter	240
perfect	362	bonds, fetter	240
blanch, bleach	122	bonny, beautiful	115
bland, calm	187	banus, subtly	483
blandishment, praise	376	bookish, academic	32
blank, bleak	123	books, literature	319
vacant	478	boon, gift	268
blaspheming, oath	346	boorish, awkward	106
blasphemy, oath	346	rustic	424
blaze, v., burn	182	bootless, vain	474
blaze, n., fire	246	boozy, drunk, u.	205
light	317	bolder, bank	111
blazon, announce	69	boundary	126

	PAGE		PAGE
bordering, adjacent	36	brilliant, bright	129
bore, cavity	147	brim, bank	111
both	126	bring, carry	144
every	225	bring about, do	198
bother, care	141	make	322
bottom, foundation	254	bring into being, make	322
bound, bank	111	bring over, persuade	365
boundary	126	bring to an end, cease	149
end, n.	214	bring to pass, do	190
boundless, infinite	300	make	322
bounteous, plentiful	371	brink, bank	111
bountiful, generous	261	brisk, active	28
plentiful	371	alert	47
bounty, benevolence	120	alive	49
gift	263	nimble	344
subsidy	453	briskness, alacrity	46
bourne, boundary	126	pertness	365
bourne, boundary	126	broad, large	313
bout, battle	114	broil, altercation	58
bow, band	119	fraud	241
box, blow	124	brood, flock	249
boyish, youthful	488	brook, endure	216
brag, ostentation	352	brotherly, friendly	256
brain, mind	329	browbeat, frighten	258
brand, v., burn	132	bruise, beat	115
brand, n., blamish	124	brush, cleanse	160
brandish, shake	436	brusk, bluff	125
brass, affrontery	210	brutal, barbarous	118
bravado, ostentation	352	brutish	181
brave	127	brute, a., brutish	131
bravery, prowess	393	brute, n., animal	68
brawl, altercation	58	brutish	181
feud	240	buccaneer, robber	425
breach, cavity	147	bucolic, rustic	426
break	128	buffet, blow	124
rend	410	build, make	322
break off, defer	182	bulky, large	313
end, v.	213	bullion, money	336
break up, defer	182	bulwark, barrier	113
breastwork, barrier	113	defense	182
fortification	252	bungling, awkward	106
breathing, alive	49	buoyant, happy	270
breeding, behavior	119	burden, load, n.	319
education	209	burglar, robber	425
bribe, gift	268	burlesque, caricature	148
bridle, check	155	wit,	486
restrain	418	burn	132
bridle-path, way	482	burning, eager	207
brief, a., terse	463	fire	246
brief, n., sketch	440	burrow, cavity	147
transient	470	burst, break	128
brigand, robber	425	rend	410
bright	129	bury, hide	278
clever	162	immerse	294
happy	270	business	188
brillancy, light	317	duty	207
		transaction	469
		work	487

	PAGE		PAGE
bustling, active	28	caprice, fancy	237
nimble	344	capricious, fickle	242
busy, industrious	299	captain, chief	156
but	134	captious	140
notwithstanding, conj. .	345	captivate, allure	57
butcher, kill	310	captivating, charming	164
butchery, massacre	324	captive, arrest	88
buy, purchase	395	capture, catch	146
by	134	carcass, body	125
by dint of, by	184	cardinal, principal, a.	386
by means of, by	134	care	141
byword, proverb	393	anxiety	73
cabal	185	oversight	353
cabalistic, mysterious	337	prudence	394
cackle, babble	107	careen, tip	465
cajole, allure	57	career	142
calamity, accident	24	careful, vigilant	479
blow	124	carefulness, prudence	394
catastrophe	145	carelessness, neglect	842
misfortune	331	caress	143
calculate	186	cargo, load, n.	319
esteem, v.	223	caricature	143
calculated, fit ...	246	carnage, massacre	324
call	186	carnal, brutish	131
appeal	77	carnival, carousal	144
convoke	178	carol, sing	440
employ	218	carousal	144
callow, youthful	488	carouse, carousal	144
call together, convoke	178	carp at, disparage	198
call upon, pray	377	carping, captious	140
calm, v., allay	50	carriage, air	44
calm, a.	185	behavior	119
rest	416	carry	144
calmness, apathy	74	convey	177
patience	358	keep	310
rest	416	support	456
calumniate, slander	442	carry on, keep	310
canaille, mob	333	transit	469
cancel	188	carry out, do	198
candle	189	excuse	228
honest	283	carry through, do	198
candor, veracity	477	cartel, contract	175
canon, law	315	case, event	225
cant, hypocrisy	285	precedent	373
slang	443	rest	416
tip	465	sample	429
capability, power	375	cash, money	335
capable, adequate	34	cashier, break	123
clever	162	cast, calculate	136
capacious, large	313	send	432
capacity, power	375	caste, class	159
comparison	140	castigate, beat	115
capital	140	chasten	155
money	335	castle, fortification	352
principal, a.	386	cast up, add	32
capitulate, surrender	457	casualty, accident	24
		hazard	275

	PAGE		PAGE
casuistry, fallacy	233	chance, event	225
cataclysm, catastrophe	145	happen	267
catalog (ue, record)	405	hazard	275
catastrophe	145	change, v.	151
catch, v.	146	convey	177
arrest	88	change, n.	152
catch, n., lock	320	motion	336
causality, cause	146	sale	428
causation, cause	146	changeable, fickle	242
cause, v, make	322	changeful, fickle	242
cause, n.	146	changeless, permanent	362
reason, n.	403	channel, way	482
caustic, bitter	122	chant, sing	440
causticity, acrimony	26	char, burn	132
cauterize, burn	132	character	153
caution, care	141	characteristic	154
prudence	394	characteristic	154
vigilant	479	charge, v, arraign	84
cautious, afraid	40	attack, v.	98
cave, cavity	147	attribute, v	100
cavern, cavity	147	charge, n., care	141
caviling, captious	140	career	142
cavity	147	load, n.	319
cease	149	oversight	358
abandon	3	price	388
die	193	charitable, humane	284
end, v.	213	charity, benevolence	120
ceaseless, continual	175	love	321
cede, give	264	charming	154
surrender	457	amiable	64
celebrate	150	beautiful	115
keep	310	chase, follow	250
celebrity, fame	235	hunt	285
celerity, alacrity	46	chasm, cavity	147
cell, cavity	147	chaste, pure	395
censorious, captious	140	tasteful	460
censure, v., arraign	84	chasten	155
condemn	168	reprove	414
reprove	414	chastening, misfortune	331
censure, n., reproof	413	chastise, beat	115
center	150	chasten	155
ceremonious, polite	372	chastisement, misfortune	331
ceremony, sacrament	427	chastity, virtue	480
certain, authentic	103	chat, babble	107
conscious	173	conversation	176
real	402	speak	446
certainty, demonstration	138	chatter, babble	107
certification, testimony	403	speak	446
certified, conscious	173	chattering, garrulous	259
certify, confess	170	cheat, artifice	88
state	449	fraud	258
cessation, end, n.	214	hypocrite	286
rest	416	cheating, fraud	256
chaff, banter	112	check	155
chagrin, n.	151	hinder	280
chains, fetter	240	obstruct	349
chance, accident	24	reproof	413

	PAGE
check, reprove	414
<i>restrain</i>	418
checkmate, check	155
<i>conquer</i>	172
cheer, v., <i>cherish</i>	156
<i>entertain</i>	218
cheer, n., <i>entertainment</i>	219
<i>happiness</i>	268
cheerful, bright	129
<i>comfortable</i>	168
<i>happy</i>	270
cheering, a, <i>bright</i>	129
<i>happy</i>	270
cheering, n., <i>praise</i>	376
cheerless, <i>bleak</i>	123
cheers, <i>praise</i>	376
cheery, <i>bright</i>	129
<i>comfortable</i>	168
<i>happy</i>	270
cherish	156
<i>support</i>	450
chide, reprove	414
chiding, reproof	413
chief	156
<i>principal, a</i>	386
chief city, <i>capital</i>	140
chieftain head, <i>chief</i>	156
childish, <i>youthful</i>	488
childlike, <i>youthful</i>	488
chill, <i>bleak</i>	123
chilling, <i>bleak</i>	123
chilly, <i>bleak</i>	123
chimerical, <i>absurd</i>	19
<i>fanciful</i>	236
chirp, <i>sing</i>	440
chirrup, <i>sing</i>	440
chivalric, <i>brave</i>	127
chivalrous, <i>brave</i>	127
<i>generous</i>	261
choice, <i>alternative</i>	60
choke, <i>obstruct</i>	849
choler, <i>anger</i>	67
choose,	157
chronicle, <i>history</i>	281
<i>record</i>	405
chum, <i>associate, n.</i>	91
churlish, <i>morose</i>	385
circle, <i>class</i>	159
circulate, <i>announce</i>	69
<i>circumlocution</i>	157
circumscribe, <i>restrain</i>	418
circumspect, <i>vigilant</i>	479
circumspection, <i>care</i>	141
<i>prudence</i>	394
<i>circumstance</i>	158
<i>event</i>	225
<i>circumstantial, minute</i>	330

	PAGE
circumvent, <i>baffle</i>	108
citadel, <i>fortification</i>	252
cite, <i>allege</i>	51
<i>arraign</i>	84
<i>quote</i>	398
civil, <i>polite</i>	372
civilization, <i>refinement</i>	408
claim, <i>allege</i>	51
<i>assume</i>	93
<i>right, n.</i>	424
<i>state</i>	449
clamor, <i>call</i>	136
clan, <i>class</i>	169
clarified, <i>fine</i>	245
clash, <i>collision</i>	162
clashing, <i>collision</i>	162
clasp, <i>catch</i>	146
<i>lock</i>	320
<i>class</i>	159
classic, <i>pure</i>	395
classical, <i>pure</i>	395
classify, <i>arrange</i>	85
clay, <i>body</i>	125
clean, <i>cleanse</i>	160
<i>innocent</i>	304
<i>neat</i>	340
<i>pure</i>	395
cleaning, <i>ablution</i>	9
cleanly, <i>neat</i>	340
<i>cleanse</i>	160
<i>amend</i>	63
cleansing, <i>ablution</i>	9
clear, v., <i>absolve</i>	16
clear, a.	161
<i>evident</i>	220
<i>fine</i>	245
<i>innocent</i>	304
<i>pure</i>	395
clear-sighted, <i>astute</i>	91
<i>sagacious</i>	427
cleave, <i>rand</i>	410
cleft, <i>cavity</i>	147
clemency, <i>merry</i>	327
clever	162
<i>skilful</i>	442
cleverness, <i>acumen</i>	28
<i>dexterity</i>	192
<i>power</i>	375
cling to, <i>cherish</i>	156
clique, <i>class</i>	159
cloak, v., <i>hide</i>	278
<i>palliate</i>	354
cloak, n., <i>pretense</i>	380
clog, v., <i>hinder</i>	280
<i>obstruct</i>	349
clog, n., <i>impediment</i>	295
<i>load, n.</i>	319

	PAGE		PAGE
alone, <i>v.</i> , <i>end</i> , <i>v.</i>	213	color, <i>stain</i>	448
close, <i>a.</i> , <i>adjacent</i>	36	colossal, <i>large</i>	313
<i>avaricious</i>	104	coma, <i>stupor</i>	452
<i>taciturn</i>	459	combat, <i>v.</i> , <i>attack</i> , <i>v.</i>	98
clone, <i>n.</i> , <i>end</i> , <i>n.</i>	214	combat, <i>n.</i> , <i>battle</i>	114
clothes, <i>dress</i>	204	combination, <i>cabal</i>	135
clothing, <i>dress</i>	204	<i>union</i>	471
cloudy, <i>obscure</i>	347	combine, <i>agree</i>	42
clownish, <i>awkward</i>	106	<i>associate</i> , <i>v.</i>	90
<i>rustic</i>	426	<i>attach</i>	95
cloy, <i>satisfy</i>	429	<i>conjoin</i>	170
club, <i>association</i>	92	<i>mix</i>	331
<i>class</i>	159	combustion, <i>fire</i>	246
clumsy, <i>awkward</i>	106	come after, <i>follow</i>	250
clutch, <i>catch</i>	146	comely, <i>beautiful</i>	115
coadjutor, <i>accessory</i>	23	<i>becoming</i>	117
<i>associate</i> , <i>n.</i>	91	come to, <i>reach</i>	401
<i>auxiliary</i>	103	come to an end, <i>cease</i>	149
coalition, <i>alliance</i>	53	come to pass, <i>happen</i>	267
<i>union</i>	471	comfort, <i>cherish</i>	156
coarse, <i>bluff</i>	125	<i>console</i>	174
<i>brutish</i>	131	<i>happiness</i>	268
<i>large</i>	313	comfortable	163
<i>rustic</i>	426	comical, <i>queer</i>	397
coat, <i>bank</i>	111	comity, <i>friendship</i>	257
coax, <i>allure</i>	57	command, <i>govern</i>	265
<i>persuade</i>	865	<i>law</i>	315
coddle, <i>caress</i>	148	<i>order</i>	351
code, <i>law</i>	315	<i>oversight</i>	358
coerce, <i>compel</i>	165	<i>power</i>	375
coercive, <i>absolute</i>	15	commander, <i>chief</i>	156
cogency, <i>power</i>	375	commanding, <i>absolute</i>	15
cognition, <i>knowledge</i>	311	commandment, <i>law</i>	315
cognizance, <i>knowledge</i>	311	commemorate, <i>celebrate</i>	150
cognizant, <i>conscious</i>	178	commencement, <i>beginning</i>	118
cognomen, <i>name</i>	338	commendation, <i>praise</i>	376
cohesive, <i>adhesive</i>	36	commensurate, <i>adequate</i>	34
coin, <i>money</i>	335	comment, <i>definition</i>	184
coincide, <i>agree</i>	42	<i>remark</i>	409
coincidence, <i>analogy</i>	66	<i>reproof</i>	413
cold, <i>bleak</i>	123	commerce, <i>business</i>	133
coldness, <i>modesty</i>	334	commingle, <i>mix</i>	331
colleague, <i>accessory</i>	23	comminuted, <i>fine</i>	245
<i>associate</i> , <i>n.</i>	91	<i>minute</i>	330
collect, <i>amass</i>	60	commiseration, <i>pity</i>	368
<i>convoke</i>	178	commit	164
collected, <i>calm</i>	137	<i>do</i>	198
collection, <i>array</i>	87	commix, <i>mix</i>	331
<i>company</i>	104	common, <i>general</i>	260
collectivism, <i>socialism</i>	445	<i>mutual</i>	337
collegiate, <i>academic</i>	22	<i>normal</i>	344
colligate, <i>arrange</i>	85	<i>usual</i>	472
collation	162	commonplace, <i>general</i>	260
collocate, <i>arrange</i>	85	commonwealth, <i>people</i>	360
colloquialism, <i>lang</i>	443		
colloquy, <i>conversation</i>	176		
color, <i>pretense</i>	380		

	PAGE
communicate, announce . . .	60
give	264
communication, conversation . . .	176
communion, conversation . . .	176
sacrament	427
communism, socialism	445
community, association	92
people	360
commute, change	151
compact, a., terse	463
compact, n., alliance	53
contract	175
companion, accessory	23
associate, n.	91
companionable, friendly	256
companionship, acquaintance . .	25
association	92
company	164
association	92
class	159
compare, contrast	175
comparison, analogy	66
compass, attain	99
compassion, mercy	327
pity	368
compassionate, humane	284
compel	165
bind	121
drive	204
influence	300
makes	322
compend, abridgment	13
compendious, terse	463
compendium, abridgment . . .	13
compensate, requite	415
compensation, pay, n.	359
reward	422
competence, wealth	482
competency, power	375
wealth	482
competent, adequate	84
competition, ambition	62
competitor, enemy	217
complain	165
complaint, disease,	197
complaisant, friendly	256
polite	372
complete, v., do	198
end, v.	213
complete, a., perfect	302
plentiful	371
radical	400
completed, perfect	302
completion, end, n.	214
complex	166
obscure	347

	PAGE
compliant, docile	20
meek	32
complicate, involve	30
complicated, complex	16
obscure	34
compliment, praise	37
comply, agree	4
component, part, n.	35
compose, allay	5
arrange	8
make	32
composed, calm	13
composite, complex	16
composition, compromise	16
composure, patience	35
compound, complex	16
mix	33
compounding, compromise . . .	16
comprehend, catch	14
perceive	36
comprehension, knowledge . . .	31
compromise	16
compulsion, necessity	34
compulsive, absolute	1
compulsory, absolute	1
compunction, repentance	415
compute, calculate	130
comrade, associate, n.	9
con, time	461
concentrate, conjoin	17
concavity, cavity	14
conceal, hide	271
palliate	35
concealed, latent	31
conceal oneself, abscond	1
concede, allow	51
confess	170
conceit, egotism	210
fancy	287
idea	287
pride	387
conceive, perceive	361
conceivable, likely	311
concept, idea	287
conception, fancy	287
idea	287
concern, anxiety	71
business	131
care	141
concert, harmony	271
union	471
concession, compromise	167
conciliation, compromise	167
concise, terse	463
conclave, cabal	186
company	164

	PAGE		PAGE
conclude, <i>cease</i>	149	conformity, <i>harmony</i>	271
<i>and, v.</i>	218	confound, <i>mix</i>	381
conclusion, <i>end, n.</i>	214	<i>refute</i>	407
<i>demonstration</i>	188	confront, <i>abide</i>	9
concomitant, <i>appendage</i>	79	confuse, <i>abash</i>	5
<i>circumstance</i>	158	<i>displace</i>	198
concord, <i>harmony</i>	271	<i>mix</i>	381
concourse, <i>company</i>	164	confused, <i>complex</i>	166
<i>throng</i>	464	<i>heterogeneous</i>	277
concupiscence, <i>desire</i>	190	confusion, <i>amazement</i>	61
concur, <i>agree</i>	42	<i>chagrin</i>	151
concurrence, <i>harmony</i>	271	<i>perplexity</i>	364
concession, <i>blow</i>	124	<i>revolution</i>	420
<i>collision</i>	162	confute, <i>refute</i>	407
condemn	168	cong�, <i>farewell</i>	288
<i>reprove</i>	414	congenial, <i>delightful</i>	186
condemnation, <i>reproof</i>	413	congenital, <i>inherent</i>	801
condensed, <i>terse</i>	463	conglomerate, <i>complex</i>	166
condign	169	<i>heterogeneous</i>	277
condition, <i>cause</i>	146	congratulate	171
<i>term</i>	462	congregation, <i>company</i>	164
condolence, <i>pity</i>	368	congruity, <i>harmony</i>	271
condole with, <i>console</i>	174	congruous, <i>becoming</i>	117
condone, <i>pardon, v.</i>	355	<i>fit</i>	246
conduct, <i>v., keep</i>	310	conjectural, <i>likely</i>	318
<i>transact</i>	409	conjecture, <i>v., suppose</i>	450
conduct, <i>n., behavior</i>	119	conjecture, <i>n., hypothesis</i>	286
confabulation, <i>conversation</i> . .	176	conjoin, <i>apply</i>	80
confederacy, <i>alliance</i>	53	<i>associate, v.</i>	90
<i>association</i>	92	<i>attach</i>	95
<i>cabal</i>	185	conjugal union, <i>marriage</i>	328
confederate, <i>accessory</i>	23	conjure, <i>pray</i>	377
<i>associate, v.</i>	90	conjunction, <i>association</i>	92
<i>associate, n.</i>	91	<i>union</i>	471
<i>auxiliary</i>	108	connect, <i>apply</i>	80
confederation, <i>alliance</i>	53	<i>associate, v.</i>	90
<i>association</i>	92	<i>attach</i>	95
confess, <i>deliberate</i>	185	<i>attribute, v.</i>	100
<i>give</i>	264	<i>conjoin</i>	171
conference, <i>company</i>	164	connection, <i>association</i>	92
<i>conversation</i>	176	connoisseur, <i>amateur</i>	61
confess	170	conquer	172
<i>avow</i>	105	<i>beat</i>	115
confession, <i>apology</i>	75	consanguinity, <i>kin</i>	311
confide, <i>commit</i>	164	conscious	173
confidence, <i>assurance</i>	98	consciousness, <i>mind</i>	329
<i>faith</i>	232	consecrate, <i>a.</i>	181
confine, <i>restrain</i>	418	consecrated, <i>holy</i>	282
confines, <i>boundary</i>	126	consent, <i>v., agree</i>	42
confirm	170	consent, <i>n., harmony</i>	271
conflagration, <i>fire</i>	246	<i>permission</i>	363
conflict, <i>battle</i>	114	consent to, <i>allow</i>	55
<i>collision</i>	162	consequence	178
conflicting, <i>adverse</i>	89	<i>demonstration</i>	168
<i>alien, a.</i>	48	<i>end, n.</i>	214
<i>incongruous</i>	297	<i>event</i>	225
conform, <i>adapt</i>	29	consequent, <i>consequence</i>	173

	PAGE
consequently, <i>therefore</i> . . .	464
conserve, <i>keep</i>	310
consider, <i>calculate</i>	136
<i>deliberate</i>	185
<i>esteem, v.</i>	223
considerable, <i>important</i> . . .	295
<i>large</i>	313
consideration, <i>friendship</i> . .	257
<i>prudence</i>	304
<i>reason, n.</i>	403
consign, <i>commit</i>	164
consistency, <i>harmony</i>	271
console	174
consolidate, <i>fix</i>	247
consonance, <i>harmony</i>	271
consort, <i>associate, n.</i>	91
conspicuous, <i>evident</i>	226
conspiracy, <i>cabal</i>	135
constancy, <i>industry</i>	299
constant, <i>continual</i>	175
<i>permanent</i>	363
consternation, <i>alarm</i>	47
<i>fear</i>	238
constituent, <i>part, n.</i>	357
constitute, <i>make</i>	322
constitution, <i>character</i>	153
<i>polity</i>	373
constitutional, <i>radical</i>	400
constrain, <i>compel</i>	165
<i>make</i>	322
<i>restrain</i>	418
<i>modesty</i>	334
construct, <i>make</i>	322
consult, <i>deliberate</i>	185
consume, <i>absorb</i>	16
<i>burn</i>	132
consummate, <i>v., do</i>	198
<i>perfect</i>	362
consummation, <i>act</i>	27
<i>end, n</i>	214
contact, <i>collision</i>	162
contagion	174
contain, <i>involve</i>	307
contaminate, <i>defile</i>	184
contemplate, <i>look</i>	320
contemptible, <i>pitiful</i>	307
contend, <i>reason, v.</i>	402
content, <i>satisfy</i>	429
contented, <i>comfortable</i>	163
contention, <i>altercation</i>	58
<i>feud</i>	241
contentment, <i>happiness</i>	268
contiguous, <i>adjacent</i>	36
contest, <i>battle</i>	114
<i>feud</i>	241
contiguity, <i>approximation</i> . .	83
contiguous, <i>adjacent</i>	36

	PAGE
continence, <i>abstinence</i>	17
continent, <i>pure</i>	395
contingency, <i>accident</i>	24
<i>event</i>	235
<i>hazard</i>	275
continual	175
continue, <i>abide</i>	9
<i>protract</i>	392
continuous, <i>continual</i>	175
contract	175
contraction, <i>abbreviation</i>	6
contradictory, <i>alien, a.</i>	48
<i>incongruous</i>	297
contrariety, <i>difference</i>	194
contrary, <i>adverse</i>	39
<i>perverse</i>	366
<i>contrast</i>	175
contrast, <i>n., difference</i>	194
contrasted, <i>alien, a.</i>	48
contravene, <i>object, v.</i>	346
contriteness, <i>repentance</i>	412
contrition, <i>repentance</i>	412
contrivance, <i>artifice</i>	88
contrived, <i>fit</i>	246
control, <i>govern</i>	263
<i>oversight</i>	353
controlling, <i>absolute</i>	15
<i>principal, a.</i>	386
controversy, <i>altercation</i>	58
<i>feud</i>	241
controvert, <i>reason, n.</i>	402
contumacious, <i>obstinate</i>	348
<i>rebellious</i>	404
conundrum, <i>riddle, n.</i>	423
convene, <i>convoke</i>	178
convenient, <i>comfortable</i>	163
convention, <i>company</i>	164
conventional, <i>academic</i>	22
conversation	176
converse, <i>conversation</i>	176
<i>converse, speak</i>	440
conversion, <i>change, n.</i>	153
convert, <i>change, v.</i>	171
convert, <i>n.</i>	170
convey	177
convict, <i>condemn</i>	168
conviction, <i>faith</i>	232
convince, <i>persuade</i>	346
convocation, <i>company</i>	164
convoke	178
cool, <i>calm</i>	137
cooperate, <i>help</i>	276
cooperation, <i>union</i>	471
copious, <i>plentiful</i>	371
copy, <i>v., follow</i>	260
copy, <i>n., duplicate</i>	266
<i>model</i>	334

	PAGE		PAGE
cordial, friendly	256	craft, artifice	88
corporal, physical	366	business	138
corporation, association	92	deception	181
corporeal, physical	366	crafty, astute	94
corpse, body	125	crater, cavity	147
corpse, particle	358	crave, ask	90
correct, v., amend	63	craving, appetite	20
chasten	155	desire	190
correct, a., perfect	362	craziness, insanity	305
correlative, mutual	337	create, make	322
correspondent, synonymous	457	creator, cause	146
corresponding, synonymous	457	credence, faith	282
corroborate, confirm	170	credible, likely	318
corrupt, decay	181	credit, faith	232
defile	184	fame	285
cost, expense	229	credulity, fanaticism	286
price	383	creed, faith	282
costume, dress	204	cremate, burn	132
coterie, class	159	crew, cabal	185
coterminous, adjacent	36	crime, abomination	12
count, calculate	136	sin	439
countenance, abet	6	criminal	178
counteract, baffle	108	criminality, sin	439
check	155	criterion	179
hinder	280	critic, amateur	61
counterpart, duplicate	206	critical, captious	140
countless, infinite	300	important	295
countrified, rustic	426	minute	380
country, rustic	426	criticism, reproof	418
couple, associate, v.	90	croak, complain	165
courage, fortitude	253	crook, bend	119
prowess	393	crop, harvest	272
courageous, brave	127	cross off, or out, cancel	188
course, career	142	crotchety, fickle	242
direction	196	quarrel	397
way	482	crowd, company	164
court, address, v.	83	mob	383
caress	143	throng	464
courteous, polite	872	crowd out, displace	108
courtly, address, n.	34	cruel, barbarous	113
courtly, polite	872	crush, break	128
covenant, contract	175	conquer	172
cover, hide	278	crusty, morose	385
palliate	354	cry, call	186
shelter	437	cudgel, beat	115
coveting, desire	190	cuff, blow	124
covetous, avaricious	104	cull, choose	157
covey, flock	249	culpable, criminal	178
cow, frighten	258	cultivated, polite	372
cowardly, afraid	40	cultivation, agriculture	48
coyness, modestly	384	education	209
crabbed, morose	385	refinement	406
crack, v., break	128	culture, agriculture	48
crack, n., blemish	124	education	209
cavity	147	refinement	406
		cultured, polite	372
		cunning, a., astute	94

	PAGE
cunning, <i>n.</i> , <i>artifice</i>	88
<i>deception</i>	181
curb, <i>check</i>	155
<i>govern</i>	265
<i>restrain</i>	418
cure, <i>recover</i>	406
curious, <i>inquisitive</i>	304
<i>querer</i>	397
<i>rare</i>	400
currency, <i>money</i>	335
current, <i>authentic</i>	103
curse, <i>abomination</i>	12
<i>oath</i>	346
cursing, <i>oath</i>	346
curve, <i>bend</i>	119
custody, <i>fetter</i>	240
custom, <i>habit</i>	267
customary, <i>general</i>	260
<i>usual</i>	472
cut, <i>blow</i>	124
cutting, <i>bitter</i>	122
<i>bleak</i>	123
cynical, <i>captious</i>	140
daily	179
dainty, <i>delicious</i>	186
<i>fine</i>	245
<i>tasteful</i>	460
damage, <i>abuse</i>	20
<i>injury</i>	302
danger	180
<i>hazard</i>	275
dangerous, <i>formidable</i>	252
dapper, <i>neat</i>	340
daring, <i>brave</i>	127
dark	180
<i>mysterious</i>	337
<i>obscure</i>	347
darksome, <i>obscure</i>	347
dart, <i>send</i>	432
dashing, <i>brave</i>	127
date, <i>time</i>	405
daub, <i>blemish</i>	124
daunt, <i>abash</i>	5
<i>frighten</i>	258
dauntless, <i>brave</i>	127
dawdling, <i>slow</i>	443
day-dream, <i>dream</i>	208
dazzling, <i>bright</i>	129
deadly, <i>pernicious</i>	364
deal, <i>apportion</i>	82
<i>sale</i>	428
deathless, <i>eternal</i>	224
debar, <i>prohibit</i>	389
debase, <i>abass</i>	4
debasement, <i>alloy</i>	56

	PAGE
debate, <i>v.</i> , <i>deliberate</i>	185
<i>reason, r.</i>	402
debate, <i>n.</i> , <i>altercation</i>	58
<i>reasoning</i>	404
debauch, <i>carousal</i>	144
decamp, <i>abscond</i>	14
decay	181
decease, <i>die</i>	193
decent, <i>deception</i>	181
<i>fraud</i>	256
deceitful, <i>vain</i>	474
deceiver, <i>hypocrite</i>	280
decent, <i>fit</i>	216
deception, <i>fraud</i>	256
decide, <i>fix</i>	247
decided, <i>obstinate</i>	348
deciding, <i>important</i>	295
decisive, <i>important</i>	295
deck, <i>adorn</i>	38
declaim, <i>speak</i>	446
declare, <i>allege</i>	51
<i>announcer</i>	69
<i>vow</i>	106
<i>speak</i>	446
<i>state</i>	449
decline, <i>abate</i>	6
<i>die</i>	193
decompose, <i>decay</i>	181
decorate, <i>adorn</i>	84
decorous, <i>becoming</i>	117
<i>fit</i>	246
decoy, <i>allure</i>	67
decrease, <i>abate</i>	6
decree, <i>law</i>	315
decrepit, <i>old</i>	350
decri, <i>slander</i>	442
dedicate, <i>apply</i>	80
<i>devote</i>	191
deduction, <i>demonstration</i>	188
<i>induction</i>	298
deed, <i>act</i>	37
<i>transaction</i>	409
<i>work</i>	487
deem, <i>calculate</i>	186
<i>esteem, v.</i>	223
<i>suppose</i>	456
deep, <i>abyss</i>	20
<i>obscure</i>	347
defacement, <i>blemish</i>	124
defame, <i>abuse</i>	20
<i>slander</i>	442
default, <i>neglect</i>	342
defeat, <i>beat</i>	115
<i>conquer</i>	172
defect, <i>blemish</i>	124
defective, <i>dependent, n.</i>	198

	PAGE		PAGE
defend, keep	310	demeanor, air	44
shelter	437	behavior	119
defense	182	dementia, insanity	805
apology	75	demolish	187
defenses, fortification	252	break	128
defer	182	demonstrable, real	402
hinder	280	demonstrate, reason, v.	402
protract	392	demonstration	188
deference, esteem, n.	223	demur, object, v.	846
deferential, meek	325	demure, meek	825
defile	184	den, cavity	147
abuse	20	denial, abnegation	11
cavity	147	denomination, name	388
definite, clear	161	term	462
definition	184	denouement, catastrophe	145
deflect, bend	119	denounce, condemn	168
deformity, blemish	124	dense, obscure	847
doff, skilful	442	dent, blemish	124
degrade, abase	4	cavity	147
degree, class	159	denunciation, oath	346
delaist, skeptic	441	reproof	413
delay, defer	182	demy, renounce	411
hinder	280	depart, abscond	14
protract	392	die	198
delaying, slow	448	depart from, abandon	8
delegate, n.	185	dependent, n.	188
send	432	deplore, mourn	386
deleterious, pernicious	304	deportment, behavior	119
deliberate, v.	185	depose, state	449
slow	443	deposit, put	396
delicate, fine	245	deposition, testimony	468
tasteful	460	depravity, sin	439
delicious	186	depreciate, disparage	198
delightful	186	slander	442
tasteful	460	depredator, robber	425
delight, v., entertain	218	depress, abase	4
delight, n., entertainment	219	depression, cavity	147
happiness	268	depth, abyss	20
delighted, happy	270	cavity	147
delightful	186	wisdom	485
beautiful	115	depute, send	432
charming	154	deputy, delegate	185
delicious	186	derange, displace	198
happy	270	derangement, insanity	805
delight in, admire	87	derision, banter	112
delineation, sketch	440	derogate from, disparage	198
delinquency, sin	439	descent, kin	811
delinquent, dependent, n.	188	description, definition	184
delirium, insanity	805	report	412
deliver, give	264	desecry, discern	196
speak	448	discover	196
dell, cavity	147	look	820
delusion	187	desecrate, abuse	20
deception	181	desert, abandon	8
delusive, vain	474	deserter, heretic	276
demand, ask	90	deserved, condign	169

	PAGE
<i>design</i>	190
<i>aim</i>	44
<i>end, n</i>	214
<i>idea</i>	287
<i>model</i>	384
<i>reason, n</i>	408
<i>sketch</i>	440
<i>designation, name</i>	838
<i>designer, cause</i>	146
<i>desire</i>	190
<i>appetite</i>	80
<i>fancy</i>	287
<i>desirous, eager</i>	207
<i>desist, cease</i>	149
<i>end, v.</i>	213
<i>desolate, bleak</i>	128
<i>despair</i>	191
<i>despatch, kill</i>	310
<i>quicken</i>	398
<i>send</i>	432
<i>desperation, despair</i>	191
<i>despicable, pitiful</i>	867
<i>despise, abhor</i>	8
<i>despite, notwithstanding, prep.</i>	345
<i>despoiler, robber</i>	425
<i>despondency, despair</i>	191
<i>despotie, absolute</i>	15
<i>destine, allot,</i>	54
<i>devote</i>	191
<i>destiny, necessity</i>	341
<i>destitution, poverty,</i>	374
<i>destroy, abolish</i>	11
<i>break</i>	128
<i>demolish</i>	187
<i>exterminate</i>	231
<i>subvert</i>	454
<i>destructive, pernicious</i>	364
<i>detach, abstract</i>	18
<i>detail, circumstance</i>	158
<i>detailed, minute,</i>	380
<i>detain, arrest</i>	88
<i>keep</i>	310
<i>detect, discover</i>	190
<i>detective, spy</i>	447
<i>deter, hinder</i>	280
<i>deterioration, alloy</i>	56
<i>determination, aim</i>	44
<i>determinative, important</i>	295
<i>determine, fix</i>	247
<i>determined, obstinate</i>	348
<i>determining, important</i>	295
<i>detest, abhor</i>	8
<i>detestation, abomination</i>	12
<i>antipathy</i>	72
<i>hated</i>	278
<i>detract, slander</i>	442
<i>detract from, disparage</i>	198

	PAGE
<i>detriment, injury</i>	302
<i>detrimental, pernicious</i>	364
<i>develop, amplify</i>	65
<i>developed, real</i>	402
<i>development, education</i>	209
<i>progress</i>	388
<i>deviate, bend</i>	119
<i>wander</i>	481
<i>device, artifice</i>	88
<i>design</i>	190
<i>devote</i>	191
<i>apply</i>	80
<i>devoted, addicted</i>	32
<i>faithful</i>	233
<i>holy</i>	282
<i>devotion, allegiance</i>	51
<i>attachment</i>	97
<i>anthusiasm</i>	220
<i>friendship</i>	237
<i>love</i>	321
<i>religion</i>	408
<i>dexterly</i>	192
<i>address, n.</i>	34
<i>power</i>	375
<i>dexterous, clever</i>	162
<i>happy</i>	270
<i>skilful</i>	442
<i>dialect, language</i>	312
<i>dialog(ue), conversation</i>	176
<i>diaphanous, clear</i>	181
<i>dictatorial, absolute</i>	15
<i>dogmatic</i>	190
<i>diction</i>	193
<i>language</i>	312
<i>dictum, proverb</i>	393
<i>die</i>	194
<i>diet, food</i>	251
<i>difference</i>	194
<i>differentiate, contrast</i>	175
<i>difficult</i>	195
<i>obscure</i>	347
<i>difficulty, impediment</i>	295
<i>predicament</i>	379
<i>diffidence, modesty</i>	334
<i>diffuseness, circumlocution</i>	167
<i>digest, abridgment</i>	18
<i>dignity, aggrandize</i>	41
<i>digress, wander</i>	481
<i>dilate, amplify</i>	65
<i>dilatatory, slow</i>	443
<i>dilemma, predicament</i>	379
<i>dilettante, amateur,</i>	61
<i>diligence, industry</i>	299
<i>diligent, active</i>	28
<i>industrious</i>	299

	PAGE		PAGE
dim, dark	180	discomposure, chagrin	151
faint	231	disconcert, abash	5
obscure	347	discontinuance, abeyance . . .	7
diminish, abate	6	discontinue, abandon	8
diminutive, minute	330	cease	149
dip, immerse	294	discord, altercation	58
tip	405	discordant, heterogeneous . .	277
dire, awful	106	incongruous	297
direct, govern	205	discouragement, despair . . .	191
direction	196	discourse, conversation	176
care	141	speak, speech	446
order	351	discourteous, bluff	125
oversight	353	discover	196
directly, immediately	293	catch	146
direful, awful	106	discredit, abase	4
disadvantage, injury	302	disparage	198
disagreement, difference . . .	194	discrepancy, difference	194
disallow, prohibit	389	discrepant, incongruous . . .	297
abnegation	11	discretion, address, n.	34
disappear, abscond	14	prudence	394
disappointment, chagrin . . .	151	wisdom	485
misfortune	331	discriminate, abstract	18
disapproval, reproof	413	contrast	175
disapprove, object, v.	346	discern	196
disarrange, displace	198	discriminating, astute	94
disaster, accident	24	discrimination, difference . .	194
blow	124	discuss, reason, v.	402
catastrophe	145	discussion, altercation	58
misfortune	331	disdain, pride	384
disavow, renounce	411	discease	197
disbeliever, skeptic	441	disfigurement, blemish	124
discard, renounce	411	disgrace, v, abase	4
discern	196	disgrace, n., stain	448
discover	196	disguise, v, hide	278
look	320	disguise, n., pretense	380
discernible, evident	226	disgust, abomination	12
discerning, astute	94	antipathy	72
sagacious	427	dishonesty, fraud	256
discernment, acumen	28	dishonor, v., abase	4
wisdom	485	disparage	198
discharge, absolve	16	stain	448
banish	110	dishonor, n., blemish	124
cancel	188	disinclined, reluctant	409
do	198	disinfect, cleanse	160
send	432	disintegration, revolution . .	420
disciple, adherent	35	disinterested, generous . . .	256
convert	170	dislike, v., abhor	8
scholar	430	dislike, n., antipathy	72
discipline, v., chasten	155	hatred	278
teach	461	dislodge, banish	110
discipline, n., education . . .	209	dismal, bleak	128
disclaim, renounce	411	dark	180
disclose, confess	170	dismay, v., frighten	258
discover	196	dismay, n., alarm	47
disclosure, revelation	419	chagrin	151
discolor, stain	448	fear	238
discomfort, conquer	172	dismiss, banish	110
		send	432

	PAGE
disobedient, <i>rebellious</i>	404
disorder, <i>disease</i>	197
<i>revolution</i>	420
disown, <i>renounce</i>	411
disparage	198
<i>abuse</i>	20
<i>slander</i>	442
disparity, <i>difference</i>	194
dispassionate, <i>calm</i>	137
dispense, <i>apportion</i>	82
display, <i>ostentation</i>	352
displease, <i>affront</i>	39
displeasure, <i>anger</i>	67
<i>pique</i>	367
disport, <i>entertain</i>	218
dispose, <i>arrange</i>	85
<i>influence</i>	300
<i>persuade</i>	365
disposed, <i>addicted</i>	32
disposition, <i>appetite</i>	80
<i>array</i>	87
<i>character</i>	153
<i>mind</i>	329
disprove, <i>refute</i>	407
disputation, <i>altercation</i>	58
dispute, <i>v., reason, v.</i>	402
dispute, <i>n., altercation</i>	58
<i>feud</i>	241
disquiet, <i>anxiety</i>	73
disquietude, <i>alarm</i>	47
<i>fear</i>	238
disquisition, <i>speech</i>	446
disregard, <i>neglect</i>	342
dissemble, <i>hide</i>	278
dissembler, <i>hypocrite</i>	286
dissemination, <i>altercation</i> . . .	58
<i>feud</i>	241
dissenter, <i>heretic</i>	276
dissertation, <i>speech</i>	446
dissimilar, <i>heterogeneous</i> . . .	277
dissimilarity, <i>difference</i>	194
dissimilitude, <i>difference</i>	194
dissimulation, <i>deception</i>	181
<i>hypocrisy</i>	285
<i>pretense</i>	380
dissipation, <i>excess</i>	228
dissolve, <i>defer</i>	182
distant, <i>alien, a.,</i>	48
distaste, <i>antipathy</i>	72
distemper, <i>disease</i>	197
distinct, <i>clear</i>	161
<i>evident</i>	226
distinction, <i>characteristic</i> . . .	154
<i>difference</i>	194
<i>fame</i>	285
distinguish, <i>abstract</i>	18
<i>discern</i>	198

	PAGE
distract, <i>abstract</i>	18
distract, <i>perplexity</i>	364
distress, <i>grief</i>	266
<i>misfortune</i>	331
<i>pain</i>	354
<i>poverty</i>	374
distribute, <i>allot</i>	51
<i>apportion</i>	82
distributively, <i>apiece</i>	75
distrust, <i>v., doubt, n.</i>	201
distrust, <i>n., doubt, n.</i>	201
disturb, <i>displace</i>	198
disturbance, <i>altercation</i>	58
<i>anxiety</i>	73
<i>perplexity</i>	364
<i>storm</i>	450
disused, <i>obsolete</i>	348
diurnal, <i>daily</i>	179
diverge, <i>bend</i>	119
<i>wander</i>	481
divergence, <i>difference</i>	194
diversify, <i>change, v.,</i>	151
diversion, <i>entertainment</i>	219
diversity, <i>change, n.,</i>	152
<i>difference</i>	194
divert, <i>abstract</i>	18
<i>entertain</i>	218
divide, <i>allot</i>	54
<i>apportion</i>	82
divine, <i>v., augur</i>	102
divine, <i>n., holy</i>	242
division, <i>part, n.,</i>	357
<i>topic</i>	488
do	198
<i>execute</i>	228
<i>make</i>	222
<i>transact</i>	469
docile	300
doctrinal, <i>dogmatic</i>	200
doctrine	200
<i>faith</i>	232
document, <i>record</i>	405
dodge, <i>artifice</i>	88
doer, <i>agent</i>	41
dogged, <i>morose</i>	355
<i>obstinate</i>	348
dogma, <i>doctrine</i>	200
dogmatic	200
<i>absolute</i>	15
doing, <i>act</i>	27
<i>transaction</i>	469
<i>work</i>	487
domicile, <i>home</i>	282
dominant, <i>principal, a.,</i>	386
domineering, <i>absolute</i>	15
<i>dogmatic</i>	200
dominion, <i>power</i>	375
donation, <i>gift</i>	268

	PAGE		PAGE
doom, condemn	168	dumb, taciturn	459
door, entrance	220	duplicate	206
doorway, entrance	220	duplicity, deception	181
dormancy, abeyance	7	fraud	256
dormant, latent	314	durable, permanent	362
double dealing, deception	181	duress, fetter	240
douse, immerse	294	duration, time	465
doubt, v.	201	duress, fetter	240
doubt, n.	201	dusky, dark	180
perplexity,	364	obscure	347
doubter, skeptic	441	dust, v., cleanse	160
doubtful, equivocal	222	dust, n., body	125
obscure	347	duty	207
precarious	377	business	138
doughty, brave	127	virtue	480
down, conquer	172	dwell, abide	9
draft, sketch	440	dwelling, home	282
drag, draw	202	dwindle, abate	6
draw	202	dye, stain	448
allure	57	each, apiece	75
influence	300	every	225
drawing, sketch	440	eager	207
draw out, protract	392	eagerness, alacrity	46
dread, a., awful	106	enthusiasm	220
dread, n., alarm	47	earlier, previous	382
anxiety	73	earn, attain	99
fear	238	get	262
veneration	476	earnest, eager	207
dreafid, awful	106	security	431
dream	208	earnestness, enthusiasm	220
dreary, bleak	128	earnings, pay, n.	359
dress of the people, mob	338	ease	208
dress	204	easiness, ease	208
drill, exercise	220	ebb, abate	6
teach	460	eccentric, queer	397
drink in, drink up, absorb	16	eclipse, misfortune	381
drinking-bout, carousal	144	economy, frugality	259
drive	204	law	315
compel	165	ecstasy, enthusiasm	220
influence	300	happiness	268
quicken	398	edge, bank	111
send	482	boundary	126
drive on, quicken	396	edict, law	315
drive out, banish	110	educate, teach	461
driveaway, way	482	education	209
droll, queer	397	efface, conceal	138
drollery, wit	486	effect, v., do	198
drove, flock	249	make	322
drowsy, slow	448	effect, n., act	27
drudgery, work	487	consequence	171
drunk, a.	205	end,	214
drunken, drunk, a.	205	operation	351
dubious, equivocal	222	effeminate, feminine	240
precarious	377	efficacy, power	375
duck, immerse	294	efficiency, power	375
dull, bleak	128	effort, endeavor, n.	216
slow	448	industry	297
dulness, stupidity	451		

	PAGE		PAGE
<i>effrontery</i>	210	enactment, law	315
<i>assurance</i>	93	enchancing, charming	154
<i>impudence</i>	296	enclosure, boundary	126
effulgence, light	317	encomium, praise	376
effulgent, bright	129	encounter, v., attack	98
egoism, <i>egotism</i>	210	encounter, n., battle	111
egotism	210	<i>collision</i>	162
either, every	225	encourage, abet	6
ejaculate, call	136	<i>cherish</i>	158
eject, banish	110	<i>console</i>	174
elderly, old	350	<i>help</i>	276
elect, choose	157	<i>promote</i>	390
election, alternative	60	encroachment, attack, n.	99
elegance, refinement	406	encumber, hinder	280
elegant, beautiful	115	enmeshment, impediment	295
<i>fine</i>	215	<i>load, n.</i> ,	319
<i>polite</i>	372	end, v.	213
<i>tasteful</i>	460	<i>abolish</i>	11
element, humane	284	<i>cease</i>	149
<i>part, n.</i>	357	end, n.	214
<i>particle</i>	358	<i>aim</i>	44
<i>propitious</i>	391	<i>consequence</i>	173
elevate, aggrandize	41	<i>design</i>	190
<i>promote</i>	390	<i>event</i>	225
elevated, drunk, a.	205	<i>reason, n.</i>	403
<i>high</i>	279	endeavor, v.	215
eliminate, abstract	18	endeavor, n.	216
elongate, protract	392	<i>aim</i>	44
emanate, rise	421	endless, eternal	224
emancipation, liberty	316	endorse, confess	170
embarrass, hinder	280	endowment, foundation	251
<i>involve</i>	307	endurance, fortitude	263
<i>obstruct</i>	349	<i>patience</i>	353
embarrassment, perplexity	364	endure	216
embellish, adorn	38	<i>abide</i>	9
emblem	211	enduring, permanent	362
<i>sign</i>	438	enemy	217
embolden, abet	6	energetic, active	28
embrace, caress	143	energy, power	375
embroid, involve	307	enforce, execute	228
emend, amend	68	engage, bind	121
emergency, necessity	341	<i>employ</i>	213
emigrate	212	engaged, industrious	299
eminence, fame	235	engagement, battle	114
eminent, high	279	<i>contract</i>	175
emissary, spy	447	engaging, amiable	64
emit, send	432	engross, absorb	16
emolument, profit	387	<i>employ</i>	213
emotion, sensation	438	enigma, riddle, n.	423
employ	213	enigmatis, equivocal	222
<i>apply</i>	80	enigmatical, equivocal	222
employed, industrious	299	<i>mysterious</i>	337
employment, business	133	<i>obscure</i>	347
<i>exercise</i>	229	enjoy, admire	37
<i>work</i>	487	enjoyment, entertainment	219
empty, vacant	473	<i>happiness</i>	368
<i>vain</i>	474	enlarge, add	92
emulation, ambition	62	<i>amplify</i>	65

	PAGE		PAGE
enlighten, <i>teach</i>	461	equivocal	222
enlightenment, <i>wisdom</i>	485	<i>praevarious</i>	377
enliven, <i>entertain</i>	218	equivocation, <i>deception</i>	181
enmity,	218	<i>fallacy</i>	233
<i>feud</i>	241	era, <i>time</i>	465
<i>hatred</i>	273	eradicate, <i>abolish</i>	11
ennoble, <i>aggrandize</i>	41	<i>exterminate</i>	231
enormous, <i>large</i>	313	erase, <i>cancel</i>	138
enough, <i>plentiful</i>	371	err, <i>wander</i>	481
enrapturing, <i>charming</i>	154	eratic, <i>queer</i>	397
enrich, <i>aggrandize</i>	41	erroneous, <i>absurd</i>	19
enrolment, <i>record</i>	405	error, <i>delusion</i>	187
exemplar, <i>example</i>	227	erudition, <i>knowledge</i>	311
ensnare, <i>catch</i>	116	<i>wisdom</i>	485
ensue, <i>follow</i> ,	250	espousal, <i>marriage</i>	328
entangle, <i>complex</i>	166	<i>espousals, marriage</i>	323
<i>involve</i>	307	essay, <i>v., endeavor, v.</i>	215
enter, <i>reach</i>	401	essay, <i>n., endeavor, n.,</i>	216
entertain	218	essential, <i>important</i>	295
<i>cherish</i>	156	<i>inherent</i>	301
entertainment	219	<i>necessary</i>	341
<i>feast</i>	237	<i>necessity</i>	349
enthusiasm	220	<i>radical</i>	400
enthusiastic, <i>eager</i>	207	<i>real</i>	400
entice, <i>allure</i>	57	establish, <i>confirm</i>	170
<i>draw</i>	203	<i>make</i>	322
<i>persuade</i>	365	<i>reason, v.,</i>	402
entire, <i>perfect</i>	362	establishment, <i>foundation</i>	254
<i>radical</i>	400	esteem, <i>v.</i>	223
entomb, <i>hide</i>	278	<i>admit</i>	37
entrance	220	esteem, <i>n.</i>	223
entrancing, <i>charming</i>	154	<i>attachment</i>	97
entrap, <i>catch</i>	116	<i>friendship</i>	257
entreat, <i>appeal</i>	77	esthetic, <i>tasteful</i>	460
<i>ask</i>	90	esthetical, <i>tasteful</i>	460
<i>plead</i>	369	estimate, <i>v., calculate</i>	136
<i>pray</i>	377	<i>esteem, v.,</i>	223
entrée, <i>entrance</i>	220	estimate, <i>n., esteem, n.</i>	223
entrenchment, <i>fortification</i>	252	estimation, <i>attachment</i>	97
entrust, <i>commit</i>	164	<i>esteem, n.</i>	223
entry, <i>entrance</i>	220	eternal	224
<i>record</i>	405	<i>infinite</i>	300
enumerate, <i>calculate</i>	136	ethereal, <i>airy</i>	45
enumeration, <i>record</i>	405	eucharist, <i>sacrament</i>	427
enunciate, <i>announce</i>	69	eulogy, <i>praise</i>	376
<i>speak</i>	146	euphony, <i>meter</i>	328
envious	221	evanescent, <i>transient</i>	470
eonian, <i>eternal</i>	224	evasion, <i>fallacy</i>	238
ephemeral, <i>transient</i>	470	even, <i>horizontal</i>	238
episode, <i>event</i>	225	event	225
epithet, <i>name</i>	338	<i>circumstance</i>	158
epitome, <i>abridgment</i>	13	<i>consequence</i>	178
epoch, <i>time</i>	465	everlasting, <i>eternal</i>	224
equal, <i>adequate</i>	34	over-living, <i>eternal</i>	224
<i>alike</i>	40	every	225
equitable, <i>honest</i>	283	every-day, <i>general</i>	260
equity, <i>justice</i>	309	<i>usual</i>	472
equivalent, <i>synonymous</i>	457	evict, <i>banish</i>	110

	PAGE
evidence, demonstration	188
<i>testimony</i> ,	463
evident	226
<i>clear</i>	161
evil, n., abomination	12
<i>injury</i>	302
<i>pernicious</i>	364
<i>sin</i> ,	439
exact, minute	330
exacting, absolute	15
exaggeration, caricature	143
exalt, aggrandize	41
<i>promote</i>	390
exalted, high	279
example	227
<i>model</i> ,	334
<i>precedent</i>	378
<i>sample</i>	429
exasperate, affront	39
exasperation, anger	67
excavation, cavity	147
excellence, virtue	480
excellent, fine	245
except, but	134
except to, object, v.	346
excerpt, quote	398
excess	228
exchange, v., change, v	151
exchange, n., sale	428
excite, influence	300
<i>promote</i>	390
excitement, enthusiasm	220
exclaim, call	186
exculpate, absolve	16
exculpation, apology	75
excusable, venial	477
excuse, apology	75
<i>pardon</i> , v	354
<i>pretense</i>	380
excursion, journey,	307
execration, abomination	12
<i>oath</i>	346
execute	228
<i>do</i>	198
<i>kill</i>	310
<i>make</i>	322
execution, act	27
<i>operation</i>	351
exemplar, example	227
exemplary, condign	169
<i>innocent</i>	304
exemplification, example	227
<i>sample</i>	429
exempt, absolve	16
exemption, right, n.	424
exercises	229
<i>act</i>	27
<i>apply</i>	80

	PAGE
exertion, act	27
<i>endeavor</i> , n.	216
<i>exercise</i>	229
<i>industry</i>	209
<i>work</i>	487
exhaust, absorb	16
<i>tire</i>	466
exhausted, faint	231
exhausting, difficult	195
exhibition, array	87
exhilarated, drunk, a	205
exigency, necessity	341
exile, banish	110
existent, alive	49
existing, alive	49
exonerate, absolve	16
exorbitance, excess	228
expand, amplify	65
expatiate, amplify	65
expatriate, banish	110
expect, abide	9
<i>anticipate</i>	71
expectancy, abeyance	7
<i>anticipation</i>	71
expectation, abeyance	7
<i>anticipation</i>	71
expediency, profit	387
<i>utility</i>	472
expedite, quicken	398
expedition, journey	307
expeditions, active	28
expel, banish	110
<i>exterminate</i>	231
expenditure, expense	229
<i>price</i>	383
expense	229
<i>price</i>	383
experience, acquaintance	26
<i>knowledge</i>	311
expert, clever	162
<i>skillful</i>	442
expertness, dexterity	192
<i>ease</i>	208
<i>power</i>	375
expiration, end, n.	214
expire, die	198
<i>end</i> , v.	212
explanation, definition	184
<i>propitiation</i>	390
explicit	230
<i>clear</i>	161
exploit, act	27
expose, discover	196
exposed, bleak	123
exposition, definition	184
expostulate with, reprove	414
express, a., explicit	230

	PAGE		PAGE
express, <i>speak</i>	446	fag, <i>we</i>	466
<i>state</i>	449	failure, <i>bankruptcy</i>	111
expression, <i>air</i>	44	<i>misfortune</i>	331
<i>diction</i>	193	<i>neglect</i>	342
<i>language</i>	312	<i>faint</i>	231
<i>term</i>	462	faint-hearted, <i>afraid</i>	40
expunge, <i>cancel</i>	138	<i>faint</i>	231
exquisite, <i>beautiful</i>	115	fainting, <i>stupor</i>	452
<i>delicious</i>	186	fair, <i>admissible</i>	37
<i>fine</i>	245	<i>beautiful</i>	115
<i>tasteful</i>	460	<i>candid</i>	139
extemporaneous	280	<i>honest</i>	283
extemporary, <i>extemporaneous</i>	230	fairness, <i>justice</i>	309
extempore, <i>extemporaneous</i>	230	fair play, <i>justice</i>	309
extend, <i>add</i>	82	fairylike, <i>any</i>	45
<i>amplify</i>	65	<i>faith</i>	232
<i>protract</i>	392	<i>religion</i>	408
extension, <i>appendage</i>	79	faith, article of, <i>doctrine</i>	100
extensive, <i>large</i>	313	<i>faithful</i>	232
extent, <i>end, n.</i>	214	<i>honest</i>	282
extenuate, <i>palliate</i>	354	faithfulness, <i>allegiance</i>	51
exterminate	231	<i>justice</i>	309
<i>abolish</i>	11	<i>virtue</i>	480
extinguish, <i>subvert</i>	454	fall, <i>happen</i>	267
extirpate, <i>abolish</i>	11	<i>fallacy</i>	238
<i>extirminate</i>	231	<i>delusion</i>	187
extol, <i>admire</i>	37	fall out, <i>happen</i>	267
extract, <i>quote</i>	398	fall upon, <i>attack, v.</i>	98
extraordinary, <i>queer</i>	397	false, <i>absurd</i>	19
<i>rare</i>	400	falsehood, <i>deception</i>	131
extravagance, <i>enthusiasm</i>	220	<i>fiction</i>	243
<i>excess</i>	228	faltering, <i>faint</i>	281
extravaganza, <i>caricature</i>	143	<i>fame</i>	285
extreme, <i>radical</i>	400	familiar, <i>general</i>	260
extremity, <i>end, n.</i>	214	<i>usual</i>	472
<i>necessity</i>	441	familiarity, <i>acquaintance</i>	25
exuberant, <i>plentiful</i>	371	<i>association</i>	92
Fabianism, <i>socialism</i>	445	family, <i>kin</i>	311
fabl, <i>allegory</i>	52	<i>fanaticism</i>	236
<i>fiction</i>	248	<i>enthusiasm</i>	220
fabricate, <i>make</i>	322	<i>fanciful</i>	236
fabrication, <i>deception</i>	181	<i>fickle</i>	242
<i>fiction</i>	243	<i>fancy</i>	237
facetiousness, <i>wit</i>	486	<i>dream</i>	203
facilitate, <i>quicken</i>	398	<i>idea</i>	287
facility, <i>ease</i>	208	<i>imagination</i>	290
facsimile, <i>duplicate</i>	206	fantastic, <i>fanciful</i>	236
<i>model</i>	334	<i>queer</i>	397
fact, <i>circumstances</i>	158	fantasy, <i>dream</i>	208
<i>event</i>	225	<i>idea</i>	287
faction, <i>cabal</i>	185	<i>imagination</i>	290
factious, <i>perverse</i>	366	fare, <i>food</i>	251
factor, <i>agent</i>	41	<i>farewell</i>	238
faculty, <i>power</i>	375	farming, <i>agriculture</i>	43
fade, <i>dis</i>	193	fascinating, <i>charming</i>	155
faded, <i>faint</i>	231	fashion, <i>n., air</i>	44
fadeless, <i>eternal</i>	222	<i>habit</i>	267
		<i>make</i>	322

	PAGE		PAGE
fasten, <i>attack</i>	95	festivity, <i>feast</i>	239
<i>bind</i>	121	fetter, <i>v.</i> , <i>bind</i>	121
<i>fix</i>	247	fetter, <i>n.</i>	210
fastening, <i>lock</i>	320	feud	211
fastidious, <i>tasteful</i>	460	fickle	242
fasting, <i>abstinence</i>	17	flection	213
fatigued, <i>faint</i>	231	<i>allegory</i>	52
fastness, <i>fortification</i>	252	fidgety, <i>restive</i>	417
fataity, <i>necessity</i>	341	field works, <i>fortification</i>	252
fate, <i>necessity</i>	341	perce	244
<i>predestination</i>	378	fiery, <i>fierce</i>	214
fatigue, <i>tire</i>	466	fight, <i>battle</i>	114
fatuity, <i>idiotcy</i>	289	figment, <i>flection</i>	243
fault, <i>blemish</i>	121	figure, <i>emblem</i>	211
<i>sin</i>	439	fill, <i>satisfy</i>	429
faultfinding, <i>captious</i>	140	final cause, <i>design</i>	190
faultless, <i>innocent</i>	304	finale, <i>end, n</i>	214
<i>perfect</i>	362	financial	215
fauna, <i>animal</i>	68	find, <i>discover</i>	196
favor, <i>n.</i> , <i>esteem, n.</i>	223	find fault, <i>complain</i>	165
<i>friendship</i>	257	find fault with, <i>reproce</i>	414
<i>mercy</i>	327	find out, <i>discover</i>	196
favorable, <i>friendly</i>	256	fine	245
<i>propitious</i>	391	<i>beautiful</i>	115
favoried, <i>fortunate</i>	253	<i>minute</i>	330
fealty, <i>allegiance</i>	51	<i>tasteful</i>	460
fear	238	fineme, <i>artiflee</i>	88
<i>alarm</i>	47	<i>deception</i>	181
<i>anxiety</i>	73	finish, <i>end, n.</i>	214
fearful, <i>afraid</i>	40	finish, <i>v.</i> , <i>cease</i>	149
<i>awful</i>	106	<i>do</i>	198
fearless, <i>brave</i>	127	<i>end, v.</i>	213
feast	239	finish, <i>n.</i> , <i>end, n.</i>	214
feast, <i>act</i>	27	finished, <i>perfect</i>	362
feature, <i>characteristic</i>	158	fire	240
federation, <i>alliance</i>	53	fireside, <i>home</i>	282
<i>association</i>	92	firm, <i>faithful</i>	231
fee, <i>pay, n.</i>	359	<i>obstinate</i>	318
feeble, <i>faint</i>	231	firm, <i>principal, n.</i>	386
feed, <i>food</i>	251	fiscal, <i>financial</i>	245
feeling, <i>sensation</i>	433	fissure, <i>crack</i>	147
<i>sensibility</i>	434	fit	246
feign, <i>assume</i>	93	<i>adapt</i>	29
felicitate, <i>congratulate</i>	171	<i>adequate</i>	34
felicitous, <i>happy</i>	270	<i>apply</i>	80
felicity, <i>happiness</i>	268	<i>becoming</i>	117
fellow, <i>associate, n.</i>	91	<i>condign</i>	169
fellowship, <i>acquaintance</i>	25	fitful, <i>fickle</i>	242
<i>association</i>	92	fitied, <i>adequate</i>	34
felonious, <i>criminal</i>	178	<i>fit</i>	246
female, <i>feminine</i>	240	fitting, <i>adequate</i>	34
feminine	240	<i>becoming</i>	117
ferocious, <i>fiere</i>	244	<i>fit</i>	246
ferret out, <i>discover</i>	196	fix	247
ferveney, <i>enthusiasm</i>	220	<i>adapt</i>	29
fervant, <i>eager</i>	207	<i>apply</i>	80
fervor, <i>enthusiasm</i>	220	<i>attach</i>	95
festival, <i>feast</i>	239	<i>bind</i>	121

	PAGE		PAGE
fix, confirm	170	footpad, robber	425
predicament	379	footprint, trace	468
fixed, obstinate	348	footstep, trace	468
permanent	362	for, because	116
flagitious, criminal	178	forager, robber	425
flame, burn	132	forbearance, mercy	327
fire	246	pardon, n.	356
light	317	patience	358
flap, shake	436	forbid, prohibit	389
flare, light	317	force, v., compel	105
flash, burn	132	make	322
light	317	force, n., army	84
flashing, bright	129	operation	351
flat, horizontal	283	power	375
flatter, caress	143	forces, army	84
flattery, praise	376	forcible, racy	399
flavorous, racy	399	forebode, augur	102
flaw, blemish	124	foreboding, anticipation	71
flee, abscond	14	anxiety	73
floating, transient	470	forecast, anticipation	71
flicker, light	317	prudence	394
flight, career	142	forgoing, previous	382
fling, send	432	foreign, alien, a.	48
sneer	444	foreigner, alien, n.	48
flippancy, pertness	365	foreknowledge, predestination	378
fitting, transient	470	foremost, principal, a.	386
flock	249	foreordination, predestination	378
flog, beat	115	foresight, anticipation	71
floriculture, agriculture	43	prudence	394
flourish, v., abound	18	wisdom	485
succeed	454	forestall, prevent	381
flourish, n., ostentation	352	foretaste, anticipate	71
flow, abound	13	foretell, augur	102
rise	424	forethought, anticipation	71
fluctuates	249	care	141
shake	436	prudence	394
fluctuating, fickle	242	forgive, absolve	16
fluid	250	pardon, v.	355
flutter, shake	436	forgiveness, mercy	327
flying, transient	470	pardon, n.	356
fodder, food	251	forgiving, humane	284
foe, enemy	217	form, arrange	85
foil, baffle	108	body	125
hinder	280	formal, academic	22
follow	250	formalism, hypocrisy	285
follower, accessory	28	former, cause	146
adherent	35	previous	382
folly, idiocy	289	formidable	252
foment, promote	390	form or system of govern- ment, policy	378
fond, friendly	256	formula, law	315
fondle, caress	143	forsake, abandon	3
fondness, love	321	forswear, renounce	411
food	251	fort, fortification	252
foolhardiness, temerity	461	forthwith, immediately	293
foolish, absurd	19	fortification	252
foolishness, idiocy	289	fortitude	253
foot, foundation	254	patience	358
footmark, trace	408		

	PAGE		PAGE
fortress, defense	182	fretting, anxiety	78
fortification	252	friend, associate, n.,	91
fortuity, accident	24	friendliness, friendship	257
hazard	275	friendly	256
fortunate	253	propitious	391
happy	270	friendship	257
fortune, event	225	acquaintance	25
wealth	482	association	92
forward, v., promote	390	attachment	97
forward, a., previous	382	love	321
send	432	fright, alarm	47
forwardness, impudence	296	fear	238
pertness	365	frighten	258
foster, cherish	156	frightened, afraid	40
help	276	frightful, awful	108
promote	390	frisky, restive	417
foul, pernicious	364	frivolous, vain	474
foundation	254	frolic, entertainment	219
fount, beginning	118	frolicsome, airy	45
fountain, beginning	118	front, previous	382
cause	146	frontier, boundary	126
fracas, altercation	58	froward, perverse	368
feud	241	frugality	259
fraction, part, n.	357	abstinence	17
fractious, perverse	366	prudence	394
restive	417	fruit, harvest	272
fracture, break	128	fruitless, vain	474
fragment, part, n.	357	frustrate, baffle	108
frame, body	125	hinder	280
make	322	fuddled, drunk, a.	203
franchise, right, n.	424	fugitive, transient	470
frank, bluff	125	fulfil, do	198
candid	189	keep	310
honest	283	fulfilment, end, n.	214
frankness, veracity	477	full, drunk, a.	205
fraternity, association	92	plentiful	371
fraud,	256	fun, entertainment	219
artifice	88	wit	486
deception	181	function, duty	207
fray, feud	241	fundamental, radical	400
free, absolve	16	funds, money	335
generous	261	funny, queer	397
spontaneous	447	furlous, fierce	244
freebooter, robber	425	furnish, give	264
freedom, liberty,	316	further, quicken	398
free-handed, generous	261	promote	390
free-hearted, generous	261	yet	487
freethinker, skeptic	441	further, a., but	184
freight, load, n.	319	fury, anger	67
frenzy, enthusiasm	220	fuse, mix	331
insanity	305	fusion, alliance	53
frequent, general	260	futile, vain	474
usual	472	gabble, babble	107
fresh, new	343	gaze, security	431
fretful, captious	140	gaiety, happiness	268
restive	417	gain, attain	99
fretfulness, anger	67	get	262
anxiety	78	profit	357

	PAGE		PAGE
gain, reach	401	give lessons, teach	461
gainsay, object, v.	346	given, addicted	32
gallant, brave	127	give notice of, announce	69
gallantry, prowess	393	give oneself up, surrender	457
gang, cabal	135	give over, cease	149
gap, cavity	147	surrender	457
garb, dress	204	give up, surrender	457
gardening, agriculture	43	given over or up, addicted	32
garments, dress	204	glad, happy	270
garnish, adorn	38	gladness, happiness	268
garrulous	259	glance, look	320
gas, fluid	250	glare, light	317
gate, entrance	220	glaring, bright	129
gateway, entrance	220	evident	226
gather, amass	60	gleam, light	317
convoke	178	gleaming, bright	129
gathering, company	104	light	317
gawky, awkward	106	glimmer, light	317
gay, airy	45	glimmering, bright	129
happy	270	glistening, bright	129
gaze, look	320	light	317
gender	260	glistering, light	317
general	260	glitter, light	317
usual	472	glittering, bright	129
generosity, benevolence	120	gloomy, bleak	123
generous	261	dark	180
plentiful	371	morose	335
genial, comfortable	168	glorious, bright	129
friendly	256	glory, fame	235
genius	262	gloss over, palliate	354
character	153	glow, light	317
genteel, polite	372	glowing, bright	129
gentle, amiable	64	eager	207
calm	137	glut, satisfy	429
humans	284	go after, follow	250
meek	325	goal, aim	44
gentleness, mercy	327	end, n.	214
genuine, authentic	103	go astray, wander	481
honest	233	godliness, religion	408
pure	395	gold, money	335
real	402	good, honest	238
get	262	profit	337
attain	99	good-by, farewell	238
make	322	good-natured, amiable	64
purchase	395	pleasant,	370
get to, reach	401	goodness, virtue	430
gibe, sneer	444	goods, wealth	432
gift	263	good will, benevolence	120
subsidy	453	friendship	257
gifted, clever	162	gorge, cavity	147
gigantic, large	313	gossip, babble	107
gild, adorn	38	govern	265
girlish, youthful	433	grace, mercy	327
give	264	graceful	266
allot	54	beautiful	115
convey	177	becoming	117
surrender	457	gracious, humane	284
give instruction, teach	461	gracious, polite	371

	PAGE
gracious, propitious	391
grade, class	159
gradual, slow	443
grain, particle	358
grand, awful	106
large	313
grant, allot	54
apportion	82
confess	170
give	264
gratuity	263
subsidy,	453
grasp, attain	99
catch	116
grateful, delightful	186
gratification, happiness	268
gratify, entertain	218
gratifying, delightful	186
grave, important	295
gray, old	350
great, important	295
large	313
greatest, principal, a.	386
greedy, avaricious	104
greet, address, v.	33
grief	266
grievance, injustice	303
grieve, mourn	336
grip, catch	146
gripe, catch	146
grotesque, fanciful	236
querer	397
ground, foundation	254
reason, n.	403
groundwork, foundation	254
group, arrange	85
company	164
flock	249
growl, complain	165
growth, harvest	272
progress	888
grudge, hatred	278
pique	367
gruff, morose	835
grumble, complain	165
grunt, complain	165
guard, v., keep	810
guard, n., defense	182
shelter	487
guardian, reward	422
guess, hypothesis	286
guess, suppose	456
guile, artifice	88
deception	181
guileless, candid	139
innocent	304
pure	395
guilt, sin	489

	PAGE
guiltless, innocent	304
pure	395
guilty, criminal	178
gulf, abyss	20
gummy, adhesive	36
gyves, fetter	210
habiliments, dress	204
habit	267
dress	204
habitation, home	282
habitual, general	260
usual	472
habituated, addicted	32
habitude, habit	267
hail, address, v.	31
hale, healthy	275
half hearted, faint	331
half-seas-over, drunk, a.	295
hallow, denote	191
hallowed, holy	282
hallucination, delusion	187
dream	203
insanity	305
hamper, hinder	280
handcuffs, fetter	240
handicraft, business	133
handsome, beautiful	215
fine	245
handy, skilful	442
hankering, desire	190
hap, accident	24
happen	267
happening, accident	24
happiness	268
happy	270
clever	102
fortunate	29
skilful,	442
harangue, speech	440
harass, tire	446
harbor, cherish	156
shelter	437
hard, difficult	195
severe	435
hardihood, effrontery	210
temerity	461
hardship, misfortune	331
hark, listen	319
harken, listen	319
harm, v., abuse	20
harm, n., injury	302
misfortune	331
harmful, pernicious	304
harmless, innocent	304
harmonize, agree	42
arrange	85
harmony	271
melody	336

	PAGE		PAGE
harness, arms	83	herd, flock	249
<i>caparison</i>	140	heresiarch, heretic	276
harsh, bitter	122	heretic	276
<i>severe</i>	435	heroic, brave	127
harshness, acrimony	26	heroism, fortitude	259
harvest	272	<i>prowess</i>	393
harvest-fest, harvest	272	hesitancy, doubt, n	201
harvest-festival, harvest . .	272	hesitate, fluctuate	249
harvest home, harvest	272	<i>object, v.</i>	346
harvest tide harvest	272	hesitation, doubt, n	201
harvest-time, harvest	272	heterogeneous	277
harvesting, harvest	272	<i>complex</i>	166
harp, lock	320	hidden, latent	314
hasten, quicken	398	<i>mysterious</i>	337
hastiness, temerity	461	<i>obscure</i>	347
hatch, flock	249	hide	278
hate, abhor	8	<i>abscond</i>	14
<i>hatred</i>	273	<i>palpate</i>	354
hatred	273	high	279
<i>abomination</i>	12	<i>steep</i>	450
<i>antipathy</i>	72	highest, principal, u.	386
<i>enmity</i>	218	highroad, way	482
haughtiness, pride	384	highway, way	482
haughty, absolute	15	highwaymen, robber	425
haul, draw	202	hinder	280
have	274	<i>check</i>	155
havoc, massacre	324	<i>obstruct</i>	349
hazard	275	<i>prohibit</i>	389
<i>accident</i>	24	<i>restrain</i>	418
<i>danger</i>	180	hindrance, barrier	118
hazardous, precarious	377	<i>impediment</i>	295
head, chief	156	hint, allude	56
<i>topic</i>	468	<i>suggestion</i>	454
headstrong, obstinate	348	hire, v., employ	213
heady, obstinate	318	hire, n., pay, n	359
heal, recover	406	hiring, vain	474
healthful, healthy	275	history	281
healthy	275	<i>record</i>	405
heap up, amass	60	hit, beat	115
hear, listen	318	<i>blow</i>	124
hearth, home	282	hitch, attach	95
hearthstone, home	282	<i>bind</i>	121
hearty, friendly	256	hitherto, yet	487
<i>healthy</i>	275	hoard, amass	60
head, v., follow	250	hoard up, amass	60
<i>listen</i>	318	hoary, old	350
heed, n., care	141	holdenish, rustic	426
heedless, abstracted	18	hold, arrest	88
heedlessness, neglect	342	<i>cavity</i>	147
<i>temerity</i>	461	<i>esteem, v.</i>	223
heel over, tip	465	<i>have</i>	274
help	276	<i>keep</i>	310
<i>promote</i>	390	<i>restrain</i>	418
helper, accessory	23	hold back, restrain	418
<i>auxiliary</i>	108	hold dear, cherish	156
helpmate, associate, n.	91	hold in, restrain	418
henchman, accessory	28	hold up, support,	456
herald, announce	69	hola, cavity	147

	PAGE		PAGE
holiness, religion	408	hurl, send	433
hollow, cavity	147	hurry, quicken	308
holy	282	hurt, injury	302
<i>perfect</i>	362	hurtful, pernicious	364
<i>pure</i>	395	husbandry, agriculture	43
homage, allegiance	51	hygienic, healthy	275
home	262	hypocrisy, deception	181
homogeneous, alike	49	<i>hunt</i>	285
honest	283	<i>hypocrite</i>	286
<i>candid</i>	139	hypocritical, captious	140
honesty, veracity	477	<i>hypothesis</i>	286
<i>virtue</i>	480	<i>idea</i>	287
honor, v., admire	87	<i>fancy</i>	237
<i>venerate</i>	475	<i>ideal</i>	288
honor, n., fame	235	<i>ideal</i>	288
<i>justice</i>	309	<i>example</i>	227
<i>virtue</i>	480	<i>idea</i>	287
honorable, honest	288	<i>perfect</i>	382
honorarium, pay, n.	359	identical, alike	49
hook, lock	320	<i>synonymous</i>	457
hope, v., anticipate	71	<i>idiocy</i>	289
hope, n., anticipation	71	idiom, language	312
hopelessness, despair	191	<i>idle</i>	289
horizontal	288	<i>vain</i>	474
horrible, awful	106	ignite, burn	132
horror, abomination	10	<i>ignorant</i>	290
<i>fear</i>	238	<i>brutish</i>	181
horticulture, agriculture	43	ill, misfortune	381
host, army	84	ill-advised, absurd	19
<i>company</i>	164	ill-considered, absurd	19
<i>throng</i>	464	ill-defined, faint	231
hostile adverse	39	ill-doing, sin	439
<i>alien, a.</i>	48	illegal, criminal	178
hostility, antipathy	72	ill-fortune, misfortune	381
<i>enmity</i>	218	ill-humored, morose	385
<i>feud</i>	241	illimitable, infinite	300
<i>hatred</i>	273	ill-informed, ignorant	290
hot, eager	207	illiterate, ignorant	290
house, home	282	ill-judged, absurd	19
housings, caparison	140	ill luck, misfortune	381
howbeit, notwithstanding, conj.	345	ill-matched, incongruous	297
however, but	135	illness, disease	197
<i>notwithstanding, conj.</i>	345	ill-treat, abuse	20
huge, large	313	illuminated, bright	129
hum, sing	440	illumination, light	317
human, humane	284	illuminated, bright	129
humane	284	ill-use, abuse	20
humanity, benevolence	120	illusion, delusion	187
humble, abase	4	illustrate, adorn	88
<i>abash</i>	5	illustration, allegory	52
<i>chasten</i>	155	<i>sample</i>	429
<i>conquer</i>	172	ill-will, enmity	218
<i>meek</i>	325	<i>hatred</i>	273
humiliation, chagrin	151	image, idea	287
humor, fancy	287	<i>emblem</i>	311
<i>wit</i>	486	<i>fancy</i>	287
hunt	285	<i>model</i>	324
hunting, hunt	288		

	PAGE		PAGE
<i>imagination</i>	290	<i>impertinence, impudence</i> ..	296
<i>fancy</i>	237	<i>pertness</i> ..	365
<i>idea</i>	287	<i>impertinent, alien, a</i> ..	48
<i>imaginative, fanciful</i> ..	236	<i>meddlesome</i>	324
<i>imagine, suppose</i> ..	456	<i>impertinable, calm</i>	137
<i>imbibe, absorb</i>	16	<i>impetuous, eager</i> ..	207
<i>imbruted, brutish</i> ..	131	<i>ferce</i> ..	244
<i>imitate, follow</i>	250	<i>implement, tool</i> ..	466
<i>imitation, caricature</i> ..	143	<i>implicate, involve</i> ..	307
<i>duplicate</i>	206	<i>implication, suggestion</i> ..	454
<i>model</i>	334	<i>implicit, latent</i> ..	314
<i>immaculate, innocent</i> ..	304	<i>implied, latent</i>	314
<i>perfect</i>	362	<i>implore, ask</i>	90
<i>pure</i>	395	<i>plead</i>	369
<i>immanent, inherent</i> ..	301	<i>pray</i>	377
<i>immature, youthful</i> ..	488	<i>imply, allude</i> ..	56
<i>immeasurable, infinite</i> ..	300	<i>involve</i>	307
<i>immediately</i>	293	<i>impolite, bluff</i> ..	125
<i>immemorial, old</i>	350	<i>important</i>	295
<i>primeval</i>	285	<i>importunate, eager</i> ..	207
<i>immense, large</i>	313	<i>importune, pray</i> ..	377
<i>immerse, immerse</i>	294	<i>impose on, abuse</i>	20
<i>immigrate, emigrate</i> ..	212	<i>imposing, awful</i> ..	106
<i>imminent</i>	294	<i>imposition, deception</i> ..	181
<i>immobility, apathy</i> ..	74	<i>fraud</i>	256
<i>immoral, criminal</i> ..	178	<i>imposter, hypocrite</i> ..	286
<i>immorality, sin</i>	439	<i>imposture, artifice</i> ..	88
<i>immortal, eternal</i> ..	224	<i>fraud</i>	256
<i>immovable, obstinate</i> ..	343	<i>imprecation, oath</i> ..	346
<i>immunity, right, n.</i> ..	423	<i>impregnable, formidable</i> ..	252
<i>immutable, permanent</i> ..	362	<i>impressibility, sensibility</i> ..	434
<i>impact, collision</i> ..	162	<i>impression, idea</i> ..	287
<i>impairment, injury</i> ..	302	<i>trace</i>	463
<i>impart, give</i>	264	<i>imprisonment, fetter</i> ..	240
<i>impartial, candid</i> ..	139	<i>impromptu, extemporaneous</i> ..	230
<i>impartiality, justice</i> ..	309	<i>improvement, profit</i> ..	337
<i>impassibility, apathy</i> ..	74	<i>progress</i>	333
<i>impatience, anger</i> ..	67	<i>impudence</i>	296
<i>impatient, eager</i>	207	<i>assurance</i>	93
<i>resistive</i>	417	<i>effrontery</i>	210
<i>impeach, arraign</i>	84	<i>pertness</i>	365
<i>impede, check</i>	155	<i>impulse, appetite</i> ..	30
<i>hinder</i>	280	<i>impulsive, spontaneous</i> ..	447
<i>obstruct</i>	349	<i>impute, attribute, v.</i> ..	100
<i>impediment</i>	295	<i>inaction, abeyance</i> ..	7
<i>impel, drive</i>	204	<i>inactive, idle</i>	239
<i>influence</i>	300	<i>slow</i> ..	443
<i>persuade</i> ..	365	<i>in addition, also</i> ..	57
<i>send</i>	432	<i>inadvertence, neglect</i> ..	342
<i>impending, imminent</i> ..	294	<i>inapplicable, alien, a.</i> ..	48
<i>imperative, absolute</i> ..	15	<i>inappropriate, alien, a.</i> ..	48
<i>imperceptible, latent</i> ..	314	<i>incongruous</i>	297
<i>imperfection, blemish</i> ..	124	<i>inapposite, incongruous</i> ..	297
<i>imperious, absolute</i> ..	15	<i>inasmuch as, because</i> ..	116
<i>dogmatic</i>	200	<i>inattention, neglect</i> ..	342
<i>imperishable, eternal</i> ..	224	<i>inattentive, abstracted</i> ..	18
<i>permanent</i>	362	<i>inauguration, beginning</i> ..	113
		<i>inborn, inherent</i> ..	301

	PAGE
inbred, <i>inherent</i>	301
incandescence, <i>light</i>	317
incandescent, <i>bright</i>	129
incapacity, <i>idiotry</i>	289
inception, <i>beginning</i>	118
incessant, <i>continual</i>	175
incident, <i>accident</i>	24
<i>circumstance</i>	158
<i>event</i>	223
<i>story</i>	451
incinerate, <i>burn</i>	132
incite, <i>influence</i>	300
<i>persuade</i>	365
incivility, <i>impudence</i>	206
inclination, <i>aim</i>	44
<i>appetite</i>	80
<i>attachment</i>	97
<i>desire</i>	190
<i>direction</i>	196
<i>fancy</i>	237
incline, <i>bend</i>	119
<i>draw</i>	202
<i>influence</i>	300
<i>persuade</i>	365
<i>tip</i>	465
inclined, <i>addicted</i>	32
include, <i>involve</i>	307
included, <i>latent</i>	314
incoherent, <i>incongruous</i>	297
incommensurable, <i>incongruous</i>	297
incomparable, <i>rare</i>	400
incompatible, <i>adverse</i>	39
<i>incongruous</i>	297
incomprehensible, <i>mysterious</i>	337
<i>obscure</i>	347
inconclusive, <i>absurd</i>	19
incongruous	297
inconsiderate, <i>bluff</i>	125
inconsistency, <i>difference</i>	194
inconsistent, <i>incongruous</i>	297
inconstant, <i>fickle</i>	242
<i>vain</i>	474
incorrect, <i>absurd</i>	19
incorruptible, <i>faithful</i>	283
increase, <i>add</i>	82
<i>amplify</i>	65
<i>harvest</i>	272
<i>progress</i>	388
incredulity, <i>doubt</i> , <i>n.</i>	201
incorporate, <i>mix</i>	331
incorrupt, <i>pure</i>	395
incubus, <i>load</i> , <i>n.</i>	319
inculcate, <i>teach</i>	461
indefinite, <i>equivocal</i>	222
indelible, <i>permanent</i>	302
indemnity, <i>subsidy</i>	453
indentation, <i>canity</i>	147
independence, <i>liberty</i>	316

	PAGE
indestructible, <i>permanent</i> ..	362
indeterminate, <i>equivocal</i> ..	222
indicate, <i>allude</i>	56
indication, <i>characteristic</i> ..	154
<i>sign</i>	434
indict, <i>arraign</i>	84
indifference, <i>apathy</i>	74
<i>neglect</i>	342
indifferent, <i>abstracted</i>	18
indigence, <i>poverty</i>	374
indigenous, <i>native</i>	339
<i>primal</i>	345
indignation, <i>anger</i>	67
indispensability, <i>necessity</i> ..	341
indispensable, <i>necessary</i>	341
indispensableness, <i>necessity</i> ..	311
indispensible, <i>inherent</i>	301
indisposed, <i>reluctant</i>	409
indisposition, <i>disease</i>	197
indistinct, <i>equivocal</i>	222
<i>faint</i>	231
<i>obscure</i>	347
individuality, <i>apiece</i>	76
indoctrinate, <i>teach</i>	465
indolent, <i>idle</i>	280
indomitable, <i>formidable</i>	252
<i>obstinate</i>	318
indubitable, <i>evident</i>	228
induce, <i>draw</i> ,	202
<i>influence</i>	300
<i>persuade</i>	365
induction	298
<i>demonstration</i>	188
industrious	209
<i>active</i>	28
industry	209
indwelling, <i>inherent</i>	301
inebriated, <i>drunk</i> , <i>a.</i>	205
ineffectual, <i>vain</i>	474
inelegant, <i>rustic</i>	426
inequality, <i>difference</i>	194
inert, <i>idle</i>	280
<i>slow</i>	413
inevitable, <i>necessary</i>	341
inexorable, <i>severe</i>	435
inexplicable, <i>mysterious</i>	337
infallible, <i>necessary</i>	341
infatuated, <i>absurd</i>	19
infect, <i>defile</i>	184
infection, <i>contagion</i>	171
inference, <i>demonstration</i> ..	184
<i>induction</i>	298
infidel, <i>skeptical</i>	441
infinite	200
infirmity, <i>disease</i>	197
influxed, <i>inherent</i>	301
inflexible, <i>obstinate</i>	348
<i>severe</i>	435

	PAGE		PAGE
<i>influence</i>	300	<i>innovation, change, v</i> ..	152
<i>bond</i>	119	<i>innocuous, innocent</i> ...	304
<i>govern</i>	265	<i>innuendo, suggestion</i> ..	454
<i>operation</i>	351	<i>innumerable, infinite</i> ..	300
<i>persuade</i>	365	<i>inoffensive, innocent</i> ..	304
<i>influential, important</i> ..	295	<i>inquiring, inquisitive</i> ..	304
<i>inform, state</i>	449	<i>inquisition, hunt</i> ..	285
<i>teach</i>	461	<i>inquisitive</i>	304
<i>information, education</i> ..	209	<i>insalubrious, pernicious</i> ..	364
<i>knowledge</i>	311	<i>insanity</i>	305
<i>wisdom</i>	485	<i>inscription, record</i>	405
<i>informed, conscious</i>	173	<i>inscrutable, mysterious</i> ..	387
<i>infrequent, rare</i>	400	<i>insecure, precarious</i>	377
<i>infringement, attack, n.</i> ..	99	<i>insecurity, danger</i>	180
<i>ingathering, harvest</i>	272	<i>insensibility, apathy</i> ..	74
<i>ingenious, clever</i>	162	<i>stupidity</i>	451
<i>skillful</i>	442	<i>stupor</i>	452
<i>ingenuily, address, n.</i> ..	34	<i>insensible, brutish</i>	181
<i>ingenuous, candid</i>	139	<i>inseparable, inherent</i> ..	301
<i>honest</i>	283	<i>insight, acumen</i>	28
<i>ingenuousness, veracity</i> ..	477	<i>wisdom</i>	485
<i>ingleside, home</i>	282	<i>insinuate, allude</i>	56
<i>ingrained, inherent</i>	301	<i>insinuation, suggestion</i> ..	454
<i>radical</i>	400	<i>insolence, effrontery</i>	210
<i>ingredient, part, n.</i>	357	<i>impudence</i>	296
<i>ingress, entrance</i>	220	<i>pride</i>	384
<i>inhabit, abide</i>	9	<i>insolvency, bankruptcy</i> ..	111
<i>inharmomious, incongruous</i> ..	297	<i>inspect, look</i>	320
<i>inherent</i>	301	<i>inspection, oversight</i>	352
<i>latent</i>	314	<i>inspiration, enthusiasm</i>	220
<i>inhering, inherent</i>	301	<i>in spite of, notwithstanding,</i> <i>prep</i>	345
<i>inhibit, check</i>	150	<i>instalment, part, n</i>	357
<i>prohibit</i>	389	<i>instance, precedent</i>	378
<i>inhuman, barbarous</i>	113	<i>sample</i>	429
<i>inimical, adverse</i>	39	<i>instant, immediately</i>	298
<i>iniquitous, criminal</i>	178	<i>instantly, immediately</i>	298
<i>iniquity, abomination</i>	12	<i>instigate, influence</i>	300
<i>injustice</i>	303	<i>instil, teach</i>	461
<i>sin</i>	439	<i>instinct, mind</i>	329
<i>initiate, teach</i>	461	<i>instinctive, spontaneous</i>	447
<i>initiation, beginning</i>	118	<i>institution, foundation</i> ..	254
<i>injunction, order</i>	351	<i>instruct, teach</i>	461
<i>injure, abuse</i>	20	<i>instruction, education</i>	209
<i>injurious, pernicious</i>	364	<i>order</i>	351
<i>injury</i>	302	<i>instrument, agent</i>	41
<i>blemish</i>	124	<i>record</i>	405
<i>infusion</i>	308	<i>tool</i>	466
<i>injustice</i>	303	<i>insubordinate, rebellious</i> ..	404
<i>injury</i>	302	<i>insubordination, revolution</i> ..	420
<i>inlet, entrance</i>	220	<i>insult, affront</i>	89
<i>in like manner, also</i>	57	<i>insurrection, revolution</i> ..	420
<i>innate, inherent</i>	301	<i>integrity, justice</i>	309
<i>native</i>	339	<i>virtus</i>	480
<i>radical</i>	400	<i>intellect, mind</i>	329
<i>innocent</i>	304	<i>intellectual, clever</i>	162
<i>candid</i>	139	<i>intelligence, knowledge</i>	311
<i>pure</i>	395	<i>mind</i>	329
<i>innocuous, innocent</i>	304		

	PAGE
intelligent, <i>clever</i>	162
<i>sagacious</i>	427
intelligible, <i>clear</i>	161
intemperance, <i>excess</i>	228
intense, <i>eager</i>	207
intensity, <i>enthusiasm</i>	220
intent, <i>a</i> , <i>eager</i>	207
intent, <i>n</i> , <i>aim</i>	44
<i>design</i>	190
<i>end</i> , <i>n.</i>	214
intention, <i>aim</i>	44
<i>design</i>	190
intentness, <i>industry</i>	299
inter, <i>hide</i>	278
intercede, <i>interpose</i>	306
intercept, <i>interpose</i>	306
interchangeable, <i>mutual</i>	337
<i>synonymous</i>	457
intercourse, <i>conversation</i> ..	176
interdict, <i>prohibit</i>	389
interest, <i>entertain</i>	218
interfere, <i>interpose</i>	306
intermeddle, <i>interpose</i>	306
interminable, <i>eternal</i>	224
<i>infinite</i>	300
intermingle, <i>mix</i>	331
intermission, <i>abeyance</i>	7
<i>rest</i>	416
intermit, <i>cease</i>	149
internal, <i>inherent</i>	301
interpose	306
interpretation, <i>definition</i> ..	184
interrupt, <i>hinder</i>	280
interpose	306
<i>obstruct</i>	349
interruption, <i>abeyance</i>	7
in the midst of, <i>amid</i>	65
intimacy, <i>acquaintance</i>	25
intimate, <i>allude</i>	56
intimation, <i>suggestion</i>	454
intimidate, <i>frighten</i>	258
intolerance, <i>fanaticism</i>	236
intoxicated, <i>drunk</i> , <i>a.</i>	205
intractable, <i>obstinate</i>	348
<i>perverse</i>	366
<i>rebellious</i>	404
<i>restive</i>	417
intrenchment, <i>fortification</i> ..	252
intrepid, <i>brave</i>	127
intrepidity, <i>proveness</i>	393
intricate, <i>complex</i>	166
<i>obscure</i>	347
intrinsic, <i>inherent</i>	301
introduce, <i>allege</i>	51
introduction, <i>entrance</i>	220
introductory, <i>previous</i>	382
intrusion, <i>attack</i> , <i>n.</i>	99
intrusive, <i>inquisitive</i>	304

	PAGE
intrusiveness, <i>meddlesome</i> ...	324
intrusiveness, <i>impudence</i> ...	296
intuition, <i>knowledge</i>	311
intuitive, <i>transcendental</i>	470
invade, <i>attack</i> , <i>v.</i>	98
invariable, <i>continual</i>	175
<i>permanent</i>	362
invasion, <i>attack</i> , <i>n.</i>	99
inveigle, <i>allure</i>	67
invent, <i>discover</i>	190
invention, <i>artifice</i>	88
<i>fiction</i>	243
inventory, <i>record</i>	405
invincible, <i>formidable</i>	252
invisible, <i>latent</i>	314
invoke, <i>appeal</i>	77
<i>pray</i>	377
involuntary, <i>spontaneous</i>	447
involve	307
involved, <i>complex</i>	106
<i>latent</i>	314
<i>obscure</i>	347
inwrought, <i>inherent</i>	301
iota, <i>particle</i>	258
irate, <i>bitter</i>	122
ire, <i>anger</i>	67
irony, <i>fetter</i>	240
irony, <i>banter</i>	112
irrational, <i>absurd</i>	19
irreconcilable, <i>incongruous</i> ..	297
irrelevant, <i>alien</i> , <i>a.</i>	48
irresolute, <i>faint</i>	231
<i>feble</i>	242
irresolution, <i>doubt</i> , <i>n.</i>	201
irresponsible, <i>absent</i>	15
irritable, <i>captious</i>	140
irritate, <i>affront</i>	39
irritation, <i>anger</i>	67
<i>piquer</i>	367
issue, <i>v.</i> , <i>rise</i>	424
issue, <i>n.</i> , <i>consequence</i>	173
<i>end</i> , <i>n.</i>	214
<i>event</i>	228
<i>topic</i>	488
item, <i>circumstance</i>	158
jabber, <i>babble</i>	107
jade, <i>tire</i>	408
jam, <i>throng</i>	464
jar, <i>shake</i>	486
jealous, <i>envious</i>	321
jeer, <i>snear</i>	444
jeering, <i>banter</i>	112
jeopardy, <i>danger</i>	180
<i>hazard</i>	275
jest, <i>wit</i>	486
job, <i>business</i>	128
jocularly, <i>wit</i>	486

	PAGE		PAGE
jocund, <i>happy</i>	270	keep back, <i>restrain</i>	418
judgment, <i>prudence</i>	394	keep down, <i>restrain</i>	418
joggle, <i>shake</i>	436	keep in, <i>restrain</i>	418
join, <i>agree</i>	42	keep under, <i>restrain</i>	418
<i>associate, v.</i>	90	keep up, <i>support</i>	456
<i>attach</i>	95	<i>kill</i>	310
<i>conjoin</i>	171	<i>kin</i>	311
<i>mix</i>	381	kind, <i>amiable</i>	64
join on, <i>add</i>	32	<i>friendly</i>	256
joint, <i>mutual</i>	387	<i>humane</i>	284
joke, <i>wit</i>	486	<i>kin</i>	311
jollification, <i>carousal</i>	144	<i>pleasant</i>	370
jolly, <i>happy</i>	270	<i>propitious</i>	391
jolt, <i>shake</i>	436	kind-hearted, <i>humane</i>	284
jot, <i>particle</i>	858	kind-heartedness, <i>benevolence</i>	120
journey	307	kindly, <i>friendly</i>	256
jounce, <i>shake</i>	436	<i>pleasant</i>	370
jovial, <i>happy</i>	270	<i>propitious</i>	391
joy, <i>happiness</i>	262	kindness, <i>benevolence</i>	180
joyful, <i>happy</i>	270	<i>mercy</i>	327
joyous, <i>airy</i>	45	kindred, <i>a, alike</i>	49
<i>happy</i>	270	<i>kin</i>	311
judge	308	king, <i>chief</i>	156
judgment, <i>idea</i>	287	kinglike, <i>royal</i>	425
<i>prudence</i>	394	kingly, <i>royal</i>	425
<i>wisdom</i>	485	kiss, <i>caress</i>	148
judicious, <i>sagacious</i>	427	kitchen-gardening, <i>agriculture</i>	48
judiciousness, <i>prudence</i>	394	knack, <i>ease</i>	208
<i>wisdom</i>	485	knock, <i>blow</i>	124
jumble, <i>displace</i>	198	knowing, <i>astute</i>	94
junction, <i>union</i>	471	<i>clever</i>	162
juncture, <i>union</i>	471	knowledge	311
junto, <i>cabal</i>	135	<i>acquaintance</i>	25
jurisprudence, <i>law</i>	815	<i>education</i>	209
just, <i>a, admissible</i>	87	<i>science</i>	430
<i>condign</i>	169	<i>wisdom</i>	485
<i>honest</i>	283	labor, <i>industry</i>	299
just, <i>adv., but</i>	134	<i>work</i>	487
justice	309	laborious, <i>difficult</i>	195
<i>fudge</i>	308	lacerate, <i>rend</i>	410
<i>virtue</i>	480	laconic, <i>terse</i>	468
justification, <i>apology</i>	75	lading, <i>load, n.</i>	319
<i>defense</i>	182	lament, <i>mourn</i>	386
justness, <i>justice</i>	309	lamentable, <i>pitiful</i>	367
juvenile, <i>new</i>	348	lance, <i>send</i>	482
<i>youthful</i>	488	land, <i>reach</i>	401
keen, <i>astute</i>	94	landmark, <i>boundary</i>	126
<i>clever</i>	162	lane, <i>way</i>	482
<i>eager</i>	207	language	312
<i>fine</i>	245	<i>diction</i>	198
<i>sagacious</i>	427	<i>speech</i>	446
keenness, <i>acumen</i>	28	languid, <i>faint</i>	231
keen-sighted, <i>sagacious</i>	427	large	318
keen-witted, <i>sagacious</i>	427	<i>plentiful</i>	371
keep	310	largess, <i>gift</i>	268
<i>celebrate</i>	150	lawless, <i>brutish</i>	131
<i>restrain</i>	418	lash, <i>blow</i>	124
<i>support</i>	456	lasting, <i>permanent</i>	362

	PAGE
latch, lock	320
late, new	343
latent	314
laudation, praise	376
laughable, queer	397
launch, send	432
laurels, fame	235
lavation, abtution	9
lave, defense	160
laving, abtution	9
lavish, abuse	20
plentiful	371
lavishness, excess	228
law	315
justice	309
lawfulness, justice	309
lawlessness, revolution	420
lay, put	396
lay hold of, catch	146
lazy, idle	289
lead, draw	202
follow	260
influence	300
persuade	305
leader, chief	156
leading, principal, a.	386
league, alliance	58
associate, v.	90
lean, tip	465
learned, academic	22
learner, scholar	430
learning, education	209
knowledge	311
wisdom	485
leave, abandon	3
abscond	14
permission	363
leave-off, cease	149
leave-taking, farewell	238
legality, justice	309
legate, delegate	185
legend, fiction	243
story	451
legions, army	84
legislation, law	315
legitimate, authentic	108
leisure, vacant	478
lengthen, protract	392
lenience, mercy	327
leniency, mercy	327
patience	358
lenity, mercy	327
lesson, abate	6
alleviate	53
let, allow	55
let go, surrender	457
lethargy, apathy	74
stupor	452

	PAGE
lettered, academic	22
level, horizontal	283
liable, likely	318
responsible	415
libel, slander	442
liberal, generous	261
plentiful	371
liberality, benevolence	120
liberate, absolve	10
liberty	316
permission	362
right, n.	424
license, liberty	316
permission	363
right, n.	424
lie, deception	181
life, behavior	119
lift, carry	144
light, a., airy	45
light,	317
knowledge	311
lighten, alleviate	53
like, alike	49
synonymous	457
likely	318
apparent	76
likeness, analogy	68
approximation	83
duplicate	208
likewise, also	57
liking, appetite	80
fancy	237
love	321
limit, boundary	126
end, n.	214
limitless, infinite	300
limpid, clear	101
line, boundary	126
line of achievement, career ..	142
line of battle, array	87
lingering, slow	443
link, associate, v.	90
liquid, fluid	250
list, listen	314
tip	465
listen	314
listless, abstracted	17
faint	231
literal, verbal	474
literary, academic	22
literary productions, literature	316
literary works, literature	319
literature	319
litter, flock	249
little, minute	230
live, v., abide	9
live, a., alive	49

	PAGE		PAGE
liveliness, <i>alacrity</i>	46	ludicrous, <i>qucer</i>	397
<i>perliness</i>	365	luminous, <i>bright</i>	129
lively, <i>active</i>	28	lunacy, <i>insanity</i>	305
<i>airy</i>	45	lure, <i>allure</i>	57
alert	47	<i>draw</i>	202
alive	49	<i>knowledge</i>	311
<i>nimble</i>	344	luscious, <i>delicious</i>	186
<i>racy</i>	399	lust, <i>appetite</i>	80
living, <i>alive</i>	94	luster, <i>light</i>	317
living being, <i>animal</i>	68	lustrous, <i>bright</i>	129
living creature, <i>animal</i>	68	luxuriance, <i>excess</i>	228
living organism, <i>animal</i>	68	<i>wealth</i>	482
load, <i>n.</i>	319	luxuriant, <i>plentiful</i>	371
loath, <i>reluctant</i>	409	luxuriate, <i>abound</i>	13
loathe, <i>abhor</i>	8	luxury, <i>wealth</i>	482
locate, <i>fix</i>	247	lying, <i>deception</i>	181
lock	320	machination, <i>artifice</i>	88
lodge, <i>abide</i>	9	machine, <i>tool</i>	466
<i>association</i>	92	madness, <i>insanity</i>	305
lofty, <i>high</i>	279	magisterial, <i>dogmatic</i>	200
loneliness, <i>retirement</i>	418	magnanimous, <i>general</i>	261
long, <i>large</i>	318	magnificent, <i>royal</i>	425
longing, <i>appetite</i>	80	magnify, <i>aggrandize</i>	41
<i>desire</i>	190	mail, <i>arms</i>	83
<i>eager</i>	207	main, <i>principal, a.</i>	386
long-suffering, <i>patience</i>	358	maintain, <i>allege</i>	51
look	320	<i>keep</i>	310
look, <i>v.</i> , <i>appear</i>	78	<i>state</i>	449
look, <i>n.</i> , <i>air</i>	44	<i>support</i> ,	456
look forward to, <i>anticipate</i>	71	majestic, <i>awful</i>	106
loquacious, <i>garrulous</i>	259	<i>royal</i>	425
lordly, <i>absolute</i>	15	make	322
Lord's Supper, <i>sacrament</i>	427	<i>compel</i>	165
loss, <i>injury</i>	302	make better, <i>amend</i>	63
lot, <i>flock</i>	249	make haste, <i>quicken</i>	398
<i>portion</i>	374	make known, <i>announce</i>	69
lovable, <i>amiable</i>	64	make out, <i>make</i>	322
love	321	make prisoner, <i>arrest</i>	88
love, <i>v.</i> , <i>admire</i>	37	make up, <i>add</i>	32
love, <i>n.</i> , <i>attachment</i>	97	<i>make</i>	322
<i>friendship</i>	257	make use of, <i>employ</i>	213
lovely, <i>amiable</i>	64	make void, <i>cancel</i>	138
<i>beautiful</i>	115	make white, <i>bleach</i>	122
loving, <i>amiable</i>	64	maladroit, <i>awkward</i>	106
<i>friendly</i>	256	malady, <i>disease</i>	197
lower, <i>abase</i>	4	male, <i>masculine</i>	323
<i>abate</i>	6	malediction, <i>oath</i>	346
<i>disparage</i>	198	malevolence, <i>enmity</i>	218
lower classes, <i>mob</i>	323	<i>hatred</i>	273
lowly, <i>meek</i>	325	malice, <i>enmity</i>	218
loyal, <i>faithful</i>	233	<i>hatred</i>	273
loyalty, <i>allegiance</i>	51	malign, <i>abuse</i>	20
lucid, <i>clear</i>	161	<i>slander</i>	442
lucky, <i>fortunate</i>	259	malignity, <i>acrimony</i>	26
<i>happy</i>	270	<i>enmity</i>	218
lucra, <i>wealth</i>	482	<i>hatred</i>	273
ludicrous, <i>absurd</i>	19	maltreat, <i>abuse</i>	20

	PAGE		PAGE
manacles, <i>fetter</i>	240	mean, <i>pitiful</i>	367
manage, <i>govern</i>	265	means, <i>agent</i>	41
manageable, <i>docile</i>	200	wealth	482
management, <i>care</i>	141	measure, <i>criterion</i>	179
oversight	353	meter	328
mandate, <i>law</i>	315	measureless, <i>infinite</i>	300
order	351	mechanic, <i>artist</i>	89
maneuver, <i>artifice</i>	88	mechanism, <i>tool</i>	466
manful, <i>masculine</i>	323	meddle, <i>interpose</i>	306
mangle, <i>rend</i>	410	mix	331
mania, <i>insanity</i>	305	meddlesome	324
manifest, <i>clear</i>	161	inquisitive	304
evident	226	meddling, <i>inquisitive</i>	301
manifestation, <i>sign</i>	438	meddlesome	321
revelation	419	mediate, <i>interpose</i>	306
manifold, <i>complex</i>	160	meditate, <i>deliberate</i>	185
manlike, <i>masculine</i>	323	meed, <i>poverty</i>	374
manly, <i>masculine</i>	323	reward	422
manner, <i>air</i>	44	meek	326
behavior	119	meet, <i>becoming</i>	117
system	458	condign	149
manners, <i>address, n.</i>	84	fit	246
behavior	119	meeting, <i>collision</i>	162
mannish, <i>masculine</i>	323	company	161
manufacture, <i>make</i>	322	melancholy, <i>grief</i>	269
marauder, <i>robber</i>	425	mellorate, <i>amend</i>	63
marches, <i>boundary</i>	126	melody	326
margo, <i>bank</i>	111	member, <i>part, n.</i>	357
boundary	126	term	462
margin, <i>bank</i>	111	memoir, <i>history</i>	261
boundary	126	memorandum, <i>record</i>	465
marine, <i>nautical</i>	339	memorial, <i>history</i>	261
maritime, <i>nautical</i>	339	record	465
mark, <i>aim</i>	44	trace	468
characteristic	154	memory	327
sign	438	mend, <i>amend</i>	63
trace	468	mendicancy, <i>poverty</i>	374
market-gardening, <i>agriculture</i>	43	mention, <i>allude</i>	56
marriage	323	mercenary, <i>auxiliary</i>	163
marshal, <i>arrange</i>	85	vain	474
masculine	323	merciful, <i>humane</i>	264
mask, <i>v., hide</i>	278	propitious	361
mask, <i>n., pretense</i>	380	merciless, <i>barbarous</i>	118
mass, <i>throng</i>	464	mercy	327
massacre	324	pardon, <i>n.</i>	350
kill	310	pity	368
masses, <i>mob</i>	338	mere, <i>pure</i>	365
massive, <i>large</i>	313	merely, <i>but</i>	164
master, <i>chief</i>	156	merited, <i>condign</i>	169
conquer	172	merriment, <i>entertainment</i>	219
mastery, <i>victory</i>	479	happiness	268
mate, <i>associate, n.</i>	91	merry, <i>happy</i>	270
material, <i>important</i>	295	metamorphosis, <i>change, v.</i>	161
matrimony, <i>marriage</i>	323	metaphor, <i>allegory</i>	52
matter, <i>topic</i>	468	mete out, <i>allot</i>	84
maudlin, <i>drunk, a.</i>	205	meter	328
maxim, <i>proverb</i>	393	poetry	373

	PAGE		PAGE
method, system	458	mitigate, abate	6
metrical composition, poetry . .	372	alleviate	53
metropolis, capital	140	amend	68
middle, center	150	palliate	354
raids, center	150	mix	331
(in the midst of), amid	65	mixed, complex	166
mien, air	44	heterogeneous	277
might, power	375	nob	333
migrate, emigrate	212	mobile, active	28
mild, calm	137	mock, sneer	444
meek	325	mockery, banter	112
mildness, mercy	327	mode, system	458
military, army	84	model	334
ministry, caricature	143	example	227
mind	329	idea	287
mine, cavity	147	ideal	288
minge, mix	331	moderate, v, abate	6
mingled, complex	166	alleviate	53
heterogeneous	277	check	155
mingled with, amid	65	moderate, a, slow	443
minute	330	moderation, abstinence	17
fine	245	modern, new	343
miraculous, supernatural	455	modest, meek	325
mirth, happiness	268	modesty	334
mirthful, happy	270	modify, change, v.	151
misadventure, accident	24	mold, bend	119
misfortune	331	govern	265
miscellaneous, heterogeneous . .	277	model	334
mischance, catastrophe	145	molder, decay	181
misfortune	331	molecule, particle	358
mischief, injury	302	molest, abuse	20
mischievous, pernicious	364	mollify, allay	50
misdeed, sin	439	momentary, transient	470
misemploy, abuse	20	momentous, important	295
miserable, pitiful	367	monetary, financial	245
miserliness, frugality	259	money	335
miserly, avaricious	104	wealth	432
misery, misfortune	331	monomania, insanity	305
misfortune	331	monstrous, absurd	19
accident	24	mood, fancy	237
blow	124	moor, bind	121
catastrophe	145	mop, cleanse	160
misgiving, alarm	47	morality, religion	408
anxiety	78	virtue	430
doubt, n.	201	moreover, but	134
fear	238	morose	335
mishap, accident	24	severe	435
catastrophe	145	moroseness, acrimony	26
misfortune	331	mortification, chagrin	151
mislay, displace	198	mortify, abash	5
mismatched, incongruous	297	mother tongue, language	312
mismatched, incongruous	297	motion	336
misplace, displace	198	act	27
mistaken, absurd	19	topic	468
mistrust, doubt, v.	201	motive, cause	146
misuse, abuse	20	reason, n.	403
mix, particle	358	motto, proverb	393
		mourn	336

	PAGE
mournful, pitiful	367
move, v., carry	144
convey	177
influence	300
persuade	365
move, n., motion	336
movement, act	27
motion	336
mover, agent	41
moving, pitiful	367
mourning, grief	266
muddled, drunk, a	205
muddy, obscure	347
murish, obstinate	348
restive	417
multiform, complex	166
multitude, army	84
company	164
throng	404
munificence, benevolence	120
munificent, generous	261
royal	425
muniment, history	279
record	405
murder, kill	310
murky, dark	180
murmur, babble	107
complain	165
music, melody	326
muster, convoke	178
mutable, fickle	242
mutation, change, n.	152
mute, taciturn	459
mutinous, rebellious	404
restive	417
mutiny, revolution	420
mutual	337
mysterious	337
dark	180
obscure	347
mystic, mysterious	337
mystical, mysterious	337
myth, fiction	243
story	451
naive, candid	189
name	338
allude	56
term	402
narration, history	281
report	412
story	451
narrative, history	281
report	412
story	451
natal, native	339
nation, people	360
native	339

	PAGE
inherent	361
primeval	387
radical	400
natty, neat	341
natural, inherent	361
native	339
normal	344
physical	366
radical	400
nature, character	152
nauseate, abhor	7
nautical	337
naval, nautical	339
near, adjacent	36
nearness, approximation	83
neat	340
becoming	117
terse	403
necessary	341
necessitate, compel	165
necessity	341
predestination	378
need, necessity	341
needed, necessary	341
needful, necessary	341
notorious, criminal	174
neglect	342
neglectfulness, neglect	342
negligence, neglect	342
negligent, abstracted	18
negotiate, transact	160
neighborhood, adjacent	36
neighborly, friendly	256
neophyte, convert	176
never ending, eternal	224
never failing, eternal	224
nevertheless, but	131
notwithstanding, conj.	345
new	343
new-fangled, new	343
new-fashioned, new	343
new made, new	343
next, adjacent	36
nice, fine	245
neat	340
tasteful	400
niggardly, avaricious	104
nigh, adjacent	36
nimble	311
active	28
alert	47
noble, awful	106
generous	361
high	279
noise, sound	445
noisome, pernicious	361
nonconformist, heretic	276

	PAGE		PAGE
non-homogeneous, <i>heterogene-</i>		oblige, <i>compel</i>	165
ous	277	obliging, <i>pleasant</i>	370
nonnautical, <i>absurd</i>	10	polite	372
normal	344	obliterate, <i>abolish</i>	11
general	260	cancel	138
usual	472	oblivion, <i>pardon, n</i>	356
notch, <i>carity</i>	147	oblivious, <i>abstracted</i>	18
note, <i>remark</i>	409	obnoxious, <i>pernicious</i>	364
sign	438	obscure	347
sound	445	complex	166
notes, <i>money</i>	335	dark	180
notify, <i>announce</i>	69	equivocal	222
notion, <i>idea</i>	287	mysterious	337
notoriety, <i>fame</i>	235	observance, <i>sacrament</i>	427
notwithstanding, <i>conj.</i>	345	observation, <i>remark</i>	409
but	184	observe, <i>celebrate</i>	150
notwithstanding, <i>prep.</i>	345	discern	196
nourish, <i>cherish</i>	156	follow	250
nourishment, <i>food</i>	251	keep	310
novel, <i>fiction</i>	243	obsolescent, <i>obsolete</i>	348
story	451	obsolete	348
novel, <i>a., new</i>	343	obstacle, <i>barrier</i>	113
novelty, <i>change, n.</i>	152	impediment	295
novice, <i>amateur</i>	61	obstinate	348
now, <i>immediately</i>	293	perverse	366
yet	487	restive	417
noxious, <i>pernicious</i>	304	obstruct	349
nutratory, <i>vain</i>	474	check	155
nuisance, <i>abomination</i>	12	hinder	280
null, <i>vain</i>	474	obstruction, <i>barrier</i>	113
nullify, <i>abolish</i>	11	impediment	295
cancel	138	obtain, <i>attain</i>	99
number, <i>calculate</i>	186	gal	262
numberless, <i>infinite</i>	300	purchase	395
numbers, <i>poetry</i>	372	obtrusive, <i>meddlesome</i>	324
nuptials, <i>marriage</i>	323	obtuseness, <i>stupidity</i>	451
nurse, <i>cherish</i>	156	obviate, <i>prevent</i>	381
nurture, <i>cherish</i>	156	obvious, <i>clear</i>	161
education	209	evident	226
teach	461	occasion, <i>cause</i>	146
nutriment, <i>food</i>	251	make	322
nutrition, <i>food</i>	251	occult, <i>latent</i>	314
oath	346	mysterious	337
obdurate, <i>obstinate</i>	348	occupation, <i>business</i>	133
obedience, <i>allegiance</i>	51	exercise	229
obedient, <i>docile</i>	200	work	487
obey, <i>follow</i>	250	occupied, <i>industrious</i>	299
keep	310	occupy, <i>entertain</i>	218
obiter dictum, <i>precedent</i>	378	have	274
object, <i>v.</i>	346	occur, <i>happen</i>	267
aim	44	occurrence, <i>circumstance</i>	158
design	190	event	225
reason, <i>n.</i>	403	ocean, <i>nautical</i>	339
objective, <i>subjective</i>	452	oceanic, <i>nautical</i>	339
obfurgation, <i>reproof</i>	413	odd, <i>queer</i>	397
obligation, <i>contract</i>	175	rare	400
duty	207	of consequence, <i>important.</i> . . .	295
oblige, <i>bind</i>	121		

	PAGE		PAGE
offend, <i>affront</i>	89	opposition, <i>ambition</i>	62
offense, <i>abomination</i>	12	<i>antipathy</i>	73
<i>anger</i>	67	<i>collision</i>	103
<i>pique</i>	367	oppress, <i>abuse</i>	20
<i>sin</i>	439	option, <i>alternative</i>	60
offer, <i>v.</i> , <i>allege</i>	51	opulence, <i>wealth</i>	482
offer, <i>n.</i> , <i>proposal</i>	391	oral, <i>verbal</i>	478
off-hand, <i>extemporaneous</i>	230	oration, <i>speech</i>	446
office, <i>duty</i>	205	oratory, <i>speech</i>	446
officious, <i>active</i>	28	order	851
<i>meddlesome</i>	324	<i>arrange</i>	85
officiousness, <i>impudence</i>	296	<i>array</i>	87
of importance, <i>important</i>	295	<i>class</i>	159
of moment, <i>importance</i>	295	<i>law</i>	313
old	350	<i>system</i>	458
<i>obsolete</i>	348	orderly, <i>neat</i>	341
<i>primeval</i>	385	order of battle, <i>array</i>	87
olden, <i>old</i>	350	ordinance, <i>law</i>	315
old-fashioned, <i>antique</i>	72	<i>sacrament</i>	427
omen, <i>sign</i>	438	ordinary, <i>general</i>	280
omission, <i>neglect</i>	342	<i>normal</i>	314
oneness, <i>union</i>	471	<i>usual</i>	472
onerous, <i>difficult</i>	195	organic, <i>radical</i>	400
only, <i>but</i>	184	orgy, <i>carousal</i>	144
onset, <i>attack, n.</i>	99	orifice, <i>cavity</i>	147
onslaught, <i>attack, n.</i>	99	origin, <i>beginning</i>	118
on the alert, <i>vigilant</i>	479	<i>cause</i>	146
on the lookout, <i>vigilant</i>	479	<i>foundation</i>	254
on the watch, <i>alert</i>	47	original, <i>a.</i> , <i>authentic</i>	103
opaque, <i>dark</i>	180	<i>native</i>	339
open, <i>bluff</i>	125	original, <i>n.</i> , <i>ideal</i>	288
<i>candid</i>	139	<i>model</i>	314
<i>evident</i>	226	<i>primaval</i>	385
open-handed, <i>generous</i>	261	<i>radical</i>	400
open-hearted, <i>generous</i>	261	<i>transcendental</i>	470
opening, <i>beginning</i>	118	originate, <i>make</i>	322
<i>cavity</i>	147	originator, <i>cause</i>	146
<i>entrance</i>	220	ornament, <i>adorn</i>	38
operation	351	oscillate, <i>fluctuate</i>	249
<i>act</i>	27	<i>shake</i>	488
<i>exercise</i>	227	ostentation	352
operative, <i>artist</i>	89	<i>pride</i>	314
operator, <i>agent</i>	41	ostracise, <i>banish</i>	110
opinion, <i>faith</i>	282	ought	353
<i>idea</i>	287	oust, <i>banish</i>	110
opinionated, <i>dogmatic</i>	200	outcome, <i>consequence</i>	178
<i>obstinate</i>	348	<i>end, n.</i>	214
opponent, <i>enemy</i>	217	<i>event</i>	225
oppose, <i>contrast</i>	175	outgo, <i>expend</i>	259
<i>hinder</i>	280	outgrowth, <i>consequence</i>	178
<i>object, v.</i>	346	outlandish, <i>rustic</i>	436
<i>obstruct</i>	349	outlay, <i>expend</i>	259
opposed, <i>adverse</i>	89	<i>price</i>	388
<i>alien, a.</i>	48	outline, <i>abridgment</i>	18
<i>reluctant</i>	409	<i>sketch</i>	440
opposing, <i>adverse</i>	89	out of date, <i>obsolete</i>	348
opposite, <i>adverse</i>	89	outrage, <i>injury</i>	302

	PAGE		PAGE
outset, <i>beginning</i>	118	paradox, <i>riddle</i> , <i>n</i>	423
outwit, <i>baffle</i>	108	paradoxical, <i>absurd</i>	19
overbearing, <i>absolute</i>	15	parapet, <i>barricade</i>	113
<i>dogmatic</i>	200	paraphrase, <i>quote</i>	398
overcome, <i>beat</i>	115	parcel, <i>portion</i>	374
<i>conquer</i>	172	pardon, <i>v.</i>	355
<i>drunk</i> , <i>a.</i>	205	<i>absolve</i>	16
over-confidence, <i>temerity</i>	461	pardon, <i>n.</i>	356
overflow, <i>abound</i>	13	<i>mercy</i>	327
overflowing, <i>plentiful</i>	371	pardonable, <i>venial</i>	477
overlook, <i>pardon</i> , <i>v.</i>	355	parity, <i>analogy</i>	66
overmaster, <i>conquer</i>	172	parley, <i>conversation</i>	176
overmatch, <i>conquer</i>	172	parody, <i>caricature</i>	143
overplus, <i>excess</i>	228	paroxysm, <i>pain</i>	354
overpower, <i>conquer</i>	172	parsimonious, <i>avaricious</i>	104
oversight	353	parsimoniousness, <i>frugality</i>	259
<i>care</i>	141	parsimony, <i>frugality</i>	259
<i>neglect</i>	342	part, <i>n</i>	357
overt, <i>evident</i>	226	<i>portion</i>	374
overtake, <i>catch</i>	146	partiality, <i>prejudice</i>	380
overthrow, <i>abolish</i>	11	participation, <i>association</i>	92
<i>conquer</i>	172	participator, <i>accessory</i>	23
<i>demolish</i>	187	particle	358
<i>exterminate</i>	231	<i>part</i> , <i>n.</i>	357
<i>refute</i>	407	particular, <i>circumstance</i>	158
<i>subvert</i>	453	<i>minute</i>	330
overture, <i>proposal</i>	391	parting salutation, <i>farewell</i>	238
overturn, <i>demolish</i>	187	partisan, <i>adherent</i>	35
<i>subvert</i>	454	partition, <i>part</i> , <i>n.</i>	357
overwhelm, <i>hide</i>	278	partner, <i>accessory</i>	23
<i>involve</i>	307	<i>associate</i> , <i>n.</i>	91
own, <i>avow</i>	105	partnership, <i>alliance</i>	53
<i>confess</i>	170	<i>association</i>	92
<i>have</i>	274	pass, <i>way</i>	482
pabulum, <i>food</i>	251	passable, <i>admissible</i>	87
pacific, <i>calm</i>	137	passage, <i>career</i>	142
pacify, <i>allay</i>	50	<i>motion</i>	336
pack, <i>flock</i>	249	<i>way</i>	482
<i>load</i> , <i>n.</i>	319	passage of arms, <i>batle</i>	114
past, <i>contract</i>	175	passageway, <i>way</i>	482
pageant, <i>ostentation</i>	352	pass by, <i>pardon</i> , <i>v.</i>	355
pageantry, <i>ostentation</i>	352	passing, <i>transient</i>	470
pain	354	passion, <i>anger</i>	67
pains, <i>industry</i>	299	<i>appetite</i>	80
painting, <i>sketch</i>	440	<i>enthusiasm</i>	220
palaver, <i>babble</i>	107	passiveness, <i>apathy</i>	74
pallete	354	<i>patience</i>	358
palpable, <i>evident</i>	226	pass over, <i>pardon</i> , <i>v.</i>	355
paltry, <i>pitiful</i>	367	pastime, <i>entertainment</i>	219
pamper, <i>caress</i>	143	pastoral, <i>rustic</i>	426
pangyria, <i>praise</i>	376	patent, <i>evident</i>	226
pang, <i>pain</i>	354	path, <i>way</i>	482
paula, <i>alarm</i>	47	pathetic, <i>pitiful</i>	367
<i>fear</i>	288	pathway, <i>way</i>	482
parable, <i>allegory</i>	52	patience	358
parade, <i>array</i>	87	<i>industry</i>	299
<i>ostentation</i>	352	patois, <i>language</i>	812

	PAGE		PAGE
patriarchal, <i>old</i>	350	peril, <i>danger</i>	180
<i>primeval</i>	385	<i>hazard</i>	275
pattern, <i>example</i>	227	perilous, <i>precarious</i>	377
<i>idea</i>	287	period, <i>end, n.</i>	214
<i>ideal</i>	288	<i>time</i>	465
<i>model</i>	334	periphrasis, <i>circumlocution</i>	157
<i>precedent</i>	378	perish, <i>die</i>	193
pauperism, <i>poverty</i>	374	permanent	362
pause, <i>cease</i>	149	permissible, <i>admissible</i>	37
<i>rest</i>	416	permission	362
pay, <i>n.</i>	359	permit, <i>a., allow</i>	55
<i>requite</i>	415	<i>endure</i>	216
payment, <i>pay, n.</i>	359	permit, <i>n., permission</i>	363
pay off, <i>requite</i>	415	pernicious	364
peace, <i>rest</i>	416	perpetrate, <i>do</i>	198
peaceful, <i>calm</i>	137	perpetual, <i>continual</i>	175
peacefulness, <i>rest</i>	416	<i>eternal</i>	224
peculiar, <i>queer</i>	397	<i>permanent</i>	362
<i>rare</i>	400	perplexing, <i>equivocal</i>	222
peculiarity, <i>characteristic</i>	154	perplexity	364
pecuniary, <i>financial</i>	245	amazement	61
pedantic, <i>academic</i>	22	anxiety	73
peeping, <i>inquisitive</i>	304	care	141
peer, <i>associate, n.</i>	91	doubt, <i>n.</i>	201
peevish, <i>capitious</i>	140	predicament	379
peevishness, <i>anger</i>	67	persecute, <i>abuse</i>	20
pelf, <i>wealth</i>	482	perseverance, <i>industry</i>	299
pellucid, <i>clear</i>	161	persistence, <i>industry</i>	299
penetrating, <i>astute</i>	94	persistent, <i>obstinate</i>	348
penetration, <i>acumen</i>	28	<i>permanent</i>	362
<i>entrance</i>	220	personality, <i>character</i>	153
penetrative, <i>astute</i>	94	perspicacious, <i>astute</i>	94
penitence, <i>repentance</i>	412	<i>sagacious</i>	427
pension, <i>subsidy</i>	453	perspicacity, <i>acumen</i>	28
penurious, <i>avaricious</i>	104	perspicuous, <i>clear</i>	161
penury, <i>poverty</i>	374	persuade, <i>allure</i>	265
people	860	<i>bend</i>	119
perceive	361	<i>influence</i>	300
<i>discern</i>	196	pertinacious, <i>obstinate</i>	348
perceptible, <i>evident</i>	226	pertinent, <i>fit</i>	246
perception, <i>knowledge</i>	811	pertness	365
<i>sensation</i>	483	impudence	296
peremptory, <i>absolute</i>	15	perverse	366
perennial, <i>eternal</i>	224	pervert, <i>abuse</i>	20
perfect	362	<i>heretic</i>	276
<i>pure</i>	395	perverting, <i>pernicious</i>	364
<i>radical</i>	400	pest, <i>abomination</i>	12
perforation, <i>cavity</i>	147	pestiferous, <i>pernicious</i>	364
perform, <i>do</i>	198	pestilential, <i>pernicious</i>	364
<i>execute</i>	228	pet, <i>caress</i>	143
<i>make</i>	322	petition, <i>ask</i>	90
<i>transact</i>	469	<i>pray</i>	377
performance, <i>act</i>	27	pettishness, <i>anger</i>	67
<i>enroute</i>	229	petulance, <i>anger</i>	67
<i>operation</i>	351	petulant, <i>capitious</i>	160
<i>work</i>	487	<i>perverse</i>	366
performer, <i>agent</i>	41	phalanx, <i>army</i>	84

	PAGE		PAGE
phantasm, delusion	187	<i>plead</i>	369
phantasy, imagination	290	<i>allege</i>	51
pharisaism, hypocrisy	285	<i>pray</i>	377
philanthropy, benevolence	120	<i>pleasant</i>	370
phlegm, apathy	74	<i>amiable</i>	64
phrase, diction	103	<i>comfortable</i>	163
<i>term</i>	462	<i>delightful</i>	186
phraseology, diction	193	<i>pleasantry, wit</i>	486
<i>physical</i>	866	<i>please, entertain</i>	218
<i>pick, alternative</i>	60	<i>pleased, happy</i>	270
<i>choose</i>	157	<i>pleasing, amiable</i>	64
<i>pick out, choose</i>	157	<i>delightful</i>	186
<i>picture, sketch</i>	440	<i>pleasant</i>	370
<i>picturesque, beautiful</i>	115	<i>pleasurable, delightful</i>	186
<i>piece, part, n.</i>	357	<i>pleasant</i>	370
<i>piercing, bleak</i>	123	<i>pleasure, entertainment</i>	219
<i>pietism, hypocrisy</i>	285	<i>happiness</i>	268
<i>religion</i>	408	<i>pledge, contract</i>	175
<i>piety, religion</i>	408	<i>security</i>	431
<i>pile up, amass</i>	60	<i>plenteous, plentiful</i>	371
<i>pilgrimage, journey</i>	307	<i>plentiful</i>	371
<i>pillager, robber</i>	425	<i>plenty, wealth</i>	482
<i>pipe, cavity</i>	147	<i>pleonasm, circumlocution</i>	157
<i>plquant, racy</i>	399	<i>pliable, docile</i>	200
<i>pique</i>	307	<i>pliant, docile</i>	200
<i>pirate, robber</i>	425	<i>plight, predicament</i>	379
<i>pit, abyss</i>	20	<i>plunderer, robber</i>	425
<i>pitceous, pitiful</i>	367	<i>plunge, immerse</i>	294
<i>pitthy, terse</i>	463	<i>poem, poetry</i>	372
<i>pittable, pitiful</i>	367	<i>poesy, poetry</i>	372
<i>pitiful</i>	367	<i>poetry</i>	372
<i>pitiless, barbarous</i>	113	<i>point, v., allude</i>	56
<i>pitty</i>	368	<i>point, n., circumstance</i>	158
<i>mercy</i>	327	<i>end, n.</i>	214
<i>pitying, humane</i>	284	<i>topic</i>	468
<i>place, fix</i>	247	<i>poisonous, pernicious</i>	364
<i>put</i>	896	<i>policy, polity</i>	373
<i>place in order, arrange</i>	85	<i>polished, fine</i>	245
<i>placid, calm</i>	187	<i>polite</i>	372
<i>plagiarize, quote</i>	898	<i>polite</i>	372
<i>plague, abomination</i>	12	<i>politeness, address, n.</i>	34
<i>plain, clear</i>	161	<i>refinement</i>	406
<i>evident</i>	226	<i>polity</i>	373
<i>horizontal</i>	283	<i>law</i>	315
<i>rustic</i>	426	<i>polute, defile</i>	184
<i>plain-spoken, bluff</i>	125	<i>pommel, beat</i>	115
<i>plan, design</i>	190	<i>pomp, ostentation</i>	352
<i>idea</i>	287	<i>pomposity, ostentation</i>	352
<i>sketch</i>	440	<i>pompousness, ostentation</i>	352
<i>plane, horizontal</i>	283	<i>ponder, deliberate</i>	185
<i>plant</i>	369	<i>populace, mob</i>	333
<i>fix</i>	247	<i>popular, general</i>	260
<i>Platonic, academic</i>	22	<i>population, people</i>	360
<i>Platonic, academic</i>	22	<i>pore, cavity</i>	147
<i>plaudit, praise</i>	376	<i>port, air</i>	44
<i>playfulness, wit</i>	486	<i>portal, entrance</i>	220
<i>plea, apology</i>	75	<i>portend, augur</i>	107

	PAGE
portent, <i>sign</i>	438
portentous, <i>awful</i>	106
portion	374
<i>part, n.</i>	357
portion out, <i>allot</i>	54
portrayal, <i>sketch</i>	440
position, <i>circumstance</i>	158
positive, <i>absolute</i>	15
<i>dogmatic</i>	200
<i>radical</i>	400
<i>real</i>	402
possess, <i>have</i>	274
possessions, <i>wealth</i>	482
possibility, <i>accident</i>	24
<i>event</i>	225
possible, <i>admissible</i>	37
postpone, <i>defer</i>	182
<i>hinder</i>	280
<i>protract</i>	392
potency, <i>power</i>	375
potential, <i>latent</i>	314
potentiality, <i>power</i>	375
pound, <i>beat</i>	115
poverty	374
power	375
<i>cause</i>	146
powerful, <i>important</i>	295
practise, <i>v., follow</i>	250
practise, <i>n., exercise</i>	229
<i>habit</i>	267
practised, <i>skilful</i>	442
praise	376
prate, <i>babble</i>	107
prattle, <i>babble</i>	107
pray	377
<i>ask</i>	90
precarious	377
precaution, <i>care</i>	141
precedent, <i>a., previous</i>	382
precedent, <i>n.</i>	378
<i>cause</i>	146
<i>example</i>	227
preceding, <i>previous</i>	382
precept, <i>doctrine</i>	200
precipitancy, <i>tamerty</i>	461
precipitation, <i>tamerty</i>	461
precipitous, <i>steep</i>	450
precept, <i>proverb</i>	393
precious, <i>rare</i>	400
precise, <i>minute</i>	380
preclude, <i>prevent</i>	381
<i>prohibit</i>	389
preconception, <i>prejudice</i>	380
predestination	378
predicament	379
predicament state	440

	PAGE
predict, <i>augur</i>	10
predilection, <i>fancy</i>	27
predominant, <i>principal, a.</i>	37
predominating, <i>principal, a.</i>	37
preeminent, <i>principal, a.</i>	37
prefer, <i>choose</i>	11
<i>promote</i>	35
preference, <i>alternative</i>	6
prejudice	39
<i>injury</i>	30
preliminary, <i>previous</i>	39
premium, <i>subsidy</i>	4
premonition, <i>name</i>	35
preoccupied, <i>abstracted</i>	4
prepared, <i>fit</i>	2
prepossession, <i>prejudice</i>	39
preposterous, <i>absurd</i>	1
<i>queer</i>	34
prerogative, <i>right, n.</i>	45
pressage, <i>augur</i>	10
<i>sign</i>	45
presence, <i>wisdom</i>	45
present, <i>gift</i>	20
<i>give</i>	20
presentiment, <i>anticipation</i>	7
presently, <i>immediately</i>	20
preserve, <i>keep</i>	31
press, <i>plead</i>	30
<i>throng</i>	46
press forward, <i>quicken</i>	30
presumable, <i>apparent</i>	7
<i>likely</i>	31
presume, <i>assume</i>	7
presumption, <i>assurance</i>	7
<i>impudence</i>	25
<i>prejudice</i>	39
<i>pride</i>	35
<i>tamerty</i>	46
pretend, <i>assume</i>	7
pretender, <i>hypocrite</i>	20
pretense	30
<i>hypocrisy</i>	20
pretension, <i>pretense</i>	30
preternatural, <i>supernatural</i>	45
pretext, <i>pretense</i>	30
pretty, <i>beautiful</i>	11
prevail, <i>abound</i>	1
<i>succeed</i>	45
prevailing, <i>principal, a.</i>	37
<i>usual</i>	45
prevail on or upon, <i>persuade</i>	35
prevail over, <i>conquer</i>	15
prevalent, <i>general</i>	26
<i>usual</i>	45
provarication, <i>deception</i>	15
prevent	38
<i>hinder</i>	28
<i>unstable</i>	21

	PAGE		PAGE
<i>previous</i>	382	profane swearing, <i>oath</i>	346
<i>prevision, anticipation</i>	71	profanity, <i>oath</i>	346
<i>price</i>	383	profess, <i>avow</i>	138
<i>pride</i>	384	proficiency, <i>progress</i>	388
<i>prim, neat</i>	340	proficient, <i>skilful</i>	442
<i>primal, primeval</i>	385	<i>profit</i>	387
<i>primary, primeval</i>	385	<i>utility</i>	472
<i>prime, primeval</i>	385	profitless, <i>vain</i>	474
<i>principal, a</i>	386	profound, <i>obscure</i>	347
<i>primeval</i>	385	profundity, <i>wisdom</i>	485
<i>primitive, primeval</i>	385	profuse, <i>plentiful</i>	371
<i>radical</i>	400	profusion, <i>excess</i>	228
<i>primordial, primeval</i>	385	prognostic, <i>sign</i>	438
<i>transcendental</i>	470	prognosticate, <i>augur</i>	102
<i>prince, chief</i>	156	<i>progress</i>	388
<i>princely, royal</i>	425	progression, <i>progress</i>	388
<i>principal, a</i>	386	<i>prohibit</i>	389
<i>chief</i>	156	<i>abolish</i>	11
<i>principle, doctrine</i>	200	prohibition, <i>barrier</i>	113
<i>law</i>	315	<i>order</i>	351
<i>reason, n.</i>	403	project, <i>n</i> , <i>design</i>	190
<i>prior, previous</i>	382	<i>send</i>	432
<i>pristine, primeval</i>	385	proximity, <i>circumlocution</i>	157
<i>privacy, retirement</i>	418	prolong, <i>hinder</i>	280
<i>privation, poverty</i>	374	<i>protract</i>	392
<i>privilege, right, n.</i>	424	prominent, <i>important</i>	295
<i>prize, esteem, v.</i>	228	<i>principal, a.</i>	386
<i>probable, admissible</i>	37	promise, <i>contract</i>	175
<i>apparent</i>	76	<i>promote</i>	390
<i>likely</i>	318	<i>abet</i>	6
<i>probit, virtue</i>	480	<i>aggrandize</i>	41
<i>problem, riddle, n.</i>	423	<i>quicken</i>	398
<i>proceed, rise</i>	424	promoter, <i>agent</i>	41
<i>proceeding, act</i>	27	<i>auxiliary</i>	103
<i>transaction</i>	469	prompt, <i>v.</i> , <i>influence</i>	300
<i>procedure, operation</i>	351	prompt, <i>a.</i> , <i>active</i>	28
<i>proceeds, harvest</i>	272	<i>alert</i>	47
<i>profit</i>	387	<i>nimble</i>	344
<i>process, motion</i>	386	promptitude, <i>alacrity</i>	46
<i>proclaim, announce</i>	69	promptness, <i>alacrity</i>	46
<i>avow</i>	105	promulgate, <i>announce</i>	69
<i>proclivity, appetite</i>	80	prone, <i>addicted</i>	32
<i>desire</i>	190	proneness, <i>appetite</i>	80
<i>procrastinate, defer</i>	182	pronounce, <i>speak</i>	446
<i>protract</i>	392	<i>state</i>	449
<i>procrastinating, slow</i>	443	proof, <i>criterion</i>	179
<i>procure, attain</i>	99	<i>demonstration</i>	188
<i>get</i>	262	<i>testimony</i>	463
<i>purchase</i>	395	prop, <i>support</i>	456
<i>prodigality, excess</i>	228	propel, <i>drive</i>	204
<i>produce, v., allege</i>	51	<i>send</i>	432
<i>harvest</i>	272	propensity, <i>appetite</i>	80
<i>make</i>	322	<i>desire</i>	190
<i>product, harvest</i>	272	proper, <i>admissible</i>	37
<i>work</i>	487	<i>becoming</i>	117
<i>production, work</i>	487	<i>fit</i>	246
<i>profane, abuse</i>	20	property, <i>attribute, n.</i>	101

	PAGE		PAGE
property, characteristic	154	puerile, youthful	448
<i>money</i>	385	pull, draw	202
<i>wealth</i>	482	pungent, bitter	122
prophecy, <i>augur</i>	102	<i>rare</i>	319
propinquity, <i>approximation</i> . .	83	punish, <i>avenge</i>	104
prophitiation	390	<i>chasten</i>	155
propitious	391	<i>requite</i>	415
proportion, <i>analogy</i>	66	pupil, <i>scholar</i>	480
<i>portion</i>	374	purchasable, <i>vain</i>	474
proposal	391	<i>purchase</i>	395
<i>design</i>	190	<i>pure</i>	395
<i>propose</i>	392	<i>fine</i>	245
proposition, <i>proposal</i>	391	<i>innocent</i>	304
<i>topic</i>	468	purification, <i>ablution</i>	9
propound, <i>announce</i>	69	purify, <i>amend</i>	63
<i>state</i>	449	<i>chasten</i>	155
prorogue, <i>defer</i>	182	<i>cleanse</i>	180
prosecute, <i>arraign</i>	84	purity, <i>virtue</i>	480
prochelyte, <i>convert</i>	176	purloin, <i>abstract</i>	18
prosper, <i>succeed</i>	454	purpose, v., <i>propose</i>	302
prospered, <i>fortunate</i>	253	purpose, n., <i>aim</i>	44
prosperity, <i>wealth</i>	482	<i>design</i>	190
prosperous, <i>fortunate</i>	253	<i>end, n.</i>	314
<i>happy</i>	270	<i>idea</i>	287
prostitute, <i>abuse</i>	20	<i>reason, n.</i>	403
protect, <i>cherish</i>	156	purposeless, <i>faint</i>	231
<i>keep</i>	310	<i>fickle</i>	242
<i>shelter</i>	437	pursue, <i>follow</i>	250
protection, <i>defense</i>	182	<i>hunt</i>	285
protest, <i>avow</i>	105	push, <i>drive</i>	204
<i>state</i>	449	<i>promote</i>	390
prototype, <i>example</i>	227	push on, <i>promote</i>	390
<i>ideal</i>	288	<i>put</i>	396
<i>model</i>	334	put down, <i>conquer</i>	172
protract	392	put in order, <i>adapt</i>	29
<i>defer</i>	182	<i>arrange</i>	85
proud, <i>high</i>	279	put in place, <i>adapt</i>	29
prove, <i>confirm</i>	170	put off, <i>defer</i>	182
<i>reason, v.</i>	402	put on, <i>assume</i>	93
provender, <i>food</i>	251	putrefy, <i>decay</i>	181
proverb	398	put right, <i>adapt</i>	29
provided, <i>but</i>	184	put to death, <i>kill</i>	310
providence, <i>frugality</i>	259	put to rights, <i>adapt</i>	29
<i>prudence</i>	394	put up with, <i>endure</i>	216
provoke, <i>affront</i>	39	puzzle, <i>predicament</i>	479
prowess	393	<i>riddle, n.</i>	423
proxy, <i>delegate</i>	185	quaint, <i>antique</i>	72
prudence	394	<i>quar</i>	397
<i>care</i>	141	quake, <i>shake</i>	438
<i>frugality</i>	259	qualification, <i>power</i>	375
<i>wisdom</i>	485	qualified, <i>adequate</i>	84
prying, <i>inquisitive</i>	304	<i>fit</i>	246
public, <i>general</i>	200	qualify, <i>change, n.</i>	151
<i>usual</i>	472	quality, <i>attribute, n.</i>	101
publications, <i>literature</i>	319	<i>characteristic</i>	154
public life, <i>career</i>	142	quandary, <i>predicament</i>	379
publish, <i>announce</i>	69		

	PAGE		PAGE
quarrel, altercation	58	range, arrange	85
<i>feed</i>	241	<i>wander</i>	481
quash, cancel	138	rank, class	159
quaver, shake	436	rap, blow	124
quaser	897	rapacious, <i>avaricious</i>	104
quell, conquer	172	rapture, <i>enthusiasm</i>	220
question, v., reason, v	402	<i>happiness</i>	268
question, n., doubt, n	201	rapturous, happy	270
<i>topic</i>	468	rare	400
questionable, <i>equivocal</i>	222	<i>obsolete</i>	348
quibble, fallacy	233	rashness, <i>temerity</i>	461
quibbling, fallacy	233	rate, calculate	136
quick, active	28	ratify, confirm	170
<i>alive</i>	49	ratiocination, <i>reasoning</i>	404
<i>clever</i>	162	rational, <i>sagacious</i>	427
<i>nimble</i>	344	ravine, cavity	147
quicken	398	raze, <i>demolish</i>	187
quickness, <i>alacrity</i>	46	reach	401
quick of scent, <i>sagacious</i>	427	<i>attain</i>	99
quick-scented, <i>sagacious</i>	427	<i>make</i>	322
quick-witted, <i>clever</i>	162	readiness, address, n.	34
quiescence, <i>abeyance</i>	7	<i>alacrity</i>	46
<i>rest</i>	416	<i>dexterity</i>	192
quiet, <i>allay</i>	50	<i>ease</i>	208
<i>calm</i>	187	<i>power</i>	375
<i>rest</i>	416	reading, education	209
quietness, <i>apathy</i>	74	ready, active	28
<i>rest</i>	416	<i>alert</i>	47
quietude, <i>apathy</i>	74	real	402
<i>rest</i>	416	<i>authentic</i>	108
quit, abandon	8	<i>pure</i>	395
<i>cease</i>	149	reality, <i>veracity</i>	477
<i>end, v.</i>	218	realize, <i>do</i>	198
<i>requite</i>	415	reanimate, recover	406
quiver, shake	486	reaping, <i>harvest</i>	272
quots	898	reason, v.	402
rabble, mob	338	reason, n.	408
race, career	142	<i>cause</i>	146
<i>kin</i>	311	<i>mind</i>	329
<i>people</i>	360	<i>wisdom</i>	485
racy	899	reasonable, <i>admissible</i>	37
radiance, light	317	<i>likely</i>	318
radiant, bright	129	reasonableness, <i>wisdom</i>	485
radical	400	reasoning	404
rage, anger	67	rebellion, <i>revolution</i>	420
raging, fierce	244	rebellious	404
raider, robber	425	<i>restive</i>	417
rail at, abuse	20	rebuke, reproof	413
rallery, banter	112	<i>reprove</i>	414
<i>wit</i>	486	recalcitrant, <i>restive</i>	417
raiment, dress	204	recall, <i>renounce</i>	411
raise, promote	390	recant, <i>renounce</i>	411
ramble, wander	481	receipts, profit	387
rampart, barrier	113	receive, get	262
<i>defense</i>	182	received, <i>authentic</i>	108
rancor, enmity	218	recent, new	348
<i>hated</i>	278	reciprocal, mutual	337

	PAGE
reciprocate, <i>requite</i>	415
recital, <i>history</i>	281
<i>story</i>	451
recite, <i>quote</i>	398
recklessness, <i>temerity</i>	461
reckon, <i>calculate</i>	136
recognition, <i>knowledge</i> ..	311
recognize, <i>confess</i>	170
<i>discern</i>	196
recollection, <i>memory</i>	327
recompense, <i>pay, n.</i>	359
<i>requite</i>	415
<i>reward</i>	422
reconciliation, <i>propitiation</i> ..	390
recondite, <i>latent</i>	314
<i>mysterious</i>	337
record	405
<i>character</i>	153
<i>history</i>	281
<i>report</i>	412
<i>story</i>	451
recover	406
recreate, <i>entertain</i>	218
recreation, <i>entertainment</i>	219
<i>rest</i>	416
recruit, <i>recover</i>	406
rectify, <i>amend</i>	68
rectitude, <i>justice</i>	309
<i>virtue</i>	480
recuperate, <i>recover</i>	406
redoubted, <i>formidable</i>	252
reduce, <i>abate</i>	6
<i>alleviate</i>	53
<i>check</i>	155
<i>conquer</i>	172
redundance, <i>circumlocution</i> ..	157
redundancy, <i>circumlocution</i> ..	157
<i>excess</i>	228
reel, <i>shake</i>	436
refer, <i>allude</i>	56
<i>appeal</i>	77
<i>attribute, v.</i>	100
referee, <i>judge</i>	308
refine, <i>chasten</i>	155
refined, <i>fine</i>	245
refinement	406
<i>fallacy</i>	233
reflect, <i>deliberate</i>	185
reflection, <i>reproof</i>	413
reform, <i>amend</i>	68
refractory, <i>obstinate</i>	348
<i>rebellious</i>	404
<i>restive</i>	417
refrain, <i>cease</i>	149
<i>keep</i>	310
refreshing, <i>delightful</i>	186
refulgent, <i>bright</i>	129
refuse, <i>renounce</i>	411

	PAGE
<i>refute</i>	407
regain, <i>recover</i>	406
regal, <i>royal</i>	425
regard, <i>v., esteem, v.</i>	223
<i>look</i>	320
<i>love</i>	321
regard, <i>n., attachment</i>	97
<i>esteem, n.</i>	223
<i>friendship</i>	257
regeneration, <i>change, n.</i>	152
regimen, <i>food</i>	251
register, <i>history</i>	281
<i>record</i>	405
regret, <i>grief</i>	268
<i>mourn</i>	330
<i>repentance</i>	412
regular, <i>continual</i>	175
<i>normal</i>	344
<i>usual</i>	472
regularity, <i>system</i>	458
regulation, <i>law</i>	315
rehearsal, <i>report</i>	412
reign, <i>govern</i>	265
reign over, <i>govern</i>	265
reject, <i>renounce</i>	411
rejection, <i>abnegation</i>	11
<i>happy</i>	270
rejoicing, <i>happiness</i>	268
<i>happy</i>	270
rejoinder, <i>answer</i>	70
relation, <i>analogy</i>	66
<i>report</i>	413
<i>story</i>	451
relationship, <i>kin</i>	310
release, <i>absolve</i>	16
relegate, <i>commit</i>	161
relentless, <i>severe</i>	435
relevant, <i>important</i>	305
reliable	407
<i>authentic</i>	103
reliance, <i>faith</i>	233
relieve, <i>alleviate</i>	53
religion	400
relinquish, <i>abandon</i>	3
<i>surrender</i>	457
relish, <i>appetite</i>	30
reluctant	409
remain, <i>abide</i>	9
remains, <i>body</i>	125
<i>trace</i>	408
remark	409
remarkable, <i>rare</i>	400
remembrance, <i>memory</i>	327
remembrance, <i>memory</i>	327
remission, <i>pardon, n.</i>	355
remissness, <i>neglect</i>	342
remit, <i>pardon, n.</i>	355
remnant, <i>trace</i>	408

	PAGE		PAGE
remonstrate, complain	165	reproach, <i>v</i> , <i>reprove</i>	414
remonstrate with, <i>reprove</i>	414	reproach, <i>n.</i> , <i>blemish</i>	124
remorse, <i>repentance</i>	410	<i>reproof</i>	413
remote, alien, <i>a.</i>	48	reprobate, <i>n.</i> , <i>condemn</i>	168
<i>old</i>	350	reprobation, <i>oath</i>	346
remove, abolish	11	reproduction, <i>duplicate</i>	206
<i>abstract</i>	18	<i>reproof</i>	413
<i>alleviate</i>	53	reproval, <i>reproof</i>	413
<i>cancel</i>	138	<i>reprove</i>	414
<i>carry</i>	144	<i>condemn</i>	168
<i>convey</i>	177	repudiate, <i>abandon</i>	3
<i>displace</i>	198	<i>renounce</i>	411
<i>exterminate</i>	231	repugnance, <i>antipathy</i>	72
remunerate, <i>requite</i>	415	<i>hatred</i>	273
remuneration, <i>pay</i> , <i>n.</i>	359	repugnant, <i>incongruous</i>	297
<i>reward</i>	422	repulse, <i>drive</i>	204
rend	410	repulsion, <i>antipathy</i>	72
<i>break</i>	128	reputation, <i>character</i>	158
render, <i>make</i>	322	<i>fame</i>	285
rendering, <i>definition</i>	184	request, <i>v</i> , <i>appeal</i>	77
renegade, <i>heretic</i>	276	<i>ask</i>	90
renewal, <i>change</i> , <i>n.</i>	152	<i>pray</i>	377
renewing, <i>change</i> , <i>n.</i>	152	require, <i>make</i>	322
renounce	411	required, <i>necessary</i>	341
<i>abandon</i>	3	requirement, <i>necessity</i>	341
renown, <i>fame</i>	285	<i>order</i>	351
rent, <i>cavity</i>	147	requisite, <i>necessary</i>	341
renunciation, <i>abnegation</i>	11	<i>necessity</i>	341
repair, <i>amend</i>	68	requital, <i>pay</i> , <i>n.</i>	359
reparation, <i>reward</i>	422	<i>revenge</i>	419
repartee, <i>answer</i>	70	<i>reward</i>	422
repast, <i>feast</i>	289	<i>requite</i>	415
repay, <i>requite</i>	415	rescind, <i>cancel</i>	138
repel, abolish	11	resemblance, <i>analogy</i>	66
<i>cancel</i>	138	<i>approximation</i>	83
repeat, <i>quote</i>	398	resembling, <i>alike</i>	49
repel, <i>drive</i>	204	resentful, <i>restive</i>	417
<i>refute</i>	407	resentment, <i>anger</i>	67
repentance	412	<i>hatred</i>	273
repine, <i>complain</i>	165	<i>pique</i>	367
replete, <i>plentiful</i>	371	reservation, <i>obeyance</i>	7
replica, <i>duplicate</i>	206	reserve, <i>modesty</i>	334
reply, <i>answer</i>	70	<i>pride</i>	334
report	412	reserved, <i>tactful</i>	459
report, <i>v.</i> , <i>announce</i>	69	reside, <i>abide</i>	9
report, <i>rest</i>	416	residence, <i>home</i>	282
repossess, <i>recover</i>	406	resign, <i>abandon</i>	3
reprehend, <i>reprove</i>	414	resignation, <i>patience</i>	358
reprehension, <i>reproof</i>	413	resist, <i>drive</i>	204
representation, <i>model</i>	384	<i>hinder</i>	280
<i>sketch</i>	440	resistance, <i>defense</i>	132
representative, <i>delegate</i>	135	resolute, <i>obstinate</i>	343
repress, <i>check</i>	135	resolution, <i>fortitude</i>	258
<i>restrain</i>	418	resolved, <i>obstinate</i>	343
reprimand, <i>reproof</i>	413	resort, <i>appeal</i>	77
<i>reprove</i>	414	resource, <i>alternative</i>	60
reproach, <i>v.</i> , <i>abuse</i>	20	respect, <i>v.</i> , <i>admire</i>	37

	PAGE
respect, <i>n.</i> , <i>esteem</i> , <i>n.</i>	223
<i>venerate</i>	475
resplendent, <i>bright</i>	129
response, <i>answer</i>	70
responsibility, <i>duty</i>	207
responsible	415
rest	416
rest, <i>v.</i> , <i>abide</i>	9
restiff, <i>restive</i>	417
restive	417
restless, <i>active</i>	28
<i>fickle</i>	242
<i>restive</i>	417
restore, <i>recover</i>	406
restrain	418
<i>arrest</i>	88
<i>bind</i>	121
<i>check</i>	155
<i>govern</i>	265
<i>keep</i>	310
restraint, <i>barrier</i>	113
restrict, <i>restrain</i>	418
result, <i>v.</i> , <i>follow</i>	250
result, <i>n.</i> , <i>consequence</i>	173
<i>end</i> , <i>n.</i>	214
<i>event</i>	225
<i>harvest</i>	272
<i>operation</i>	351
resume, <i>recover</i>	406
retain, <i>keep</i>	310
retainer, <i>accessory</i>	23
retaliate, <i>avenge</i>	104
<i>requite</i>	415
retaliation, <i>revenge</i>	419
retard, <i>hinder</i>	280
<i>obstruct</i>	349
reticent, <i>taciturn</i>	459
retire, <i>abscond</i>	14
retire from, <i>abandon</i>	3
retirement	418
retort, <i>answer</i>	70
retract, <i>abandon</i>	3
<i>renounce</i>	411
retreat, <i>abscond</i>	14
retribution, <i>revenge</i>	419
<i>reward</i>	422
retrieve, <i>recover</i>	406
retrospect, <i>memory</i>	327
retrospection, <i>memory</i>	327
return, <i>profit</i>	387
<i>requite</i>	415
returns, <i>profit</i>	387
<i>harvest</i>	272
reveal, <i>announce</i>	69
revel, <i>abound</i>	18
<i>carousal</i>	144
revelation	419
revelry, <i>carousal</i>	144

	PAGE
revenge, <i>v.</i> , <i>avenge</i>	104
<i>requite</i>	415
revenge, <i>n.</i>	419
<i>hatred</i>	273
revere, <i>admire</i>	37
<i>venerate</i>	475
reverence, <i>venerate</i>	476
<i>veneration</i>	476
reverie, <i>dream</i>	303
reverse, <i>v.</i> , <i>abolish</i>	11
<i>misfortune</i>	331
revile, <i>abuse</i>	20
<i>slander</i>	442
revoke, <i>abolish</i>	11
<i>cancel</i>	138
<i>renounce</i>	411
revolt, <i>revolution</i>	420
revolution	420
<i>change</i> , <i>n.</i>	152
revolve	421
reward	422
<i>requite</i>	415
<i>subtly</i>	463
rhythm, <i>meter</i>	328
rich, <i>plentiful</i>	371
<i>racy</i>	399
riches, <i>wealth</i>	483
riddle, <i>n.</i>	423
ride, <i>drive</i>	204
ridicule, <i>banter</i>	112
ridiculous, <i>absurd</i>	19
<i>queer</i>	307
rifle-pit, <i>fortification</i>	252
right, <i>a.</i> , <i>admissible</i>	37
<i>innocent</i>	304
right, <i>n.</i>	424
<i>duty</i>	207
<i>justice</i>	309
right away, <i>immediately</i>	398
righteous, <i>innocent</i>	304
righteousness, <i>duty</i>	207
<i>justice</i>	309
<i>religion</i>	408
<i>virtue</i>	480
rightfulness, <i>justice</i>	309
rightness, <i>virtue</i>	480
right off, <i>immediately</i>	398
rigid, <i>severe</i>	435
rigorous, <i>condign</i>	189
rim, <i>bank</i>	111
rime, <i>poetry</i>	373
rinse, <i>cleanse</i>	160
riot, <i>feud</i>	241
<i>revolution</i>	420
rip, <i>rend</i>	410
rise, <i>v.</i>	424
rise, <i>n.</i> , <i>beginning</i>	118

	PAGE		PAGE
risk, <i>n.</i> , <i>danger</i>	180	ruse, <i>artifice</i>	88
<i>hazard</i>	275	<i>pretense</i>	380
risky, <i>precarious</i>	377	rush, <i>career</i>	142
rite, <i>sacrament</i>	427	rustic	426
rival, <i>n.</i> , <i>enemy</i>	217	sable, <i>dark</i>	180
rivalry, <i>ambition</i>	62	sachem, <i>chief</i>	156
rive, <i>break</i>	128	sacrament	427
<i>rend</i>	410	sacred, <i>holy</i>	282
road, <i>way</i>	482	sacrifice, <i>abnegation</i>	11
roadway, <i>way</i>	482	<i>surrender</i>	457
roam, <i>wander</i>	481	sadness, <i>grief</i>	266
roar, <i>call</i>	180	safeguard, <i>defense</i>	182
robber	425	sagacious	427
robes, <i>dress</i>	204	<i>astute</i>	94
rock, <i>shake</i>	436	sagacity, <i>acumen</i>	28
roll, <i>record</i>	405	<i>wisdom</i>	485
<i>revolver</i>	421	sage, <i>sagacious</i>	427
romance, <i>dream</i>	203	saintly, <i>holy</i>	282
<i>fiction</i>	248	salable, <i>venal</i>	474
root, <i>fix</i>	247	salary, <i>pay, n.</i>	359
<i>foundation</i>	254	sale	426
root out, <i>exterminate</i>	231	salubrious, <i>healthy</i>	275
rot, <i>decay</i>	181	salutary, <i>healthy</i>	275
rotate, <i>revolve</i>	421	salute, <i>address, v.</i>	88
rough, <i>bluff</i>	106	same, <i>alike</i>	49
roust, <i>carousal</i>	144	<i>synonymous</i>	457
<i>conquer</i>	172	sample	429
route, <i>way</i>	482	<i>example</i>	227
routine, <i>habit</i>	267	sanctimoniousness, <i>hypocrisy</i>	285
rove, <i>wander</i>	481	sanctimony, <i>hypocrisy</i>	285
row, <i>altercation</i>	58	sanction, <i>v.</i> , <i>abet</i>	6
<i>frud</i>	241	<i>allow</i>	55
royal	425	<i>confirm</i>	170
rub off or out, <i>cancel</i>	138	sanitary, <i>healthy</i>	275
rude, <i>barbarous</i>	113	sarcasm, <i>banter</i>	112
<i>bluff</i>	125	sate, <i>satisfy</i>	429
<i>rustic</i>	426	satiated, <i>satisfy</i>	429
rudeness, <i>impudence</i>	296	satire, <i>banter</i>	112
rue, <i>mourn</i>	330	satisfaction, <i>propitiation</i>	390
ruin, <i>v.</i> , <i>abuse</i>	20	<i>reward</i>	422
<i>demolish</i>	187	<i>triumph</i>	268
<i>subvert</i>	454	satisfactory, <i>adequate</i>	84
ruin, <i>n.</i> , <i>misfortune</i>	331	<i>comfortable</i>	168
ruinous, <i>pernicious</i>	364	satisfied, <i>comfortable</i>	168
rule, <i>v.</i> , <i>govern</i>	265	satisfy	429
rule, <i>n.</i> , <i>criterion</i>	179	<i>requite</i>	415
<i>habit</i>	267	satisfying, <i>delightful</i>	186
<i>law</i>	315	saturnalia, <i>carousal</i>	144
<i>power</i>	375	sauciness, <i>impudence</i>	296
<i>system</i>	458	<i>perthness</i>	865
ruler, <i>chief</i>	156	savage, <i>barbarous</i>	113
rumor, <i>report</i>	412	<i>bitter</i>	122
run away, <i>abscond</i>	14	<i>ferce</i>	244
run off, <i>abscond</i>	14	savant, <i>scholar</i>	480
rupture, <i>break</i>	128	savo, <i>but</i>	134
<i>rend</i>	410	saving, <i>frugality</i>	259
rural, <i>rustic</i>	426	savory, <i>delicious</i>	186

	PAGE
saw, proverb	393
say, allage	51
<i>announce</i>	69
<i>speak</i>	446
<i>state</i>	449
saying, proverb	393
scan, look	320
scarce, rare	400
scare, fear	238
<i>frighten</i>	258
scared, afraid	40
scene, altercation	58
schedule, record	405
scheme, design	190
<i>hypothesis</i>	286
schismatic, heretic	276
scholar	430
scholarship, knowledge	311
scholarly, academic	22
scholastic, academic	22
school, teach	461
schooling, education	209
science	430
<i>knowledge</i>	311
scintilla, particle	358
scintillating, bright	129
scintillation, light	317
scorch, burn	132
scorn, v., abhor	8
scour, cleanse	160
scourge, beat	115
scrap, altercation	58
<i>particle</i>	358
scrape, predicament	379
scratch out, cancel	138
scream, call	136
screen, hide	278
<i>palliate</i>	354
<i>shelter</i>	437
scrimping, frugality	259
scroll, record	405
scrub, cleanse	160
scruple, doubt, n.	201
<i>object, v.</i>	346
scrutinizing, inquisitive	304
scuff, sneer	444
scorn, neglect	342
scout, spy	447
search, hunt	285
searching, inquisitive	304
season, time	465
seat of government, capital	140
seclusion, retirement	418
second, help	276
secret, latent	314
<i>mysterious</i>	337
secrete, hide	278

	PAGE
section, part, n.	357
secure, arrest	88
<i>attach</i>	95
<i>attain</i>	99
<i>bind</i>	121
<i>catch</i>	146
<i>fix</i>	217
<i>get</i>	262
<i>purchase</i>	395
security	431
sedate, calm	137
sedition, revolution	420
seditious, rebellious	404
seduce, allure	57
sedulous, industrious	299
sedulousness, industry	299
see, discern	196
<i>look</i>	320
seed, plant	369
seed down, plant	369
seem, appear	78
seeming, a., apparent	76
<i>pretense</i>	380
seemly, becoming	117
<i>fit</i>	246
segment, part, n.	357
seize, arrest	88
<i>catch</i>	146
select, allot	54
<i>choose</i>	157
self abnegation	433
self assertion, assurance	93
<i>egotism</i>	210
self complacency, pride	384
self conceit, egotism	210
<i>pride</i>	384
self condemnation, repentance	413
self confidence, assurance	93
<i>egotism</i>	210
self consciousness, egotism	210
self control, abstinence	17
<i>self abnegation</i>	433
self denial, self abnegation	432
<i>abstinence</i>	17
self devotion, self abnegation	432
self esteem, egotism	210
<i>pride</i>	384
self exaltation, pride	384
self immolation, self abnegation	433
self opinionated, dogmatic	200
self possessed, calm	137
self reliance, assurance	93
self renunciation, self abnega-	
<i>tion</i>	432
self respect, pride	384
self restraint, abstinence	17
self sacrifice, self abnegation	432

	PAGE		PAGE
tell, convey	177	set up, arrange	85
resemblance, analogy	66	set upon, attack, v.	98
pretense	380	sever, break	128
and	432	rend	410
semitic, old	350	severally, apiece	75
sensation	433	severa	435
severe, mind	329	condign	169
sensation	433	difficult	195
wisdom	485	morose	335
sentience, absurd	19	severity, acrimony	26
sentienceless, idiosyncrasy	289	sex, gender	200
sensibility	434	shackle, v., bind	121
sensible, conscious	173	shackles, n., fetter	240
physical	366	shadowy, dark	180
sagacious	427	vain	474
sensitive, fine	245	shady, dark	180
sensitiveness, sensibility	434	shake	436
sensual, brutish	131	sham, hypocrisy	285
sentence, v., condemn	108	shame, n., abomination	12
sententious, terse	463	chagrin	151
sentient being, animal	68	shamelessness, effrontery	210
sentiment, idea	287	shape, make	322
separate, abstract	18	share, v., apportion	82
separately, apiece	75	share, n., part, n.	357
requir, catastrophe	145	portion	374
consequences	173	sharp, astute	94
event	225	bitter	122
sequence, time	465	clever	102
serene, calm	187	fine	245
serious, important	295	sagacious	427
sermon, speech	440	steep	450
service, profit	387	sharpness, acrimony	26
argument	427	acumen	28
utility	472	sharp-witted, sagacious	427
servicableness, utility	472	sheen, light	317
set, n., arrange	85	sheer, pure	395
plant	369	steep	450
put	390	sheller, v.	437
set, n., class	159	charish	156
pe	247	shelter, n., defense	182
flock	249	shield, n., defense	182
set apart, allot	54	shelter	437
denote	191	shift, v., change, v.	151
holy	282	convey	177
set aside, abolish	11	shift, n., fallacy	233
set fire to, burn	132	shifting, fallacy	233
set forth, state	449	fable	242
set free, absolve	15	shimmer, light	317
set in order, arrange	85	shimmering, bright	129
set on fire, burn	132	shine, light	317
set out, plant	369	shining, bright	129
set right, adapt	29	light	317
settle, confirm	170	shiver, break	128
pe	247	shake	436
settlement, compromise	107	shock, blow	124
settle with, requite	415	collision	106
set to rights, adapt	29	shore, bank	111

	PAGE
short, terse	403
transient	470
should, ought	353
shout, call	136
show, array	87
ostentation	352
pretense	380
shred, particle	358
shrewd, astute	94
sagacious	427
shrewdness, acumen	28
shriek, call	136
shudder, shake	436
shun, abhor	8
shyness, modesty	334
sickness, disease	197
sight, array	87
sign	428
characteristic	154
emblem	211
trace	468
signal, sign	438
significant, important	295
signify, allude	56
silent, taciturn	459
silver, money	335
similar, alike	42
synonymous	457
similarity, also	57
analogy	66
approximation	83
simile, allegory	52
analogy	66
similitude, analogy	66
simple, candid	189
pure	395
simulation, pretense	380
sin	439
since, because	116
sincere, candid	189
honest	283
sine qua non, necessity	341
sinful, criminal	178
sing	440
singe, burn	182
singular, queer	397
rare	400
singularity, characteristic	154
sink, immerse	294
sinless, innocent	304
perfect	362
situation, circumstance	158
skeleton, sketch	440
skeptic	441
skepticism, doubt, n.	201
sketch	440
skilful	442
clever	162

	PAGE
skill, dexterity	192
power	376
wisdom	485
skilled, skilful	442
skirmish, battle	114
skittish, restive	417
slack, slow	413
slacken, check	155
slackness, neglect	342
slander	442
abuse	20
slang	443
slant, tip	465
slaughter, kill	310
massacre	324
slay, kill	310
sleep, rest	416
sleepless, vigilant	473
slender, fine	246
minute	380
slight, fine	246
neglect	342
venial	477
sling, send	432
slip away, abandon	14
silt, cavity	117
rand	410
slope, tip	465
slithful, idle	289
slow	443
reluctant	409
slowness, stupidity	459
sluggish, idle	289
slow	443
sluggishness, apathy	74
stupidity	451
slumber, rest	416
small, fine	243
minute	380
smart, clever	162
smartness, pertness	366
smash, break	128
smiling, happy	270
smirch, blemish	121
smite, beat	113
smooth, fine	245
snappish, morose	305
sneak, catch	140
sneer	444
snug, comfortable	163
sobriety, abstinence	17
sociable, friendly	356
social, friendly	356
socialism	445
society, association	92
soft, meek	325

	PAGE		PAGE
soften, alleviate	53	speck, blemish	124
chaaten	155	speculation, hypothesis	286
soil, v., defile	184	speculative, academic	22
soil, n., blemish	124	speech	446
sojourn, abide	9	<i>language</i>	312
soldiers, army	84	speechless, taciturn	459
soldiers, army	84	speed, n., alacrity	46
solemn, awful	106	<i>quicken</i>	398
solemnity, sacrament	427	speedy, nimble	344
solemnize, celebrate	150	spicy, racy	399
solicit, ask	90	spirit, character	153
<i>plead</i>	369	<i>mind</i>	329
solicitude, alarm	47	spirited, racy	399
<i>anxiety</i>	78	spite, enmity	218
<i>cure</i>	141	<i>hatred</i>	278
solitude, retirement	418	splendid, bright	129
somber, dark	180	<i>fine</i>	245
song, poetry	372	splendor, light	317
soothe, allay	50	splenetic, capitious	140
sophism, fallacy	233	<i>morose</i>	385
sophistry, fallacy	233	split, break	128
sordid, avaricious	104	spoil, decay	181
sorrow, v., mourn	336	<i>defile</i>	184
<i>repentance</i>	412	sponge, cleanse	160
sorrow, n., grief	266	spontaneous	447
<i>misfortune</i>	331	sport, entertainment	219
sorrowful, piteous	367	spot, n., blemish	124
soul, air	44	<i>stain</i>	448
<i>arrange</i>	85	spotless, innocent	304
sort out, arrange	85	<i>perfect</i>	362
sort over, arrange	85	<i>pure</i>	395
sotish, brutish	181	spousal, marriage	328
drunken, a.	205	spousals, marriage	328
soul, mind	329	spread abroad, announce	69
sound	445	spruce, carousal	144
<i>healthy</i>	275	sprightliness, alacrity	46
sour, bitter	122	<i>pertness</i>	365
<i>morose</i>	335	sprightly, active	28
source, beginning	118	<i>atry</i>	45
<i>cause</i>	146	<i>happy</i>	270
sourness, acrimony	26	<i>nimble</i>	344
sow, plant	309	spring, v., rise	424
spacious, large	313	spring, n., beginning	118
spark, heat	115	<i>cause</i>	146
sparkling, frugality	259	spruce, neat	340
sparkle, light	317	spry, active	28
sparkling, bright	129	<i>nimble</i>	344
spasmodic, sickle	242	spy	447
speak	446	stable, permanent	362
speaking, speech	446	stain	448
speak to, address, v.	88	stain, v., defile	184
special pleading, fallacy	233	stain, n., blemish	124
specie, money	385	stainless, innocent	304
specify, state	449	<i>perfect</i>	362
specimen, example	227	<i>pure</i>	395
<i>sample</i>	429	stamp out, abolish	11
		stanch, faithful	283

	PAGE
standard, criterion	179
<i>example</i>	227
<i>ideal</i>	288
<i>model</i>	334
stand by, help	276
stare, look	320
start, beginning	118
state, v.	440
<i>allege</i>	51
<i>announce</i>	69
state, n., people	360
stately, awful	106
statement, report	412
statute, law	315
stay, abide	9
<i>check</i>	155
<i>hinder</i>	280
<i>obstruct</i>	349
<i>rest</i>	416
steadfast, permanent	362
steal, abstract	18
steal away, abscond	14
steal off, abscond	14
steep	450
<i>high</i>	279
stern, severe	435
stick, attach	95
sticking, adhesive	30
sticky, adhesive	36
stiff, severe	435
stigma, blemish	124
still, v., <i>alloy</i>	50
still, a., <i>calm</i>	137
still, conj., but	134
<i>notwithstanding</i>	345
<i>yot</i>	487
stillness, apathy	74
<i>rest</i>	416
stipend, pay, n.	359
stir, influence	300
stolid, brutish	131
stoop, bend	119
stop, v., abide	9
<i>arrest</i>	88
<i>cease</i>	149
<i>check</i>	155
<i>end</i> , v.	213
<i>hinder</i>	280
<i>obstruct</i>	349
stop, n., rest	416
store up, amass	60
storm, v., attack, v.	98
storm, n.	450
stormy, bleak	123
story	451
<i>fiction</i>	243
<i>history</i>	281
<i>report</i>	412

	PAGE
straightforward, candid	139
<i>clear</i>	161
<i>honest</i>	283
straightway, immediately	293
strait, predicament	379
strand, bank	111
strange, alien, a.	44
<i>queer</i>	397
<i>rare</i>	400
stratagem, artifice	88
stray, wander	481
stream, abound	13
street, way	443
strength, power	375
strengthen, confirm	170
strict, severe	435
strife, altercation	58
<i>battle</i>	114
<i>feud</i>	241
strike, beat	115
strip, blow	124
strive, endeavor, v.	215
stroke, blow	124
<i>misfortune</i>	331
strong, healthy	375
stronghold, fortification	352
struggle, endeavor, v.	215
stubborn, obstinate	344
<i>perverse</i>	344
<i>restive</i>	417
student, scholar	430
study, education	200
stupor, stupidity	451
<i>stupor</i>	452
stupid, absurd	19
<i>brutish</i>	131
stupidity	451
<i>idiot</i>	249
stupor	452
<i>stupidity</i>	451
style, air	44
<i>distinction</i>	198
<i>name</i>	333
subdivision, part, n.	357
subdue, chasten	155
<i>conquer</i>	172
subdued, meek	323
subject, v., conquer	172
<i>topic</i>	404
subjection, allegiance	51
subjective	452
<i>inherent</i>	301
subjoin, add	32
<i>append</i>	73
subjugate, conquer	172
submerge, immerse	294
submission, patience	353

	PAGE		PAGE
submissive, <i>docile</i>	200	summary, <i>abridgment</i>	13
<i>meek</i>	325	summon, <i>arraign</i>	84
submit, <i>bend</i>	119	<i>convoke</i>	178
submit to, <i>endure</i>	216	sum up, <i>add</i>	32
subordinate, <i>auxiliary</i>	103	<i>calculate</i>	130
subscript, <i>append</i>	78	sunder, <i>break</i>	128
subside, <i>abate</i>	6	<i>rend</i>	410
subsidy	453	sunny, <i>bright</i>	129
subsiding, <i>alive</i>	49	<i>happy</i>	270
substance, <i>wealth</i>	482	sunshine, <i>bright</i>	129
substantial, <i>important</i>	295	superabundance, <i>excess</i>	228
<i>real</i>	402	superannuated, <i>antique</i>	72
substantiate, <i>confirm</i>	170	superciliousness, <i>pride</i>	384
substitute, <i>v., change, v.</i>	151	supereminent, <i>principal, a.</i>	386
substitute, <i>n., delegate</i>	185	superfluity, <i>excess</i>	228
substratum, <i>foundation</i>	254	superhuman, <i>supernatural</i>	455
substructure, <i>foundation</i>	254	superintendence, <i>oversight</i>	353
subterfuge, <i>artifice</i>	88	superior, <i>principal, a.</i>	386
<i>fallacy</i>	233	supernatural	455
<i>pretense</i>	380	superstede, <i>subvert</i>	454
subtle, <i>astute</i>	94	superstition, <i>fanaticism</i>	236
<i>fine</i>	245	supervene, <i>happen</i>	267
subtle, <i>astute</i>	94	supervision, <i>oversight</i>	353
<i>fine</i>	245	supplant, <i>abolish</i>	11
subvention, <i>subsidy</i>	453	<i>subvert</i>	454
subvert	454	supple, <i>active</i>	28
<i>abolish</i>	11	supplement, <i>appendage</i>	79
succeed	454	supplicate, <i>ask</i>	90
<i>follow</i>	250	<i>pray</i>	377
success, <i>victory</i>	479	supply, <i>give</i>	264
successful, <i>fortunate</i>	259	support, <i>v.</i>	456
<i>happy</i>	270	<i>abet</i>	6
succession, <i>time</i>	465	<i>endure</i>	216
successor, <i>term</i>	468	<i>keep</i>	310
succor, <i>help</i>	276	support, <i>n., help</i>	276
suck up, <i>absorb</i>	16	<i>subsidy</i>	458
suffer, <i>allow</i>	55	supporter, <i>adherent</i>	85
<i>endure</i>	216	suppose	456
sufferance, <i>patience</i>	358	supposition, <i>fancy</i>	287
suffering, <i>pain</i>	354	<i>hypothesis</i>	286
suffice, <i>satisfy</i>	429	<i>idea</i>	287
sufficient, <i>adequate</i>	84	suppress, <i>abolish</i>	11
<i>plentiful</i>	371	<i>hide</i>	278
suggest, <i>allude</i>	56	<i>restrain</i>	418
suggestion	454	<i>subvert</i>	454
suit, <i>adapt</i>	29	supremacy, <i>victory</i>	479
suitable, <i>adequate</i>	84	supreme, <i>absolute</i>	15
<i>admirable</i>	37	<i>principal, a.</i>	386
<i>becoming</i>	117	sure, <i>authentic</i>	103
<i>condign</i>	170	<i>conscious</i>	173
<i>fit</i>	246	<i>faithful</i>	238
suit, <i>adequate</i>	84	surety, <i>security</i>	481
<i>fit</i>	246	surfeit, <i>satisfy</i>	439
sulky, <i>morose</i>	335	surly, <i>morose</i>	335
sullen, <i>morose</i>	335	surmise, <i>v., doubt, v.</i>	201
sully, <i>defile</i>	184	<i>suppose</i>	456
<i>stain</i>	448	surmise, <i>n., hypothesis</i>	286

	PAGE
surmount, conquer	172
surname, name	338
surpass, beat	115
surpassing, principal, a.	386
surplus, excess	228
surplusage, circumlocution	157
surprise, amazement	61
surrender	457
abandon	3
abnegation	11
surrounded by, amid	65
surveillance, oversight	353
survey, look	320
susceptibility, power	375
sensibility	434
suspect, doubt, v.	201
suspend, defer	182
suspense, abeyance	7
doubt, n.	201
suspension, abeyance	7
suspension of payment, bank- ruptcy	111
surpicion, doubt, n.	201
suspicious, envious	221
equivocal	222
sustain, carry	144
confirm	170
endure	216
help	276
keep	310
support	456
sustenance, food	251
swallow, absorb	16
swallow up, absorb	16
swarm, abound	13
flock	249
swart, dark	180
swarthy, dark	180
sway, govern	265
influence	300
power	375
shake	436
swear, state	449
swearing, oath	346
sweep, cleanse	160
sweet, amiable	64
swell, abound	13
swerve, fluctuate	249
wander	481
swift, nimble	344
swiftness, alacrity	46
swindle, fraud	256
swindling, fraud	256
swing, shake	436
swinish, brutish	181
switch, beat	115
swoon, stupor	452

	PAGE
swooning, stupor	452
sworn statement, oath	316
sycophancy, praise	376
sylvan, rustic	426
symbol, emblem	211
sign	438
symmetry, harmony	271
sympathetic, humane	284
sympathize with, console	174
sympathy, benevolence	120
pity	368
symphony, melody	326
symptom, sign	438
syncope, stupor	452
synonymic, synonymous	457
synonymous	457
synopsis, abridgment	13
system	458
body	125
habit	267
hypothesis	280
systematic, dogmatic	200
taciturn	459
tact, address, n.	34
taint, v., defile	184
taint, n., blemish	121
take, assume	63
carry	114
catch	140
take away, abstract	18
take exception, object, v.	343
take hold of, catch	140
take in, take up, absorb	16
take into custody, arrest	88
take-off, caricature	143
take oneself off, abscond	14
take prisoner, arrest	88
take to task, reprove	414
tale, report	412
story	451
talent, genius	302
power	375
talented, clever	182
talents, genius	302
talk, n., conversation	176
sprak	646
speech	446
talkative, garrulous	259
tall, high	279
tame, docile	200
tangible, evident	226
physical	366
tangled, complex	166
tardy, slow	443
tarnish, blemish	124
defile	184
stain	445
tarry, abide	9

	PAGE		PAGE
tart, bitter	122	testify, avow	105
tartness, acrimony	26	state	449
tasteful	460	testimony	463
tasty, tasteful	460	testy, captious	140
tattle, babble	107	tether, bind	121
taunt, sneer	444	that, but	134
tautology, circumlocution	157	theme, topic	408
teach	461	then, therefore	464
teachable, docile	200	thence, therefore	464
teaching, doctrine	200	theology, religion	408
education	209	theoretic, academic	22
tear, rend	410	theoretical, academic	22
tease, affront	39	theory, hypothesis	286
tediumness, circumlocution	157	idea	287
teem, abound	13	therefore	464
teeming, plentiful	371	the vulgar, mob	333
tell, announce	69	the worse for liquor, drunk, a.	205
speak	446	thief, robber	425
state	449	thin, fine	245
temerity	461	think, esteem, v.	223
temper, anger	67	suppose	456
character	153	thirst, appetite	80
temperament, character	153	this instant, immediately	298
temperance, abstinence	17	thorough, radical	400
tempest, storm	450	thoroughfare, way	482
temporary, transient	470	thoroughgoing, radical	400
tempt, allure	57	though, but	184
tendency, aim	44	notwithstanding, conj.	345
direction	196	thought, idea	287
tender, friendly	256	mind	329
humane	284	thoughtless, abstracted	18
tender-hearted, humane	284	thoughtlessness, neglect	342
tenderness, attachment	97	thrash, beat	115
love	321	threatening, immerse	294
mercy	327	thrift, frugality	259
play	368	thrill, shake	486
tenet, doctrine	200	thrive, succeed	454
term, boundary	126	throe, pain	354
terminate, abolish	11	throng	464
cease	149	company	104
end, v.	213	through, by	134
termination boundary	126	throw, send	132
end, n.	214	thrust, drive	204
terminus, end, n.	214	thump, blow	124
tenuous, fine	245	thus far, yet	487
term	462	thwart, baffle	108
time	465	hinder	280
terrible, awful	106	tidy, neat	340
formidable	252	tie, bind	121
terrific, awful	106	as	247
terrified, afraid	40	tie up, bind	121
terrify, frighten	258	tillage, agriculture	48
terror, alarm	47	tilt, tip	465
fear	238	time	465
terror-stricken, afraid	40	time-honored, old	350
terse	463	timeless, eternal	224
test, criterion	179	time-worn, old	350

	PAGE		PAGE
timid, afraid	40	tranquil, calm	137
faint	231	tranquillize, alloy	50
timidity, alarm	47	tranquillity, apathy	74
fear	238	rest	415
modesty	334	transact	469
timorous, afraid	40	do	104
tinge, stain	448	transaction	469
tint, stain	448	act	27
tiny, minute	330	business	133
tip, v.	465	transcendent, transcendental	170
tip, n., end, n.	214	transcendental	470
tipsy, drunk, a.	205	mysterious	337
tire	466	transcript, duplicate	206
title, name	338	transfer, convey	177
tittle, particle	358	transfigure, change, v.	151
toil, work	487	transform, change, v.	151
toilsome, difficult	195	transformation, change, n.	152
token, emblem	211	transgress, break	128
sign	438	transgression, sin	439
trace	468	transient	470
tolerable, admissible	37	transit, journey	307
tolerate, abide	9	motion	336
allow	55	transition, change, n.	152
endure	216	motion	336
tone, sound	445	transitory, transient	470
tongue, language	312	translation, definition	184
too, also	57	translucent, clear	161
tool	466	transmit, carry	144
topic	468	convey	177
torture, pain	354	send	432
torpid, latent	314	transmutation, change, n.	153
torpor, stupor	452	transmute, change, v.	151
torture, pain	354	transparent, candid	139
total, radical	400	clear	161
totter, shake	436	evident	230
touching, pitiful	367	transport, carry	144
touchstone, criterion	179	convey	177
touchy, captious	140	enthusiasm	220
tour, journey	307	trappings, caparison	140
tow, draw	202	travel, journey	307
towering, high	279	travesty, caricature	143
trace	468	treachery, fraud	256
characteristic	154	treason, fraud	250
track, trace	468	treasure, cherish	156
way	482	treat, feast	239
tractable, docile	200	trandact	469
trade, business	133	tremble, shake	436
sale	428	trembling, fear	238
trading, business	133	tremendous, formidable	252
traduce, slander	442	trenches, fortification	262
traffic, business	133	trespass, attack, n.	99
trail, trace	468	trial, endeavor, n.	218
train, teach	461	misfortune	221
trained, skilful	442	tribe, people	360
training, education	209	tribulation, grief	246
trait, characteristic	154	misfortune	221
trance, dream	203	tribute, subsidy	453

	PAGE		PAGE
trick, artifice	88	twinkling, bright	129
<i>fraud</i>	256	twinkling, light	317
<i>pretence</i>	380	twist, bend	119
trickery, deception	181	two, both	126
trifling, idle	289	type, emblem	211
vain	474	<i>example</i>	227
trim, neat	340	<i>model</i>	334
trip, journey	307	<i>sign</i>	438
triumph, happiness	268	typical, normal	344
triumph, victory	479	tyrannical, absolute	15
trivial, vain	474	tyro, amateur	61
<i>venial</i>	477	umbrage, pique	367
troops, army	84	umpire, judge	308
trouble, anxiety	73	unadorned, clear	163
<i>cara</i>	141	unadulterated, pure	395
<i>grief</i>	266	unanimity, harmony	271
<i>misfortune</i>	331	unassuming, meek	325
true, authentic	103	unassured, precarious	377
<i>faithful</i>	233	unavailing, vain	474
<i>honest</i>	283	unavoidable, necessary	341
<i>pure</i>	395	unavoidableness, necessity	341
<i>real</i>	402	unbelief, doubt, n.	201
truism, axiom	107	unbeliever, skeptic	441
<i>proverb</i>	393	unbiased, candid	141
trunk, body	125	unbidden, spontaneous	447
trust, v., commit	164	unblemished, perfect	362
trust, n., assurance	93	<i>pure</i>	395
<i>faith</i>	232	unbounded, infinite	300
trustworthy, authentic	103	unbroken, continual	175
<i>faithful</i>	233	unceasing, continual	175
<i>honest</i>	283	<i>eternal</i>	224
<i>reliable</i>	407	uncertain, fickle	242
trusty, faithful	233	equivocal	222
<i>honest</i>	283	<i>precarious</i>	377
<i>reliable</i>	407	uncertainty, doubt, n.	301
truth, justice	309	unchangeable, permanent	362
<i>veracity</i>	477	unchanging, permanent	362
<i>virtue</i>	480	uncivil, bluff	125
truthful, candid	139	uncivilized, barbarous	118
truthfulness, veracity	477	uncommon, queer	397
try, chasten	155	<i>rare</i>	400
<i>endeavor, v.</i>	215	uncommunicative, taciturn	459
trying, difficult	195	uncomprehended, latent	314
tube, cavity	147	uncompromising, severe	435
tuition, education	259	unconcern, apathy	74
tumult, revolution	420	unconditional, absolute	15
tunnel, cavity	147	unconditioned, infinite	300
turbid, obscure	347	<i>absolute</i>	15
turn, bend	119	uncongeniality, antipathy	72
<i>change, v.</i>	151	unconnected, alien, a.	48
<i>revolve</i>	421	unconquerable, obstinate	348
tutor, teach	461	unconsciousness, stupor	452
twaddle, babble	107	uncontrollable, rebellious	404
twain, both	126	uncorrupted, pure	395
twine, bend	119	uncouth, awkward	106
twinge, pain	354	<i>barbarous</i>	118
twinkle, light	317	<i>rustic</i>	426

	PAGE		PAGE
uncreated, <i>primal</i>	385	union, <i>association</i>	92
uncultivated, <i>ferce</i>	244	<i>attachment</i>	97
undaunted, <i>brave</i>	127	<i>harmony</i>	271
undefiled, <i>perfect</i>	302	<i>marriage</i>	323
<i>pure</i>	305	unique, <i>queer</i>	397
undeniable, <i>necessary</i>	241	<i>rare</i>	400
underestimate, <i>disparage</i>	198	unison, <i>harmony</i>	271
undergo, <i>endure</i>	216	<i>melody</i>	326
underrate, <i>disparage</i>	198	unite, <i>agree</i>	42
understand, <i>perceive</i>	361	<i>associate, v.</i>	90
understanding, <i>mind</i>	329	<i>attach</i>	95
<i>wisdom</i>	485	<i>condign</i>	171
undertake, <i>endeavor, v.</i>	215	<i>mix</i>	331
under the influence of liquor, <i>drunk, a.</i>	205	unity, <i>harmony</i>	271
undervalue, <i>disparage</i>	198	<i>union</i>	471
undeveloped, <i>latent</i>	314	universal, <i>general</i>	210
undismayed, <i>brave</i>	127	unkindness, <i>acrimonious</i>	28
undulate, <i>fluctuate</i>	249	unknown, <i>latent</i>	314
undying, <i>eternal</i>	224	<i>mysterious</i>	337
uneducated, <i>ignorant</i>	290	unlawful, <i>criminal</i>	178
unemployed, <i>idle</i>	289	*unlearned, <i>ignorant</i>	290
<i>vacant</i>	473	unlens, <i>but</i>	134
unending, <i>external</i>	224	unlettered, <i>ignorant</i>	290
unenlightened, <i>ignorant</i>	290	unlike, <i>alien, a.</i>	42
unequivocal, <i>absolute</i>	15	<i>heterogeneous</i>	277
unfailing, <i>eternal</i>	224	unlikeness, <i>difference</i>	194
unfairness, <i>injustice</i>	303	unlimited, <i>absolute</i>	15
<i>prejudice</i>	380	<i>infinite</i>	300
unfathomable, <i>infinite</i>	300	unlucky, <i>adverse</i>	39
<i>mysterious</i>	387	unmanageable, <i>rebellious</i>	401
unfathomed, <i>mysterious</i>	387	unmatched, <i>queer</i>	397
unfavorable, <i>adverse</i>	89	unmeasured, <i>infinite</i>	300
unfeelingness, <i>apathy</i>	74	unmingled, <i>pure</i>	395
unfilled, <i>vacant</i>	473	unmistakable, <i>evident</i>	228
unfixed, <i>flexible</i>	242	<i>clear</i>	101
unflinching, <i>obstinate</i>	348	unmitigated, <i>severe</i>	435
unfold, <i>amplify</i>	65	unmixed, <i>pure</i>	395
ungainly, <i>awkward</i>	106	unobserved, <i>latent</i>	314
ungedliness, <i>sin</i>	439	unobtrusiveness, <i>modest</i>	333
ungovernable, <i>perverse</i>	366	unoccupied, <i>idle</i>	289
<i>rebellious</i>	404	<i>vacant</i>	473
unhandy, <i>awkward</i>	106	unostentatious, <i>meek</i>	325
unhealthiness, <i>disease</i>	197	unparalleled, <i>rare</i>	400
unhealthful, <i>pernicious</i>	364	unperceived, <i>latent</i>	314
unhomogeneous, <i>heterogeneous</i>	277	unpolished, <i>runtic</i>	428
unification, <i>union</i>	471	unpolluted, <i>pure</i>	395
uniform, <i>a., alike</i>	49	unprecedented, <i>rare</i>	400
uniform, <i>n., dress</i>	204	unprejudiced, <i>candid</i>	139
uniformity, <i>harmony</i>	271	unpremeditated, <i>extemporan-</i> <i>eous</i>	220
unimportant, <i>vain</i>	474	unpretentious, <i>meek</i>	325
uninformed, <i>ignorant</i>	290	unprofitable, <i>vain</i>	474
uninstructed, <i>ignorant</i>	290	unpropitious, <i>adverse</i>	89
unintellectual, <i>brutish</i>	131	unquestionable, <i>real</i>	403
unintelligible, <i>obscure</i>	347	unreal, <i>vain</i>	474
uninterrupted, <i>continual</i>	175	unreasonable, <i>absurd</i>	19
union	471	unrelenting, <i>severe</i>	435
<i>alliance</i>	58	unreliable, <i>flexible</i>	242

	PAGE		PAGE
unremitting, continual	175	uprightness, justice	309
unreserved, candid	139	virtue	480
unrighteousness, injustice	303	uproot, exterminate	231
sin	439	upshot, consequence	178
unruffled, calm	137	upstart, new	343
unruly, restive	417	urbane, polite	372
unsatisfying, vain	474	urge, influence	300
unseen, latent	814	persuade	265
unselfishness, benevolence	120	plead	369
unservicable, vain	474	quicken	398
unsettle, displace	198	urge forward, promote	390
unsettled, fickle	242	urgency, necessity	341
precarious	377	urge on, drive	204
unsheltered, bleak	123	promote	390
unskilful, awkward	106	quicken	398
unskilled, ignorant	290	usage, habit	267
unsophisticated, candid	139	use, apply	80
rustic	426	employ	213
unsoundness, disease	197	exercise	229
unspiritual, brutish	131	habit	267
unspotted, pure	395	utility	472
unstable, fickle	242	usefulness, profit	387
precarious	377	utility	472
unstained, pure	395	useless, vain	474
untidy, fickle	242	use up, employ	213
precarious	377	usual	472
unsubstantial, vain	474	general	260
unsuitable, incongruous	297	normal	344
unswilled, pure	395	usurp, assume	98
untainted, pure	395	utensil, tool	466
untamed, barbarous	113	utility	472
untarnished, pure	395	profit	387
untaught, ignorant	290	utmost, end, n.	214
rustic	426	utter, speak	446
untenanted, vacant	473	utterance, remark	409
untoward, adverse	39	speech	446
perverse	366	utmost, end, n.	214
untrained, fierce	244	vacant	473
untruth, deception	181	idle	289
untutored, ignorant	290	vacate, cancel	188
unusual, queer	397	vacillate, fluctuate	249
rare	400	vacillating, fickle	242
unvarying, continual	175	vacuous, vacant	473
unwavering, faithful	233	vagrancy, fancy	237
unwholesome, pernicious	364	vain	474
unwilling, reluctant	409	vainglory, pride	384
unyielding, obstinate	348	vale, cavity	147
severe	435	valadiction, farewell	238
upbraid, reprove	414	valadictory, farewell	238
upbraiding, reproof	413	vallant, brave	127
uphold, confirm	170	valley, cavity	147
help	276	valor, prowess	398
support	456	value, cherish	156
uplifted, high	279	esteem, v.	228
upright, honest	283	price	383
innocent	304	profit	387
pure	395	valueless, vain	474

	PAGE		PAGE
vanity, egotism	210	vice, sin	139
pride	384	vicious, criminal	174
vanquish, beat	115	vestive	417
conquer	172	viciousness, sin	439
rapid, vain	474	vicesitude, change, n.	152
variable, fickle	242	victimize, abuse	20
variant, heterogeneous	277	victory	479
variation, change, n.	152	victual, food	351
difference	194	vile, look	320
variety, change, n.	152	vigilance, care	111
difference	194	vigilant	479
various, heterogeneous ...	277	alert	47
vary, change, v.	151	vigorous, active	28
fluctuate	249	healthy	375
vast, large	313	severe	435
vaunt, ostentation	352	vile, brutish	181
vaunting, ostentation	352	criminal	178
veer, fluctuate	249	villify, abuse	20
change, v.	151	slander	412
wander	481	villany, abomination	12
vehemence, enthusiasm	220	vindicate, avenge	104
vehement, eager	207	vindication, apology	75
veil, hide	278	violate, abuse	20
palliate	351	violent, persec	214
venal	474	virile, masculine	323
venerable, old	350	virtue	180
venerate	475	justice	309
admire	37	virtuous, innocent	304
veneration	476	pure	396
vengeance, revenge	419	virtuousness, virtue	180
venial	477	virulence, acrimony	28
venture, hazard	275	virulent, bitter	122
venturesome, brave	127	viscid, adhesive	38
venturesomeness, temerity ..	461	viscous, adhesive	38
veracity	477	visible, evident	228
verbal	478	physical	368
verbiage, circumlocution ..	157	vision, dream	203
diction	193	visionary, fanciful	238
verbose, garrulous	259	vain	474
verbosity, circumlocution ..	157	visit, avenge	104
verdant, rustic	426	visitation, misfortune	381
verge, boundary	126	vitalize, defile	184
veritable, authentic	103	vituperate, abuse	20
real	402	vivacious, alive	49
verity, veracity	477	vivacity, alacrity	48
vernacular, language	312	vocabulary, diction	192
versatile, fickle	242	language	312
verse, meter	328	vocal, verbal	474
poetry	372	vocation, business	183
vestige, trace	488	vociferate, call	180
vestments, dress	204	void, abysm	20
vesture, dress	204	vacant	478
vex, affront	89	vow, oath	341
vexation, anger	97	voyage, journey	307
chaprin	151	vulgarism, slang	443
viands, food	251	vulgarity, slang	443
vibrate, shake	436	wages, pay, n.	359

	PAGE		PAGE
waggery, wit	486	well-mannered, polite	372
waggonets, wit	486	well-off, comfortable	163
walt, abide	9	well-provided, comfortable	163
wakeful, vigilant	479	well-to-do, comfortable	163
wander	481	whence, therefore	464
want, necessity	341	wherefore, therefore	464
poverty	374	while, time	465
warble, sing	410	whim, fancy	237
ward, shelter	437	whimsical, fickle	242
wariness, care	141	qucer	397
warmth, enthusiasm	220	whip, beat	115
warn, reprove	414	whit, particle	358
warning, example	227	whiten, bleach	122
warp, bend	119	whitewash, bleach	122
warrant, precedent	378	wholesome, healthy	275
wary, vigilant	479	wicked, criminal	178
wash, cleanse	100	wickedness, abomination	12
washing, ablution	9	sin	439
wasnail, carousal	144	wide, large	318
waste, bleak	123	wide-awake, active	28
excess	228	alert	47
variant	473	vigilant	479
wastefulness, excess	228	widen, amplify	65
watch, abide	9	wild, absurd	19
look	320	bleak	123
oversight	353	fierce	214
watchful, alert	47	wile, artifice	88
vigilant	479	pretense	880
watchfulness, care	141	willful, perverse	366
oversight	353	willing, spontaneous	447
wave, shake	486	win, allure	57
waver, fluctuate	249	attain	99
shake	436	conquer	172
wavering, fickle	212	get	262
way	482	succeed	454
air	44	wind up, end, v.	213
direction	196	windy, bleak	123
wayward, perverse	306	winning, amiable	64
weak, faint	231	charming	154
wealth	482	win over, persuade	365
weapon, tool	406	winsome, amiable	64
weapons, arms	83	wipe, cleanse	100
wearied, faint	231	wipe out, exterminate	231
went out, tire	466	wisdom	485
wet, tire	466	knowledge	811
wedded, addicted	32	prudence	894
wedding, marriage	323	wise, sagacious	427
wedlock, marriage	323	wish, desire	190
weigh, deliberate	185	wit	486
weight, load, &c.	319	with, by	184
weighty, important	285	withal, also	57
welcome, deliberate	185	withdraw, abscond	14
delightful	186	abstract	18
well, healthy	275	wither, die	198
well-behaved, polite	372	withhold, keep	310
well-bred, polite	372	restrain	418
well-disposed, friendly	256	without delay, immediately	298

	PAGE		PAGE
without end, <i>eternal</i>	224	worthless, <i>vain</i>	474
witness, <i>avow</i>	105	worthy, <i>becoming</i>	117
<i>testimony</i>	463	wound, <i>affront</i>	39
witticism, <i>wit</i>	480	wrangle, <i>altercation</i>	54
woe, <i>grief</i>	266	<i>reason, v.</i>	402
<i>pain</i>	354	wrangling, <i>altercation</i>	54
woeful, <i>pitiful</i>	367	wrath, <i>anger</i>	67
womanish, <i>feminine</i>	240	wretched, <i>pitiful</i>	367
wonder, <i>admire</i>	37	writings, <i>literature</i>	319
<i>amazement</i>	61	wrong, <i>v., abuse</i>	20
wont, <i>habit</i>	267	wrong, <i>a., criminal</i>	178
wonted, <i>usual</i>	472	wrong, <i>n., injury</i>	302
woo, <i>address, v.</i>	33	<i>injustice</i>	303
word, <i>term</i>	402	<i>sin</i>	433
wordiness, <i>circumlocution</i> ..	157	wrong-doing, <i>sin</i>	439
wording, <i>diction</i>	193	yearning, <i>eager</i>	207
work	487	yell, <i>call</i>	136
<i>act</i>	27	yet	487
<i>business</i>	133	<i>but</i>	131
workman, <i>artist</i>	89	<i>notwithstanding, conj.</i> ..	345
work out, <i>do</i>	198	yield, <i>allow</i>	55
works, <i>fortification</i>	252	<i>bend</i>	119
worn, <i>faint</i>	231	<i>harvest</i>	273
worn down, <i>faint</i>	231	<i>surrender</i>	457
worn out, <i>faint</i>	231	yielding, <i>docile</i>	200
worry, <i>anxiety</i>	73	<i>meek</i>	325
<i>care</i>	141	young, <i>new</i>	313
worship, <i>religion</i>	408	<i>youthful</i>	444
worst, <i>beat</i>	115	youthful	444
<i>conquer</i>	172	<i>new</i>	313
worth, <i>price</i>	383	zeal, <i>enthusiasm</i>	250
<i>virtue</i>	480	zealous, <i>eager</i>	207
worthiness, <i>virtue</i>	480	zeat, <i>appetite</i>	80

INDEX OF ANTONYMS

abandon, 0, 100, 216.
 335, 456.
 abandonment, 182.
 abate, 43.
 abbreviate, 66, 303.
 abet, 110, 156, 415.
 abettor, 217.
 abhor, 37.
 abhorrence, 224.
 abide, 152, 250.
 abiding, 171.
 abjure, 78.
 abnormal, 345.
 abnormality, 429.
 abominable, 382.
 abominate, 37.
 abridge, 66, 393.
 abrogate, 171.
 absolute, 416.
 absolve, 169, 415.
 abominous, 206.
 abominousness, 144.
 abstinence, 144, 240.
 abstinent, 206.
 abstract, 52.
 absurd, 38, 428.
 absurdity, 107, 486.
 abundance, 259.
 abuse, 192, 377.
 accede, 347.
 accelerate, 156, 350.
 accept, 317.
 acceptance, 391.
 accessory, 217, 387.
 accident, 378.
 accidental, 302.
 accommodating, 366.
 accomplice, 217.
 accomplished, 426.
 accomplishment, 289.
 accordant, 298.
 accountable, 16.
 accumulatively, 75.
 accurate, 287.
 accusation, 76.
 accuse, 16.
 achievement, 380.
 acknowledge, 412.
 acquired, 339.
 acquit, 85, 169, 415.

acid, 186.
 acrimonious, 65.
 act, 184, 289.
 action, 8.
 action, 289.
 active, 290, 315.
 act on, 184.
 actual, 378.
 actuality, 187, 237, 288,
 381.
 acuteness, 289, 451.
 add, 18.
 added, 387.
 additional, 387.
 adequate, 474.
 adhere, 250.
 adherent, 157.
 adjourn, 178.
 adjust, 198.
 admire, 9, 347.
 admit, 279.
 admit, 347.
 admittance, 114.
 adopt, 4.
 adroit, 107, 189.
 adulterated, 396.
 advance, 4, 110, 350.
 advantage, 295, 303.
 advantageous, 39, 304,
 474.
 adventitious, 386.
 adventurous, 41.
 adversary, 24, 35.
 adverse, 247.
 advertise, 279.
 advocate, 4, 412.
 afar from, 65.
 affable, 435.
 affection, 13.
 affectionate, 244.
 affinity, 72.
 affluence, 259.
 afraid, 128.
 after, 388.
 after a while, 293.
 aggrandize, 4.
 aggravate, 6, 53, 64.
 aggregate, 356, 429.
 agitate, 51.
 agitated, 138.

agitation, 74, 417.
 agreeing, 298.
 agreement, 59, 72, 163,
 195, 218.
 aid, 99, 110, 295, 350
 418.
 aiding, 39.
 aimlessness, 44.
 akin, 48.
 alarm, 74.
 alert, 19.
 alertness, 451.
 alien, 38, 389.
 alienate, 97, 192, 203.
 alienated, 257.
 alienation, 98, 391.
 alike, 278.
 alliance, 218.
 allow, 156, 389.
 allowance, 352.
 ally, 217.
 altercation, 168.
 although, 117.
 ambiguous, 162, 280.
 amelioration, 303.
 amenable, 349, 366.
 amiable, 336.
 amiable (syn. for bitter),
 122.
 amiability, 27, 68.
 amiss, 247.
 amity, 163, 218.
 amplify, 6.
 amputate, 66.
 analysis, 471.
 analyze, 383.
 angel, 69.
 animadversion, 377.
 animate, 5, 418.
 animation, 451.
 animosity, 98.
 annals, 451.
 annoy, 174, 219.
 annoyance, 208.
 annul, 171.
 answer, 434.
 antagonism, 54, 272.
 antagonist, 24, 85, 92,
 108.
 antagonistic, 257.

anticipation, 62, 191.
antipathy, 80, 98, 221.
anxiety, 74.
apathetic, 208, 305.
apathy, 46, 74.
apocryphal, 103.
apparent, 315.
appear, 14.
applaud, 20, 165, 169,
347, 415.
applause, 414.
apply (syn. for attach),
95.
appointment, 25.
appreciation, 18.
appreciative, 141.
approbation, 414.
appropriate, 48, 55.
approval, 18, 367, 412,
414.
approve, 9, 189, 165,
169, 347, 415.
approving, 141.
apropos, 48.
arbitrary, 416.
archetype, 207.
argument, 235.
armistice, 114.
arouse, 51, 418.
array, 198.
arrive, 14.
arrogance, 335.
arrogant, 326, 370.
artful, 189.
artificial, 339.
artlessness, 89.
ascertain, 457.
ascetic, 206.
assent, 347.
assert, 4, 412.
assertion, 11.
assist, 110.
assistance, 295.
assistant, 387.
assisting, 89.
association, 419.
assort, 198, 333.
assumed, 339.
assuming, 326.
assumption, 335.
assurance, 47, 74, 191,
202, 275, 335, 380.
assure, 102.
assured, 378.
astonishment, 71.
astuteness, 289.
atheism, 409.
attach, 128.

attainment, 289.
attendant, 157.
attentive, 19.
attraction, 72.
audacious, 41.
augment, 53, 231.
august, 308.
auspicious, 39.
austere, 370.
austerity, 144.
authority, 421.
authorize, 12, 389.
auxiliary, 387.
avaricious, 261.
averse, 33.
aversion, 46, 80, 98, 224.
avoid, 9, 33, 91, 306.
avoidance, 44.
avow, 279, 412.
away from, 65.
awkward, 116, 118, 162,
247, 373, 442.
awkwardness, 84, 208,
376.
axiom, 235, 424.
bachelorhood, 323.
bad, 362.
baffle, 7, 200.
balm, 124.
barbarism, 407.
barbarity, 121, 368.
bareness, 204.
barrier, 395.
base, 106, 280.
baseless, 108.
bashfulness, 91, 210,
211, 297, 366.
battle, 168, 272.
be, 78.
be born, 194.
be certain, real, or true,
78.
be deaf to, 319.
be defeated, 454.
be deficient, 13.
be destitute, 13.
befoul, 160.
befouling, 11.
befriend, 99.
beget, 231.
beggarly, 106, 426.
beggary, 485.
begin, 150, 194.
beginning (syn. for
end), 214.
be immortal, 194.
being, 102, 105, 194.
be in subjection, 285.

be joyful, 337.
be lacking, 13.
belief, 202.
believe, 201.
believer, 441.
bellicose, 257.
belligerent, 257.
benediction, 346.
beneficent, 364, 368.
beneficial, 361, 474.
benefit, 13, 20, 146, 335,
363.
benign, 30.
benignant, 336.
benison, 346.
be present, 14.
be silent, 137.
benumber, 160.
beaming, 11.
beamish, 160.
beamingly, 11.
beapater, 160.
be still, 137.
be subject, 265.
be sure, 457.
be the fact, 78.
betray, 279, 428, 430.
betrayal, 182.
betrayed, 21, 35.
be wanting, 13.
beyond, 65.
bible, 152.
big, 216.
bind, 16, 128, 422.
biography, 451.
bitter, 140.
blacken, 123.
blackness, 318.
blame, 377.
blamelessness, 439.
bland, 123, 336, 426.
blasphemy, 409.
blatant, 64.
blatantly, 362.
blessing, 12, 146, 302,
331, 316.
blind, 94.
bluff, 373.
blunt, 246, 373.
bluntness, 29.
body, 380.
boil down, 66.
bolsterless, 138.
bold, 41, 328.
boldness, 338.
boon, 146, 303, 321.
boorish, 379.
boorishness, 84, 407.

bare, 219.
 bound, 150.
 boundary, 150.
 bounded, 300.
 bountiful, 104.
 bounty, 259.
 brave, 41.
 brawn, 330.
 break, 217.
 break down, 217, 456.
 break up, 178.
 breed, 231.
 brevity, 158.
 brief, 300, 314.
 bright, 124, 180, 181, 232.
 brilliancy, 280, 451.
 brilliant, 181, 232.
 brimful, 473.
 brimmed, 473.
 brimming, 473.
 bring, 133.
 broken, 251, 284.
 brusk, 373.
 brutality, 121, 308, 407.
 brute force, 330.
 build, 188.
 build up, 231.
 bungling, 102, 412.
 buoy, 5.
 bury, 70.
 busy, 210, 290, 475.
 but, 58.
 by and by, 298.
 calculable, 237.
 calculate, 102.
 calculated, 237.
 calculation, 25, 220.
 calm, 41, 208, 450.
 caltness, 47, 62, 74, 220, 380.
 cancel, 171.
 candor, 80, 182, 286, 381.
 canopy of heaven, 22.
 capacity, 289.
 capitulate, 173.
 capitulation, 182.
 capricious, 233.
 captivity, 310.
 care, 71, 402.
 care for, 20.
 careless, 141, 208, 305, 480.
 carelessness, 44, 62, 74, 142.
 carous (syn. for affront), 89.

carry, 433.
 cast away, 157.
 cast down, 456.
 castigate, 356.
 cast out, 17, 157, 438.
 casual, 302, 341.
 caution, 220, 462.
 cede, 173.
 celibacy, 323.
 censure, 76, 377.
 center, 127.
 certain, 19, 222, 378.
 certainly, 25, 187, 202, 203, 235, 237, 244, 275, 287, 380.
 cessation, 28.
 chafe, 422.
 chance, 179, 378.
 change, 249.
 changeableness, 300.
 changeless, 243.
 chaos, 459.
 charge, 16, 70.
 charity, 68.
 chasten, 356.
 chastise, 356.
 chastisement, 391.
 check, 388, 398, 429.
 cheer, 5, 191, 415.
 cheerful, 124.
 cheerless, 103.
 cheery, 124.
 cherish (syn. for abandon), 8; (syn. for chasten), 155.
 cherish, 4, 12, 20, 231, 412.
 chief, 24, 41.
 chill, 57.
 chimerical, 294.
 choice, 342, 378.
 choleric, 320.
 Christian, 441.
 chronicle, 53, 451.
 churchish, 65.
 churlishness, 121.
 circumference, 150.
 circumscribed, 300.
 circumspection, 462.
 citadel, 127.
 citizen, 48.
 city-like, 426.
 civilized, 118.
 claim, 4, 11, 90, 412.
 classify, 198, 388.
 clean, 184.
 cleanse, 184.

clear, 167, 181, 222, 232, 350.
 clearness, 306.
 clever, 107.
 cleverness, 451.
 cling to, 82, 177.
 cloak, 170.
 clog, 398.
 close, 261.
 cloud, 419.
 cloudiness, 419.
 cloudy, 162.
 clownish, 373.
 clownishness, 34, 407.
 clumsiness, 34.
 clumsy, 45, 116, 162, 246, 344, 442, 461.
 coarse, 246, 373, 461.
 coarseness, 407.
 coincidence, 168.
 cold, 173, 208, 257, 400.
 coldness, 220, 484.
 collect, 82.
 collected, 41.
 collectively, 75.
 colonize, 231.
 color, 123.
 combine, 18.
 come into being, 194.
 come into view, 14.
 come to life, 194.
 come short, 200, 454.
 comfort, 146, 331, 354, 380, 412.
 command, 90, 389, 421.
 commander, 24.
 commanding, 368.
 commence, 150.
 commend, 165.
 commendation, 414.
 commendatory, 141.
 common, 282, 397, 455.
 commonplace, 23, 100, 237, 455.
 common sense, 23, 289.
 commotion, 417.
 communicative, 460.
 compactness, 158.
 companionship, 419.
 company, 419.
 compassion, 420.
 compatible, 298.
 compel, 16.
 compel (syn. for hinder), 380.
 compensation, 264.
 competent, 474.
 complacency, 367, 412.

complaint, 76.
complaisant, 16, 336,
349, 356.
complete, 18.
compliant, 16, 349, 366,
405.
complimentary, 141.
comply, 265, 347.
composed, 41.
composure, 62.
compression, 158.
compulsion, 60, 316.
conceal, 70, 170.
concealed, 227.
concealment, 419.
conceit, 335.
conceived, 402.
concert, 163.
conciliate, 40.
conciseness, 158.
conclude, 393, 457.
concluding, 388.
conclusion, 380.
concord, 59, 114, 168,
218.
concur, 347.
concurrence, 59, 163.
condemn, 16, 356.
consolidate, 82.
consonance, 59, 163.
conspicuous, 232, 315.
constancy, 153.
constant, 248.
consternation, 94.
constitutional, 16.
constraint, 208, 316.
construct, 184.
consummation, 71.
contaminate, 160.
contaminating, 11.
contamination, 11.
contemn, 37, 150, 476.
contempt, 224, 236, 377,
476.
contemptible, 106, 352,
426.
contend, 48.
content, 40, 380, 412.
contented, 221.
contention, 168, 272.
contentious, 257, 326.
contentment, 63, 367,
380.
contest, 158, 272.
confound, 7, 31.
confuse, 31, 37.
confusedly, 75.
confusion, 94, 459.

congeniality, 72.
conjecture, 179.
conjoin, 18.
consent, 347, 352.
consent to, 389.
consequence, 147.
consequent, 388.
conservative, 400.
conserve, 20, 454.
consider, 20.
considerate, 141.
consistent, 19, 298.
consolation, 331.
console, 171.
condemnation, 76, 377,
391.
condensation, 158.
condense, 66.
conditional, 16.
condole with, 171.
condone, 85.
confess, 279.
confide in, 201.
confidence, 47, 74, 191,
203, 335, 380.
confident, 41.
confirm, 12, 139.
confiscate, 55.
conflict, 272.
conformity, 59, 163.
contingency, 342.
contingent, 16, 294, 341.
continuance, 153.
continue, 6, 12, 152.
contract, 393.
contradict, 43, 105, 450.
contradiction, 107.
contrariety, 471.
contravene, 450.
contributory, 39, 387.
control, 421.
controllable, 405.
controversy, 168, 272.
controvert, 450.
contumely, 236.
converse, 419.
convexity, 149.
convey, 433.
convict, 16, 356.
conviction, 202, 380.
cool, 41, 182, 208.
coolness, 62, 98.
cooperating, 39.
cooperative, 39.
correct, 356.
corrupt, 64, 180, 362.
corrupted, 362.
cover, 99, 170.

covert, 227.
cover (up), 70.
coveit, 9.
covetous, 261.
countenance, 415.
counteract, 7, 276.
counterfeit, 108.
countryman, 48.
courage, 191.
courageous, 41.
court, 4.
courtious, 125.
courtesy, 27.
courtly, 113.
covenant, 219, 297.
cowardice, 391, 462.
cowardliness, 391.
cowardly, 198.
crabbed, 63, 370.
crafty, 139.
cramped, 473.
crave, 9.
create, 184.
creation, 147.
credit, 112.
cringing, 128.
crowded, 473.
cruel, 65.
crudely, 328, 368.
crushed, 254.
crusty, 63.
crystalline, 141.
cultured, 113, 426.
cunning, 139.
curse, 391.
curled, 242.
curtail, 60, 393.
customary, 392.
cut, 33.
cut down, 66.
cynicism, 236.
damage, 388.
damp, 37.
daring, 41, 323.
dark, 227, 314.
darken, 123.
darkness, 314.
dauntless, 41.
dazzling, 181.
dead, 50, 173.
deadness, 220, 434.
deaf, 173.
death, 224.
debate, 42, 64, 160.
debate, 164.
decreased, 30.
dewelt, 478.
deceitful, 189, 268.

deception, 478.
decided, 243.
decision, 202, 380.
decline, 43, 157, 388, 425.
decomposition 471.
decree, 25.
deduct, 32.
deep, 280.
deface, 88.
defaced, 362.
defeat, 200, 479.
defend, 99, 412, 443.
defense, 99, 180.
deference, 211.
deferential, 405.
deficiency, 228.
deficient, 362, 372.
defile, 160.
defiled, 396.
defilement, 11.
defiling, 11.
deform, 38.
deformed, 116, 362, 461.
defunct, 50.
dely, 78.
degrade, 42.
degraded, 280.
delay, 388, 398.
deliberation, 28.
delicate, 113, 275.
delight, 13, 151, 354, 387.
defect, 228.
defective, 362.
defend, 4.
delusion, 478.
demand, 11.
demonish, 456.
demonstrable, 19.
demonstrate, 102.
demonstrated, 19.
demonstration, 107, 235, 247, 380.
demur, 43.
denunciations, 366.
denial, 233, 363, 391.
denounce, 7.
denunciation, 377.
deny, 43, 55, 78, 90, 101, 105, 170, 429, 450.
depart, 9, 401.
departure, 221.
depend on, 201.
depend upon, 301.
deprave, 160.
depress, 42, 64.
depressed, 280.

depressing, 187.
derange, 31, 87.
derangement, 459.
descend, 425.
desecrate, 192.
desert, 456.
desertor, 85.
desertion, 182.
designing, 139.
desire, 9, 13.
desire (syn. for antipathy), 72.
desirous, 409.
despair, 71, 217.
despair of, 71.
despatch, 184.
despicable, 106, 252.
despise, 37, 150, 476.
despitation, 228, 240, 485.
destroy, 171, 200, 456.
destruction, 388, 479.
detach, 79, 97, 240, 333.
detached, 30, 337.
deter, 7, 57, 301, 365.
deteriorate, 64.
determination, 202.
determine, 192.
determined, 200, 243.
detest, 87, 476.
detestation, 80.
detriment, 388.
develop, 6, 231.
developed, 315.
development, 147, 289.
dexterous, 107.
die, 406.
differ, 43.
difference, 83, 272.
different, 49.
difficulty, 208.
diffidence, 210, 211, 297, 353, 366.
diffuse, 468.
dignified, 368.
dignify, 4.
dilatatory, 344.
diligent, 290.
dim, 162.
diminish, 32.
diminutive, 314.
dimness, 318.
diplomatic, 189.
direct, 167, 389.
directness, 158.
dirty, 340, 396.
disadvantage 388, 478.
disaffected, 257.

disaffection, 52.
disagree, 43.
disagreeable, 65, 163, 370.
disagreement, 67, 272.
disallow, 55.
disappoint, 429.
disappointing, 187.
disappointment, 479.
disapprobation, 377.
disapproval, 377, 391.
disapprove, 7, 55.
disarrange, 31, 87, 249, 459.
disarray, 204.
disaster, 479.
disavow, 78, 105, 170.
disband, 178.
disbelieve, 233.
discard, 97.
discharge, 85, 88, 178.
disclaim, 78, 105, 157.
disclose, 279.
discomfort, 208.
discompose, 31.
disconcert, 7.
disconnect, 79, 91, 97, 101, 307, 383.
disconnected, 86, 387.
disconnection, 471.
discontented, 163.
discord, 54, 272.
discourage, 7, 276, 301, 365.
discourteous, 373.
discover, 279, 457.
discover (syn. for hide), 278.
discovery, 287.
discredit, 286.
discriminate, 383.
discussion, 168.
diadalm, 476.
discord, 275.
disengage, 79, 333.
disentangle, 307.
disfigure, 38.
disgorge, 17.
disgrace, 42, 286.
disguise, 170.
diagnat, 80.
disgusting, 116, 461.
dishabile, 204.
dishonest, 283.
dishonesty, 309.
dishonor, 42, 150, 238, 476.
disinclination, 46.

disinclined, 33.
disinfect, 184.
disingenuous, 288.
disintegration, 92.
disinter, 279.
disinterested, 475.
disjoin, 31, 91, 97, 333.
disjoined, 30.
disjoint, 31.
disjunction, 471.
dislike, 87, 46, 80, 98, 224.
dislocate, 31.
disloyalty, 52.
dismay, 94.
dismember, 31.
dismiss, 88, 157, 178, 216.
disorder, 31, 87, 459.
disorderly, 840.
disown, 105, 170.
disparage (syn. for praise), 370.
disparagement, 377.
dispassionate, 208.
disperse, 17, 61, 87, 178.
dispersion, 165.
dispirited, 50.
displace, 31, 249.
displeasing, 370, 461.
dispose, 198.
disposed, 409.
dispose of, 395.
disproportion, 67, 272.
disprove, 450.
disputation, 168.
dispute, 43, 168, 450.
disputed, 103.
disqualified, 85.
disquiet, 208, 219, 417.
disregard, 142, 160, 476.
disrelish, 80.
disrepute, 286.
disrupt, 91.
dissatisfied, 163.
dissemble, 170.
dissension, 168, 272.
dissent, 43, 233.
dissever, 32, 333.
dissimilar, 49.
dissimilarity, 67.
dissimulate, 170.
dissipate, 17, 61.
dissociate, 91, 97, 101, 333.
dissociated, 337.
dissociation, 471.
dissolve, 178.

dissuade, 7, 57, 301, 365.
distance, 83, 98.
distant, 30, 257.
distaste, 80.
distasteful, 461.
distinct, 49, 222, 337.
distinguish, 307.
distract, 17, 219.
distress, 74, 174.
distressed, 163.
distressing, 187.
distrust, 71, 94, 233.
disturb, 31, 87, 174, 219, 249.
disturbance, 74, 417.
disturbed, 138.
disunion, 54, 272, 471.
disunite, 91, 97, 333.
disunited, 337.
diverge, 91.
divert, 97.
divide, 61, 91, 333.
divide arbitrarily, 82.
division, 471.
divorce, 54, 91, 97, 98, 323, 471.
divulge, 279.
doefle, 16, 244, 349, 405, 418.
dogged, 65, 200.
doing, 289.
dome of heaven, 22.
domination, 421.
dominion, 421.
doom, 356.
doubt, 71, 94, 233, 342.
doubtful, 77, 230, 294, 318.
doubtfulness, 342.
dowdy, 340.
drag, 398.
drained, 372.
draw (syn. for drive), 205.
dread, 71.
drear, 163, 370.
drive (syn. for draw), 202.
drive away, 57.
droop, 217.
drop, 145, 216, 425, 456.
drowsy, 47, 480.
drunkenness, 18.
dubious, 77, 162, 318.
dubiousness, 342.
ductile, 16.
dulcet, 122.

dull, 28, 45, 47, 50, 94, 162, 314, 400, 428, 480.
dullest, 20, 46, 220, 262, 370, 487.
dunce, 430.
duplicity, 478.
duck, 318.
dutiful, 349, 405.
dwarfed, 280.
dye, 123.
each, 126.
eager, 409.
eagerness, 74.
earnings, 261.
ease, 74, 354, 380, 487.
easy, 141, 195, 435, 450.
easy going, 141.
economy, 228.
educated, 290.
effect, 147.
effective, 474.
effeminacy, 394.
efficient, 171.
egress, 321.
egotism, 335.
either, 126.
eject, 17.
ejection, 221.
elaborate, 231.
elation, 191.
elegant, 113, 124.
elevate, 4.
elevated, 132.
elevation, 22, 149.
eliminate, 333.
clude, 33.
emaciated, 275.
emancipate, 418.
embark, 401.
embitter, 53.
embodiment, 280.
embody, 5.
emerge, 14.
eminence, 119.
emit, 17.
emotion, 74.
empire, 421.
employed, 280.
empower, 389.
emptyness, 23.
enact, 12, 139.
encomium, 414.
encourage, 5, 110, 155, 415, 418.
encouragement, 191.
encouraging, 141.
end, 147.

end (syn. for beginning), 118.
 endurance, 28.
 endure, 152.
 enduring, 471.
 enemy, 24, 35, 92.
 energetic, 232.
 enfeeble, 42.
 enforce, 90, 139.
 enforcement, 8, 11.
 enhance, 6, 53.
 enjoin, 389.
 enjoy, 9.
 enjoyment, 8, 11, 13, 71, 354.
 enlarge, 6.
 enlightened, 182.
 en masse, 75.
 enmity, 54, 98.
 ennui, 220.
 enter upon, 150.
 entirety, 358.
 entrance, 114.
 epitomize, 66.
 equity, 304.
 eradicate, 309.
 error, 83, 478, 486.
 essence, 102.
 essential, 48.
 establish, 13, 102, 139.
 established, 19.
 estate, 127.
 esteem, 9, 13.
 estrange, 91, 208.
 estranged, 257.
 estrangement, 98, 391.
 eternal, 471.
 eulogistic, 141.
 eulogize, 20, 186, 442.
 eulogy, 414.
 evanescent, 300.
 event, 147.
 every, 126.
 everyday, 28, 455.
 everlasting, 471.
 evidence, 285, 287, 380.
 evident, 222, 315.
 evil, 481.
 exact, 90.
 exalt, 4.
 exalted, 182, 368.
 excellence, 439.
 exception, 429.
 exceptional, 261, 345, 472.
 excess, 18.
 exchange, 395.

excite, 51, 418.
 excited, 138.
 excitement, 74, 417.
 exclusion, 221.
 excrescence, 149.
 excuse, 85, 415, 420.
 execution, 289.
 excrete, 37.
 exercise, 8.
 exhausted, 275, 372.
 exhibit, 279.
 exhume, 279.
 exist, 78, 194.
 exit, 221.
 exonerate, 85, 169.
 exotic, 386.
 expectancy, 191.
 expectation, 62, 191.
 expedient, 474.
 expedite, 156, 184.
 expel, 438.
 explanation, 424.
 explicate, 307.
 explicate, 315.
 exploded, 103.
 expose, 7, 279, 438.
 exposed, 315.
 exposure, 204.
 expulsion, 221.
 extend, 6.
 external, 302.
 extinguish, 182.
 extirpate, 369.
 extol, 20, 448.
 extort, 90.
 extraordinary, 472.
 extravagance, 259.
 extricate, 307.
 extrinsic, 302.
 exude, 17.
 exult, 337.
 exultation, 151.
 fabrication, 478.
 fabulous, 108, 402.
 facile, 195.
 facilitate, 350.
 fact, 58, 187, 302, 285, 287, 244, 287, 288, 289, 381.
 fall, 18, 100, 115, 178, 200, 217, 406, 454.
 falling, 275.
 fall of, 148, 361.
 failure, 228, 351, 479.
 faint, 217.
 faint-hearted, 128.
 fainting, 275.
 fair, 141.

fair dealing, 182.
 fairness, 89, 256, 304.
 fair play, 304.
 fair weather, 450.
 faithfulness, 304.
 faithless, 233, 283.
 fall, 115, 178, 217, 425.
 fallen, 254.
 fallible, 362.
 falling back, 388.
 falling off, 388.
 fall short, 454.
 fall short of, 146.
 fall under, 145.
 false, 103, 233, 283.
 falsehood, 478.
 falseness, 478.
 falsity, 478.
 falter, 217.
 familiar, 397.
 famine, 240.
 fan, 51.
 fanciful, 402.
 fancy, 179.
 far from, 65.
 fashionable, 73.
 fast, 144, 240.
 fasten, 128.
 fasting, 240.
 fate, 25.
 fatigue, 220.
 fatuity, 34, 486.
 faulty, 362.
 favor, 4, 20, 146.
 favorable, 39, 364, 409.
 favoritism, 309.
 fear, 71, 394.
 fear (syn. for fortitude), 253.
 fearful, 128.
 fearless, 41.
 feasible, 252, 296.
 feebleness, 376.
 feeling, 74.
 feigned, 402.
 fellow-countryman, 48.
 fellow-feeling, 72.
 fellowship, 419.
 feminine (syn. for masculine), 323.
 ferocity, 365.
 fickle, 233.
 fickleness, 300.
 fiction, 478.
 fictitious, 108.
 fierce, 188, 326.
 fiery, 326.
 filled, 478.

l up, 18.
thy, 396.
ite, 300.
rm, 200, 243, 378.
rmament, 22.
rmness, 153, 380.
xed, 243.
xedness, 153.
xity, 153, 380.
at, 400, 450.
attering, 141.
avorless, 400.
light, 182.
limy, 296.
lourish, 194.
ly, 173.
'oe, 24, 92.
loggy, 162.
ollower, 157.
following, 388.
folly, 34, 262, 395, 473,
486.
foment, 6.
fool, 430.
foolish, 162, 428.
foolishness, 486.
forbearance, 68.
forbid, 55.
forbidding, 370.
force, 8.
foreign, 88, 389, 386.
foreordination, 25.
forfeit, 9, 100, 173.
forfeud, 9.
forget, 150, 415.
forgetfulness, 327.
forgive, 85, 415.
forgiveness, 420.
forlorn, 168.
fortuitous, 302.
fortuity, 342.
forward, 350.
forwardness, 385.
foster, 231.
foul, 306.
foxy, 189.
fragile, 275.
frail, 275.
frankness, 89, 182, 286,
385, 381.
frantic, 188.
fraudulent, 283.
free, 36, 88, 104, 121,
156, 249, 350, 418,
418, 460.
free agency, 378.
freedom, 335, 342, 378.
free-thinking, 236.

free will, 378.
frenzied, 138.
frenzy, 74.
fresh, 73, 232, 386.
friend, 217.
friendly, 221, 336.
friendship (syn. for bat-
tle), 114; (syn. for
enmity), 218; (syn.
for feud), 241; (syn.
for hatred), 273.
friendship, 218.
frightened, 128.
frightful, 116.
frigid, 208, 257.
frivolous, 296.
frugality, 228.
fruit, 147.
frustrate, 7, 200.
frustration, 479.
full, 473.
fulsome, 461.
furious, 138, 326.
further, 350.
fury, 74.
futile, 428.
futility, 473.
gain, 280.
gainsay, 450.
gallant, 41.
garrulous, 460.
gainer together, 82.
gandy, 461.
generous, 104, 475.
genial, 124, 125, 141,
336, 366, 435.
gentle, 16, 170, 244, 336,
349, 405, 418, 435,
450.
gentleness, 27, 68.
genuineness, 286.
germane, 48.
get (syn. for abandon),
8.
get, 433.
get the worst of, 115.
ghastly, 116.
give, 433.
give consent, 389.
give leave, 389.
give permission, 380.
give out, 217.
give up, 17, 100, 145,
146, 216, 217, 434.
gleaming, 181.
gloom, 318.
gloominess, 318.
gloomy, 370.

glorious, 308.
glory, 151.
glowing, 181.
glum, 370.
gluttony, 18.
go, 401.
go away, 401.
godlessness, 409.
godliness, 439.
go down, 115, 125.
good, 364.
good faith, 256.
good fortune, 331.
good luck, 331.
good nature, 27.
good natured, 111, 336.
goodness, 139.
good sense, 306.
gorged, 473.
go under, 115.
governable, 366.
government, 421.
grace, 120.
graceful, 113.
graceful (syn. for awk-
ward), 106.
gradual, 450.
grand, 132, 308.
gratification, 13, 331,
367.
gratify, 10.
gravely, 467.
great, 132, 246, 308.
greet, 18.
greediness, 121.
greedy, 361.
grief (syn. for happi-
ness), 288.
grieve, 174.
grim, 116, 370.
grind, 422.
grimly, 116.
gross, 396.
grossness, 107.
grotesque, 116, 461.
group, 194.
grow, 194.
grow worse, 400.
gruff, 65.
guardian, 384.
guess, 179.
guile, 474.
guilelessness, 49, 183,
381.
hallow, 184.
hand, 483.
handy, 107.

- happiness (syn. for grief), 266.
 happiness, 331.
 hard heartedness, 368.
 hardness, 328, 368, 412, 434.
 hark, 137.
 harm, 61, 388.
 harmless, 244, 252.
 harmonious, 208.
 harmony, 69, 72, 163, 195, 218.
 harsh, 370, 461.
 harshness, 121, 328, 368.
 haven, 156, 184, 393.
 hate, 37.
 hateful, 65, 187, 370.
 hater, 35.
 hatred, 80, 221.
 hatred (syn. for friend ship), 257; (syn. for love), 321.
 haughtiness, 335.
 haughty, 326.
 haunt, 4.
 heal, 410.
 health, 108.
 beautiful, 364.
 hearken, 137.
 hearty, 232.
 heated, 188.
 heavy, 28, 45, 47, 246, 344.
 heedless, 208, 305, 480.
 heedlessness, 44, 142, 305.
 height, 22, 149.
 heighten, 58.
 help, 116, 293, 303.
 helper, 217.
 helpful, 39, 364, 305.
 helping, 387.
 helpless, 262, 442.
 helplessness, 376.
 hereafter, 293.
 herole, 41.
 hesitancy, 94.
 hesitation, 493.
 heterogeneous, 49.
 hidden, 227.
 hide, 70, 170.
 hideous, 116, 461.
 hiding, 419.
 high-spirited, 326.
 hill, 23, 149.
 hillock, 149.
 hilly, 284.
 bird, 387.
 hinder, 7, 301, 365, 383, 398.
 hinder (syn. for quicken), 398.
 hinderer, 24, 92, 103.
 hindmost, 383.
 hindrance, 363.
 hissing, 377.
 history (syn. for fiction), 243.
 history, 53, 244, 451.
 hold, 4, 152, 177, 412, 433.
 hold aloof, 306.
 hold back, 365.
 hold fast, 250.
 hold off, 306.
 hold one's ground, 14.
 hold one's place, 14.
 holiness, 439.
 homelike, 124.
 homogeneous, 167, 278.
 honest, 475.
 honesty, 59, 182, 256, 286, 304, 381.
 honeyed, 122.
 honor, 4, 40, 304.
 honorable, 475.
 hope, 191.
 hopefulness, 191.
 horizontal, 450.
 horrible, 187.
 horrid, 116, 461.
 hostile, 257.
 hostility, 54, 272.
 however, 117.
 huge, 246.
 humane (syn. for barbarous), 113.
 humane, 113, 132.
 humble, 16, 42, 106.
 humiliate, 42.
 humiliation, 236.
 humility, 68, 211, 297, 306, 385.
 hurry, 156, 184, 393.
 hurt, 174, 388.
 hush, 70, 137, 447, 450.
 hyperphysical, 367.
 hypocritical, 288.
 hypothetical, 402.
 identical, 278.
 identity, 153, 195.
 idocy, 486.
 idiot, 430.
 idiotic, 94, 102.
 idle, 28, 296.
 idleness, 229, 300, 487.
 idler, 430.
 ignoble, 261.
 ignominy, 236, 377.
 ignoramus, 430.
 ignorance, 26, 210, 312.
 ignorant, 23, 162, 173, 428.
 ignore, 33, 105, 150, 319, 301.
 ignoring, 26.
 ill, 275.
 ill-becoming, 118.
 ill-behaved, 373.
 ill-bred, 373.
 ill-breeding, 34.
 ill-conditioned, 65.
 ill-contrived, 217.
 ill-disposed, 257.
 illegitimate, 38.
 ill-fitted, 247.
 ill-fitting, 118, 247.
 ill-humored, 65, 370.
 illiberal, 261.
 illiberality, 121.
 illiteracy, 210, 312.
 illiterate, 23.
 illiterate person, 430.
 ill-mannered, 373.
 ill-manners, 34.
 ill-natured, 65, 370.
 ill-starred, 254.
 ill-suited, 247.
 ill-tempered, 65.
 ill-timed, 247.
 illumined, 181.
 illusory, 402.
 ill-will, 121.
 imaginary, 402.
 imagination, 179.
 imbecile, 94.
 imbecility, 262, 376, 486.
 immaterial, 296, 367.
 immense, 246.
 immobility, 28, 336.
 immodest, 396.
 immortal, 471.
 immutable, 243, 378.
 immunity, 180.
 impair, 64.
 impalpable, 227.
 impartiality, 304.
 impeach, 16.
 impenetrability, 485.
 impel, 415, 418.
 impede, 7, 301, 393.
 impenetrable, 227.
 impenitence, 412.
 imperceptible, 227.

imperfect, 362.
 imperishable, 471.
 impertinent, 38, 326, 373.
 impity, 409.
 implacability, 328.
 implicit, 280.
 implied, 280.
 impolicy, 473.
 impolite, 373.
 imposture, 473.
 impotence, 376.
 impoverish, 42.
 impoverished, 372.
 imprisonment, 316.
 improbable, 77, 294, 313.
 improper, 118, 247.
 improvement, 303.
 improvidence, 395.
 imprudence, 395, 486.
 impudence, 335.
 impudent, 326, 373.
 impure, 282, 396.
 imputation, 76.
 inability, 376.
 inaction, 28, 229, 351.
 inactive, 28, 47, 344.
 inactivity, 28, 220.
 inadequacy, 228, 473.
 inadequate, 35, 170, 247, 372, 400.
 inadhesive, 36.
 inadmissible, 38.
 inanimate, 50.
 inanimate object, 60.
 inapplicable, 38.
 inapposite, 38.
 inappropriate, 247.
 inaptitude, 376.
 inartistic, 461.
 inattention, 142, 300.
 inattentive, 305, 480.
 inaugural, 150.
 incapacity, 376.
 incarnation, 289.
 incautious, 480.
 incidental, 302.
 incite, 415, 418.
 inclined, 284, 409.
 income, 230.
 incompetence, 376.
 incompetent, 35.
 incomplete, 362, 400.
 incongruity, 67, 272.
 inconsiderable, 296, 314, 387.
 inconsiderate, 480.
 inconsistency, 272.
 inconstancy, 300.

incontestable, 10, 378.
 incontrovertible, 19.
 incorruptible, 475.
 increase, 6, 18, 53, 231.
 incredible, 318.
 incredulity, 233.
 inculcate, 16.
 indecent, 118, 396.
 indecorous, 118.
 indefinite, 230.
 indelicate, 396.
 independence, 92, 378.
 indeterminate, 230.
 indifference, 46, 62, 63, 80, 98, 142, 220, 236.
 indifferent, 208, 257, 296, 305.
 indigence, 485.
 indiscretion, 395, 486.
 indiscriminately, 75.
 indisposed, 33.
 indisputable, 19, 222.
 indistinct, 102.
 indolence, 40, 300.
 indolent, 28.
 indubitable, 19, 223.
 indulge, 156.
 indulgence, 11.
 indulgent, 336, 435.
 industrious, 290.
 industrious (syn. for idle), 289.
 inebriation, see INTOXICATION, 18.
 ineffectiveness, 351.
 inefficiency, 351, 376.
 inequity, 309.
 inert, 28, 45, 344.
 inertia, 28.
 inertness, 46.
 inexcusable, 477.
 inexpediency, 478.
 inexpedient, 247.
 inexperience, 26, 312.
 inexperienced, 442.
 inexpressible, 477.
 infallible, 19, 378.
 infamy, 236.
 inferior, 35, 106, 280, 302, 387.
 infidelity, 288.
 infinitesimal, 314.
 inflexible, 200.
 infrequent, 261, 472.
 ingenuousness, 39, 286, 381.
 inhabited, 473.
 inharmonious, 401.

inhibit, 301.
 inhumanity, 121, 368.
 inimical, 257.
 initiate, 150.
 injure, 61.
 injury, 76, 388.
 injudice, 309.
 innocence, 80, 439.
 innocent, 178.
 innocent (syn. for criminal), 178.
 inconvertible, 173.
 insensibility, 431.
 inside, 127.
 insignificant, 296, 311.
 insincere, 139.
 insipid, 400.
 insist, 90.
 insistence, 11.
 insolent, 373. See also RUD, 246, 310, 373, 461.
 inspire, 5.
 in spite of, 58.
 instigate, 156, 415.
 instigator, 24.
 institute, 12, 150.
 instructed, 390.
 insufficiency, 228.
 insufficient, 35, 362, 372.
 insult, 76.
 insulting, 373.
 insure, 103.
 intangible, 307.
 integrity, 260, 301, 430.
 intellect, 130.
 intellectual, 132, 367.
 intelligence, 126, 280, 431.
 intelligent, 132. See also REASONABLE, 9, 287.
 intemperance, 18.
 intensify, 53.
 intention, 25.
 interior, 127.
 in the future, 293.
 intoxication, 18.
 intractable, 200.
 intrepid, 41.
 intriguing, 139.
 introduce, 12.
 inutilty, 331, 473.
 invariable, 213.
 invariability, 153.
 inventor, 41.
 invigorate, 468.
 invigorating, 381.
 invisible, 227, 387.
 irrational, 428.

- irregular, 384, 315.
 irregularity, 159.
 irrelevant, 38.
 irreligious, 109.
 irresolute, 319.
 irresponsible, 116.
 irritation, 208.
 isolation, 92.
 issue, 147.
 jammed, 173.
 join, 128, 410.
 journey, 9.
 joy, 13, 331, 337.
 jumble, 31, 87.
 just, 178.
 justice, 301, 328.
 justify, 169.
 keenness, 451.
 keep, 4, 159, 177, 433, 454.
 keep aloof, 308.
 keep away, 306.
 keep back, 70.
 keep clear, 306.
 keep out, 306.
 keep secret, 70.
 keep together, 82.
 kind, 244, 336, 366.
 kindly, 51.
 kindness, 72, 218.
 kindness, 27, 218.
 kindly, 221.
 knell, 119.
 know, 457.
 knowing, 139.
 labor, 220.
 lack, 13, 228, 485.
 laconic, 260.
 lance, 127.
 large, 316.
 latitude, 220.
 lasting, 471.
 late, 390.
 latent, 227.
 later, 383.
 latitudinarianism, 236.
 latter, 383.
 laud, 20, 166, 443.
 laudatory, 141.
 law, 25, 421.
 lawful, 178.
 lawfulness, 304.
 lawless, 418.
 lay bare, 279.
 lay open, 279.
 laziness, 46.
 lazy, 28.
 leader, 24.
 learned, 290.
 leave, 157, 352, 401.
 legal, 178.
 legalize, 12.
 leave, 487.
 lengthy, 463.
 leniency, 68.
 lenient, 16, 170, 435.
 lenity, 68.
 lessen, 32.
 let, 389.
 let alone, 306.
 let be, 306.
 let go, 100, 145, 146, 156, 216, 456.
 let loose, 418.
 level, 450.
 lewd, 396.
 liberal, 101.
 liberality, 259.
 liberate, 88, 156.
 liberty, 352.
 license, 11, 156, 352, 389.
 lie, 478.
 life-giving, 364.
 lifeless, 50.
 light, 181, 195, 296.
 light heartedness, 74.
 like, 9, 278.
 likeness, 195.
 limit, 393.
 limited, 16, 300, 314.
 list, 187.
 listen, 137.
 literal, 237.
 literalness, 244.
 little, 300, 314.
 live, 194.
 loathing, 80, 224.
 loathsome, 186.
 lofty, 326, 368.
 logic, 235.
 logical, 19.
 loneliness, 165.
 long, 463.
 long-suffering, 68.
 loose, 86, 121, 156, 409.
 loosen, 156, 249.
 loquacious, 460.
 loquaciousness, 335.
 loquacity, 335.
 lose, 100, 146, 178, 361, 454.
 loss, 388.
 love, 9, 68.
 love (syn. for antipathy), 72; (syn. for enmity), 218; (syn. for hatred), 278.
 loving, 336.
 low, 280, 450.
 lower, 42.
 lowliness, 297, 385.
 lowly, 16, 106.
 loyalty, 421.
 lucid, 181, 222.
 lucidity, 306.
 lukewarmness, 220.
 luminous, 181.
 lump, 149.
 luscious, 122.
 luxury, 259.
 lying, 283.
 magnify, 6, 53.
 maidenhood, 323.
 main body, 80.
 maintain, 4, 130, 412.
 make, 188.
 make (syn. for abolish), 11; (syn. for break), 128; (syn. for demolish), 187.
 make known, 279.
 make merry, 337.
 make sure, 102.
 make worse, 53.
 muladroit, 442.
 maladroitness, 376.
 malevolence, 121.
 malignity, 121.
 man, 69.
 manageable, 405, 418.
 maneuvering, 139.
 manifest, 222, 279, 315.
 mar, 38, 64, 200.
 marred, 362.
 masculine (syn. for feminine), 240.
 mask, 170.
 mass, 358.
 material substance, 330.
 matter, 69, 330.
 matter-of-course, 28.
 matter-of-fact, 28.
 meager, 362.
 mean, 106, 261, 280, 296, 314, 372, 426.
 measurable, 300.
 meek, 16.
 meekness, 297, 385.
 melancholy, 187.
 memoir, 451.
 mend, 128, 410.
 mendacious, 283.
 mendacity, 478.
 mendicancy, 435.
 mental, 367.

mercilessness, 368.
mercy, 420.
meritorious, 178.
meretricious, 461.
microscopic, 314.
mighty, 368.
migrate, 9.
mild, 16, 124, 170, 244,
336, 435.
mildness, 27, 68.
mind, 60, 126.
mineral, 69.
minion, 157.
minor, 296, 387.
minute, 314.
minute (syn. for large),
813.
misapplied, 247.
misapply, 31, 192.
misapprehend, 361.
misapprehension, 312.
misappropriate, 192.
miscalculated, 247.
miscalculation, 486.
miscarriage, 479.
miscarry, 200, 454.
misconceive, 361.
misconception, 312.
miscontrived, 247.
miserable, 163, 187, 254.
miserly, 261, 372.
misery, 435.
misfit, 31.
misfitted, 247.
misfitting, 247.
misgiving, 94, 233.
misjoin, 31.
misjudgment, 486.
misplace, 31.
miss, 100, 146, 200, 301,
454.
misunderstanding, 312.
misuse, 192.
mixed, 396.
model, 207.
moderate, 170, 300, 400.
modern, 73, 336.
modest, 325.
modesty, 210, 211, 297,
353, 366, 385.
modish, 73.
monstrosity, 429.
monstrous, 345.
moral, 178, 367.
morality, 439.
morose, 65.
mortal, 477.
motion, 417.

mound, 149.
mount, 22, 149.
mountain, 22, 149.
mournful, 137.
move, 9.
movement, 417.
munificent, 104.
mysterious (syn. for
clear), 161.
mysterious, 162.
mystery, 419.
nakedness, 204.
narrative, 53.
narrow, 300, 314, 372.
native, 48.
native-born inhabitant.
48.
natural, 397, 455.
naturalized person, 48.
nature, 102.
nauseous, 186.
necessity, 25, 60, 275,
316.
nectared, 122.
need, 13, 228, 240, 486.
needless, 296, 341.
neglect, 44, 142, 150,
200, 216, 300, 319,
415.
neglect (syn. for care),
141.
neglectful, 480.
negligence, 44, 142, 300.
negligent, 141, 208, 319,
480.
negligible, 296, 387.
neither, 128.
new, 73, 386.
new (syn. for old), 350.
nevertheless, 58, 117.
nice, 113.
niggardliness, 121.
niggardly, 261, 373.
nightly, 179.
noble, 132, 308.
nocturnal, 179.
nonchalance, 74.
none, 126.
non-essential, 295, 341.
no one, 126.
nonsense, 107, 480.
not any, 126.
notwithstanding, 58, 117.
normal, 397.
novel, 386.
nudity, 204.
numbness, 434.
obduracy, 412.

obedience, 421.
obedient, 349, 405, 418.
obey, 265.
objection, 363.
obligate, 16.
obligation, 316.
oblige, 16.
obliging, 366.
oblivion, 236, 327.
oblivious, 480.
obliviousness, 327.
obloquy, 377.
obscene, 396.
obscuration, 419.
obscure (syn. for
clear), 161.
obscure, 162, 227.
obscurity, 236, 318.
obsolete (syn. for new),
343.
obstinate, 412.
obstinately, 200, 326.
obstruct, 7, 334.
obtusar, 424.
obtuseness, 29, 322.
obvious, 23, 167, 222.
occult, 227.
occupied, 290, 473.
occupy, 4.
odium, 116.
offense, 76, 391.
offensive, 379, 161.
old (syn. for new), 314;
(syn. for youthful),
488.
omit, 216.
omission, 142.
on hand, 19.
on the contrary, 58.
on the other hand, 54.
opaque, 192.
open, 350.
opening, 114.
openness, 39, 182, 286,
341.
operation, 8.
opinionated, 200.
opponent, 24, 35, 92,
103.
oppose, 43, 276, 456.
opposer, 24, 92, 103.
opposition, 34, 272, 363.
oppression, 316.
option, 343.
optional, 341.
opulence, 269.
ordination, 25.
order, 195, 399, 421.

ordinance, 25.
ordinary, 23, 237, 397,
455.
original, 80, 207.
originate, 150.
Originator, 41.
outcome, 147.
outgrowth, 147.
out of place, 38.
out of the way, 472.
outside, 65.
outward, 302.
overflowing, 473.
overlook, 33, 85, 150,
210, 301, 415.
oversight, 44, 112, 327.
overthrow, 171, 456, 179.
own, 412.
packed, 473.
painful, 187.
palliative, 400.
paltry, 106, 296, 314.
panegyric, 414.
panegyricize, 20.
paradox, 107.
parent, 61.
pardon, 85, 109, 415,
420.
parsimonious, 261.
part, 91, 333.
partial, 400.
partiality, 309.
pass, 33.
passage, 114.
pass by, 33, 216.
passion, 74.
passion (in philosophic
sense), 28.
passionate, 138.
passive, 418.
pass over, 415.
patience, 68.
patience (syn. for au-
ger), 67.
patient, 244.
patriotic, 475.
pattern, 207.
pauperism, 485.
pave the way for, 350.
pears, 68, 114, 354,
450.
pervable, 418.
peaceableness, 68.
peaceful, 244.
peacefulness, 68.
peak, 149.
peculiar, 345.

penalty, 264, 328, 356,
391.
penurious, 261.
penury, 485.
perceptible, 315.
perfidious, 283.
performance, 289.
perimeter, 150.
permanence, 153.
permanent, 471.
permanent (syn. for tran-
sient), 470.
permission, 352.
permit, 352, 389.
perpetual, 471.
perpetuate, 139, 454.
perplexity, 208.
persist, 152, 250.
persistence, 153.
persistent, 471.
perspicuous, 222.
persuasion, 202.
pertinent, 48.
pertiness, 335.
pervert, 102.
perverted, 362.
petty, 170, 261, 296, 314.
phlegmatic, 208.
pi or pia (print.), 87.
pitilessness, 308.
pity, 420.
place, 198.
plain, 23, 107, 222.
plainness, 158.
plan, 25, 275.
plant, 231.
pleasant, 195, 336.
please, 40.
pleasure, 146, 331, 367.
pliable, 349, 435.
pliant, 349.
policy, 220.
polished, 125, 426.
polite, 113, 125, 426.
pollute, 160.
polluted, 282, 396.
polluting, 11.
pollution, 11.
ponderous, 45.
poor, 25, 362, 372, 426.
populate, 231.
portion, 61.
possession, 177.
possession, 8.
possibility, 179, 342.
posterior, 383.
potent, 474.
poverty, 228, 485.

powerless, 252.
powerlessness, 351.
powerful, 474.
praise, 20, 106, 169, 414,
443.
practical, 23.
practise, 289.
premeditated, 231.
prepared, 231.
preparation, 25, 62.
present oneself, 14.
preserve, 177, 454.
presuming, 326.
presumptuous, 326.
prevent, 301.
prevention, 363.
principal, 24, 41.
privacy, 105.
privation, 144, 240, 485.
privilege, 146.
probability, 179.
problematical, 294.
proceed, 9.
proceeds, 230.
proclaim, 412.
prodigal, 104.
prodigality, 395.
product, 147, 230.
profane, 150.
profanity, 409.
profit, 230.
profits, 230.
profitable, 364, 474.
prohibition, 363.
projection, 149.
prolix, 468.
prominence, 149.
promote, 4, 12, 110, 350.
promote (syn. for abase),
4; (syn. for ally), 50.
prompt, 10.
promulgate, 279.
proof, 235, 287, 380.
propagate, 231.
proper, 48.
propitious, 39.
proposition, 424.
prorogue, 178.
prosaic, 237.
prosaic speech, 372.
prosaic writing, 372.
prose, 372.
prosecute, 4.
prosper, 110.
prosperity, 112, 146,
381.
prosperous, 39.
prosy, 400.

protect, 4, 20, 99.
protection, 180, 275.
protest, 43, 55.
prototype, 207.
profuberance, 149.
rove, 102, 457.
provision, 25.
provoke, 51.
prudence, 220.
subtle spirited, 475.
publish, 279.
punish, 356.
punishment, 328, 356,
391.
puro, 278.
purify, 184.
purity, 439.
purpose, 25.
purposeless, 208.
purposelessness, 44.
pursue, 4.
pusillanimity, 394.
pusillanimous, 128.
put forth, 17.
put in an appearance, 14.
put in order, 198.
put in place, 198.
put out, 182.
put to sale, 395.
put up with, 389.
quantity, 358.
quarrel, 168.
questionable, 318.
quicken, 156, 184.
quickness, 451.
quiescence, 28, 336.
quiescent, 28.
quiet, 28, 386, 418.
quietness, 358.
radiant, 181.
radiate, 17.
rage, 6.
raging, 138, 326.
raime, 4, 6, 279.
rally, 5.
rampart, 149.
rapacious, 261.
rapture, 354.
rare, 261, 345, 472.
rare (syn. for general),
260; (syn. for nor-
mal), 344; (syn. for
usual), 472.
rashness, 395.
rational, 19.
rationality, 306.
raw, 373.
read, 231.

readiness, 451.
ready, 19.
real, 237, 378, 471.
reality, 187, 203, 237,
241, 288, 289, 381.
realization, 71, 203, 289.
reappear, 14.
reason, 380.
reasonable, 19, 141, 237.
reasoning, 380.
rebellion, 52.
rebuff, 203.
recall, 71.
receipt, 230.
receive, 82, 433.
recent, 73, 386.
recited, 231.
reckless, 41.
recklessness, 142, 395.
recompense, 356.
recollect, 71.
reconciliation, 420.
record, 53, 139.
recreate, 466.
recrutation, 487.
rectitude, 304, 439.
reduce, 32, 42, 66, 393.
recluse, 139.
redlined, 113, 125, 132,
426.
refresh, 466.
refusal, 221, 363, 391.
refuse, 43, 55, 78, 90,
157, 429, 438.
refute, 450.
regard, 20, 72, 218.
regardless, 208.
region, 127.
regular, 237, 307.
reinstate, 12.
reject, 9, 55, 90, 157,
203, 438.
rejection, 221, 338, 391.
rejoice, 327.
rejoicing, 151.
rejuvenating, 364.
relapse, 388, 406.
relax, 466.
relaxation, 229, 487.
release, 85, 88, 146, 418.
relevant, 48.
relief, 205, 331, 364.
relieve, 466.
relish, 9.
reluctance, 46.
rely on, 201.
rely upon, 201.
remain, 14, 162.

remember, 71.
remedy, 303.
remission, 112, 300.
remote, 36.
remoteness, 83.
remove, 32, 97, 307,
333.
remuneration, 261.
renegade, 35.
renew, 12.
renewal, 8.
repair, 12, 188.
repeal, 57, 263, 365.
repellent, 379.
repelling, 379.
replenish, 231.
replete, 473.
repose, 28, 17, 336, 406,
487.
reported, 102.
reproach, 377.
reprobation, 391.
reproof, 377.
repudiate, 78, 165, 167,
170, 450.
repudiation, 377.
repugnance, 46, 80, 98,
224.
repulse, 203, 391.
reputation, 80, 90.
repulsive, 110, 180, 370.
require, 349.
resemblance, 195.
resentful, 336.
reserve, 353.
reserved, 125, 200, 325.
resign, 173.
resist, 9, 55, 90, 276.
resistance, 99, 363.
resolute, 200, 252, 243.
resolution, 203, 380.
resolve, 203.
respect, 20.
responsible, 16.
rest, 28, 329, 330, 360,
466, 487.
restlessness, 417.
restore, 12, 18, 146, 188,
466.
restrain, 301, 305, 429.
restrict, 429.
restricted, 300.
result, 147.
resume, 55.
remuneration, 8.
retain, 4, 56, 89, 162,
177, 412, 433.
retainer, 157.

retaliation, 356.
retard, 301, 398.
retreat, 260.
retire, 173, 306.
retirement, 165, 353.
retiring, 325.
retract, 460.
retreat, 99, 173, 479.
retrench, 86.
retribution, 356, 391.
retrogression, 388.
return, 239.
returns, 239.
reunite, 410.
reveal, 279.
reveling, 18.
revelry, 18.
revenge, 328.
revengeful, 326.
revival, 8.
revive, 6, 12.
riches, 259.
ridiculous, 87.
right, 178, 304, 439.
righteousness, 304, 439.
rigor, 328, 368.
rim, 160.
rise again, 194.
rise from the dead, 194.
rising, 149.
rival, 34, 93.
road, 114.
robustness, 198.
rolling, 284.
root up, 869.
rough, 284, 340, 461.
rouse, 51.
rouned, 188.
roust, 479.
rude, 246, 340, 373, 461.
rudeness, 84, 312, 407.
rugged, 284, 461.
ruffled, 188.
ruin, 200, 385.
ruined, 302.
rule, 421.
rush, 156, 417.
rattle, 373.
rusticity, 407.
ruthlessness, 368.
saccharine, 123.
sacrilege, 409.
sadden, 174.
saddening, 187.
safeguard, 180, 275.
safety, 180, 275.
sagacious, 19.
sagacity, 389, 451.

sage, 290.
salutary, 364.
same, 278.
sameness, 195.
sanctify, 184.
sanction, 389.
sanity, 306.
satellite, 157.
satisfaction, 13, 63, 74,
367, 380.
satisfied, 221.
sauciness, 335.
savagery, 407.
scent, 170, 362, 372.
scantiness, 228.
scanty, 170, 314, 372.
scarce, 372.
scarcity, 485.
scatter, 61, 87, 178.
schism, 54, 272, 471.
schoal, 476.
scoorn, 37, 319, 377, 476.
scounge, 350.
screen, 170.
scrimped, 372.
secession, 54.
seclusion, 165.
secondary, 296, 387.
secrete, 227.
secrete, 70, 170.
secular, 282.
secure, 128, 410.
security, 47, 180, 275.
sedition, 52.
seek, 4.
segregate, 338.
seize, 55.
self-abasement, 385.
self-approval, 412.
self-asserting, 326.
self-complacency, 412.
self-conceit, 385.
self-confidence, 380.
self-congratulation, 412.
self-control, 68.
self-distrust, 211, 385.
self-forgetfulness, 211.
self-gratification, 432.
self-indulgence, 18, 432.
selfishness, 121, 432.
self-possession, 62.
self-reliance, 380.
self-restraint, 68.
self-satisfaction, 380.
self-seeking, 121, 432.
self-sufficiency, 385.
self-will, 432.
self-willed, 200.

sell, 395.
send out, 17.
sense, 289, 451.
senseless, 162, 428.
senselessness, 262, 486.
sensible, 19, 237.
sensibility, 74, 451.
sensitiveness, 74, 210.
sensuality, 18.
sentence, 356.
separable, 36.
separate, 36, 79, 91, 97,
101, 178, 307, 338,
337.
separated, 337.
separation, 54, 92, 98,
272, 471.
serenity, 450.
serfdom, 316.
seriousness, 487.
servant, 157.
service, 303.
serviceable, 364, 474.
servile, 426.
servitude, 316.
set, 425.
set about, 150.
set free, 85, 88, 121, 249,
418.
set going, 150.
set in operation, 150.
set in order, 198.
set on foot, 150.
set out, 401.
set sail, 401.
settle, 102, 231, 425.
settled, 243, 378.
set up, 12.
sever, 91, 97, 101, 383.
severance, 98, 471.
severed, 387.
severely, 328, 368.
sow, 410.
shade, 318.
shadow, 318.
shake, 171, 249.
shake off, 145.
shallow, 94, 300.
shame, 42, 230.
sharp, 139.
shatter, 171.
shelter, 99, 180.
sheltered, 124.
shield, 20, 99.
shiftless, 443.
shining, 181.
shocking, 116.
shoot forth, 17.

short, 280, 300, 314, 362, 372.
shortcoming, 228.
shorten, 393.
shortness, 158.
short-sighted, 94.
show, 279.
shrewd, 139.
shrinking, 128, 210, 353.
shrouding, 419.
shun, 9, 33.
shy, 325.
shyness, 94, 210, 211, 366.
sick, 275.
sift, 338.
silence, 447.
silent, 260.
silliness, 436.
silly, 428.
similar, 278.
similarity, 195.
simple, 28, 167, 428.
simplicity, 89, 182, 381.
sincerity, 89, 182, 286, 381.
singular, 261, 345, 472.
sink, 217, 406, 425.
sinlessness, 439.
skepticism, 233.
skilful, 107.
skilled, 290.
slander, 377.
slanting, 284.
slavery, 316.
slavish, 426.
slender, 314.
slide, 422.
slight, 142, 170, 195, 296, 314, 319, 400, 415, 450, 476.
slip, 422.
sloping, 284.
slough, 300.
slouchy, 340.
slovenly, 340.
slow, 28, 45, 47, 102, 344.
slow (syn. for nimble), 344.
slowness, 46.
sluggish, 28, 45, 47, 344.
sluggishness, 46.
sly, 139.
small, 300, 314, 372.
smearing, 11.
smirching, 11.
smoothness, 27.

smother, 132.
sober, 206.
sobriety, 144, 487.
sociability, 335.
society, 419.
soft, 435.
soil, 11, 123, 160.
soiled, 340.
solling, 11.
soilure, 11.
solace, 354.
solder, 128, 410.
solemnity, 487.
solid, 237, 471.
solitude, 92, 165.
solution, 424.
solvency, 112.
some time, 293.
sophism, 107.
sort, 198, 333.
sort out, 333.
sottish, 428.
soul, 69, 126.
sound, 19, 237, 474.
soundness, 112, 198, 235, 289.
sour, 65.
sovereignty, 421.
sparing, 372.
speechless, 260.
speechlessness, 447.
speed, 156.
spend, 61.
spirit, 69, 126.
spiritless, 50.
spiritual, 367.
spoil, 38, 64, 100, 200.
spoiled, 362.
spurious, 103.
spurn, 476.
squander, 61, 192.
squalor, 485.
stable, 343, 378.
stain, 11, 123, 160.
stained, 396.
staining, 11.
stale, 400.
stand, 422.
stand aside, 306.
stand away, 306.
stand back, 306.
stand fast, 250.
standing, 112.
stand off, 306.
stand one's ground, 14.
start, 150, 401.
starve, 429.
stay, 14, 152, 250, 388.

steadfast, 213.
steadiness, 62, 153.
steady, 213, 374.
sternness, 328, 368.
stick, 250, 422.
stifle, 132.
stillness, 336, 147, 450.
stinginess, 121.
stingy, 261, 372.
stint, 429.
stir, 51, 117.
stir up, 51.
stitch, 410.
stoicism, 62.
stolid, 91, 208.
stolidity, 487.
stony, 45, 208.
stop, 388.
stoppage, 388.
storm, 74.
stormy, 158.
stout, 246.
straightforward, 28.
strain, 417.
straiten, 429.
straitened, 373.
straitened circumstances, 486.
strange, 472.
stranger, 92.
strength, 198.
strengthen, 18.
strife, 168.
strong, 232, 378.
stubborn, 200, 326.
stubbornness, 412.
studied, 231.
stunted, 280.
stupid, 28, 47, 91, 162, 208, 400, 428.
stupidity, 29, 31, 40, 202, 376, 486, 487.
sturdiness, 198.
sturdy, 383.
stylish, 73.
subaltern, 157.
subdue, 192.
subject, 387.
sublime, 368.
submission, 99, 421.
submissive, 19, 214, 349, 405, 418.
submissiveness, 297.
submit, 173, 263.
subordinate, 157, 387.
subsequent, 383.
subservient, 406.
subsidiary, 302, 387.

substance (material), 69.
 substance, 102, 203, 288.
 substantial, 19, 171.
 subtle, 139.
 subtract, 32.
 succeeding, 383.
 success, 116, 331.
 succumb, 158.
 succeed, 335.
 succumb, 173, 317.
 suffer, 389.
 suffering, 28.
 sufficient, 474.
 suitable, 208.
 sullen, 65.
 sullied, 396.
 sully, 160.
 sum, 354.
 summarize, 66.
 summit, 22.
 sum total, 358.
 sum up, 66.
 sander, 91, 101, 333.
 sander, 337.
 sunny, 124.
 superadded, 302.
 superb, 308.
 superficial, 303, 400.
 superfluous, 302.
 superimposed, 302.
 superior, 368.
 superstition, 316.
 supplemental, 302, 387.
 support, 4, 12, 99.
 supporter, 217.
 supporting, 39.
 supposed, 402.
 supposition, 179.
 supposititious, 402.
 suppress, 70.
 supremacy, 421.
 supreme, 416.
 sure, 237, 243, 378.
 sureness, 235.
 surely, 235, 275.
 surly, 65.
 surprise, 71.
 surrender, 99, 115, 173, 182, 217, 438.
 survive, 164.
 susceptibility, 74.
 suspension, 28.
 suspension of hostilities, 114.
 suspicion, 233.
 sustain, 12, 20, 99, 130, 454.

sustaining, 39.
 sweet, 122, 241, 435.
 sweetness, 27.
 swelling, 149.
 sympathetic, 336.
 sympathy, 72, 74, 218.
 synthetically, 75.
 taciturn, 280.
 taciturnity, 447.
 taint, 11, 160.
 tainted, 396.
 tainting, 11.
 take up, 184.
 talkative, 460.
 tame, 244.
 tantalize, 429.
 tarnish, 64.
 tarnished, 396.
 tasteless, 400.
 tawdry, 461.
 teachable, 349.
 tedious, 463.
 tell, 279.
 temperance, 144.
 temperate, 206.
 tend, 20.
 tender, 113, 244, 336, 435.
 tentative, 400.
 territory, 127.
 terneness, 158.
 theoretical, 402.
 thick, 246.
 thick headed, 162.
 thoughtful, 19, 141.
 thoughtless, 480.
 thoughtlessness, 44, 395.
 thoroughfare, 114.
 thralldom, 316.
 throw aside, 146, 157.
 throw away, 146.
 throw down, 146, 456.
 throw over, 216.
 throw up, 216.
 thrown away, 216.
 thrown off, 17, 145.
 thwart, 276.
 timid, 128.
 timidity, 94, 210, 220, 353, 394, 402.
 timorous, 128.
 tiny, 314.
 tire, 219.
 together, 75.
 toll, 220, 417.
 tolerate, 389.
 total, 80, 358, 429.

tractable, 349, 405, 418, 435.
 trained, 290.
 traitor, 35.
 traitorous, 283.
 tranquillity, 74, 450.
 transient, 300, 302.
 transit, 114.
 transitory, 360.
 transparency, 286.
 transparent, 181.
 treacherous, 283.
 treason, 52.
 treat, 23.
 trial, 400.
 tricky, 139.
 trifling, 170, 195, 296, 314.
 triumph, 151, 331, 337.
 trivial, 170, 195, 296, 314.
 trouble, 174, 208.
 truce, 114.
 truculence, 368.
 true, 19, 237.
 trust, 191, 201.
 trustful, 221.
 truth, 89, 182, 187, 235, 237, 244, 256, 280, 381.
 truthfulness, 286.
 tumult, 417.
 turbid, 162.
 turbulence, 74.
 turbulent, 188.
 ugly, 116.
 unaccustomed, 33.
 unallowable, 38.
 unalterable, 243.
 unambiguous, 222.
 unamiable, 65.
 unanimity, 59.
 unassuming, 325.
 unattractive, 116.
 unauthorized, 103.
 unawares, 173.
 unbecoming, 118.
 unbelief, 233, 409.
 unblind, 121.
 unholt, 249.
 uncared for, 340.
 uncertain, 230.
 uncertainty, 342, 378.
 unchangeableness, 158.
 unchanging, 243.
 unchange, 396.
 unclvil, 373.
 unclean, 396.

uncombined, 167.
uncomfortable, 163
uncommon, 261, 345
uncommon, 472
uncompounded, 167
unconcealed, 315
unconcerned, 208, 305.
unconditioned, 416.
unconnected, 38, 302
337
unconscious, 178
unconsciousness, 327,
434.
unconsecrated, 282.
uncontrolled, 416. -
uncouth, 116, 378.
uncover, 279.
undaunted, 41
undecided, 349.
undeniable, 19, 378.
underling, 157
undertake, 4.
undignified, 106.
undiscerning, 94, 428.
undiscovered, 227.
undismayed, 41.
undoubted, 378.
undress, 204.
undying, 471.
uneasiness, 208.
unequal, 35
unequivocal, 222.
uneven, 284.
unexpected, 294
unfading, 471
unfair, 38
unfairness, 309
unfaithful, 233, 288
unfamiliarity, 26, 312.
unfasten, 121, 249.
unfettered, 416
unfit, 35, 118, 247.
unfix, 249.
unfortunate, 254.
unfriendly, 257
ungainly, 116, 247.
ungodliness, 409.
unhallowed, 282.
unhandy, 442.
unhappy, 254.
unhealthy, 275
unholy, 282
uniform, 167, 243, 278.
uniformity, 153, 195
unimaginable, 77
unimagined, 227
unimportant, 296
uninfluential, 296.

uninstructed, 28
unintelligent, 94, 428.
unintelligible, 162
uninterested, 208, 305.
union, 59
unison, 163
unite, 18, 128, 410.
unitedly, 75.
unity, 59, 163, 195.
unjustifiable, 477.
unkempt, 340.
unkind, 257, 370.
unkindness, 121
unknown, 227, 261
unlatch, 249
unlawfulness, 309.
unlike, 49
unlikely, 77, 294, 318.
unlikeness, 67, 83
unlimited, 416
unlock, 249
unloose, 121.
unlovely, 65, 116.
unlucky, 254
unmannerliness, 34
unmannerly, 373
unmask, 279
unmindful, 208
unmoved, 208
unnatural, 339
unnecessary, 296, 341.
unobtrusive, 325.
unobtrusiveness, 211,
353
unostentatiousness, 211
unpalatable, 186
unparalleled, 472
unpardonable, 477
unpleasant, 116, 370
unpolished, 373.
unprecedented, 345.
unprofitableness, 473
unpurchasable, 475
unqualified, 35.
unquestionable, 19, 222,
378.
unquestioned, 222.
unravel, 338.
unraveled, 167.
unready, 344.
unreal, 367, 402
unreasonable, 818.
unreasonableness, 309
unreasoned, 23.
unreciprocated, 337
unrequited, 337.
unreserved, 480.
unrest, 417.

unrestrained, 416.
unsanctified, 282
unsatisfactory, 35
unsavory, 186
unscrupulous, 283.
unseemly, 118, 247.
unseen, 227.
unsettle, 171, 249
unshared, 337.
unskilfulness, 376.
unskilled, 442
unsound, 275.
unstudied, 23.
unsubstantial, 367.
unsuitable, 35, 38, 118
247
untangle, 333
untaught, 28, 373, 442
unthought of, 227.
untidy, 340.
untie, 121.
untimely, 247
untrained, 442
untrue, 233, 283, 402.
untrustworthy, 233.
untruth, 309, 478.
untutored, 373.
untwine, 333
unusual, 261, 345, 472.
unveil, 279.
unwarrantable, 38.
unwarranted, 38.
unwary, 480
unwavering, 249.
unwillingness, 46.
unwisdom, 34
unyielding, 200
uphold, 4, 5, 20, 99, 139
412, 454.
uplift, 4.
uprightness, 256, 304,
439.
uproot, 369.
upset, 171.
urban, 426.
urbane, 113, 125, 426.
urge forward, 156, 184.
urge on, 156, 184, 415.
useful, 364, 474.
useless, 35, 296, 341.
uselessness, 351, 478.
usual, 297, 455.
utility, 303.
vacation, 487.
vague, 162, 230.
valiant, 41.
valid, 474.
valorous, 41.

- | | | |
|---|---|---|
| <p>valuable, 474.
vapid, 400
variance, 272.
variation, 83.
vassal, 157.
vault of heaven, 22.
vegetable, 69.
vehemence, 74.
veil, 170
veiling, 419.
vengeance, 328, 356, 391.
vengeful, 326.
venturesome, 41.
veracity, 182.
verbose, 463
verity, 187, 203, 244,
235, 287.
vexation, 208.
vice, 481.
viciousness, 481.
vigor, 198.
vigorous, 232.
vile, 426.
vilification, 377.
vindicate, 4, 20, 412,
443
vindictive, 326
violate, 150.
violence, 74.
violent, 138.
virginity, 328.
virtue, 439.
virtuous, 178.
visible, 815.
visionary, 402.
visit, 356.
vitiate, 64, 160
vituperation, 377.
vomit, 17.
vulgar, 106.
vulgarity, 407.</p> | <p>wages, 264
waive, 450.
want, 13, 228, 240, 485
wantonness, 18.
war, 54, 168.
warfare, 272.
wariness, 220, 462.
warlike, 257.
warm, 124.
warn, 57.
warrant, 103, 389.
wash, 184.
waste, 61, 192, 259, 388.
wasted, 275.
wasteful, 104.
wastefulness, 395.
wavering, 233, 349
way, 114
weak, 252, 275.
weaken, 171, 249.
weakness, 376.
wealth, 259.
weariness, 220.
weary, 219.
weed out, 369.
weigh anchor, 401.
weld, 128, 410.
well-bred, 426
well-disposed, 221.
well-informed, 290.
white, 181.
whole, 80, 358, 429.
wholesome, 364.
wicked, 282.
wickedness, 409, 481.
wide-awake, 19.
widowhood, 323.
wild, 138
wilful, 200, 326.
willing, 409.
wily, 189.</p> | <p>wisdom, 289
wise, 19, 290.
withdraw, 32, 306.
withdrawal, 221.
withhold, 55, 70.
without, 65
withstand, 55, 99, 276.
wileless, 162
woful, 187, 254.
wooden, 45.
wonder, 71.
wordy, 463.
work, 220, 417.
working, 290.
worldly, 282.
worn, 275.
worn down, 275.
worn out, 275.
worry, 208
worthless, 35, 296, 341,
362.
worthlessness, 473.
worthy, 474.
wound, 174.
wrath, 391.
wrathful, 138, 326.
wrangle, 168.
wrangling, 168.
wreck, 456.
wretched, 163, 187, 254.
wretchedness, 485.
write, 139.
written, 281.
wrong, 76, 309, 481.
yet, 58, 117.
yield, 173, 217, 265.
yielding, 16, 349, 405,
418, 435.
youthful (syn. for old),
850.
zenith, 22.</p> |
|---|---|---|

A New Creation From Cover To, Cover

THE FUNK & WAGNALLS
NEW
Standard Dictionary

Completed after nearly four years of time and more than a million and a half of dollars had been spent in its production. The work of over 380 Editors and Specialists. Has nearly 3,000 pages; more than 7,000 illustrations contains over 450,000 living vocabulary terms—more than 125,000 of these being new; has dozens of important features not found in any other work; and has been revised since the World War so as to include all the important new terms that have come into the language.

*The Superlative Achievement in
Lexicography*

UNITED STATES DEPT. OF EDUCATION

"This great work can not fail to be a distinct contribution to English scholarship."—*Hon. Philander P. Claxton*, United States Commissioner of Education, 1910-1920.

WILLIAM PENN CHARTER SCHOOL

"It is the greatest book, the Bible alone excepted, the world has yet seen."—*Richard M. Jones, LL.D.*, Head Master, William Penn Charter School (Founded 1689, Chartered, 1711).

Sample pages and prices on application.

FUNK & WAGNALLS COMPANY, Pubs.
NEW YORK and LONDON

The Greatest Single Volume Reference Work Ever Produced

THE FUNK & WAGNALLS NEW Standard Dictionary

Retaining all of the characteristic superior features of the old Standard, which have given that work world-wide fame, this yet more stupendous book adds others exclusive and of immense value. Here are but

A Few of Its Many Points of Surpassing Superiority:

ONE ALPHABETICAL ORDER throughout its entire vocabulary, an immense time-saving feature,—no divided pages, supplemental vocabularies, etc.

THE COMMON MEANING OF EVERY WORD is given in its first definition and the obsolete meaning last as it should be.

KEY-WORDS TO THE CONTENTS of every two facing pages greatly aid consultation.

TWO KEYS TO PRONUNCIATION are placed at the top of every page.

COMMON ERRORS OF SPEECH are systematically corrected.

A SYSTEMATIC METHOD OF COMPOUNDING words reduces compounding to a science.

RULES GOVERNING THE PLURALS of nouns and their formation are a great help.

GRAMMATICAL AND RHETORICAL CONSTRUCTION are aided by the special rules which the New Standard explains.

THE SYLLABIC DIVISION OF WORDS is shown by the simplest possible system.

SYNONYMS AND ANTONYMS are given in such numbers as are nowhere else found.

Send for Information, Prices, etc.

FUNK & WAGNALLS COMPANY, Pubs.
NEW YORK and LONDON

The New Treasure Chest of the English Language

The Funk & Wagnalls

PRACTICAL STANDARD DICTIONARY

An unparalleled achievement, abridged from the FUNK & WAGNALLS *New Standard Dictionary* by Frank H. Vizetelly, Litt.D., LL.D. Outranks other Standard Dictionary abridgements as the largest abridged dictionary published. It is only semi-unabridged, for it contains in its 1,325 pages, 140,000 vocabulary terms—about 40,000 more than its nearest competitor. Defines the very newest words and phrases in our language. (One outstanding feature is the ample treatment given to faulty diction.)

The subjects specially edited for this volume, so as to provide the latest material, are Anatomy, Biology, Botany, Chemistry, Church terms, Engineering, Entomology, Forestry, Geology, Medicine, Mineralogy, Pathology, Physics, Physiology, Psychoanalysis, Psychology, Radiography, Therapeutics, War terms.

Features at a Glance

Number of terms of all kinds in vocabulary . . .	140,000
Number of proper names of all kinds	15,000
Number of synonymic treatments	6,000
Number of lines of synonymic treatments	12,000
Number of antonyms	6,000
Number of illustrations	2,500
Number of foreign phrases	1,900
Number of pages	1,325

Regular Paper Edition, Size 10¾" high, 7¼" wide, 3" thick. Cloth, with thumb-notch index

Buckram, with thumb-notch index

Bible Paper Edition, Size 9¾" high, 7" wide, 1½" thick, full flexible leather, gilt edges, with thumb-notch index, boxed

Exquisitely bound in full crushed Levant, size 10¾" high, 7" wide, 1½" thick; gilt edges, hand tooled, raised bands, boxed

FUNK & WAGNALLS COMPANY, Publishers
NEW YORK AND LONDON

An Entirely New Work from Cover to Cover

THE COMPREHENSIVE Standard Dictionary

AN ENTIRELY NEW WORK

*Abridged from the Funk & Wagnalls
NEW Standard Dictionary*

*Defines and Explains 50,000 Words and Phrases
Contains 1000 Pictorial Illustrations*

AN IDEAL SMALL DICTIONARY FOR ALL
GENERAL PURPOSES. ESPECIALLY
FITTED FOR USE IN SCHOOLS

Special Features:

COMPREHENSIVE VOCABULARY.—Including many important words found in *no other dictionary designed for similar use.*

EXACT, INCLUSIVE DEFINITIONS.—The most common meaning is always placed first and the obsolete last.

DEFINITIONS BY DEFINITIVE STATEMENT.—Not by long and abstruse synonyms that must in turn be looked up

THE SPELLINGS conform to the standard usage of the world's foremost philologists.

EXCLUSIVE COMPOUNDING SYSTEM.—It contains a systematic method for compounding words and indicates how and when the hyphen should be used.

PRECISE ETYMOLOGIES are given in clear and simple form. A wholly new feature in a dictionary of this size.

EXCLUSIVE CAPITALIZATION.—It is a reliable guide in the matter of capitalization because it capitalizes only such words as should be written or printed in capitals.

*Price, Cloth, \$1.00; Indexed, \$1.25
Postage 12 cents extra*

FUNK & WAGNALLS COMPANY, Pubs.
NEW YORK and LONDON

THE CONCISE Standard Dictionary

*Abridged from the Funk & Wagnalls
NEW Standard Dictionary*

The ideal small dictionary for all handy uses—widely adopted for use in schools. Defines and explains about 38,000 words and phrases, and contains 780 pictorial illustrations.

SPECIAL FEATURES:

PRONUNCIATION.—Pronunciation is indicated by the Revised Scientific Alphabet; and by the Text-book Key, or familiar system of notation.

DEFINITIONS.—The definitions are clear and explicit—simple and easy to understand—written in definitive statement, not expressed by many-syllabled synonyms beyond the student's comprehension.

CAPITALIZATION.—The book is a sure guide in the matter of capitalization, only such words as should be written or printed with initial capital letters are capitalized in the vocabulary.

PREPOSITIONS.—It indicates the correct prepositions to use.

ILLUSTRATIONS.—There are 780 pictorial illustrations throughout the book.

APPENDIX.—The Appendix embraces several novel features. *Faulty Diction; Rules for Spelling; Proper Names of All Kinds; Foreign Words and Phrases; Symbolic Flowers and Gems; Abbreviations and Contractions, Etc.*

12mo, Cloth, 589 pp. Cloth-bound, 75 cents; Limp Morocco, \$1.75. Indexed, 25 cents extra. Exquisitely bound in full crushed Levant, gilt edges hand tooled, raised bands, boxed, \$10.00

Postage 12 cents extra.

FUNK & WAGNALLS COMPANY, Publishers
NEW YORK and LONDON

THE BIGGEST LITTLE DICTIONARY IN THE WORLD

THE VEST-POCKET Standard Dictionary

Edited by JAMES C. FERNALD, L.H.D.

*Abridged from the Funk & Wagnalls Standard Dictionary.
Contains the correct spelling, pronunciation, syllabication,
and definition of about 26,000 vocabulary terms*

DISTINGUISHING FEATURES

This is the smallest publication of the Standard Dictionary series. The vocabulary includes all words of disputed spellings and such words as have irregular plural formation. In addition to the vocabulary are given: Key to Scientific Alphabet; Parliamentary Law at Sight; Legal Holidays in all the States of the American Union; Interest Tables; Rates of Interest in all States of the American Union; Chart of (a) States of the Union, (b) Population, (c) Capitals, (d) Dates of Admission, (e) Total Population of the United States; Presidents of the United States; Postal Information; Telegraph and Cable Rates; Domestic and Foreign Weights and Measures; The Metric System; Rules for Pronunciation; Rules for Spelling; Rules for Punctuation; Abbreviations; Foreign Words and Phrases; Rulers of the World; Foreign Possessions of the United States; The Largest Cities of the World; Countries of the Postal Union; Tables of Moneys of the World; Standard Time.

*Cloth 40 cents. Blue Moroccoette (Imitation Leather) Colored Edges, 60 cents. Red English Paste Grain Leather, Gold Edges, 90 cents. Indexed, 10 cents per copy extra
Postage 4 cents extra.*

FUNK & WAGNALLS COMPANY, Publishers
NEW YORK and LONDON

An Indispensable Volume for those who would write and
speak pure English.

A Desk-Book of Errors in English

By FRANK H. VIZETELLY, Litt.D., LL.D.

*Author of "The Preparation of Manuscript for the Printer,"
Managing Editor of the "New Standard Dictionary," etc.*

This compact volume deals with the hundred and one questions that arise in daily speech and correspondence, and which are not usually treated in the dictionary in the same manner as in this handy and time-saving book.

"The scope and plan of the volume, which is of handy size and alphabetical arrangement, strike one as pleasantly sane and sound."—*The New York Times*.

"It is a book that should be on every writer's desk. If studied in season and out of season it will correct numerous inelegancies and vulgarities of speech."—*The Union*, Springfield, Mass.

"The book is admirably arranged to facilitate search for a decision on a moot point or a doubtful usage, and is invaluable for the writer who lacks the leisure for extended and thoughtful research."—*Star*, Washington, D. C.

12mo, Cloth, 243 pages Price \$1.50, Net. Exquisitely bound in full crushed Levant, gilt edges, hand tooled, raised bands, boxed, \$10.00. Postage 12 cents extra.

FUNK & WAGNALLS COMPANY, Publishers

NEW YORK AND LONDON

A Working Grammar

OF THE

English Language

By JAMES C. FERNALD, L.H.D.

*Author of "English Synonyms, Antonyms, and Prepositions,"
"Connectives of English Speech," Etc., Etc.*

In this book Dr. Fernald has covered the field of English grammar in an immensely practical and entirely new and popular manner. Recognizing the large number of persons who have not the time to study ponderous definitions and arguments, he has prepared what is, in every sense, a very concise and useful "working grammar." Herein the business man, stenographer, clerk, lawyer, physician, clergyman, teacher—everyone who would refresh and enrich his knowledge of English—will find, in simple statement, a clear and lucid explanation of the principles of English grammar. All that makes the study of grammar a mystery is eliminated, and the whole book is constructed so as to enable any intelligent person to find his own way, by its teachings, to a correct working knowledge of English.

12mo, Cloth, \$1.50 net; by mail, \$1.62

FUNK & WAGNALLS COMPANY, Publishers
NEW YORK and LONDON

